



UNIVERSITY OF LEEDS

This is a repository copy of *Dependence of switch-on time on Vernier comb alignment in frequency tunable lasers*.

White Rose Research Online URL for this paper:
<http://eprints.whiterose.ac.uk/130825/>

Version: Accepted Version

Conference or Workshop Item:

Kundu, I orcid.org/0000-0002-3564-1903, Wang, F, Qi, X et al. (16 more authors)
(Accepted: 2018) Dependence of switch-on time on Vernier comb alignment in frequency tunable lasers. In: 8th International Quantum Cascade Laser School and Workshop 2018, 02-07 Sep 2018, Cassis, France. (In Press)

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

Dependence of switch-on time on Vernier comb alignment in frequency tunable lasers

**Iman Kundu^{1,*}, Feihu Wang², Xiaoqiong Qi³, Hanond Nong², Paul Dean¹,
Joshua R. Freeman¹, Alexander Valavanis¹, Gary Agnew³, Andrew T. Grier¹,
Thomas Taimre⁴, Lianhe Li¹, Dragan Indjin¹, Juliette Mangeney²,
Jérôme Tignon², Sukhdeep S. Dhillon², Aleksandar D. Rakić³,
John E. Cunningham¹, Edmund H. Linfield¹, A. Giles Davies¹**

¹ School of Electronic and Electrical Engineering, University of Leeds, Woodhouse Lane, Leeds, LS2 9JT, United Kingdom

² Laboratoire Pierre Aigrain, Département de physique de l'ENS, École normale supérieure, PSL Research University, Université Paris Diderot, Sorbonne Paris Cité, Sorbonne Universités, UPMC Univ. Paris 06, CNRS, 75005 Paris, France

³ School of Information Technology and Electrical Engineering, The University of Queensland, Brisbane, QLD 4072, Australia

⁴ School of Mathematics and Physics, The University of Queensland, Brisbane, QLD 4072, Australia.

*Contact Email: I.Kundu@Leeds.ac.uk

Introduction

Semiconductor lasers based on Vernier frequency selection principle are used extensively to design wideband frequency tunable diode lasers [1], as well as quantum cascade lasers (QCLs) operating at mid-infrared and terahertz (THz) frequencies [2]. Such lasers typically consist of multiple cavity sections, and can include chirped or burst gratings, such that each cavity section supports a comb of frequencies. Emission is selectively favoured at a resonant frequency at which the lines of the individual combs are in Vernier alignment, which results the lowest lasing threshold. Frequency tuning is realised through a controlled index perturbation applied to the two combs which shifts the resonance to an adjacent mode. Steady-state emission characteristics and frequency tuning performances from such lasers are widely reported in the literature. Recently, ultrafast dynamics of mode selection in Vernier lasers and a temporal evolution of a multi-mode emission to a single mode emission was reported by the same authors [3]. This was studied by injection seeding a THz coupled-cavity (CC) QCL with a broadband THz pulse from a photoconductive emitter and exploiting the coherent sampling of THz radiation using time domain spectroscopy (TDS) [4]. Using a similar experimental technique, here we report an observation of a variation in the laser switch-on time as a function the Vernier alignment of combs in a CC THz QCL. The underlying physics is explained through a full multi-mode, temperature dependent carrier and photon transport simulation using a hybrid reduced rate equation (RRE) model [5].

1. Results

A CC geometry was designed such that mode hopping between two emission frequencies could be controlled through a large change in the current supplied to the tuning cavity. This allows a fine control of the alignment between the frequency combs. The CC THz QCL comprise of a 1.38-mm-long active 'lasing' cavity that is electrically driven above threshold, and a 3.43-mm-long passive 'tuning' cavity that is electrically driven sub-threshold to induce localised Joule heating and control the emission frequency. A 13- μm -long air gap was used to separate the lasing and tuning cavities. Initially, the free-running steady-state emission spectra were

measured with a lasing cavity current of 0.65 A. Single mode emission at 2.825 THz was measured when the tuning cavity current was <1.65 A, and a mode hop to 2.765 THz was observed at tuning cavity current in the range 1.65–2 A.

The temporal dynamics of the CC THz QCL emission were characterised using an injection seeding technique based on THz-TDS [Fig. 1(a)]. The switch-on delay was found to increase as the tuning cavity current was increased from 0.7–1.6 A, corresponding to a progressive misalignment of the frequency combs and an increase in the effective mirror losses at 2.825 THz [Fig. 1(b)]. However, at tuning cavity currents >1.6 A, the switch-on delay was found to decrease after the mode switched to 2.765 THz. The decrease in switch-on delay observed here at higher lattice temperatures indicates a clear influence of the frequency comb alignment on the switch-on delay in such lasers. This was further verified from the laser stabilisation time, simulated using the hybrid-RRE model [Fig. 1(c)]. In agreement with the experimental observations, the longest stabilisation time is predicted at tuning currents close to the current at which the mode hops from 2.825 to 2.765 THz (~ 1.6 A), which also corresponds to a switch in the alignment of frequency combs in the CC THz QCL.

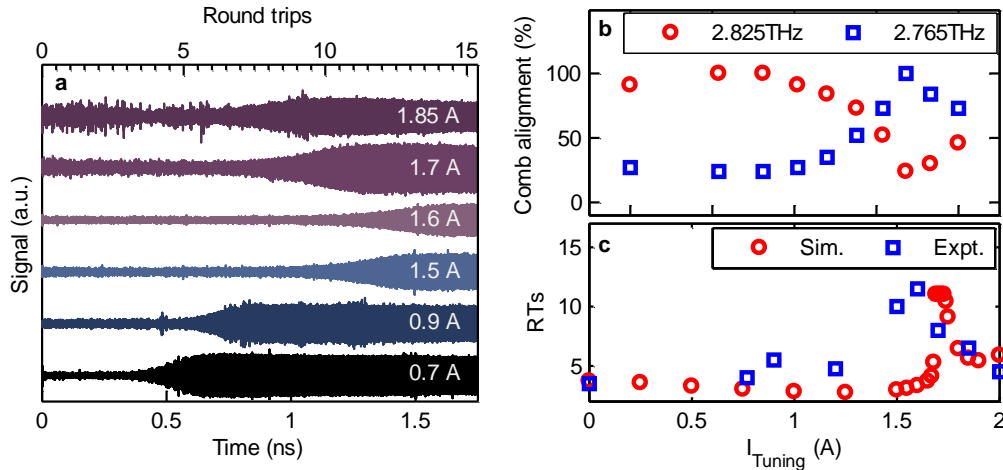


Fig. 1: (a) Electric field measured as a function of time for different tuning cavity currents. (b) Comb alignment calculated at frequencies 2.765 and 2.825 THz. (c) Experimentally measured (blue), and simulated (red) switch-on delay measured as cavity round trips (RTs) as a function of tuning cavity currents.

3. Conclusions

In conclusion, we have measured the ultrafast switch-on dynamics in a CC THz QCL using coherent time-domain sampling of the laser emission. We found that whereas hopping between single modes can be achieved through a small change in tuning current, the stabilisation time in such lasers is more sensitive to the alignment between the frequency combs supported by each cavity section.

References

- [1] L. A. Coldren, S. W. Corzine, and M. L. Masanovic, “Diode Lasers and Photonic Integrated Circuits,” John Wiley & Sons, 2012.
- [2] I. Kundu et al., “Quasi-continuous frequency tunable terahertz quantum cascade lasers with coupled cavity and integrated photonic lattice,” *Optics Express*, 25, 486–496, 2017.
- [3] I. Kundu et al., “Ultrafast switch-on dynamics of frequency tuneable semiconductor lasers,” Submitted, 2018.
- [4] D. Oustinov et al., “Phase seeding of a terahertz quantum cascade laser,” *Nature Communications*, 1, 69, 2010.
- [5] Xiaoqiong Qi et al., “Mode selection and tuning mechanisms in coupled-cavity terahertz quantum cascade lasers,” *IEEE Journal of Selected Topics in Quantum Electronics*, 23, 1–12, 2017.