

International Journal of Civil Engineering and Technology (IJCIET)

Volume 9, Issue 6, June 2018, pp. 765–772, Article ID: IJCIET_09_06_087

Available online at <http://www.iaeme.com/ijciyet/issues.asp?JType=IJCIET&VType=9&IType=6>

ISSN Print: 0976-6308 and ISSN Online: 0976-6316

© IAEME Publication



Scopus Indexed

GEOELECTRICAL INVESTIGATIONS FOR GROUNDWATER EXPLORATION IN CRYSTALLINE BASEMENT TERRAIN, SW NIGERIA: IMPLICATIONS FOR GROUNDWATER RESOURCES SUSTAINABILITY

Oyeyemi, K. D., Aizebeokhai, A. P.

Department of Physics, Covenant University, Ota, Nigeria

Olofinnade, O. M.

Civil Engineering Department, Covenant University, Ota, Nigeria

Sanuade, O. A.

Department of Geosciences, King Fahd University of Petroleum & Minerals,
Dhahran, Saudi Arabia

ABSTRACT

This research involves the subsurface geological characterization for groundwater potential assessment within the campus of the Polytechnic of Ibadan, southwestern Nigeria. The study is directed towards groundwater resources exploration, development and management in the campus. Five 2D resistivity imaging traverses were conducted using Wenner array in addition to five VES surveys using Schlumberger array that provide layering information and geoelectrical parameters. Three geologic layers delineated from the 2D resistivity inversion models include predominantly clayey sand/ sandy clay top soil (overburden), partly weathered or fractured basement and fresh basement. Their inverse model resistivity values ranges $6.68 - 98.6 \Omega m$, $68.0 - 929 \Omega m$ and $\geq 2252 \Omega m$ with bottom depths ranges $3.8 - 6.4 m$ and $6.4 - 10 m$ respectively. 1D model inversion from VES results also delineate three lithologies classifying both topsoil and some part of the partly weathered basement as overburden with resistivity and thickness range $483 - 1746.9 \Omega m$, $1.1 - 1.8 m$; partly weathered or fractured basement $60.3 - 93.5 \Omega m$, $8.4 - 12.9 m$ and fresh basement $984.6 - 2078.9 \Omega m$. The saturated portion of the partly weathered or fractured basement at depth will favour groundwater exploration and development in this area, while the relatively shallow overburden thickness would serve as the protective layer and recharge for the fractures.

Key words: Goelectrical resistivity, Basement aquifer, Groundwater exploration, Subsurface characterization, Groundwater sustainability.

Cite this Article: Oyeyemi, K.D., Aizebeokhai, A.P., Olofinnade, O. M. and Sanuade, O.A., Goelectrical Investigations for Groundwater Exploration in Crystalline Basement Terrain, SW Nigeria: Implications for Groundwater Resources Sustainability, International Journal of Civil Engineering and Technology, 9(6), 2018, pp. 765–772.

<http://www.iaeme.com/IJCIET/issues.asp?JType=IJCIET&VType=9&IType=6>

1. INTRODUCTION

The heavy reliance on groundwater as a source of affordable water for both industrial and domestic use throughout the world demands that the water occurrence within the subsurface is of significant quantity and high quality. Subsurface geological characterizations using surficial goelectrical resistivity technique are sufficient to address variety of problems related hydrological investigations in complex geological terrains such as crystalline basement. Several works have been carried out on the assessment, abstraction, development and management of groundwater within the hard rock terrain of Nigeria [1-15]. In this research, Electrical resistivity imaging (ERI) and vertical electrical soundings (VES) were combined for subsurface characterization as part of preliminary studies for groundwater resource evaluation and management in a basement complex, southwestern Nigeria.

2. METHODOLOGY

2.1. Geologic and Hydrogeologic Setting

Most parts of Ibadan and other neighbouring towns within the southwestern Nigeria are underlain by gneiss-migmatites complex and the metasediments underlie [16]. The gneiss-migmatite complexes within this region include minor quartzites and calc-silicate bearing units. The major rock types present in the study area are predominantly granites and schists of metasedimentary scores (such as mica schist, quartzite and quartz-schist), biotite, biotite-hornblende gneiss, banded gneiss and granite gneiss, and migmatite gneiss (Figs 1a and b). The minor rock types within the area include augen-gneiss pegmatite and amphibolite. The gneisses that are rich in mafic minerals may undergo weathering, resulting to regoliths and clayey soils overlying the coarse grained granitic components soil with more varying texture and lower clay contents [17].

2.2. Data Acquisition and Processing

The data acquisition were done manually using Omega resistivity meter in the investigation site within the Polytechnic of Ibadan campus, Ibadan southwestern Nigeria (Fig. 2). Five resistivity soundings were carried out along the five lines with maximum half-current electrode spread (AB/2) of 75.0 m using Schlumberger array, which is enough for the anticipated depth of investigation (DOI). Likewise, five 2D electrical resistivity profile lines in the West-East and North-South direction were conducted with each 2D resistivity profiles being 110 m length (Fig. 2). Wenner array with least electrode spacing of 5.0 m was adopted for the surveys reaching 5 data level of 5 for each profiles. The Wenner configuration was adopted for the 2D ERT survey due to its easy application, strongest signal strength, and greater sensitivity to vertical resistivity variation or structures lying horizontally with respect to the country rocks [18].

The processing of the acquired soundings (VES) data were done by plotting the apparent resistivity against half-current electrode spacing (AB/2) on a log-log graph sheets. The estimated geoelectric parameters (resistivities and thicknesses) from the partial curve matching were later adopted as the initial inputs for several iteration on a Win-Resist software program to get final model parameters for subsurface geoelectric layers. Also, apparent resistivity data observed for the 2D electrical resistivity tomography (ERT) were processed and inverted using RES2DINV inversion code [19, 20].

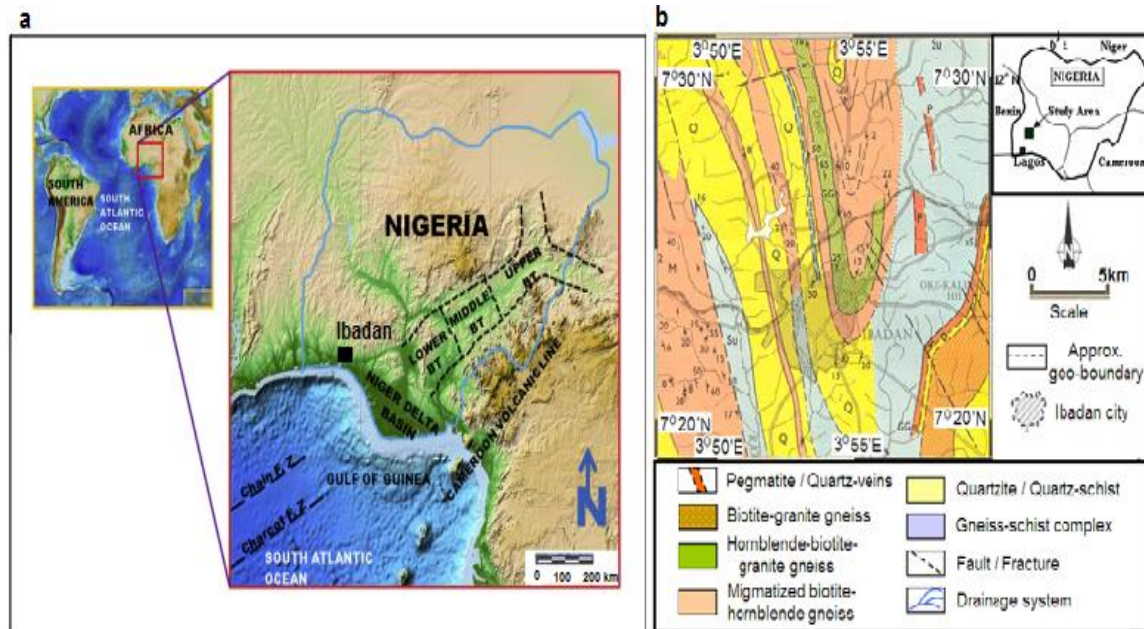


Figure 1 Map showing the Nigeria relief and adjoining areas with extracted and modified Ibadan, using ETOPO1 global relief model [21]. **b.** Geological map of Ibadan (After NGSA, 2009).



Figure 2 Satellite imagery map of the study site in Ibadan indicating the 2D resistivity profile lines (blue) and VES points (yellow arrows)

3. RESULTS AND DISCUSSION

3.1. Vertical Electrical Sounding

The derived geoelectric parameters from several iterations of the resistivity vertical electrical soundings are shown in Figs. (3 and 4) and Table 1. Three geoelectrical layers were identified from the iterated curves. Large consistency of the geoelectric parameters were observed in the VES curves. Based on the local geology of the area and the information available from the boreholes and hand-dug wells, the delineated subsurface strata are: overburden layer (mainly sandy clay units) with model apparent resistivity ranging between 1746.3 (Ωm) and 483.3 (Ωm) and thickness range 1.1 – 1.8 metres; intercalation of partly weathered and fracture basements with model resistivity range of 60.3 – 93.5 (Ωm) as well as thickness range of 8.4 – 12.4 metres; fresh basement with model resistivity ranging from 784.6 to 2078.9 (Ωm). The second layer is interpreted as the water-saturated aquiferous zone in the area of study. The fresh portion of the basement is inferred to be the lowermost infinitely thick layer with very high resistivity values. The outcomes of the VES surveys serve as great input to better understanding the hydrogeological setting in the study area. The water saturated fractured and weathered basement should be the target for sustainable water supply in the study area.

3.2. Interpretations of 2D Resistivity Models

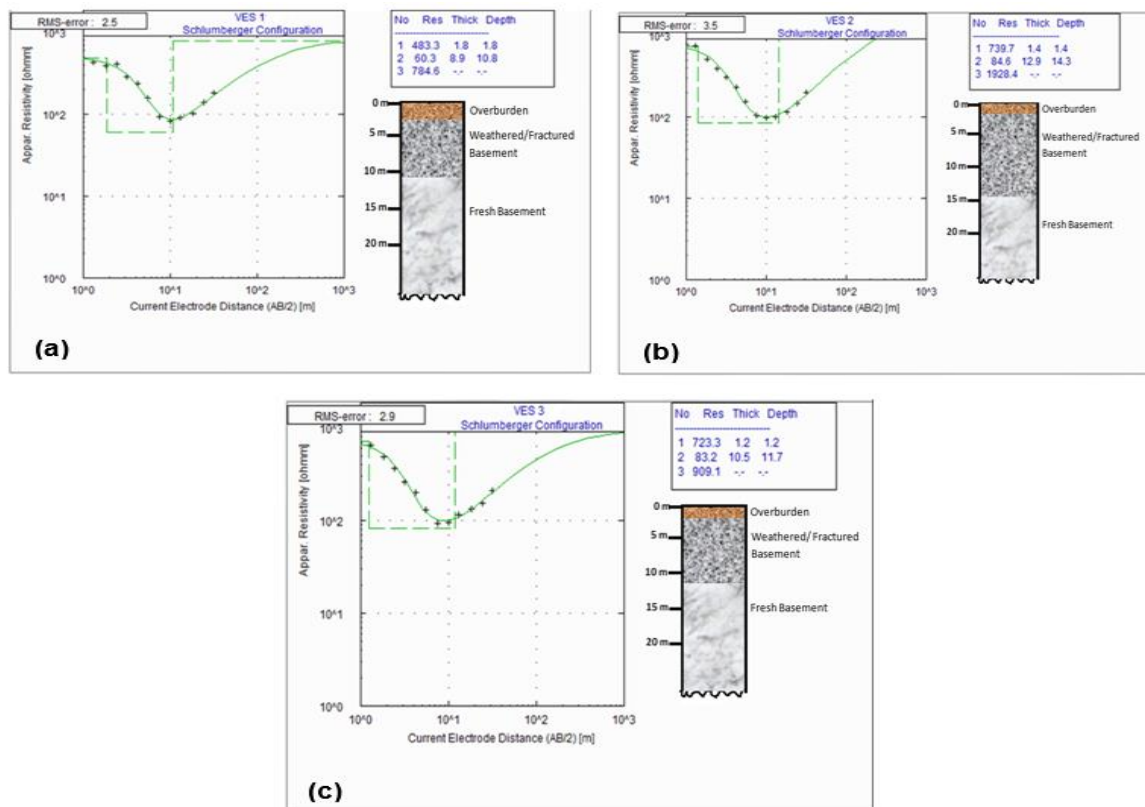


Figure 3 VES curves and geoelectrical parameters obtained for (a) VES 1, (b) VES 2 and (c) VES 3.

The 2D inverse models of the apparent resistivity distribution within the subsurface with depths obtained from the smoothness constrained inversion are presented in Figs. 5 and 6. The inversion models reveal a range of both relatively low resistivity and high resistivity zones within the area of study. The 2D inverse models resistivity values range from about 9.18 – 10133 Ωm , 6.68 – 40441 Ωm , 17.7 – 7219 Ωm , 15.1 – 20382 Ωm , and 10.1 – 19610 Ωm

for traverses 1 – 5 respectively. The variations in inverse models resistivity values 2D geoelectrical imaging to the tune of tens of thousands Ohm-metre higher than those of the 1D VES points denote the greater sensitivity and resolution of 2D electrical resistivity imaging [22-25]. The geoelectrical parameters for the three identified geoelectric layers such as the inverse resistivity models values and thicknesses obtained from the soundings agree reasonably with those obtained from the 2D resistivity imaging.

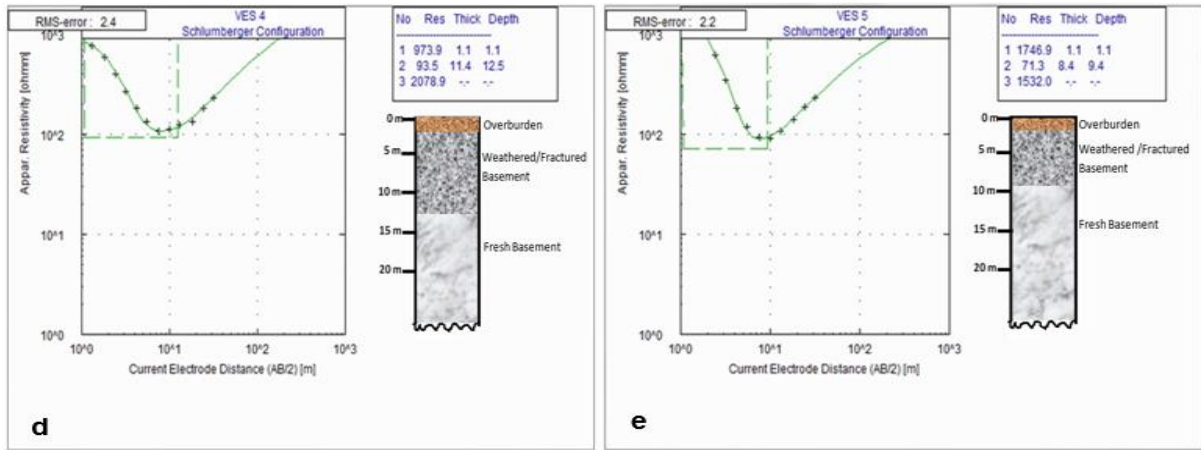


Figure 4 VES curves and geoelectrical parameters for (d) VES 4 and (e) VES 5.

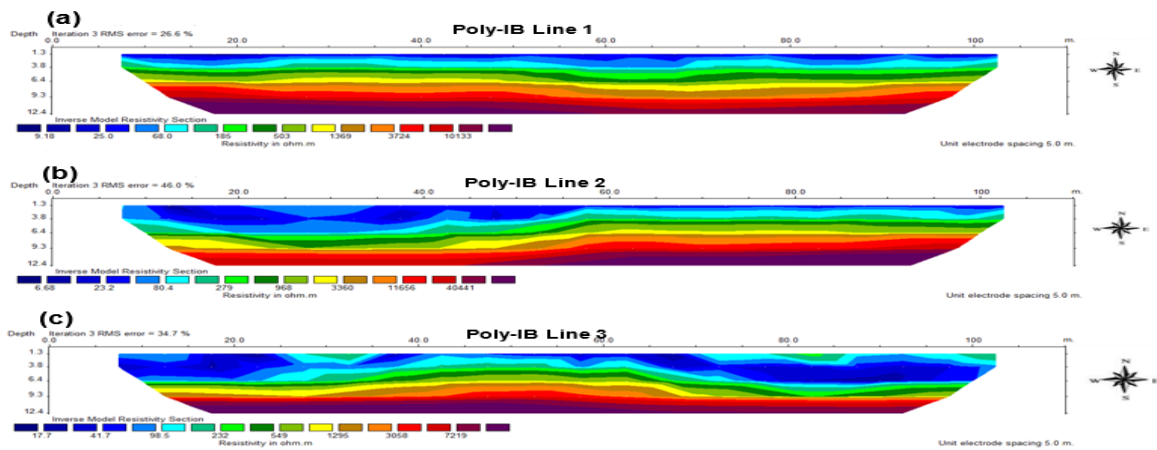


Figure 5 2D inverse resistivity model for Poly-IB profiles 1, 2 and 3.

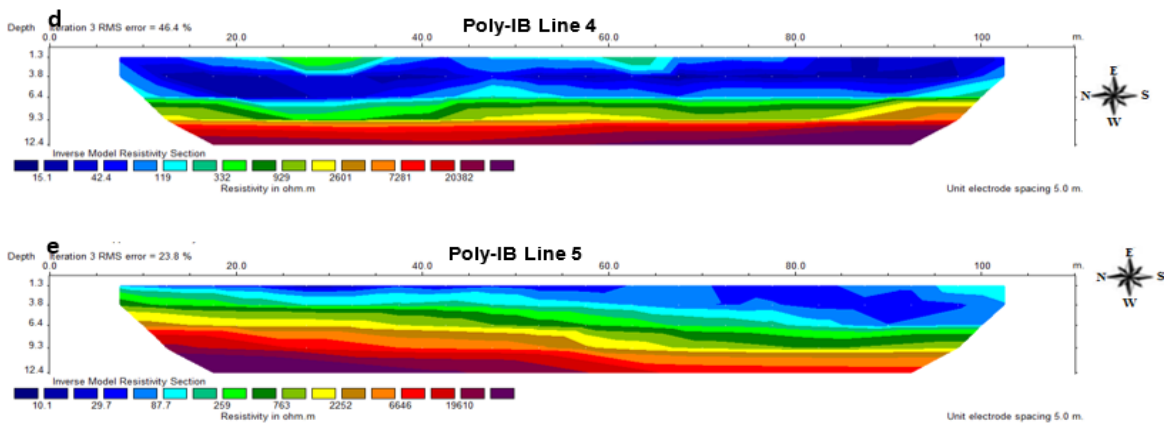


Figure 6 2D inverse model resistivity sections for Poly-IB profiles 4 and 5.

Table 1 Interpreted geoelectric layered parameters from the VES (1-5)

Layer		VES 1	VES 2	VES 3	VES 4	VES 5	Lithology
1	Resistivity (Ωm)	483.3	739.7	723.3	973.9	1746.9	Overburden (Sandy Clay)
	Thickness (<i>m</i>)	1.8	1.4	1.2	1.1	1.1	
	Bottom Depth (<i>m</i>)	1.8	1.4	1.2	1.1	1.1	
2	Resistivity (Ωm)	60.3	84.6	83.2	93.5	71.3	Weathered /Fractured basement
	Thickness (<i>m</i>)	8.9	12.9	10.5	11.4	8.4	
	Bottom Depth (<i>m</i>)	10.8	14.3	11.7	12.5	9.4	
3	Resistivity (Ωm)	784.6	1928.4	909.1	2078.9	1532	Fresh Basement

Depth-to-base of the geoelectric layers reveals quick assessment of their lateral thickening.

4. CONCLUSIONS

Geoelectrical resistivity surveys involving vertical electrical soundings and ERT have been used to evaluate the groundwater potential in a crystalline basement terrain and to delineate target locations for sitting boreholes in the study area. The analyses of the soundings resistivity models and the 2D inversion models clearly shows three geoelectric layers; top layer, which is inferred to be sandy clayey/ clay; water-saturated weathered and fractured basement with clayey materials serving as the aquifer unit, and fresh basement. The electrical soundings delineate higher bottom depth for the water-saturated aquiferous unit, however with little or low lateral resolution. Lateral heterogeneity of clay content within this layer was evident in the 2D electrical resistivity imaging. The rigoliths (weathered basement) unit within the area with bottom depth up to 10 metres from 2D imaging but about 14.1 metres from the VES results. Thus, groundwater exploration and development in the area should target the weathered and fractured basement layer.

AKNOWLEDGEMENT

The authors wish to express their appreciations to Covenant University centre for research innovation and development (CUCRID) for sponsoring this research. A lot of thanks due to the two reviewers and the editor for their efforts and their valuable comments that have improved this paper.

REFERENCES

- [1] Edet, A. E. Applications of Photogeologic and Electromagnetic Techniques to Groundwater Exploration in Northwestern Nigeria. *Journal of African Earth Sciences* 11(3-4), 1990, pp. 321-328.
- [2] Olorunfemi, M.O., Fasuyi, S. A. Aquifer types and geoelectric/hydrogeologic characteristics of part of central basement terrain of Nigeria (Niger State). *Journal of Africa Earth Science*, 16(3), 1993, pp. 309-317.
- [3] Edet, A. E., Okereke, C. S. Assessment of hydrogeological conditions in basement aquifers of the Precambrian Oban Massif, southeastern Nigeria. *Journal of Applied Geophysics* 36, 1997, pp. 195-204

- [4] Olayinka, A. I., Weller, A. The inversion of geoelectrical data for hydrogeological applications in crystalline basement areas of Nigeria. *Journal of Applied Geophysics* 37 (2), 1997, pp. 103–105.
- [5] Adepelumi, A., Ako, B., Ajayi, T. Groundwater contamination in the basement-complex area of Ile-Ife, southwestern Nigeria: A case study using the electrical-resistivity geophysical method: *Hydrogeology Journal* 9(6), 2001, pp. 611– 622.
- [6] Ehinola, O.A., Opoola, A.O., Adesokan, H.A. Empirical analysis of electromagnetic profiles for groundwater prospecting in rural areas of Ibadan, southwestern Nigeria. *Hydrogeology Journal* 14(4), 2006, pp. 613–624.
- [7] Aizebeokhai, A.P., Oyeyemi, K.D. The use of the multiple-gradient array for geoelectrical resistivity and induced polarization imaging. *Journal of Applied Geophysics* 111, 2014, pp. 364–376.
- [8] Oyeyemi, K. D., Aizebeokhai, A. P., Oladunjoye, M. A. Integrated geophysical and geochemical investigations of saline water intrusion in a coastal alluvial terrain, southwestern Nigeria. *International Journal of Applied Environmental Sciences*, 10(4), 2015, pp. 1275–1288.
- [9] Aizebeokhai, A. P., Oyeyemi, K. D., Joel, E.S. Groundwater potential assessment in a sedimentary terrain, southwestern Nigeria. *Arabian Journal of Geoscience* 9(7), 2016a, pp. 496–513. DOI 10.1007/s12517-016-2524-5.
- [10] Aizebeokhai, A. P., Oyeyemi, K. D., Joel, E.S. Electrical resistivity and induced polarization imaging for groundwater exploration. *SEG Technical Program Expanded Abstracts*, 2016b, pp. 2487- 249.
- [11] Oyeyemi, K. D., Olofinnade, O. M. Geoelectrical- Geotechnical studies for near surface characterization, case history: Lagos SW Nigeria. *Electronic Journal of Geotechnical Engineering*, 21(10), 2016, pp. 3735–3750.
- [12] Aizebeokhai, A. P., Oyeyemi, K.D., Noiki, F.R., Etete, B.I., Arere, A.U.E., Eyo, U.J., Ogbuehi, V.C. Geoelectrical resistivity data sets for subsurface characterization and aquifer delineation in Iyesi, southwestern Nigeria. *Data in brief*, 15, 2017, pp. 812–832.
- [13] Aizebeokhai, A. P., Oyeyemi, K.D. Geoelectrical characterization of basement aquifers: the case of Iberekodo, Southwestern Nigeria. *Hydrogeology Journal*, 2017, pp.1–14, DOI. 10.1007/s10040-017-1679-9.
- [14] Oyeyemi, K.D., Aizebeokhai, A.P., Adagunodo, T.A., Olofinnade, O.M., Sanuade, O.A., Olaajo, A.A. Subsoil characterization using geoelectrical and geotechnical investigations: Implications for foundation studies. *International Journal of Civil Engineering and Technology*, 8(10), 2017, pp. 302–314.
- [15] Aizebeokhai, A.P. Ogungbade, O., Oyeyemi, K.D. (2018). Geoelectrical resistivity data sets for characterizing crystalline basement aquifers in Basiri, Ado-Ekiti, southwestern Nigeria. *Data in Brief* (In Press).
- [16] Oyinloye, O. A. Geology and geotectonic setting of the basement complex rocks in South Western Nigeria: implications on provenance and evolution. In: *Earth and Environmental Sciences*, I. A. Dar IA (Ed.), chapter 5, InTech, Rijeka, Croatia. 2011.
- [17] Oyawoye, M. O. The Basement Complex of Nigeria, In: T. F. J. Dessauvagie, and Whiteman (Eds), *African Geology*. Ibadan University Press. Nigeria. 1970.
- [18] Dahlin, T., Zhou, B. A numerical comparison of 2-D resistivity imaging with 10 electrode arrays. *Geophysical Prospecting* 52, 2004, pp. 379–398.
- [19] Griffiths, D. H., Barker, R. D. Two dimensional resistivity imaging and modelling in areas of complex geology. *Journal of Applied Geophysics* 29, 1993, pp. 211–226.

Geoelectrical Investigations for Groundwater Exploration in Crystalline Basement Terrain, SW
Nigeria: Implications for Groundwater Resources Sustainability

- [20] Loke, M. H., Barker, R. D. Rapid least-squares inversion of apparent resistivity pseudo sections by a quasi-Newton method. *Geophysical Prospecting*, 44, 1996, pp. 131–152.
- [21] Amante, C., Eakins, B.W. ETOPO1 1 arc-minute global relief model: procedures, data sources and analysis. NOAA Technical Memorandum NESDIS NGDC – 24, 2009, 19p
- [22] Loke, M. H. *Electrical Imaging Surveys for Environmental and Engineering Studies: A Practical Guide to 2D and 3D Surveys*, (Available at www.geoelectrical.com), 2001, 62 pp.
- [23] Aizebeokhai, A.P., Oyeyemi, K.D., Kayode, O.T. Assessment of soil petrophysical parameters using electrical resistivity tomography (ERT) and induced polarization techniques. *Research Journal of Applied Sciences*, 10(9), 2015, pp. 479–485.
- [24] Oyeyemi, K. D., Oladunjoye, M. A., Aizebeokhai, A. P., Ajekigbe, P. G., Ogunfolakan, B. A. Integrated Geophysical Investigations for Imaging Archaeological Structures in Ancient City of Ile-Ife, Nigeria. *Asian Journal of Information Technology*, 14(7), 2015a, pp. 246 – 252.
- [25] Aizebeokhai, A. P., Ogungbade, O., Oyeyemi, K.D. Integrating VES and 2D ERT for near-surface characterization in a crystalline basement terrain. *SEG Technical Program Expanded Abstracts*, 2017, pp. 5401–5406.