

Title	<Recent research activities>Preparation and characterization of carbonized wood with metal ions for CO2 capture
Author(s)	Hata, Toshimitsu
Citation	Sustainable humansphere : bulletin of Research Institute for Sustainable Humansphere Kyoto University (2016), 12: 15-15
Issue Date	2016-11-15
URL	http://hdl.handle.net/2433/225919
Right	
Type	Departmental Bulletin Paper
Textversion	publisher

RECENT RESEARCH ACTIVITIES

Preparation and characterization of carbonized wood with metal ions for CO₂ capture**(Laboratory of Innovative Humano-habitability, RISH, Kyoto University)****Toshimitsu Hata**

In view of global warming, the adsorption and separation of CO₂ gas are necessary to prevent the further increase of its concentration in the atmosphere. The use of fossil fuels has increased in recent times, and there is a growing interest in developing CO₂-gas adsorption materials for applications not only in industries but also in offices and homes¹⁾. Till date, the amine absorption method, active carbon method, and molecular sieve method are the most popular, which are suitable for capturing CO₂ gas emitted from industries on a large scale²⁾. For example, the amine absorption method is used for collecting large-scale CO₂ emissions from thermal power stations. However, after use, a substantial amount of energy is required to collect the amine solution and it cannot be used repeatedly for a long time. On the contrary, the adsorption process using solid solvents for capturing CO₂ gas is suitable for middle- to small-scale CO₂ gas emissions. Its applicability depends on adsorption efficiency and cost. The development of a retention method for the low-cost and effective adsorption of CO₂ is urgently required.

CO₂ gas can more easily access micropores (at approximately 2 nm, at 100 kPa atmospheric pressure), compared to nitrogen, as the CO₂-saturated steam pressure is lower, approximately 3.48 MPa at 273 K. Therefore, obtaining a good separation from a gas mixture is possible. Low-cost and low-pressure capture of CO₂ gas can be achieved through the adsorption process using solid solvents.

Wood is a porous material and is composed of two types of pores: macropores and micropores. Micropores already exist in the cell walls of dry wood (Fig.1)³⁾. The authors reported that onion-like carbon structures grow during conventional carbonization on wood⁴⁾. The carbonization of such a material may provide better access for CO₂ gas to these micropores. In the present activity, solid adsorbents from raw Todo fir material are developed at a low cost, in comparison with conventional products, for effective CO₂ gas adsorption. Furthermore, high resolution transmission electron microscopy (HRTEM) is used to observe the micropores' texture to explain the adsorption mechanism.

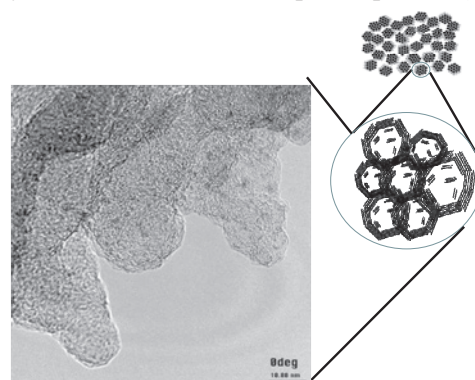


Fig.1 Formation of onion-like structures on wood obtained by heat treatment of wood⁴⁾.

Acknowledgements

This work was supported by KAKENHI (16K05866), a Grant-in-Aid for Scientific Research (C) from the Japan Society for the Promotion of Science (JSPS); by the collaborative research of the Wood Composites Hall; and by the Analysis and Development System for Advanced Materials (ADAM) project of the Research Institute for Sustainable Humanosphere (RISH), Kyoto University.

References

1. <http://www.jccca.org/>
2. http://www.meti.go.jp/committee/kenkyukai/energy_environment/jisedai_karyoku/pdf/002_02_03.pdf
3. Kojiro, K.; Furuta, Y.; Ishimaru, Y., (2008) *J. Wood Sci.*, 54 (3), 202-207.
4. Hata, T., et al. (2000). *J. Wood Sci.*, 46 (1), 89-92.