

WestminsterResearch

<http://www.westminster.ac.uk/westminsterresearch>

Design of a single chamber air cathode microbial fuel cell using a stainless steel spiral anode and 3D printing techniques for continuous flow dye decolourisation

Bowman, K., Breheny, M., Farahmand, N., Kyazze, G. and Keshavarz, T.

A poster presented at the 4th European Meeting of the International Society for Microbial Electrochemistry and Technology, Newcastle University, Newcastle upon Tyne, 12 - 14 Sep 2018.

The WestminsterResearch online digital archive at the University of Westminster aims to make the research output of the University available to a wider audience. Copyright and Moral Rights remain with the authors and/or copyright owners.

Whilst further distribution of specific materials from within this archive is forbidden, you may freely distribute the URL of WestminsterResearch: (<http://westminsterresearch.wmin.ac.uk/>).

In case of abuse or copyright appearing without permission e-mail repository@westminster.ac.uk

Design of a single chamber air cathode microbial fuel cell using a stainless steel spiral anode and 3D printing techniques for continuous flow dye decolourisation.

Kyle Bowman¹, Mark Breheny¹, Nasim Faramand¹, Godfrey Kyazze¹, Taj Keshavarz¹, Heba Hamed², Reham Fathy², Marwa Gamal², Nabila Selim², Hussein Abd El Kareem², Ola Gomaa²

¹Department of Life Sciences, University of Westminster, London, United Kingdom

²Egyptian Atomic Energy Authority (EAEA), Cairo-Egypt;

K.Bowman@westminster.ac.uk

Microbial fuel cells (MFC) offer a novel solution in wastewater treatment systems. Their capacity for COD removal and concomitant electricity generation are highly attractive properties for reducing costs & environmental impacts in industry. MFCs require expensive membranes & catalysts such as Nafion and platinum respectively to achieve increased power output, but the cost of these materials is prohibitive for real world applications.

An air breathing, 1 litre-scale spiral anode MFC was designed (Fig. 1) to provide a high electrode surface area to reactor volume ratio using commonly and cheaply available materials such as stainless steel and activated carbon. Non-platinum group metal catalysts (FeAAPyr family) were integrated into a PVDF cathode fabricated using single step phase inversion to improve rate of the oxygen reduction reaction. Anode surface area was maximized by concertina folding and spiral arrangement and its surface was modified using sulphuric acid, heat treatment & carbon black adsorption to provide a more biocompatible surface for biofilms.

The performance characteristics of the designed MFC are currently being investigated. Decolourisation of Acid orange-7 azo dye & COD removal were initially investigated in recirculating batch mode followed by continuous flow configuration with a hydraulic retention time of 36 hours. Optimisation of hydraulic retention times, cathode construction & anode surface modification will present a feasible system for the scale up of microbial fuel cells for industrial use, maximizing COD removal & electricity production.

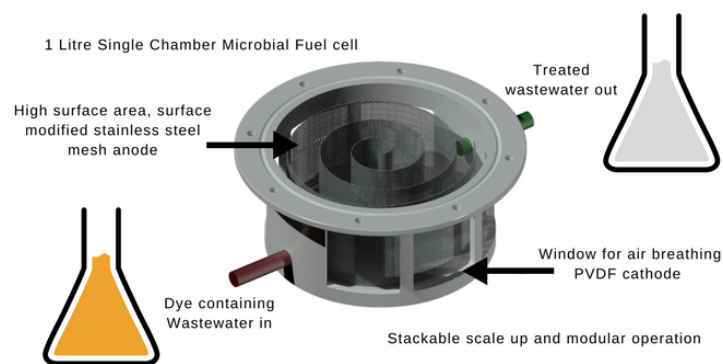


Figure 1.