

541.678.686.01

• • , • • , • • , • • ,
 • • , ,

Features of influence of technological reception of processing are considered by contact polarization of monolayers on change of parameters at dynamic and static empaxed epoxyphenol fibreglass. It is shown, that processing in an electrofield of components prepregs promotes increase of conditional fatigue strength of a polymeric composite at achievement rather high demphine characteristics.

[1].

[2].

5-211,
 -10 (19170-73).

5 5

30 .

80 ,

$N \cdot 10^6$

.

-

.1

..

L/L

L/L,

,

.

,

,

.

,

.

,

L/L

,

,

,

.

,

,

.

-

L/L

.

,

.

.

.

,

,

,





,

[3].

(. 1)



[4].

,

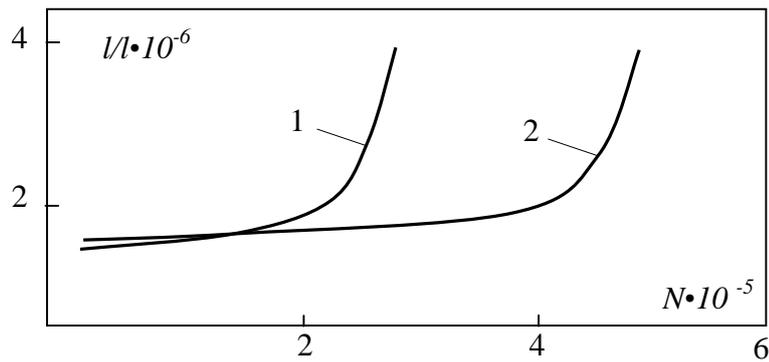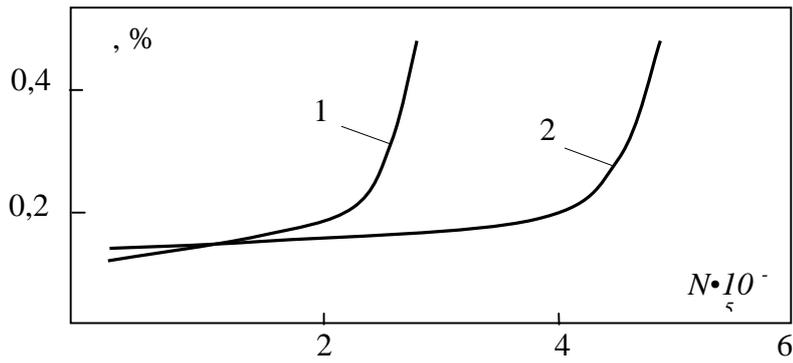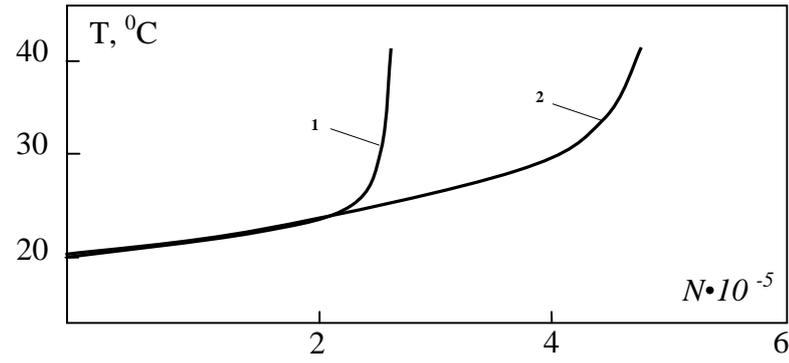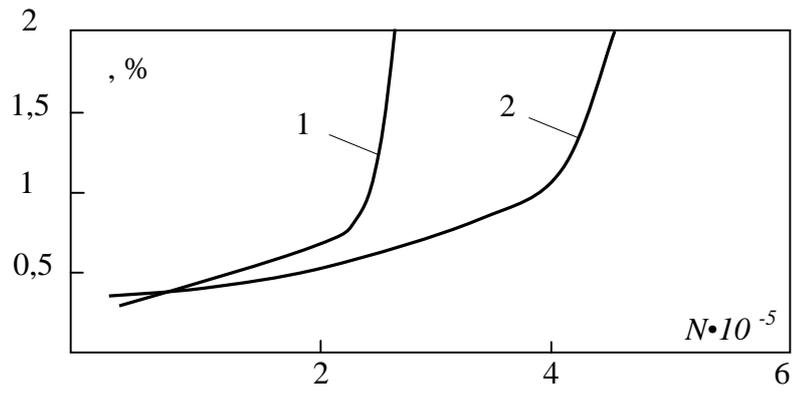

1. $lI, T, \%$ vs N :
 1 - lI , 2 - T

1, . 2).

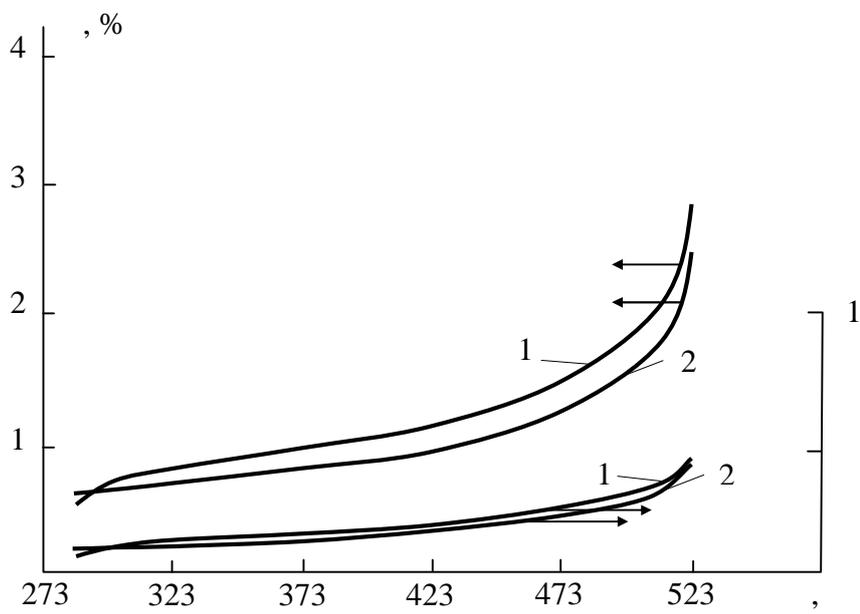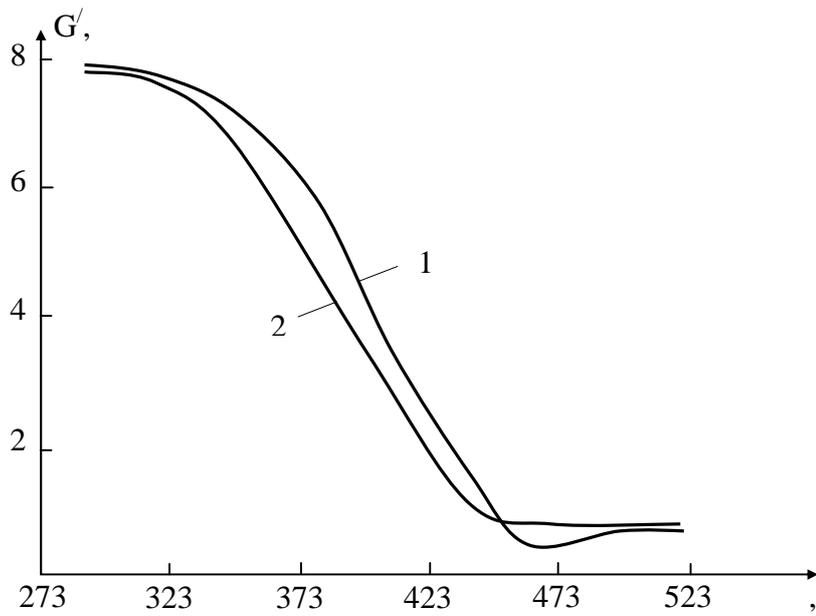

. 2.

G' ,

1 -

; 2 -

tg

(. . 2),

tg .

[6],

(. 2).

»

«

.
 : **1.** . - .: , 1988.- 376 . **2.** . . ,
 . . ,
 // « ».
 , 2005.- . 42.- . 60-64. **3.** . .
 .- .: , 1981.- 232 . **4.** . , . .
 . . .- .: , 1979.- 335 . **5.** .
 . / .- .: , 1962.- 535 . **6.** . , . , -
 . . .
 // « ».
 « , » , 2005.- .14.- . 155-159.

21.10.06

621.926.5

. . , . . ,

-
 -
 , , , .

Three directions of an intensification of work of tube mills - preliminary crushing, energyadopted and pulsing modes of operation grinding load are developed and realized at constant speed of a stream of a material.