

... – 2003. – 7. – . 31 – 37. **6.** ...
 : ... : 05.23.05 : 05.17.11 / ...
 ... , 2004. – 18. – 7.
 // ... – 1999. – 8. – . 35 – 42.
8. ... // ...
 ... « ... - ...
 ».- : , 2006. – . 94. **9.** -
 // ..
 « ».- : , 2006. – .
 106. – . 71 – 77. **10.** -
 // i « I». i -
 . « i i , i i i i ».- i : « I». – 2005, 14. –
 . 121 – 126. **11.** -
 // i
 « I». i . « i i , i i i i ».- i :
 « I». – 2006, 13. – . 16 – 24. **12.** . , . , . -
 // -
 . – 2007. – 7. – . 35 – 39. **13.** . 80369 , 04
 35/66, 04 35/18. : . 80369 , 04 35/66, 04 35/18 -

 () ; « ».- 2006 05903; . 29.05.06; . 10.09.07, . 14. – 6 .

15.10.07

621.357.7

... , ... ,
 ... « »

3 – 4,5

The estimation of an opportunity of the weaved electrodes surface development is resulted. Dependences of surface development factor on a step of the weaving scheme and amount of semitoruses are received at the use of a wire of different diameter. It is displayed, that the weaved electrode surface can be explicated in 3 – 4,5 time after a ratio to the flat electrode surface area.

[1, 2].

1
3 -
1, 2 3
:

$$_1 = 1 - \cdot d^2 / 2L^2 + ^2 \cdot d / 2L,$$

$$_2 = 1 - \cdot d^2 / L^2 + ^2 \cdot d / L,$$

$$_3 = 1 - 3 \cdot d^2 / 2L^2 + 3^2 \cdot d / 2L,$$

d - , L - .

:

$$_n = 1 - \cdot d^2 \cdot n / 2L^2 + ^2 \cdot d \cdot n / 2L, \tag{1}$$

n - .

2- (.1) .2 .

.2 ,

9





$$L = d$$

L .

L

:

$$L_o = (n+1) \cdot d. \quad (2)$$

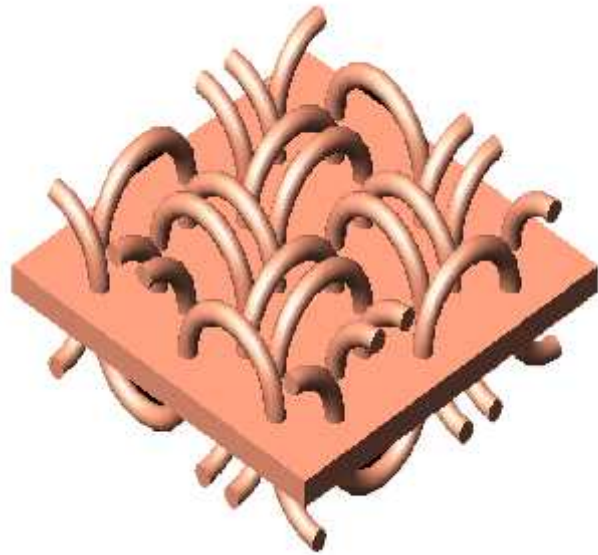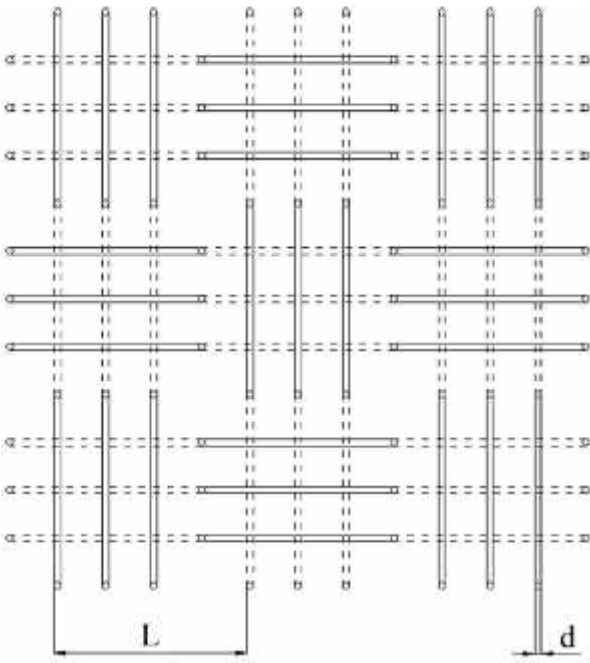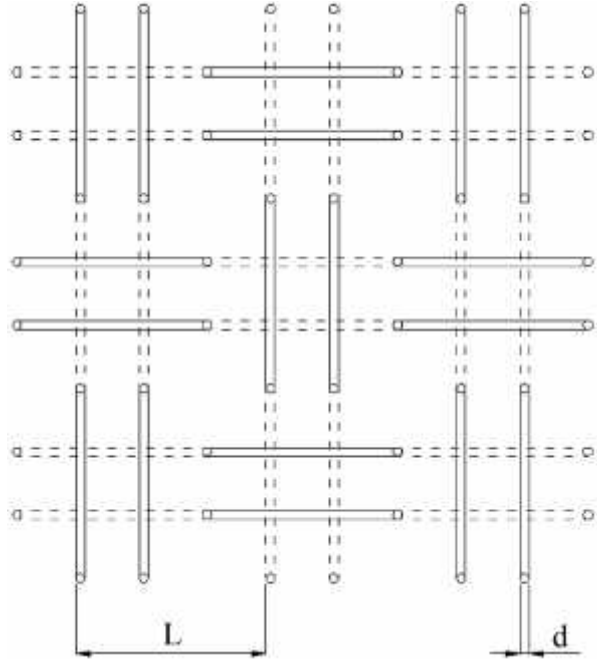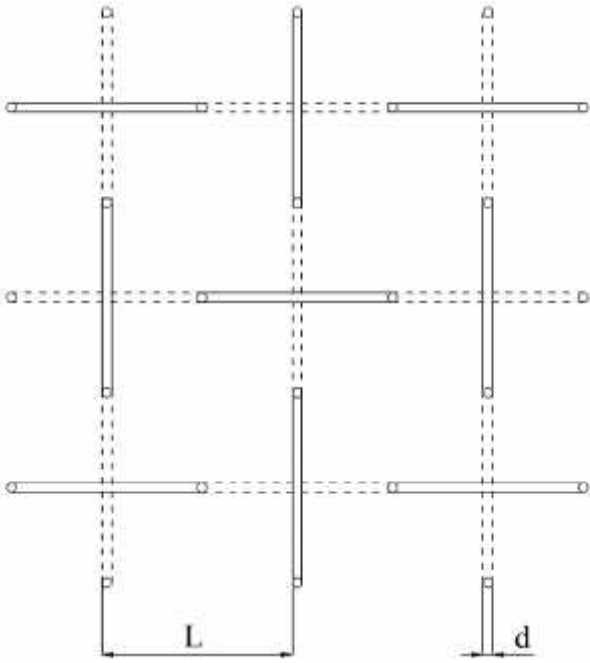

.1.

(-)

()

, , , , L_d -

:

$$L_d = (2n+1) \cdot d. \tag{3}$$

$$(2) \quad (3) \quad (1),$$

:



$$o = 1 - \frac{\cdot n}{2(n+1)^2} + \frac{^2 \cdot n}{2(n+1)} \tag{4}$$

$$d = 1 - \frac{\cdot n}{2(2n+1)^2} + \frac{^2 \cdot n}{2(2n+1)} \tag{5}$$

.2 , (4) (5),

3- -

2- - .

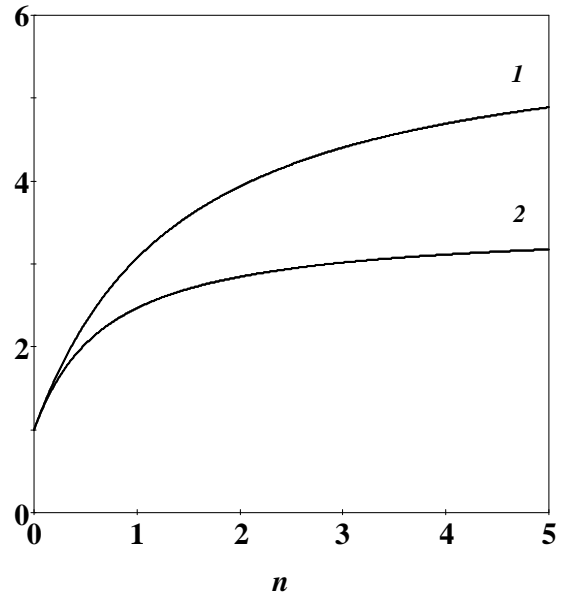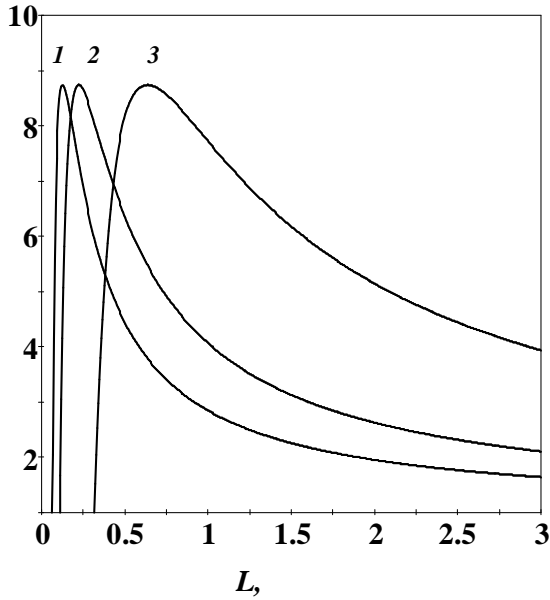

, : 1 - 0,2; 2 - 0,35; 3 - 1,0.

: 1 - , 2 - .

.2.

$L()$

$n()$

, , , -

.1 , , -

$d/2$.

(2)

3

(3) – 4,5

: 1.

, 1989. – 672 . 2.

: [] /

. I.

./ ;

«

», 2002. – 254 .

15.10.07

544.013

« »

Y – Ba – Cu – O

Y– – u– .

In the article the results of the main properties research for the composite materials on the basis of the Y– – u– system are shown. It has been found that the synthesis products have high temperature superconductivity.

Y– – u–

Y– – u–

[1] (