



Citation for published version:

Holyfield, L, Dawson, R, Noguera Diaz, AJ, Bennet, J, Weatherby, N, Burrows, A & Mays, T 2015, 'PIM-MOF Composites for Use in Hybrid Hydrogen Storage Tanks' ISSHAC-9 Ninth International Symposium on the Effects of Surface Heterogeneity in Adsorption and Catalysis in Solids, Wroclaw, Poland, 17/07/15 - 23/07/15, .

Publication date:
2015

Document Version
Publisher's PDF, also known as Version of record

[Link to publication](#)

University of Bath

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

PIM-MOF Composites for Use in Hybrid High Pressure Hydrogen Storage Tanks



UNIVERSITY OF
BATH



Centre for
Sustainable
Chemical Technologies



Leighton T. Holyfield^{a,b}, Robert Dawson^c, Antonio J. Noguera-Diaz^b,
Jack Bennet^b, Nick Weatherby^d, Andrew D. Burrows^c, Timothy J. Mays^{a,b}

^aDoctoral Training Centre in Sustainable Chemical Technologies, University of Bath, BA2 7AY, UK

^bDepartment of Chemical Engineering, University of Bath, BA2 7AY, UK

^cDepartment of Chemistry, University of Bath, BA2 7AY, UK

^dHaydale Composite Solutions, Charnwood Business Park, Loughborough, LE11 1QJ, UK

e-mail: L.T.Holyfield@bath.ac.uk; URL: <http://www.bath.ac.uk/csct>



Introduction

- Hydrogen has been proposed as a potential long term sustainable energy storage solution, particularly in light duty vehicles.
- The current industrial state of the art in hydrogen storage for vehicles is compression [1]. However this technology presents some major issues :
 - Relies on pressures as high as 70 MPa to store enough hydrogen for a 500 km range [1].
 - Uses very expensive materials to achieve the lightness and pressure resistance required.
 - Fails to meet the U.S. DoE's On-board Hydrogen Storage Goals [2].

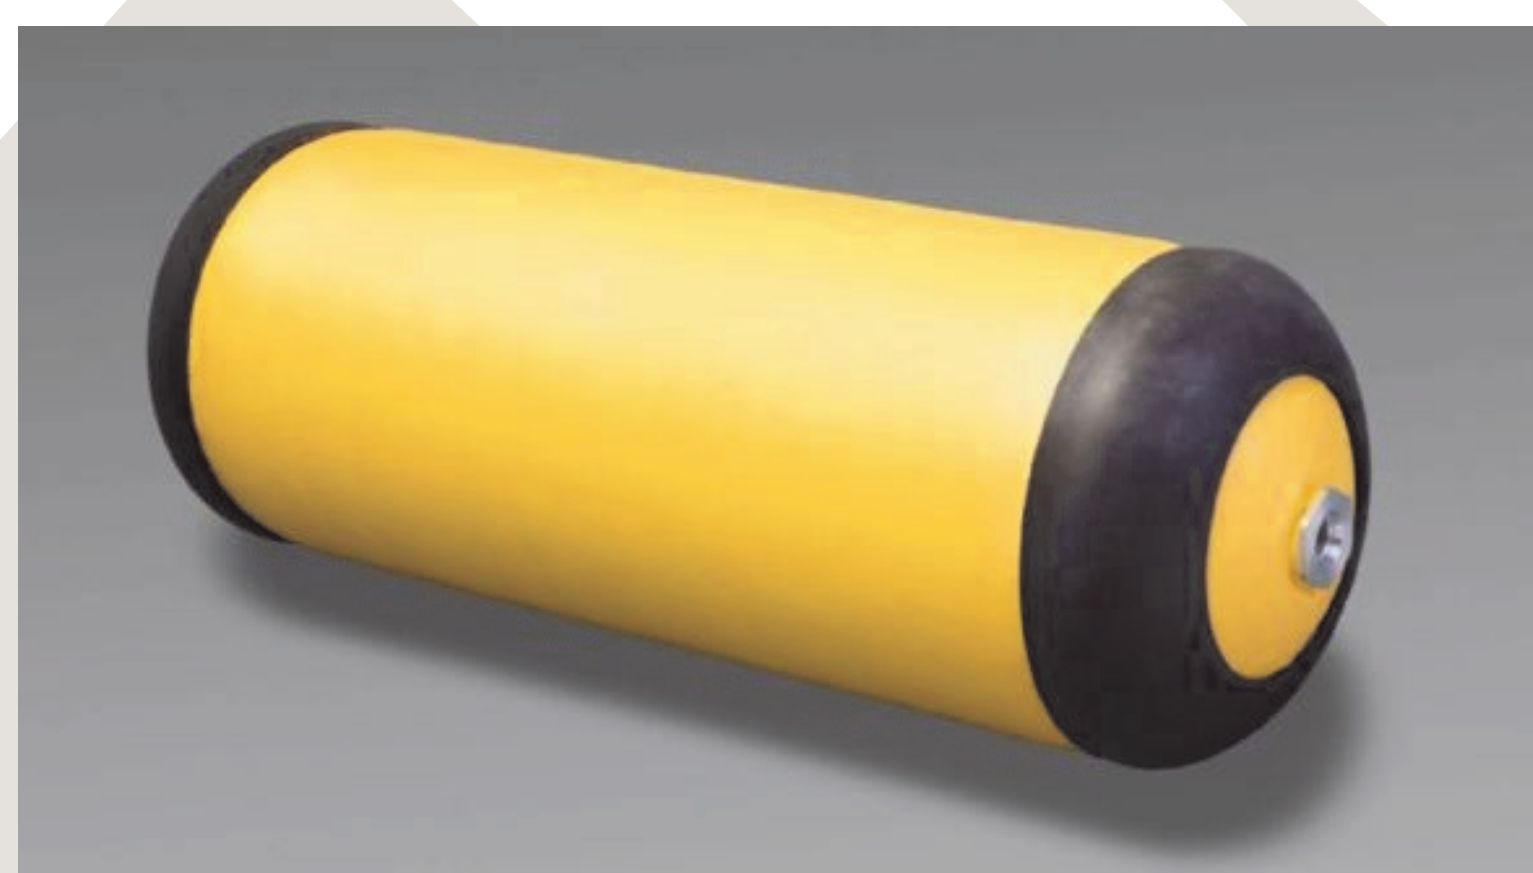


Figure 1: 70 MPa hydrogen tank used in the Toyota Mirai fuel cell vehicle [3]

- One of the routes to hydrogen storage that is being pursued is storage by adsorption, which uses nanoporous materials to physically bond hydrogen, so increasing the volumetric density.
- The aim of this project is to determine whether a composite material of the well known adsorbents PIM-1 and MOF-5 is feasible, and if so, if a hybrid tank featuring this material as a liner could provide a benefit over current hydrogen storage solutions.

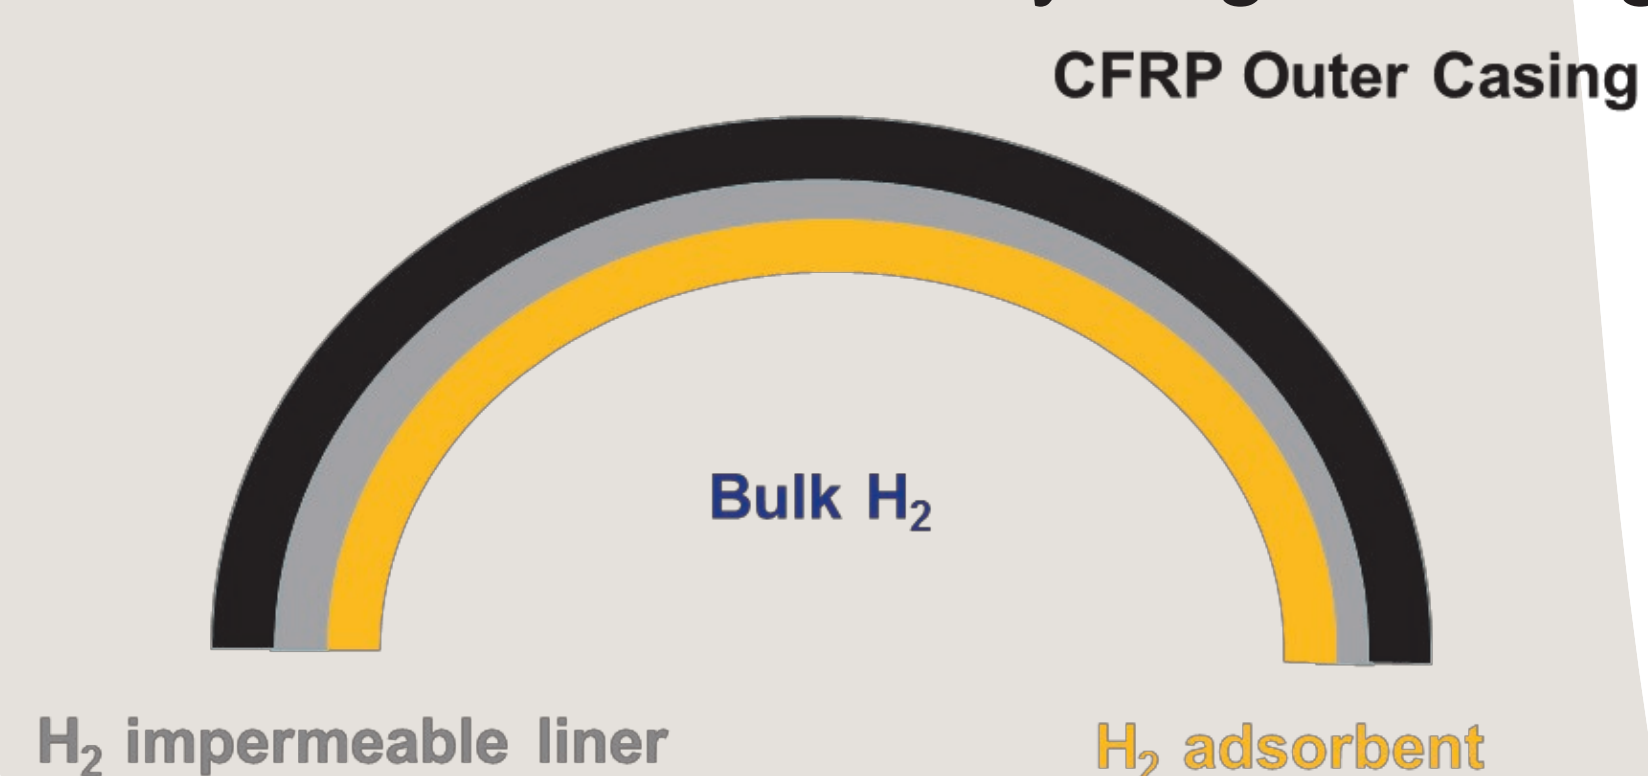


Figure 2: Schematic of a hybrid high pressure tank featuring an adsorbent liner

Metal Organic Framework (MOF-5)

- MOF-5 is composed of ZnO_4 clusters attached by 1,4-benzenedicarboxylate linkers.
- Has isorecticular topology (alternatively known as IRMOF-1).
- Industrial interest from Ford, General Motors, BASF [4].
- Rouquerol BET surface area of $3508 \pm 129 \text{ m}^2 \text{ g}^{-1}$ (N_2 isotherm at 77 K).
- Highly microporous pore size distribution; Horvath-Kawazoe (HK) model gives a modal pore size of 0.9 nm.

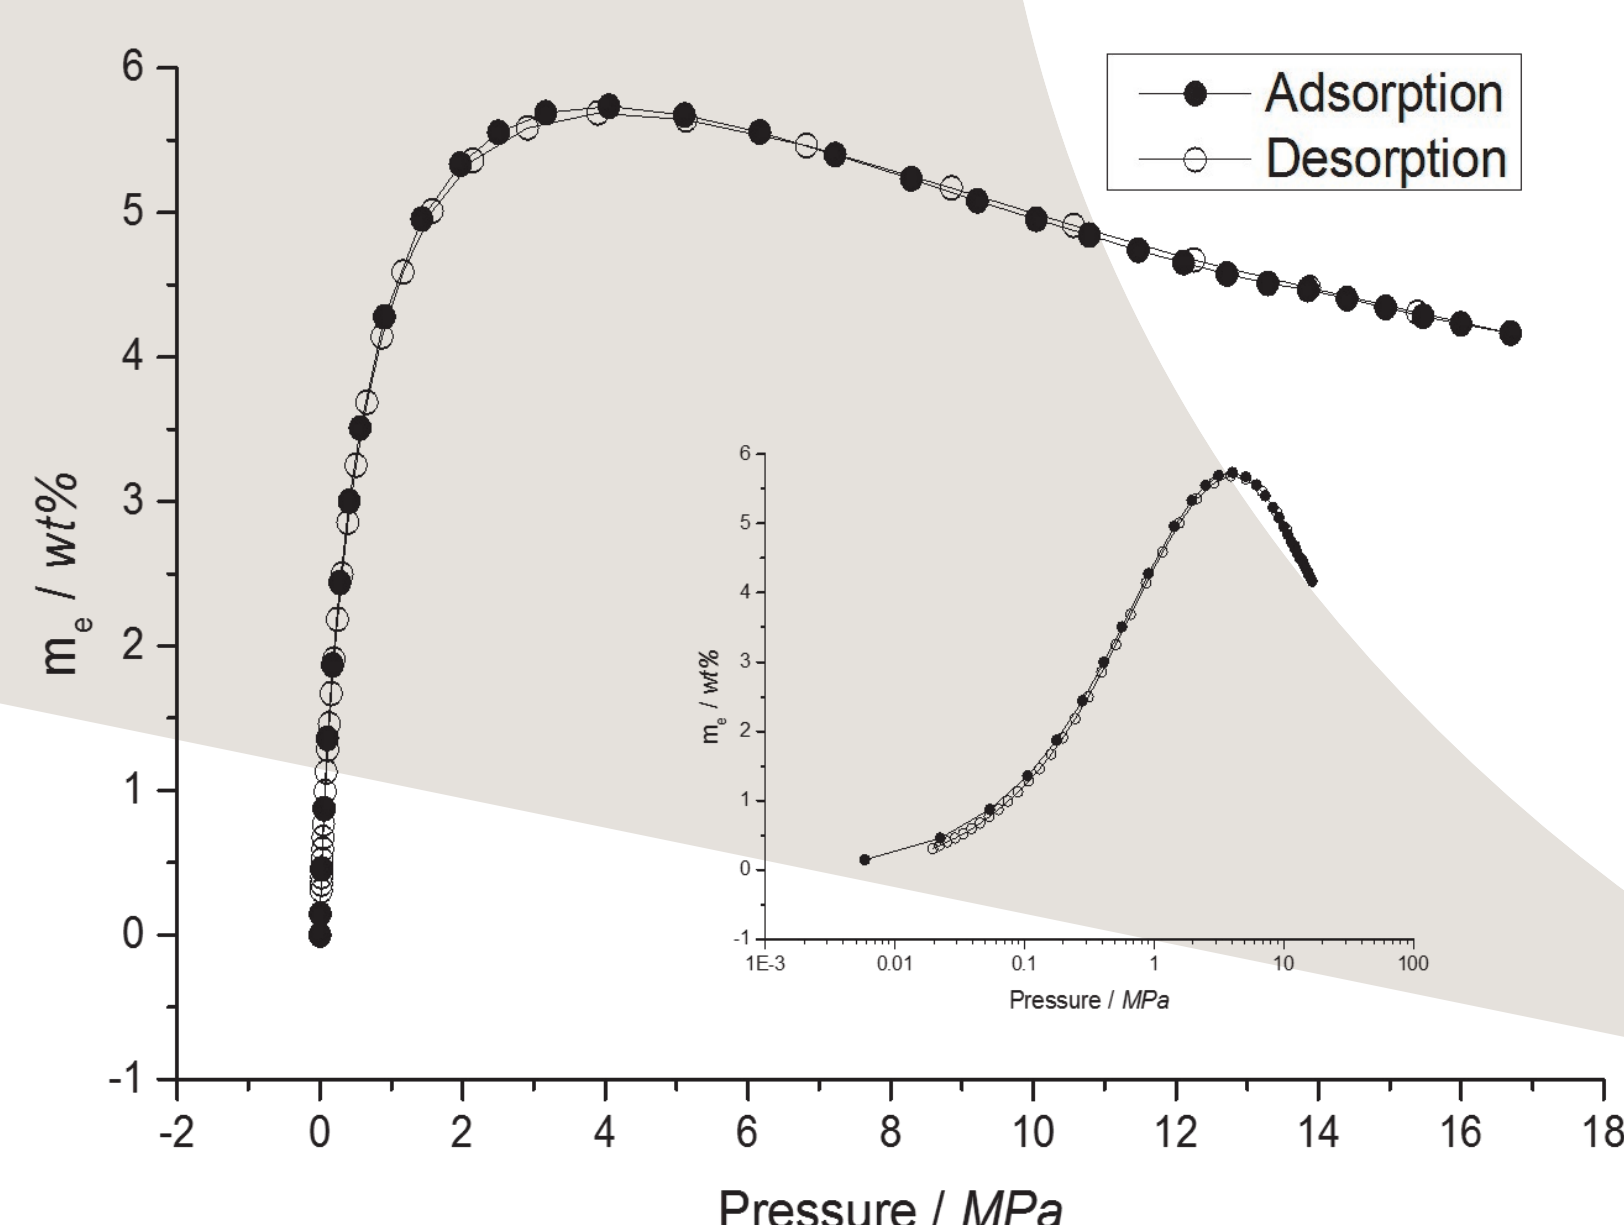


Figure 3: Hydrogen adsorption isotherm at 77 K for MOF-5

Polymer of Intrinsic Microporosity (PIM-1)

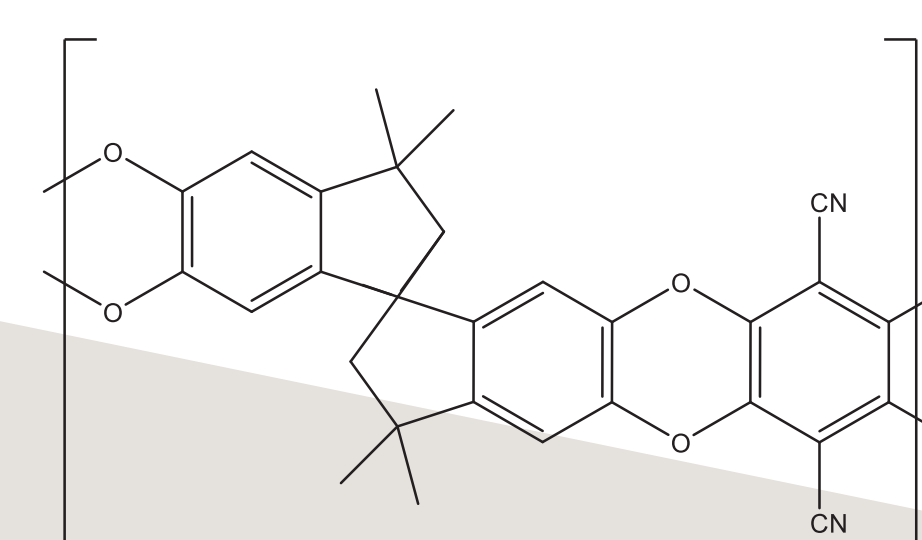


Figure 4: Chemical structure of PIM-1

PIM-1 Powder

- Bright yellow powder is soluble in polar aprotic solvents (e.g. chloroform, THF).
- Initially synthesised using the optimised method of Song et al. [5], although this resulted in a material that formed brittle, cracked films ($M_n = 9765 \text{ g mol}^{-1}$, PDI = 2.66).
- Synthesis using the original method of Budd et al. [6] resulted in a better quality PIM ($M_n = 76261 \text{ g mol}^{-1}$, PDI = 2.53).
- TGA under N_2 flow determines thermal stability up to $\sim 430 \text{ }^\circ\text{C}$.
- Helium pycnometry gives skeletal density of 1.24 g cm^{-3} .
- Rouquerol BET surface area = $621.2 \pm 3.0 \text{ m}^2 \text{ g}^{-1}$ (N_2 isotherm at 77 K).
- Pore size distribution reveals more than half the pore volume is microporous (HK total pore volume = $0.463 \text{ cm}^3 \text{ g}^{-1}$).

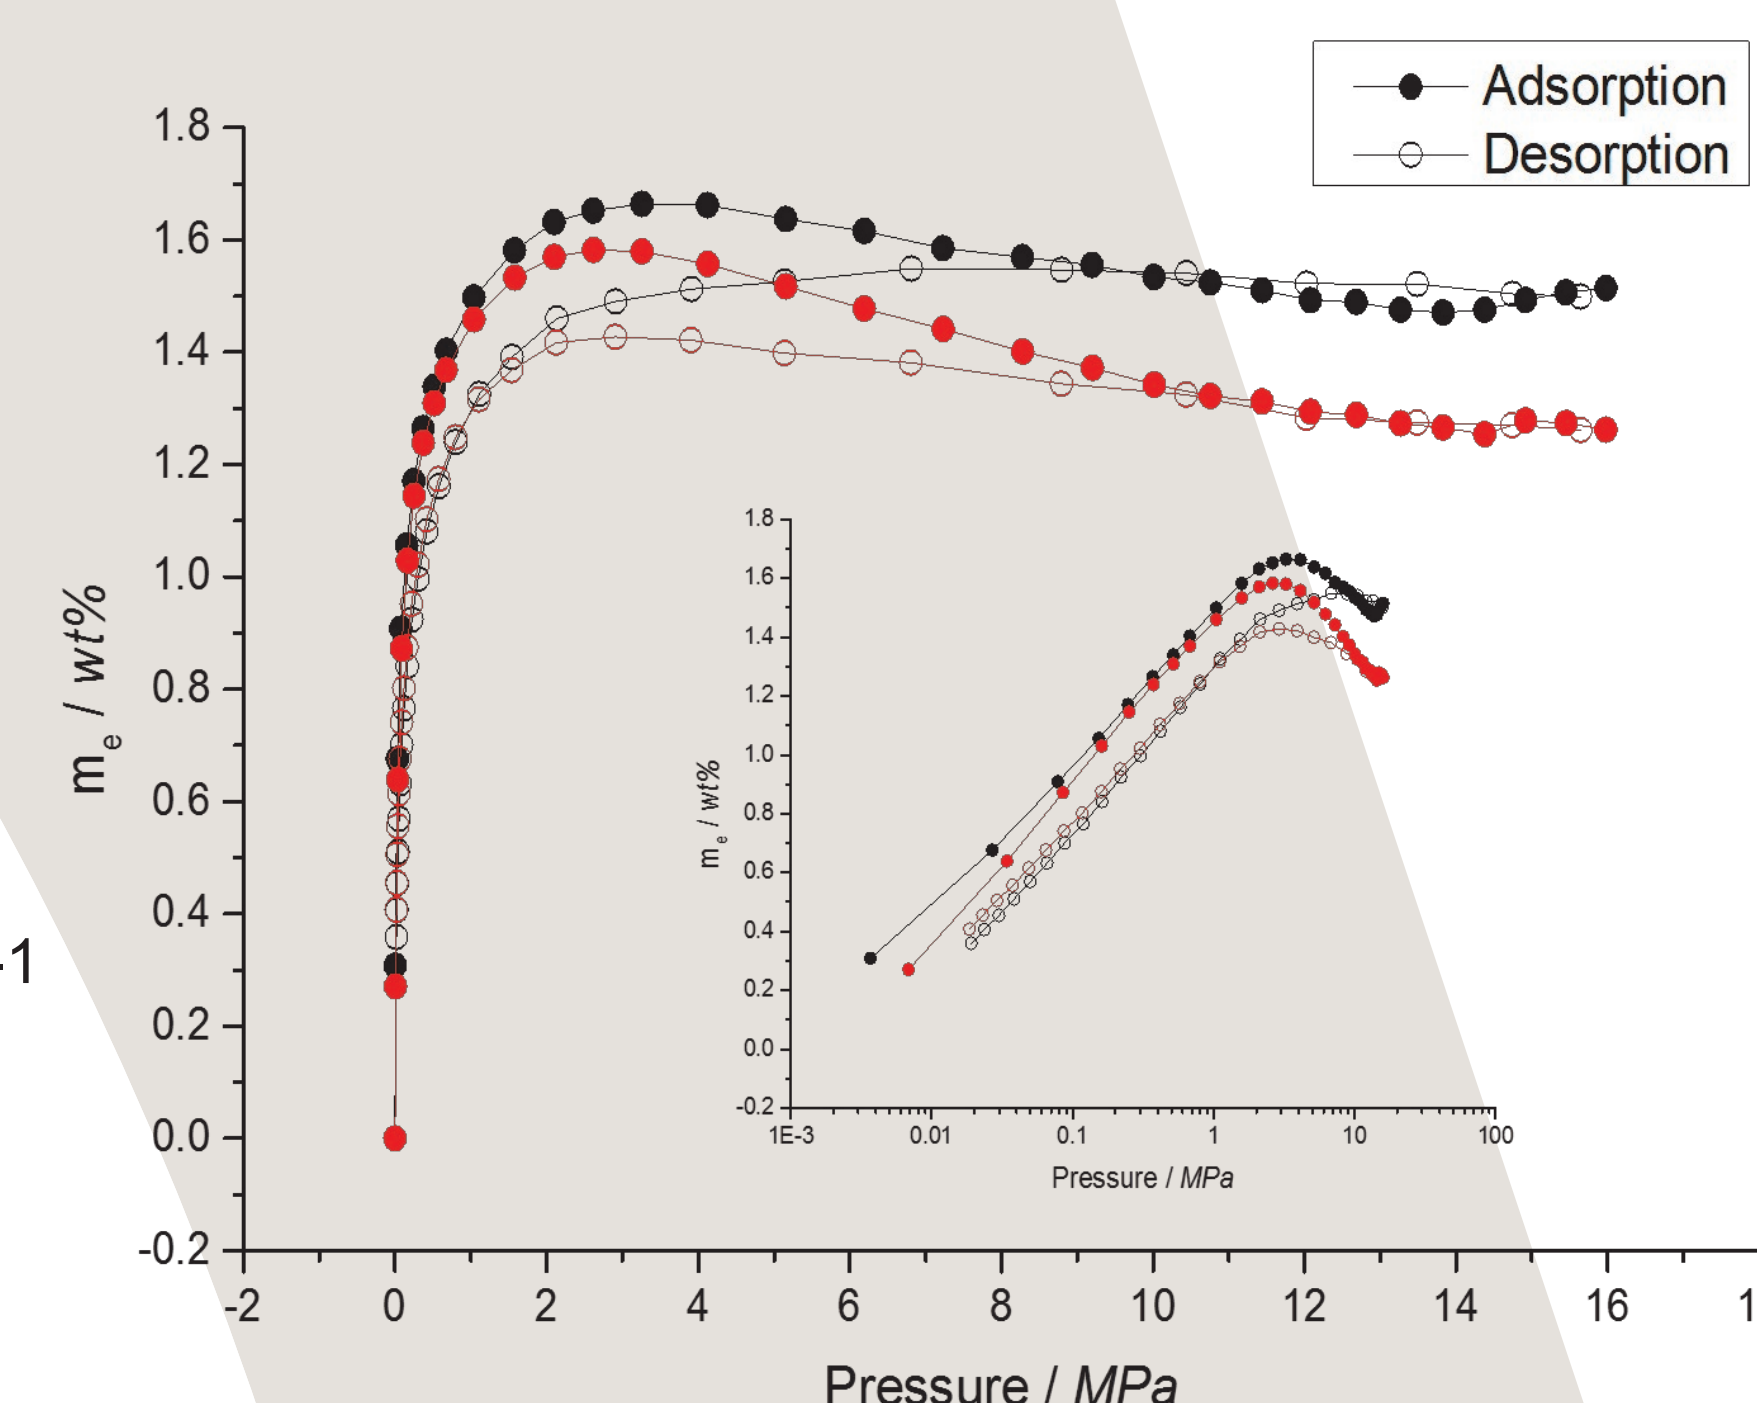


Figure 5: High Pressure (160 bar) Hydrogen adsorption isotherms at 77 K for PIM-1 powder (black) and PIM-1 film (red)

PIM-1 Film

- Synthesised through solvent casting of PIM-1 in chloroform.
- Rouquerol BET surface area of $330.9 \pm 5.2 \text{ m}^2 \text{ g}^{-1}$ (CO_2 isotherm at 273 K).
- Microporous analysis with N_2 difficult due to mass transfer limitations (slow equilibration).

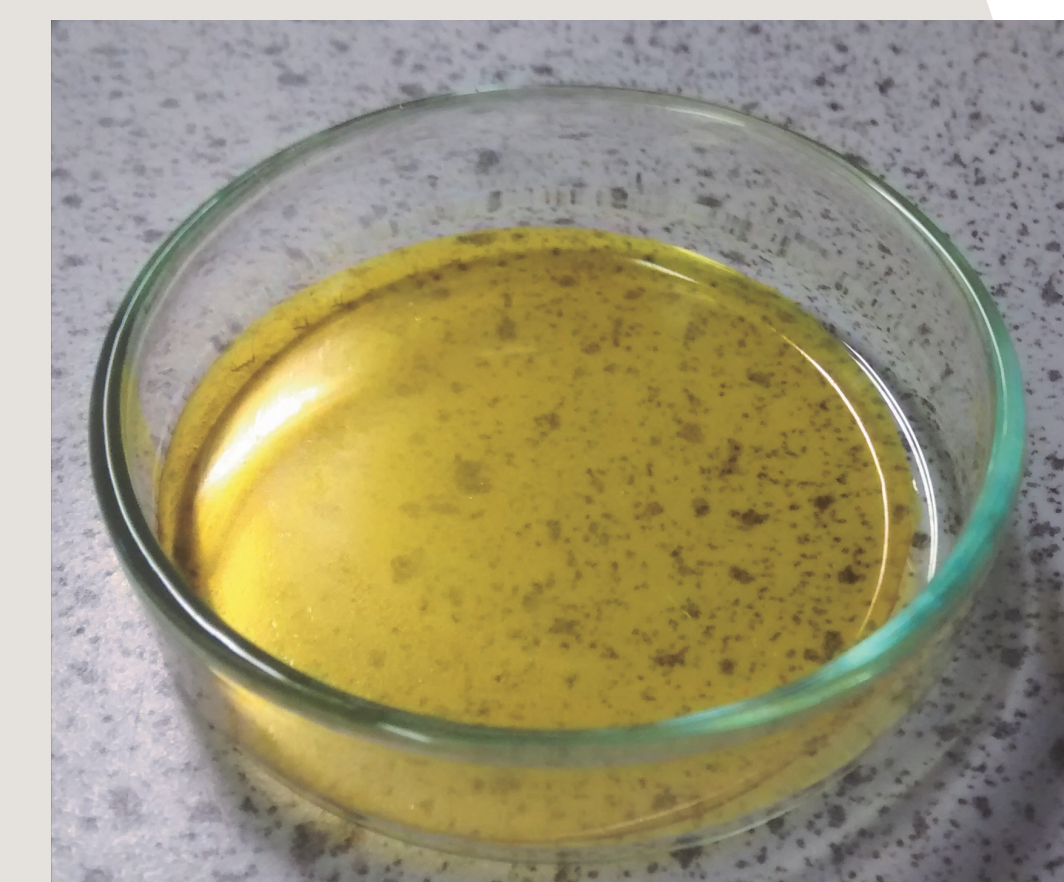



Figure 6: PIM-1 film

Future Work

- Synthesis of PIM-1/MOF-5 composite (in progress).
- Continued analysis of adsorbent properties of materials, including fitting to a model developed at the University of Bath to determine parameters such as adsorbate density and pore volume.
- Analysis of mechanical (tensile and flexural moduli), thermal (specific heat capacity, thermal conductivity) and binding properties of materials.
- Develop 'rule of mixtures'-style correlations between composite content and properties.
- Design of hybrid hydrogen storage tank with a composite liner.

References

- Mori, D. & Hirose, K., International Journal of Hydrogen Energy, 2009, 34(10): p. 4569-4574.
- U.S. Department of Energy. Target Explanation Document: Onboard Hydrogen Storage for Light-Duty Fuel Cell Vehicles, U.S. DRIVE ; 2015.
- Clifford, J. How does Toyota's fuel cell vehicle work? <http://blog.toyota.co.uk/how-does-toyotas-fuel-cell-vehicle-work> [Accessed 22/04/2015]
- Veenstra, M. et al., Ford/BASF-SE/UM Activities in Support of the Hydrogen Storage Engineering Center of Excellence, http://www.hydrogen.energy.gov/pdfs/review15/st010_veenstra_2015_o.pdf [Accessed 24/06/2015]
- Song, J. et al., Macromolecules, 2008, 41(20): p.7411-7417
- Budd, P. et al., Advanced Materials, 2004, 16(5): p. 456-459

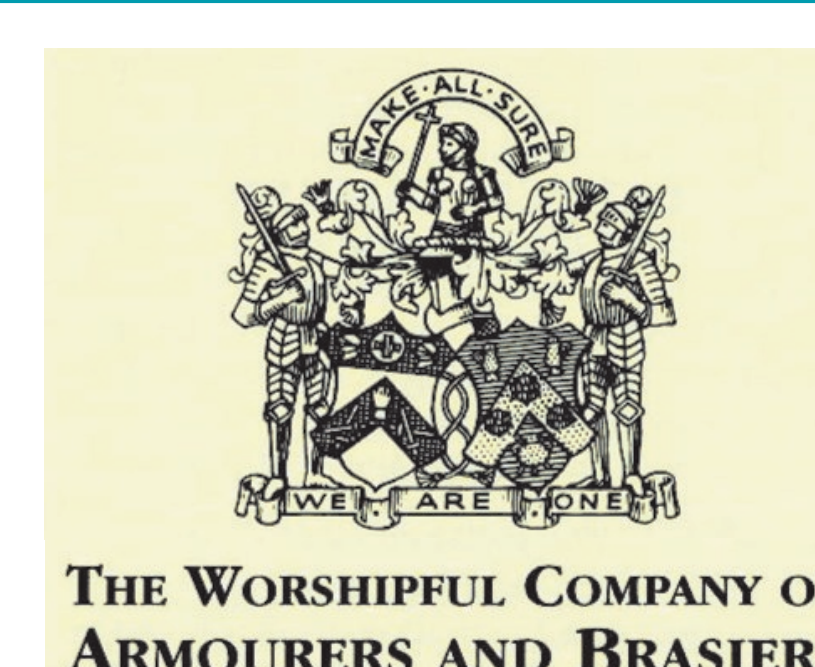

EPSRC

Engineering and Physical Sciences
Research Council