



Durham E-Theses

Acentric langmuir-blodgett: film assemblies

Christie, P

How to cite:

Christie, P (1985) *Acentric langmuir-blodgett: film assemblies*, Durham theses, Durham University.
Available at Durham E-Theses Online: <http://etheses.dur.ac.uk/7128/>

Use policy

The full-text may be used and/or reproduced, and given to third parties in any format or medium, without prior permission or charge, for personal research or study, educational, or not-for-profit purposes provided that:

- a full bibliographic reference is made to the original source
- a [link](#) is made to the metadata record in Durham E-Theses
- the full-text is not changed in any way

The full-text must not be sold in any format or medium without the formal permission of the copyright holders.

Please consult the [full Durham E-Theses policy](#) for further details.

ACENTRIC LANGMUIR-BLODGETT

FILM ASSEMBLIES

BY

P. CHRISTIE, B.Sc.

The copyright of this thesis rests with the author.
No quotation from it should be published without
his prior written consent and information derived
from it should be acknowledged.

A Thesis submitted for the Degree of
Doctor of Philosophy in the
University of Durham

November 1985



16. MAY 1986

Thesis
1985/CHR

Never say anything remarkable.
It is sure to be wrong.

Mark Rutherford (1915)

DECLARATION

I hereby declare that the work carried out in this thesis has not previously been submitted for any degree and is not being currently submitted in candidature for any other degree.

Signed *Phillip Christie*

The work carried out in this thesis was carried out by the candidate.

Signed *McPetty*

..... *Ganesh Roberts*

Directors of Studies

..... *Phillip Christie*

Candidate

ACKNOWLEDGEMENTS

I would like to take this opportunity to express my gratitude to a great many people who have helped me during the course of this work. Primarily, I must thank my supervisors, Professor Gareth Roberts and Dr. Mike Petty for the time and effort they have given encouraging and directing me in my research. Their combined talents have made the production of this thesis a most rewarding and pleasurable experience. I would also like to thank Dr. Graham Russell for the use of his equipment and Dr. Munir Ahmad for his patience with my attempts at chemical analysis. I would also like to thank everybody in the Department of Applied Physics and Electronics for both their friendship and constant sharing of ideas, in particular Mike Fowler and Doug Buchanan, whose suggestions have always been welcome and swiftly acted upon. I am indebted to the technical staff headed by Mr. Frank Spence for contributing their skills, knowledge and patience. My thanks also go to Mrs. P. Morrell for her proficiency in typing this thesis and to Mr. N. Thompson for preparing the diagrams. I gratefully acknowledge the financial support given to me by the SERC and Plessey Research (Caswell) Ltd.

I would like to thank the many friends who have made my years in Durham so enjoyable, in particular I would like to thank Julia for her invaluable faith and encouragement during the course of this work. Lastly, but most importantly, thanks to my parents for their constant support and sacrifice over the years.

ABSTRACT

In recent years there has been considerable interest in the use of Langmuir-Blodgett (LB) films as the basis of active and passive thin film devices. One such application is in room temperature, pyroelectric thermal imaging systems. As the detectivity of these sensors is approximately inversely proportional to thickness, there may be significant advantage in exploiting the ability of the LB process to produce ultra-thin layers.

Here we report the use of the LB technique to fabricate molecular assemblies with precisely defined symmetry properties. This has made possible the construction of ultra-thin organic films possessing the spontaneous polarisation necessary for the observation of the pyroelectric effect. Two distinct approaches are adopted to produce the required molecular packing arrangements. The first uses the ability of a novel alternate layer trough to assemble acentric ABAB structures. Various materials are studied for their suitability for alternate layer deposition. The co-deposition of fatty acids and amines produces alternate layer assemblies with a high degree of structural and electrical integrity. The second approach uses a novel polymeric LB film. Polybutadiene (PBD) is observed to deposit in highly asymmetric X-type layers if the transferred monolayer is exposed to u.v. radiation between each deposition step.

The structural and electrical properties are characterised. The presence of the unique polar axis associated with pyroelectric materials is investigated using surface potential measurements. Dynamic and quasi-static detection techniques are employed to detect the pyroelectric activity within the assemblies. For the first time pyroelectric activity is observed in "thin" (11 layer) acid/amine assemblies. The pyroelectric coefficient is found to be thickness dependent, increasing for larger numbers of layers; the coefficient for a 99 layer sample is comparable to that of PVDF, a commercially available pyroelectric polymer.

The incorporation of LB films into thin PVDF Metal Insulator Metal (MIM) structures is also investigated. The presence of a stable phthalocyanine LB film is shown to increase the electrical breakdown strength of the device. Finally the incorporation of highly polarisable sulphur substitutions into fatty acid LB films is reported. The permittivity is found to increase in proportion to the number of sulphur atoms introduced into the hydrocarbon chain.

CONTENTS

	<u>Page</u>
<u>CHAPTER 1 - INTRODUCTION</u>	1
<u>CHAPTER 2 - PROPERTIES OF ACENTRIC STRUCTURES</u>	
2.0 INTRODUCTION	3
2.1 AN HISTORICAL OUTLINE	4
2.2 PHENOMENOLOGICAL MODEL	7
2.3 MOLECULAR MODEL	14
2.3.1 Crystal symmetry	
2.3.2 Molecular symmetry and texture	
2.4 INHOMOGENEOUS SYSTEMS	19
2.4.1 Non-uniform heating	
2.4.2 Space charge polarisation	
2.4.3 Macroscopic symmetry	
2.5 SUMMARY	22
<u>CHAPTER 3 - DIELECTRIC RESPONSE</u>	
3.0 INTRODUCTION	23
3.1 DEFINITIONS	24
3.2 EQUIVALENT CIRCUIT MODEL OF DIELECTRIC	28
3.3 POLARISATION MECHANISMS	30
3.3.1 Orientational polarisation	
3.3.2 Interfacial polarisation	
3.4 UNIVERSAL DIELECTRIC RESPONSE	35
3.6 SUMMARY	38
<u>CHAPTER 4 - LB FILM TECHNOLOGY</u>	
4.0 INTRODUCTION	39
4.1 A BRIEF HISTORY	40
4.2 THE LANGMUIR TROUGH	42
4.2.1 Mechanical construction	
4.2.2 Instrumentation	
4.2.3 Environment and water purity	

	<u>Page</u>
4.3 THE ALTERNATE LAYER LANGMUIR TROUGH	45
4.3.1 Mechanical construction	
4.3.2 Instrumentation	
4.3.3 Cross-contamination	
4.4 MATERIALS FOR LANGMUIR-BLODGETT FILMS	47
4.4.1 Classical materials	
4.4.2 Novel materials	
4.5 ASSESSMENT OF MONOLAYER PROPERTIES	49
4.5.1 Pressure-area isotherms and monolayer structure.	
4.5.2 Collapse mechanisms	
4.6 FILM DEPOSITION	51
4.6.1 Monolayer spreading	
4.6.2 Monolayer compression	
4.6.3 Deposition modes	
4.7 QUALITY ASSESSMENT	53
4.8 LB FILM APPLICATIONS	55
4.9 SUMMARY	56
 <u>CHAPTER 5 - DEVICE FABRICATION AND EXPERIMENTAL TECHNIQUES</u>	
5.0 INTRODUCTION	57
5.1 DEVICE FABRICATION	57
5.1.1 Substrate preparation	
(a) Glass	
(b) Silicon	
(c) Polymer films	
5.1.2 Electrode deposition	
5.1.3 Electrode geometries	
5.1.4 Surface blacking materials and techniques	
5.2 QUASI-STATIC PYROELECTRIC DETECTION	62
5.2.1 Principles of measurement	
5.2.2 Experimental	
5.2.3 System assessment	
5.3 DYNAMIC PYROELECTRIC DETECTION	64
5.3.1 Principles of measurement	
5.3.2 Mechanical construction	
5.3.3 Infra-red sources	
5.3.4 Electrical construction	
5.3.5 System assessment	

	<u>Page</u>
5.4 SURFACE POTENTIAL MEASUREMENTS	69
5.4.1 Principles of measurement	
5.4.2 Mechanical construction	
5.4.3 Electrical construction	
5.4.4 System assessment	
5.5 MEASUREMENT OF THE RELATIVE PERMITTIVITY OF LB FILMS	72
5.5.1 Determination of the relative permittivity at fixed frequency	
5.5.2 Determination of the frequency dependence of the relative permittivity	
5.5.3 Determination of the temperature dependence of the relative permittivity	
5.6 SUMMARY	76

CHAPTER 6 - ALTERNATE LAYER LB FILM ASSEMBLIES : RESULTS AND DISCUSSION

6.0 INTRODUCTION	78
6.1 PYROELECTRICITY AND THE ALTERNATE LAYER TECHNIQUE	79
6.2 CHARACTERISATION OF AMINE TERMINATED ALKANES	79
6.2.1 Pressure-area isotherms and solubility	
(a) Stearylamine	
(b) Eicosylamine	
(c) Docosylamine	
6.2.2 Deposition	
6.2.3 Alternate layer deposition	
6.3 CHARACTERISATION OF CYANO AND ALCOHOL TERMINATED ALKANES	83
6.3.1 Cyano termination	
(a) Pressure area isotherm	
(b) Deposition	
(c) Alternate layer deposition	
6.3.2 Alcohol termination	
(a) Pressure area isotherm	
(b) Deposition	
6.3.3 Summary of materials	
6.4 STRUCTURAL CHARACTERISATION	84
6.5 DIELECTRIC CHARACTERISATION	88
6.6 SURFACE POTENTIAL CHARACTERISATION	91
6.6.1 Characterisation of Y type layers	
6.6.2 Characterisation of alternate layers	

	<u>Page</u>
6.7 THE PYROELECTRIC EFFECT IN ALTERNATE LAYER ASSEMBLIES	96
6.7.1 Dynamic detection	
6.7.2 Quasi-static detection	
6.7.3 Discussion	
6.8 SUMMARY	104
APPENDIX	106
<u>CHAPTER 7 - THE X-TYPE DEPOSITION OF POLYBUTADIENE LB FILMS :</u> <u>RESULTS AND DISCUSSION</u>	
7.0 INTRODUCTION	110
7.1 X-TYPE DEPOSITION AND CRYSTAL STRUCTURE	111
7.2 IONICALLY TERMINATED BUTADIENE POLYMERS	111
7.3 CHARACTERISATION OF POLYBUTADIENE LB FILMS	112
7.3.1 Monolayer properties	
7.3.2 Multilayer formation	
7.4 STRUCTURAL CHARACTERISATION	115
7.4.1 X-ray photoelectron spectroscopy	
7.4.2 RHEED	
7.4.3 Ellipsometry	
7.5 DIELECTRIC CHARACTERISATION	118
7.5.1 Determination of the relative permittivity	
7.5.2 Frequency dependence of the relative permittivity	
7.6 SURFACE POTENTIAL CHARACTERISATION	122
7.7 PYROELECTRIC DETECTION	124
7.8 SUMMARY	125
<u>CHAPTER 8 - RELATED INVESTIGATIONS : RESULTS AND DISCUSSIONS</u>	
8.0 INTRODUCTION	126
8.1 THE HIGH FIELD POLING OF PVDF	126
8.1.1 The production of thin PVDF films with high piezo- and pyroelectric activity	
8.1.2 Experimental	
8.1.3 Results and discussion	

	<u>Page</u>
8.2 <u>THE CHARACTERISATION OF SULPHUR SUBSTITUTED FATTY ACIDS</u>	130
8.2.1 Film formation	
8.2.2 Film characterisation	
8.2.3 Summary	
<u>CHAPTER 9 - CONCLUSIONS AND SUGGESTIONS FOR FURTHER WORK</u>	134
REFERENCES	139

CHAPTER 1

INTRODUCTION

One of the most active areas in solid state research today is the study of pyroelectricity, both as a means for investigating fundamental physics and as a phenomenon useful in infra-red detectors. Since the realisation of the many technological applications of the pyroelectric effect, the publication rate has been doubling every three years (see figure 1.1).

All crystalline materials may be classified according to the symmetry of their unit cell⁽¹⁾. Unit cells with no centre of symmetry are said to be acentric and they have the property that a polarisation may be induced by an applied mechanical stress. Some of these acentric classes also possess the important property that a finite and permanent polarisation exists in the absence of an applied field or stress. If this spontaneous polarisation can be varied by heating or cooling a current will result in an external circuit, which is proportional to the rate of change of temperature. This phenomenon is called pyroelectricity and it has received much attention since Hadni⁽²⁾ suggested the pyroelectric vidicon for thermal imaging in 1965. The interest in pyroelectric imaging systems stems from its ability to suppress high levels of background radiation and sense only temperature differences, without the complex scan mechanisms and cooling systems required by other imaging technologies⁽³⁾. Currently the performance of pyroelectric imaging systems is limited by noise in the detector material. This has led to a move towards thin film technology since it can be shown⁽⁴⁾ that the high frequency noise equivalent power of the detector is proportional to thickness.



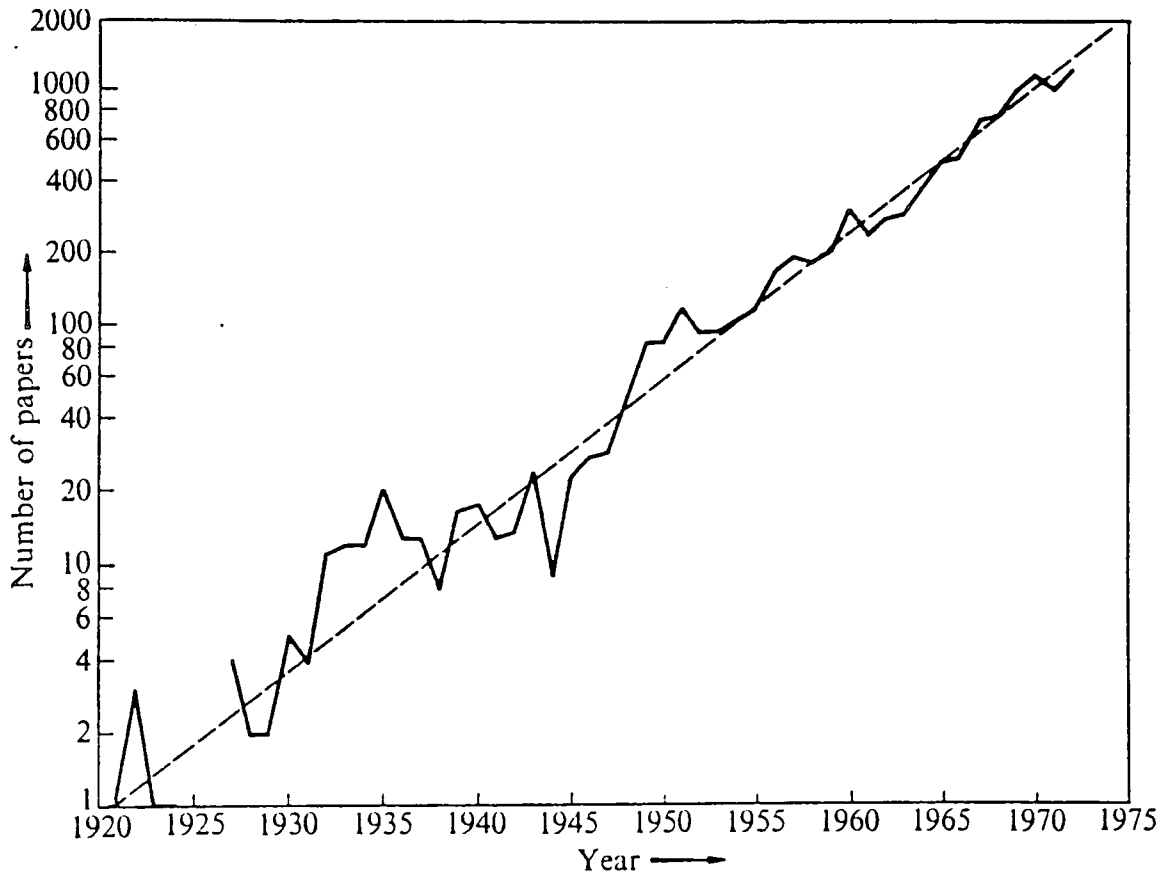


Figure 1.1 Number of publications on pyroelectricity and related topics as a function of year (After Landolt-Bornstein New Series, Group III, Vol-9, Springer-Verlag, Berlin (1975))

In this thesis the Langmuir-Blodgett technique has been used to fabricate crystal structures with precisely defined symmetry properties. This control over the molecular architecture of organic crystals is unique to the LB technique and has enabled the construction of ultra-thin organic films possessing no centre of symmetry and with the spontaneous polarisation necessary for the observation of the pyroelectric effect.

The strange properties of pyroelectric materials have been observed since ancient times because of the ability of certain minerals to attract small objects when they are heated. Thus chapter 2 describes the historical development of the effect and includes a phenomenological model based on purely thermodynamic arguments. The properties of acentric crystals are then discussed on a molecular level and the arguments extended to organic systems. Chapter 3 briefly covers the dielectric characterisation of LB film materials and surveys the polarisation mechanisms responsible for the frequency response of dielectric materials. LB film technology is introduced in chapter 4; this includes the historical background, experimental procedures and an outline of possible applications of the technique. In chapter 5 the various experimental arrangements used during the course of this study are described and the techniques of device fabrication are listed. Also included are the results of novel investigations into increasing the emissivity of LB film infra-red detectors. Chapters 6 and 7 contain the bulk of the experimental data. The first of these deals with the production of alternate layer structures for the observation of the pyroelectric effect whilst the second describes the results for the X-type deposition of a novel polymeric LB film. In chapter 8 a summary of related work is discussed. The closing chapter of this thesis reviews the conclusions and gives suggestions for further work.

CHAPTER 2

PROPERTIES OF ACENTRIC STRUCTURES

2.0 INTRODUCTION

This chapter is concerned with the properties of polar molecular crystals which possess no centre of symmetry; so called polar acentric structures. If these acentric structures also possess a unique polar axis, then a spontaneous polarisation may exist across the crystal. This spontaneous polarisation produces extremely large electric fields within the sample and consequently the dielectric properties of such structures would be expected to differ from their centrosymmetric counterparts.

If the polarisation may be varied by an applied stress then the material is termed piezoelectric, from the Greek verb πιεζειν, to press. Similarly if the polarisation existing across the sample may be varied by heating then the material is termed pyroelectric (from the Greek πυρος = fire). The two effects are closely inter-related and section 2.2 attempts to illustrate the relationships between the polarisation of a crystal and its associated piezo- and pyroelectric effects using a simple thermodynamic model. Section 2.3 describes, on a microscopic level, the importance of crystal symmetry in the production of a large spontaneous polarisation.

Finally, section 2.4 shows how inhomogeneous systems may produce effects which closely resemble the properties of acentric crystal structures.

The next section gives a brief outline of the history and applications of this technologically important class of materials.

2.1 AN HISTORICAL OUTLINE

The strange properties of acentric structures have been known since ancient times because of the ability of certain materials to attract objects when they are heated. Possibly the earliest description of the large polarisation associated with such materials, was by Theophrastus, the Greek philosopher, in a passage written 23 centuries ago:

'... remarkable in its powers, and so is the lyngourion, for seals are cut from this too, and it is very hard, like real stone. It has the power of attraction, just as amber has, and some say that it not only attracts straws and bits of wood, but also copper and iron, if the pieces are thin, as Diokles used to explain.'

Theophrastus C.315 B.C.

Theophrastus was a pupil of Aristotle and the above extract was from a treatise on minerals⁽¹⁾. For 1800 years it was a most valuable and authoritative work on mineralogy. The lyngourion stone mentioned was highly prized for its curative powers and was probably the precious stone tourmaline.

Two thousand years after Theophrastus, the strange properties of tourmaline were re-introduced into Europe, through the publication, in 1707, of a book entitled 'Curiose Speculationes bey Schlaflosen Nachten' (Curious speculations during sleepless nights). Here the author, Johan Schmidt, wrote of the curious property of trip or tourmaline, to attract ashes from burning coals and then repel them.

'... This sight was very amusing for as soon as a small quantity of ashes leaped upon it, they appeared to be endeavouring to writhe themselves by force into the stone. Soon a few of the ashes jumped from it again, as if to leap to the tourmaline again.'

It was also in the 18th century that true scientific experimentation