



Swansea University
Prifysgol Abertawe



Cronfa - Swansea University Open Access Repository

This is an author produced version of a paper published in:
Current Environmental Engineering

Cronfa URL for this paper:

<http://cronfa.swan.ac.uk/Record/cronfa43568>

Paper:

Yaser, A., Yusof, L., Ibrahim, A. & Hilal, N. (2018). Adsorption of Ammonia Nitrogen by using Jackfruit (*Artocarpus heterophyllus*) Seeds: Batch and Fixed-bed Column Studies. *Current Environmental Engineering*, 05
<http://dx.doi.org/10.2174/2212717805666180809094826>

This item is brought to you by Swansea University. Any person downloading material is agreeing to abide by the terms of the repository licence. Copies of full text items may be used or reproduced in any format or medium, without prior permission for personal research or study, educational or non-commercial purposes only. The copyright for any work remains with the original author unless otherwise specified. The full-text must not be sold in any format or medium without the formal permission of the copyright holder.

Permission for multiple reproductions should be obtained from the original author.

Authors are personally responsible for adhering to copyright and publisher restrictions when uploading content to the repository.

<http://www.swansea.ac.uk/library/researchsupport/ris-support/>

Adsorption of Ammonia Nitrogen by using Jackfruit (*Artocarpus heterophyllus*) Seeds: Batch and Fixed-bed Column Studies

A. Y. Zahrim^{a*}, Y. Lija^a, I. Azreen^a, N. Hilal^b

^aFaculty of Engineering, Universiti Malaysia Sabah, Jln UMS, 88400 Kota Kinabalu, Sabah, Malaysia

^bCentre for Water Advanced Technologies and Environmental Research (CWATER), College of Engineering, Swansea University, Swansea SA2 8PP, UK.

ARTICLE INFO

ABSTRACT

The performance of jackfruit (*Artocarpus heterophyllus*) seed adsorbent for ammonia nitrogen (NH₃-N) removal from aqueous solution was examined through batch and continuous bed column experiments. The effects of sodium chloride (NaCl) and lignin concentration on the adsorption process were evaluated. The results revealed that the adsorption performance gradually decreased upon the addition of NaCl and lignin in the solution. Fixed bed column experiments showed that maximum removal of ammonia nitrogen was obtained at an influent concentration of 100 mg/L, bed height of 10 cm and lowest inlet flow rate of 17 mL/min. Meanwhile, desorption studies were carried out at different pH and highest desorption capacity of jackfruit seed adsorbent was 0.42 mg/g. This study suggests that jackfruit seed is a promising adsorbent for the recovery process of ammonia nitrogen.

Keywords: Ammonia-nitrogen, Jackfruit seeds, Adsorption, Fixed-bed

1. Introduction

Ammonia nitrogen is one of the most common and toxic species of nitrogen found in water bodies and the main sources of this pollutant comes from agricultural run-off and industrial wastewater such as detergent manufacturing and mineral processing industry [1]. An excess amount of it in the environment could lead to a serious nature distortion as it may causes eutrophication and toxicity to aquatic organisms [2]. Thus, the treatment process of NH₃-N contaminant from water ways is essential for diminishing serious impact to environment. Various treatment methods have been developed to remove NH₃-N, such as chemical precipitation[3], membrane technology [4] and adsorption [5]. Adsorption method is considered to be the most promising and effective approach due to its simplicity in operation and economically viable [6]. Malaysia generated huge amount of solid waste annually and agricultural waste contributed about 1.2 million tons per year [7]. The utilization of agricultural

1 residue as low cost adsorbent has increased significantly over the past few years as these
2 materials are abundant [8-10] and could reduce the solid waste disposal problem [11].
3 Nonetheless, the applicability of agricultural material for NH₃-N removal specifically has not
4 received adequate interest as the availability of information is limited compared to other
5 contaminants such as dye [12] and heavy metals [13]. Hence, this research work was intended
6 to determine the adsorption performance of jackfruit seed adsorbent in batch and continuous
7 fixed bed column processes with several experimental parameters. Jackfruit seed is an oblong
8 cylindrical or rounded in shape fruit and composed of moisture ($9.59 \pm 0.1\%$), protein ($0.09 \pm$
9 0.03%), lipid ($0.03 \pm 0.01\%$), ash ($0.04 \pm 0.04\%$), carbohydrates ($93.64 \pm 0.73\%$), amylose
10 ($25.54 \pm 0.38\%$) and amylopectine ($74.46 \pm 0.38\%$) [14, 15].

11

12 **2. Materials and methods**

13 **2.1 Materials**

14

15 Jackfruit seeds were collected from market area located in Kota Belud, Sabah. The seeds
16 were washed thoroughly with tap water and distilled water to remove surface adhered
17 impurities before drying in an oven at 40°C for 48 hours. The seeds were then ground and
18 sieved to a smaller size around 1-2 mm.

19 Ammonium chloride (NH₄Cl) was dissolved in 1 L of distilled water for adsorbate solution
20 preparation and the ranges of adsorbate concentrations used in this study varied between 0 -
21 500 mg/L. 0.1 M of sodium hydroxide (NaOH) and sulphuric acid (H₂SO₄) were used for
22 solution pH adjustment. Meanwhile, lignin (alkali) powder (Sigma-Aldrich, USA) and sodium
23 chloride were used in determination of effect of lignin and ionic salt in adsorption performance
24 respectively.

25 **2.2 Batch adsorption experiment**

1 A series of batch adsorption experiments were carried out at room temperature (29±1°C)
2 for a period of time with constant adsorbent dosage of 20 g. The effect of ionic strength on the
3 amount of NH₃-N adsorbed onto the adsorbent was evaluated at NaCl concentrations ranging
4 from 0 to 2000 mg/L. Meanwhile, lignin was dissolved in distilled water to different
5 concentration ranges (0-4000 mg/L) in order to assess the effect of lignin concentration on the
6 adsorption performance. The experiment was held at constant volume of aqueous solution of
7 500 mL, 500 mg/L of initial concentration of NH₃-N, pH 7 and 20 g of adsorbent weight.

8 Sample solutions were withdrawn at certain time intervals (0-70 minutes) in order to
9 determine the residual concentration at the time and then analyzed by using a Jasco UV-vis
10 650 Bio-spectroscope with a maximum wavelength of 425 nm following the Nessler method.
11 The amount of NH₃-N adsorbed at equilibrium, Q_e (mg/g) and removal percentage (%) were
12 calculated as follows [8]:

$$13 \text{ Removal percentage (\%)} = [(C_o - C_e)/C_o]100 \quad (1)$$


$$14 \text{ Adsorption capacity, } Q_e = [(C_o - C_e)V/M] \quad (2)$$

15 where C_o (mg/L) and C_e (mg/L) are respectively the initial and at time (t) ammonia nitrogen
16 concentrations, V is the volume of aqueous solution (L) and M (g) is the mass of sample used
17 as adsorbent. Each experimental parameter was repeated twice to avoid any discrepancy in
18 experimental results and the results were taken as an average.

20 2.3 Fixed bed column studies

21 The dynamic behavior of a fixed bed column packed with jackfruit seed adsorbent in removing
22 NH₃-N was evaluated by conducting continuous flow adsorption experiments in a fixed bed
23 column of 6.5 cm internal diameter and 100 cm height. The adsorption column system was
24 equipped along with a pump, flow meter and influent and effluent tank and operated from the
25 upper boundary (down-flow mode) using a peristaltic pump (MasterFlex L/S Series Precision

1 Pump) and connected to a flow meter (TEFLON-PFA) as shown in Figure 1. The bottom of
2 the bed column was covered neatly to avoid any loss of adsorbent. A thin layer of water is kept
3 on the upper surface of adsorbent bed before the adsorbate solution was added into column in
4 order to minimizing the channeling effect.

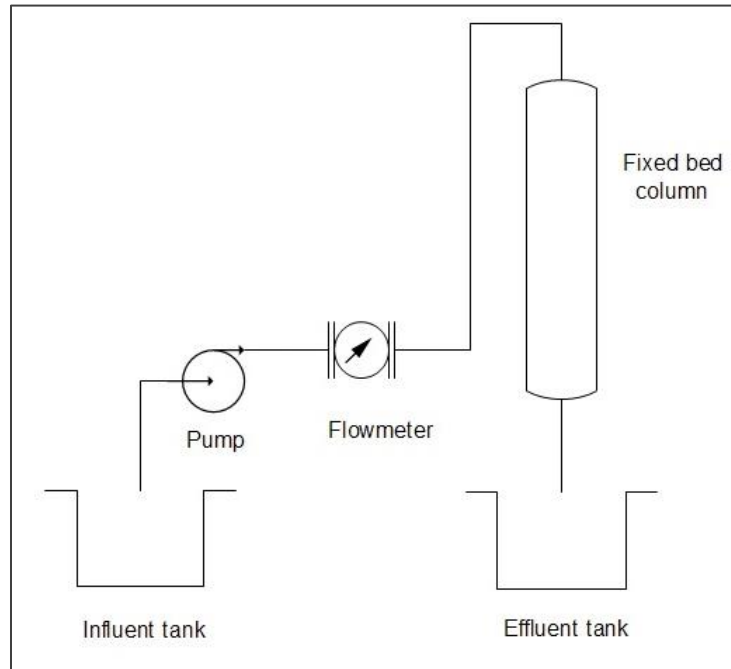

5
6 **Fig. 1. Experimental setup for fixed bed adsorption column.**

7 The breakthrough point is an effluent concentration (C_t) from the column that reaches about
8 0.1% of the influent concentration (C_o) whereas the exhaustion point is a point where the
9 effluent concentration reaches 95%. Breakthrough curves were constructed as a function of
10 each parameter studied (flow rate, ammonia nitrogen concentration and bed height) based on
11 the ratio of influent and effluent concentration (C_o/C_t) at a given sampling time (t) [16, 17].
12 The effluent volume (V_{eff}), maximum bed capacity (Q_{total}), removal percentage (%) and
13 equilibrium NH_3 -N uptake ($Q_{eq(xp)}$) were calculated for each parameter. The effluent volume
14 was calculated by using the following equation [18]:

15
$$V_{eff} = Q_{total} \quad (3)$$

1 where V_{eff} is the effluent volume collected (L), Q is volumetric flow rate (mL/min), t_{total} is total
2 flow time (min). The maximum bed capacity for a given flow rate and influent concentration
3 is given as follows [16]:

$$4 \quad q_{\text{total}} = QC_{\text{ad}}dt/1000 \quad (4)$$

5 where q_{total} is the maximum bed capacity (mg/g), C_{ad} is the concentration of adsorbed ammonia
6 nitrogen (mg/L). The area under the curve of concentration of ammonia nitrogen adsorbed
7 against time was used to determine the value of the integral. The total amount of ammonia
8 nitrogen sent to the column is given by the following equation [17]:

$$9 \quad M_{\text{total}} = C_oQt_{\text{total}}/1000 \quad (5)$$

10 where M_{total} is total amount of ammonia nitrogen sent to the column (g), C_o is the initial
11 concentration (mg/L), and t_{total} is the total flow time (min). Total removal percentage of
12 ammonia nitrogen and equilibrium ammonium uptake can be measured by [17]:

$$13 \quad \text{Removal Percentage (\%)} = (q_{\text{total}}/M_{\text{total}})100 \quad (6)$$

$$14 \quad q_{\text{eq}(xp)} = q_{\text{total}}/x \quad (7)$$

15 where $q_{\text{eq}(xp)}$ is the equilibrium uptake (mg/g), and x is the amount of adsorbent (g).

16

17 **2.4 Desorption**

18 Desorption study was conducted by treating the ammonium-loaded adsorbent with various
19 concentrations of H_2SO_4 and NaOH solutions in a series of batch experiments. The used
20 adsorbent (20 g) was initially rinsed in distilled water and dried for 2 days at room temperature.
21 The dried adsorbent then was agitated in the solutions for 70 minutes and the desorbed
22 ammonia nitrogen concentration was determined by using UV-Vis spectrophotometer (Jasco
23 UV-Vis 650 Bio-spectroscope) at maximum wavelength of 425 nm. All the experiments were
24 repeated in duplicates and results are averaged.

25

3. Result and discussion

The present study is a continuation of the previous research work [19] which applied a screening process to 40 types of agricultural wastes in assessing the $\text{NH}_3\text{-N}$ removal from aqueous solution. Jackfruit seed was selected as the best sorbent and used for further sorption studies due to the high adsorption capacity and its availability throughout the year. The effect of NaCl and lignin on ammonium adsorption was studied in this paper because it is important to evaluate the adsorbent performance at various solution conditions. For example, some of the potential solution for this adsorbent is drainage near the sea which is containing high salinity while palm oil mill effluent is high in lignin content.

3.1 Effect of sodium chloride concentration on adsorption of ammonia nitrogen

The influence of NaCl concentration on ammonium (NH_4^+) ion adsorption was studied at pH 7.0 with concentration ranges from 0 to 2000 mg/L. Figure 2 demonstrates that in the absence of salt, the NH_4^+ ions uptake showed the highest adsorption ability with adsorption capacity of 3.35 mg/g.


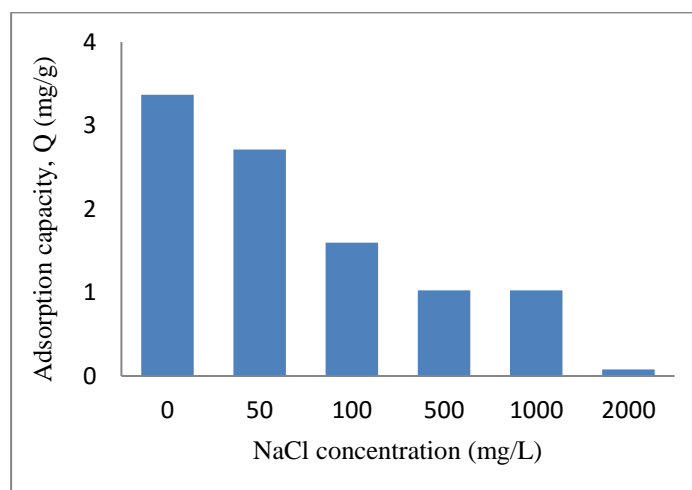


Fig. 2. Ammonia nitrogen removal by jackfruit seed with various NaCl concentration onto the adsorbent (contact time: 60 min, pH: 7.0, biosorbent weight: 20 g).

1 Further increase in the NaCl salt concentration exhibited a decreasing effect on the NH_4^+
2 ion uptake and this indicated that the cations from salt might subdue the positively charged
3 NH_4^+ ion in the solution due to the competition between the cations present in salt and
4 adsorbate species for the available negatively charged sites of jackfruit seeds adsorbent [20-
5 22]. In this study, when the adsorbent is in contact with NH_4^+ ion species in aqueous solution,
6 they are bound to be surrounded by an electrical double layer and an increase in ionic strength
7 would influence the sorbent-sorbate interactions and therefore lower the adsorption
8 performance [20, 23]. Previous studies showed similar results in lower adsorption capacity
9 due to the increase in ionic salt concentrations [22, 24].

11 3.2 Effect of lignin concentration on adsorption of ammonia nitrogen

12 Lignin is a polymer of cross-linked phenyl propane units, conferring hydro-phobicity and
13 provides structural rigidity and microbial resistance to plant cell walls [25, 26]. The adsorption
14 capacity of ammonia nitrogen by jackfruit seed with different concentrations of lignin (0 to
15 4000 mg/L) was determined at a constant pH 7 and the experimental results are shown in Figure
16 3.

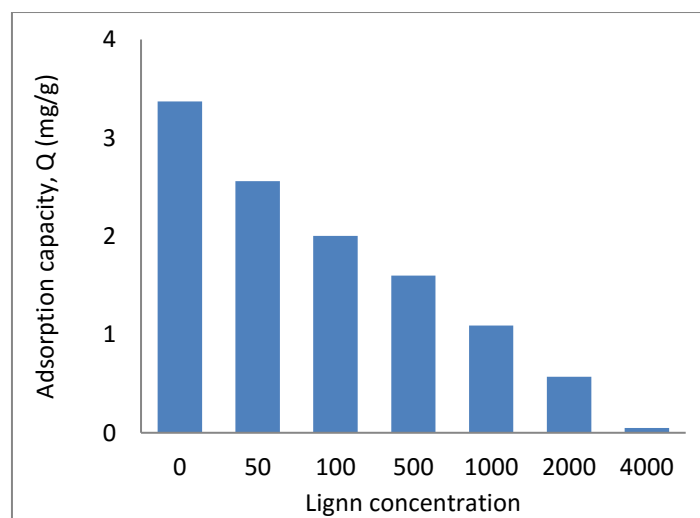

17
18 **Fig. 3.** Adsorption capacity of ammonia nitrogen by jackfruit seed adsorbent with various
19 lignin concentration (Contact time: 60 min, pH: 7.0, Biosorbent weight: 20 g).

1

2 Maximum adsorption capacity of NH₃-N was achieved at 3.37 mg/g without any lignin
3 addition and the sorption performances gradually decreased as the concentration of lignin
4 increases up to 4000 mg/L. Due to the presence of hydrophobic lignin at the surface of jackfruit
5 seed material, the strength and rigidity of the jackfruit seed cell walls are improved [26].
6 Besides, a plant with high lignin content may have some difficulties in breakdown process due
7 to the intense bond formed between plant material and lignin itself. This eventually reduced
8 the available surface area for the NH₄⁺ ion to associate with and subsequently resulted in poor
9 adsorption performance [27, 28].

10

11 3.3 Dynamic sorption of fixed bed adsorption column

12 The performance of the jackfruit seed as biosorbent in this study was evaluated based on
13 the amount of ammonia nitrogen adsorbed (Q_{eq}), treated volume (V_{eff}), breakthrough point, and
14 removal efficiency (%) at saturation condition. Table 1 tabulated all of the calculated
15 parameters for each experimental breakthrough curves.


Table 1 Parameters of fixed bed column for ammonia nitrogen removal by jackfruit seed.

C _o (mg/L)	Z (cm)	Q (mL/min)	V _{eff} (mL)	m _{total} (mg)	q _{total} (mg)	q _{eq} (mg/g)	Removal percentage (%)
500	1	17	1445	722.50	77.31	3.86	10.70
500	5	17	2380	1190	373.89	4.51	31.42
500	10	17	3485	1742.50	807.48	4.86	46.34
500	10	28	4760	2380	715.90	4.31	30.08
500	10	43	6020	3010	558.66	3.36	18.56
500	10	57	5700	2850	366.80	2.21	12.87
100	10	17	4080	408	235.46	1.42	57.71
1000	10	17	2720	2720	984.39	5.93	36.19

* C_o = Initial concentration, Z = bed height, Q = flow rate, V_{eff} = volume effluent, q_{total} = maximum bed capacity, q_{eq} = equilibrium adsorbate uptake

1 3.3.1 Effect of flow rate

2 The effect of flow rate on adsorption of ammonia nitrogen by jackfruit seed adsorbent was
3 determined by varying the inlet flow rates while the bed height and initial concentration was
4 held constant at 10 cm and 500 mg/L respectively. The breakthrough curves for the adsorption
5 process in a fixed bed column are presented in Figure 4.

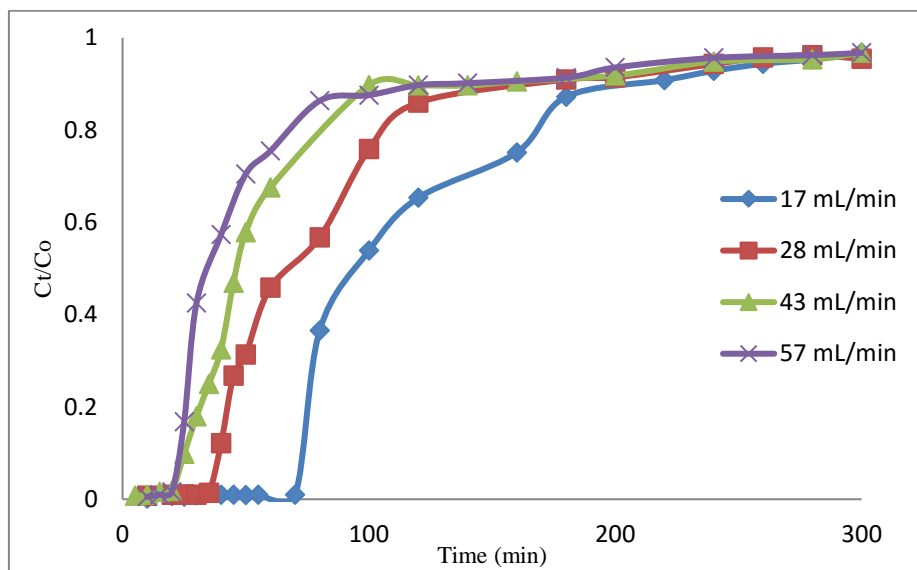

6
7 **Fig. 4.** Breakthrough curves of various inlet flow rate (Adsorbent bed height: 10 cm, initial
8 influent solution concentration: 500 mg/L, inlet flow rates: 17, 28, 43 and 57 mL/min)

9
10 As indicated, the highest ammonia nitrogen removal was achieved at the lowest flow
11 rate of 17 mL/min with 46.34% and adsorption capacity of 4.86 mg/g. Lower flow rate able to
12 provide more contact time or residence time for the mass transfer diffusion process of the solute
13 in the sorption bed [29]. Thus, prolonged bed saturation time can enhance the performances of
14 adsorption process and increased the removal percentage of ammonia nitrogen. Moreover, the
15 degree of axial flow dispersion in a column tends to increase along with the inlet flow rate as
16 the Reynolds number increases due to the turbulence occurred [20]. Any fluid flow in column

1 induces axial mixing dispersion which caused by the molecular diffusion and turbulent mixing
2 around the particles. Theoretically, the degree of axial dispersion is somewhat greater at lower
3 Reynolds number and this attributed to the effect of the greater hold-up of liquid in the laminar
4 boundary layer surrounding particles which, combined with random fluctuations in the flow
5 [21]. Greater axial dispersion in a column is undesirable as it reduces the efficiency of
6 adsorption process. This result is in accordance to previous research done by [30]. It can be
7 concluded that an increased in the flow rate reduced the removal efficiency as the insufficient
8 residence time of mass transfer process to occur.

9


10 **3.3.2 Effect of initial ammonia nitrogen concentration**

11 Figure 5 depicts the effect of initial ammonia nitrogen solution concentration on the
12 breakthrough curves with constant bed depth of 10 cm and inlet flow rate of 17 mL/min. The
13 breakthrough time recorded for 100, 500 and 1000 mg/L were 75, 55 and 25 minutes
14 respectively.

15 An increase in the initial adsorbate concentration significantly changed the trend of the
16 breakthrough curves as it became steeper as the curves shifted to the left. A faster breakthrough
17 and exhaustion time was achieved at higher ammonia nitrogen concentration and this resulted
18 in reduction of bed sorption capacity obtained. This might be due to the greater concentration
19 gradient at higher concentration and this provides higher driving force for the mass transfer
20 process. Thus, the diffusion coefficient or mass transfer coefficient needs a shorter period for
21 the transport process of NH_4^+ ion from the film layer to the surface of biosorbent [17, 29].

22 The maximum removal was observed at influent concentration of 100 mg/L, 10 cm of bed
23 depth and 17 mL/min of flow rate. The detailed parameter values obtained from this experiment
24 is tabulated in Table 1. These results proved that the adsorption process of ammonia nitrogen
25 onto the biosorbent is highly concentration dependent which affects the saturation rate and

1 breakthrough period [16]. A similar trend on the influence of influent concentration on
2 adsorption process was observed in previous studies [17, 29].

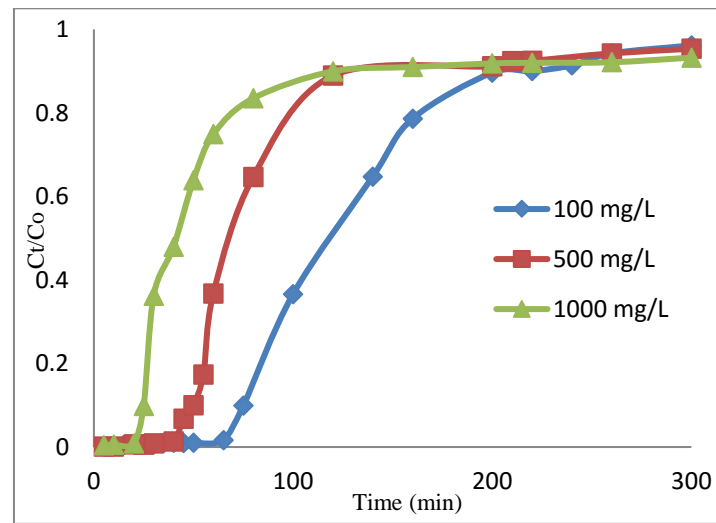

1 **Fig. 5.** Breakthrough curves of various initial adsorbate concentration ranges (Adsorbent bed
2 height: 10 cm, inlet flow rate: 17 mL/min, adsorbate concentration: 100, 500 and 1000 mg/L).

3


4 3.3.3 Effect of different bed depths on breakthrough curve

5 The breakthrough curves showing ammonia nitrogen biosorption onto jackfruit seed
6 adsorbent at different bed depths are presented in Figure 6. A constant influent concentration
7 of 500 mg/L, pH 7.0 and flow rate 17 mL/min was passed through the column with various
8 ranges of bed heights.

9 As can be seen from Figure 6, the breakthrough time increased remarkably from 15, 40 and
10 eventually to 75 min with increasing bed height from 1 to 5 and 10 cm respectively. As the
11 breakthrough time increased, the saturation time also showed an increasing pattern, which
12 resulted in a broadened mass transfer zone. Thus, longer exhaustion time of the bed allows the
13 NH_4^+ ions to come in contact with the binding sites of biosorbent [31]. Higher adsorbent bed
14 offered more available binding sites for the attachment of ammonia nitrogen molecules and
15 encouraged the diffusion mass transfer to dominate the adsorption process over the axial
16 dispersion phenomenon [29]. Eventually, the volume of treated effluent, bed sorption and

1 biosorption efficiency increased along with this as presented in Table 1. These results indicated
2 that a higher biosorbent bed height is desirable for better adsorption column performance as
3 reported by [18, 31].

4

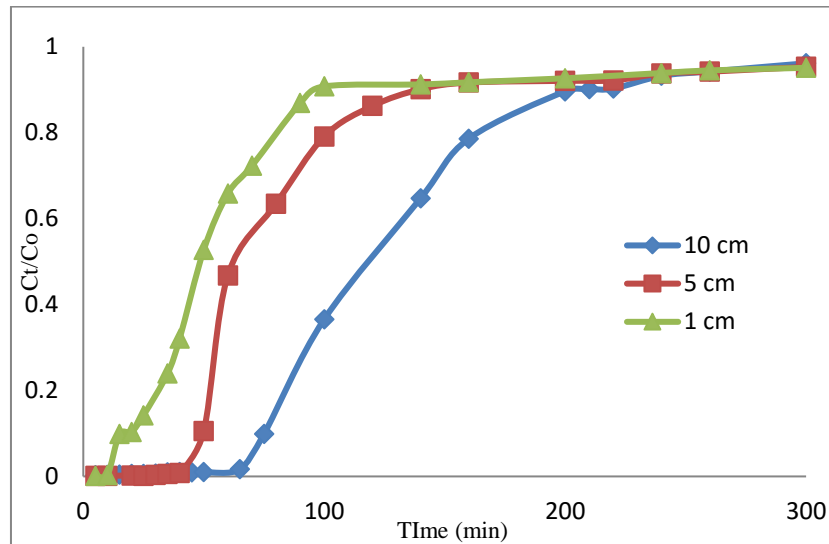

5


6 **Fig. 6.** Breakthrough curve of different bed height (Initial influent concentration: 500 mg/L,
7 inlet flow rate: 17 mL/min, biosorbent bed depth: 1, 5 and 10 cm).

8


9 **3.4 Desorption**

10 Figure 7 demonstrates the desorption performance of NH_4^+ loaded adsorbent at different pH
11 values. The maximum desorbed amount of NH_4^+ ions from the used adsorbent was obtained at
12 lowest pH analyzed (pH 3) with a released amount of 0.42 mg/g. At acidic medium, the NH_4^+
13 ion replaced by hydrogen (H^+) ions at the surface of adsorbent thus resulting in the release of
14 NH_4^+ ions to the solution, However, the desorbed amount value then dropped significantly as
15 the pH value increased up to neutral pH 7 and hit the lowest desorption amount with 0.09 mg/g.
16 As the pH moves towards the strong alkaline solution, the graph shows that the amount of NH_4^+
17 ions desorbed increased once again and reached a desorption capacity of 0.36 mg/g at pH 11.
18 This is likely due to the hydroxide (OH^-) ions would react with weak ionized NH_4^+ that was

1 adsorbed onto the surface of adsorbent in higher pH solution. The interaction can be written as
2 below:



4 It can be concluded that only a small amount of desorbed amount was able to be recovered
5 from jackfruit seed adsorbent when reacted with 0.1 M of NaOH and H₂SO₄. Nevertheless,
6 desorption could be regarded as solely surface reaction and the attachment between the NH₄⁺
7 ions electrostatic attraction is weak as it could be desorbed under neutral pH water [32]. This
8 desorption result is in accordance with previous studies on desorption of NH₄⁺ ions using
9 hydrogel, as the highest amount of desorption was observed at pH 2 and 12 [32].

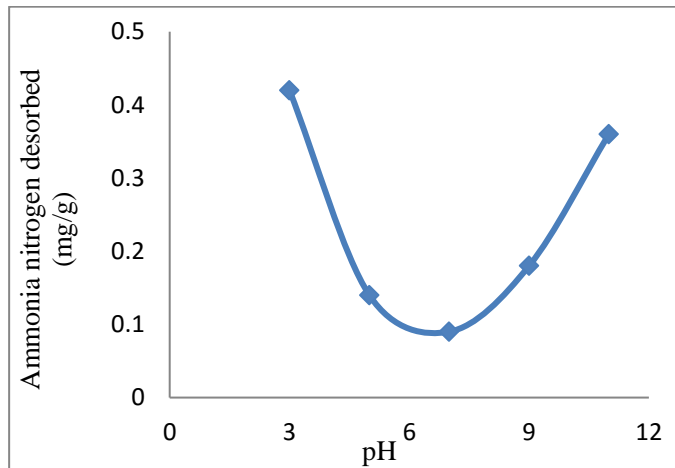

10

11 **Fig. 7.** Effect of pH on desorption of ammonia nitrogen from jackfruit seed adsorbent (initial
12 ammonia nitrogen concentration: 500 mg/L, contact time: 60 min, biosorbent weight: 20 g).

13

14 **4. Conclusion**

15 This study evaluated the ability of jackfruit seed adsorbent for adsorption of NH₃-N under a
16 batch and fixed bed continuous studies. The results depicted that NH₃-N uptake by jackfruit
17 seed adsorbent decreased significantly upon the addition of NaCl and lignin into the solution.
18 As the ionic salt concentration increased, the cations present in the salt was likely defeat the
19 NH₄⁺ ions to bind to negatively charged surface adsorbent thus lower the adsorption capacity.

1 The NH_4^+ ions uptake decreased from 3.37 mg/g as the lignin concentration increased due to
2 better resistance and rigidity provided by lignin to the jackfruit seed cell wall. Meanwhile, the
3 breakthrough curves obtained from the continuous column experiments followed the S-shaped
4 characteristic with maximum removal rate was achieved at the lowest flow rate of 17 mL/min,
5 low initial concentration of 100 mg/L and highest bed depth of 10 cm. **Maximum desorbed**
6 **amount** of $\text{NH}_3\text{-N}$ was obtained at pH 3 with desorption capacity of 0.42 mg/g. Hence, it can
7 be concluded that jackfruit seed is potentially to be used as an alternative adsorbent for $\text{NH}_3\text{-N}$
8 removal from aqueous solution.

9

10 **Acknowledgements**

11 This study was financially supported by Ministry of Higher Education Malaysia and Universiti
12 Malaysia Sabah under research Project Grant FRG0420-TK-1/2015

References

- [1] Wahab, M.A., Boubakri, H., Jellali, S., and Jedidi, N. 2012. Characterization of Ammonium Retention Processes onto Cactus Leaves Fibers Using Ftir, Edx and Sem Analysis. *Journal of hazardous materials*. 241: 101-109.
- [2] Aziz, H.A., Adlan, M.N., Zahari, M.S.M., and Alias, S. 2004. Removal of Ammoniacal Nitrogen (**N-NH₃**) from Municipal Solid Waste Leachate by Using Activated Carbon and Limestone. *Waste Management & Research*. 22(5): 371-375.
- [3] Li, X., Zhao, Q., and Hao, X. 1999. Ammonium Removal from Landfill Leachate by Chemical Precipitation. *Waste Management*. 19(6): 409-415.
- [4] Ahmadiannamini, P., Eswaranandam, S., Wickramasinghe, R., and Qian, X. 2017. Mixed-Matrix Membranes for Efficient Ammonium Removal from Wastewaters. *Journal of Membrane Science*. 526: 147-155.
- [5] Liu, H., Dong, Y., Wang, H., and Liu, Y. 2010. Adsorption Behavior of Ammonium by a Bioadsorbent–Boston Ivy Leaf Powder. *Journal of Environmental Sciences*. 22(10): 1513-1518.
- [6] Bhatnagar, A. and Sillanpaa, M. 2010. Utilization of Agro-Industrial and Municipal Waste Materials as Potential Adsorbents for Water Treatment—a Review. *Chemical Engineering Journal*. 157(2): 277-296.
- [7] Agamuthu, P. 2009. Challenges and Opportunities in Agro-Waste Management: An Asian Perspective. *Inaugural Meeting of First Regional 3R Forum in Asia. Tokyo, Japan. 2009*.
- [8] Wahab, M.A., Jellali, S., and Jedidi, N. 2010. Effect of Temperature and pH on the Biosorption of Ammonium onto Posidonia Oceanica Fibers: Equilibrium, and Kinetic Modeling Studies. *Bioresource Technology*. 101(22): 8606-8615.
- [9] Ibrahim, A., Yusof, L., and Yaser, A.Z. 2017. Adsorption of Ammonia Nitrogen by Jackfruit (*Artocarpus Heterophyllus*) Seeds: Isotherms and Kinetic Modeling Studies. *Malaysian Journal of Fundamental and Applied Sciences* 13(4): 778-783.
- [10] Zahrim, A., Lija, Y., Ricky, L., and Azreen, I. 2016. Fruit Waste Adsorbent for Ammonia Nitrogen Removal from Synthetic Solution: Isotherms and Kinetics. *IOP Conference Series: Earth and Environmental Science*. 2016. 012028.
- [11] Zhang, X. and Wang, X. 2015. Adsorption and Desorption of Nickel (**II**) Ions from Aqueous Solution by a Lignocellulose/ Montmorillonite Nanocomposite *PLoS One*. 10(2): 21.

- [12] Ansari, S.A., Khan, F., and Ahmad, A. 2016. Cauliflower Leave, an Agricultural Waste Biomass Adsorbent, and Its Application for the Removal of **MB** Dye from Aqueous Solution: Equilibrium, Kinetics, and Thermodynamic Studies. *International Journal of Analytical Chemistry*. 2016.
- [13] Sud, D., Mahajan, G., and Kaur, M. 2008. Agricultural Waste Material as Potential Adsorbent for Sequestering Heavy Metal Ions from Aqueous Solutions—a Review. *Bioresource Technology*. 99(14): 6017-6027.
- [14] Choy, S.Y., Prasad, K.M.N., Wu, T.Y., Raghunandan, M.E., Yang, B., Phang, S.-M., and Ramanan, R.N. 2017. Isolation, Characterization and the Potential Use of Starch from Jackfruit Seed Wastes as a Coagulant Aid for Treatment of Turbid Water. *Environmental Science and Pollution Research*. 24(3): 2876-2889.
- [15] Rengsutthi, K. and Charoenrein, S. 2011. Physico-Chemical Properties of Jackfruit Seed Starch (*Artocarpus Heterophyllus*) and Its Application as a Thickener and Stabilizer in Chilli Sauce. *LWT-Food Science and Technology*. 44(5): 1309-1313.
- [16] Han, R., Wang, Y., Zhao, X., Wang, Y., Xie, F., Cheng, J., and Tang, M. 2009. Adsorption of Methylene Blue by Phoenix Tree Leaf Powder in a Fixed-Bed Column: Experiments and Prediction of Breakthrough Curves. *Desalination*. 245(1-3): 284-297.
- [17] Chen, S., Yue, Q., Gao, B., Li, Q., Xu, X., and Fu, K. 2012. Adsorption of Hexavalent Chromium from Aqueous Solution by Modified Corn Stalk: A Fixed-Bed Column Study. *Bioresource Technology*. 113: 114-120.
- [18] Ahmad, A.A. and Hameed, B.H. 2010. Fixed-Bed Adsorption of Reactive Azo Dye onto Granular Activated Carbon Prepared from Waste. *Journal of Hazardous Materials*. 175(1): 298-303.
- [19] Ibrahim, A., Yusof, L., and Yaser, Z.A. 2017. Ammonia Nitrogen Removal from Aquoues Solution by Local Agricultural Wastes. *IOP Conference Series: Materials Science and Engineering*. 206(1): 012077.
- [20] Han, R., Zou, W., Yu, W., Cheng, S., Wang, Y., and Shi, J. 2007. Biosorption of Methylene Blue from Aqueous Solution by Fallen Phoenix Tree's Leaves. *Journal of Hazardous Materials*. 141(1): 156-162.
- [21] Al-Degs, Y.S., El-Barghouthi, M.I., El-Sheikh, A.H., and Walker, G.M. 2008. Effect of Solution pH, Ionic Strength, and Temperature on Adsorption Behavior of Reactive Dyes on Activated Carbon. *Dyes and Pigments*. 77(1): 16-23.
- [22] Dahri, M.K., Kooh, M.R.R., and Lim, L.B. 2016. Adsorption of Toxic Methyl Violet **2B** Dye from Aqueous Solution Using *Artocarpus Heterophyllus* (Jackfruit) Seed as an Adsorbent. *American Chemical Science Journal*. 15(2): 1-12.
- [23] Kooh, M.R.R., Dahri, M.K., and Lim, L.B. 2016. Jackfruit Seed as a Sustainable Adsorbent for the Removal of Rhodamine B Dye. *Journal of Environment & Biotechnology Research*. 4(1): 7-16.
- [24] Aksu, Z. and Balibek, E. 2007. Chromium(**VI**) Biosorption by Dried *Rhizopus Arrhizus*: Effect of Salt (**NaCl**) Concentration on Equilibrium and Kinetic Parameters. *Journal of Hazardous Materials*. 145(1): 210-220.
- [25] Saini, J.K., Patel, A.K., Adsul, M., and Singhania, R.R. 2016. Cellulase Adsorption on Lignin: A Roadblock for Economic Hydrolysis of Biomass. *Renewable Energy*. 98: 29-42.
- [26] Doherty, W.O.S., Mousavioun, P., and Fellows, C.M. 2011. Value-Adding to Cellulosic Ethanol: Lignin Polymers. *Industrial Crops and Products*. 33(2): 259-276.
- [27] Pouteau, C., Baumberger, S., Cathala, B., and Dole, P. 2004. Lignin–Polymer Blends: Evaluation of Compatibility by Image Analysis. *Comptes Rendus Biologies*. 327(9): 935-943.
- [28] Hu, L., Zeng, G., Chen, G., Dong, H., Liu, Y., Wan, J., Chen, A., Guo, Z., Yan, M., Wu, H., and Yu, Z. 2016. Treatment of Landfill Leachate Using Immobilized *Phanerochaete Chrysosporium* Loaded with Nitrogen-Doped TiO₂ Nanoparticles. *Journal of Hazardous Materials*. 301: 106-118.
- [29] Abdolali, A., Ngo, H.H., Guo, W., Zhou, J.L., Zhang, J., Liang, S., Chang, S.W., Nguyen, D.D., and Liu, Y. 2017. Application of a Breakthrough Biosorbent for Removing Heavy Metals from Synthetic and Real Wastewaters in a Lab-Scale Continuous Fixed-Bed Column. *Bioresource Technology*. 229: 78-87.
- [30] Zheng, H., Han, L., Ma, H., Zheng, Y., Zhang, H., Liu, D., and Liang, S. 2008. Adsorption Characteristics of Ammonium Ion by Zeolite 13x. *Journal of Hazardous Materials*. 158(2–3): 577-584.
- [31] Afroze, S., Sen, T.K., and Ang, H. 2016. Adsorption Performance of Continuous Fixed Bed Column for the Removal of Methylene Blue (**MB**) Dye Using *Eucalyptusheathiana* Bark Biomass. *Research on Chemical Intermediates*. 42(3): 2343-2364.
- [32] Zheng, Y., Zhang, J., and Wang, A. 2009. Fast Removal of Ammonium Nitrogen from Aqueous Solution Using Chitosan-G-Poly (Acrylic Acid)/Attapulgit Composite. *Chemical Engineering Journal*. 155(1): 215-222.