

Byrd, H., Matthewman, S. & Kenney, C. (2018) The Impact of Disruptive Technologies on Future Urban Form in New Zealand's Cities. Urbanism New Zealand Conference, 14-15 May 2018. Wellington, New Zealand

The Impact of Disruptive Technologies on Future Urban Form in New Zealand's Cities

Authors:

Hugh Byrd hbyrd@unitec.ac.nz (corresponding author)¹
Steve Matthewman s.matthewman@auckland.ac.nz²
Christine Kenney c.kenney@massey.ac.nz³

1. The University of Lincoln, UK, Unitec, NZ
2. The University of Auckland, NZ
3. Massey University, NZ

Abstract

This paper reviews the historical research that has led to widespread policies on compact urban form and collates evidence of research that demonstrates that dispersed urban form may be more energy efficient than compact. This is counterintuitive but is supported by both challenging the conventional modelling of energy use as well as case studies with empirical evidence. The conclusion is that policies on urban form should be driven not by existing technologies but by the disruptive technologies of the future.

Energy demand and supply has not only influenced the growth and size of urban areas but has also influenced the shape of cities in New Zealand. At its most basic level, the shape of a city is characterized by the extent to which it either goes 'up' or goes 'out'. Going up is associated with a compact city of relatively high density and tall buildings. Going out is associated with a dispersed city characterised by sprawl of relatively low density with detached buildings.

It is generally assumed that a compact city is more energy efficient than a dispersed city for two main reasons. Firstly, there is less energy consumption for transport since travel distances are less. Secondly, it is assumed that compact and tall building types results in less surface area of building envelope and thereby less energy loss.

Some studies supporting these views are now several decades old and have tended to make the assumption that internal combustion engine vehicles (ICVEs) will continue to dominate into the future that energy supplies are centralised and heat loss through building fabric is the best indicator of energy use for analysing built form.

More recent research is challenging these assumptions both through accrued empirical evidence and also case studies of the impact of 'disruptive technologies'. The increase use in distributed energy generation in urban areas (generally roof-mounted photovoltaics (PVs)), the growth in ownership of electric vehicles (EVs) and the potential introduction of smart and micro-grids and the possibility of virtual power plants (VPPs) is changing the impact that energy has on built form and conflicts with current policies for denser, contained and compact development.

Introduction

Firstly, it should be said that energy is not the only determinant of urban form. Politics, topography and urban land economics are just a few of the other issues that shape cities. However, energy efficiency has been widely used because the empirical evidence appears to support compact development. The purpose of this paper is to highlight the erroneous assumptions that have been made in the study of energy use by residential buildings and also to identify the relationship between disruptive technologies, energy flows and urban form. The results are counterintuitive and indicate that a dispersed urban form is more energy efficient than compact urban form when disruptive technologies are implemented.

The energy use of a city is dependent on both transport and buildings (Rickwood et al., 2008, Steemers, 2003) in varying amounts depending largely on climate, energy technologies and urban form. Traditionally this has focussed on internal combustion engine vehicles (ICVEs) and the heat loss from the fabric of buildings. The assumption has been that the energy supply for both fuel and electricity is from a centralised network, rather than generated at point of use, and the logical conclusion of these assumptions has been that a compact city will consume less energy than a dispersed city because travel distances will be less (Guhathakurta and Williams, 2015, Newman and Kenworthy, 1989a) and buildings will use less energy as there is a reduced ratio of surface area to volume of the building fabric where energy flows from (Ewing and Rong, 2008, Joiner, 2010, Rode et al., 2014).

As a result, compact urban areas have been extensively promoted (Breheny, 1995) as low energy consumers and this has been adopted as a criteria for 'smart cities' (Albino et al., 2015). This impacts on urban form since compactness requires containment at the peripheries that tends to result in built forms of greater height. Therefore, urban form has two basic shapes: compact cities go 'up' while dispersed cities go 'out'. Cities that go 'up' generally have a higher population density than cities that go 'out' (sprawl). There are secondary considerations for urban form that impact on energy use such as the density of sprawl, the proximity of tall buildings to each and whether a city is mono or polycentric. However, these have a lesser influence on energy used by buildings compared with the fundamentals of 'up' or 'out'.

Intuitively, these arguments for a compact urban form appear logical. Reducing travel distances results in a reduction of fuel consumption and reducing the surface area to volume ratio of a building reduces heat loss and hence energy use from buildings. Combined, these two arguments present a robust case for introducing policies concerning compact urban form.

However, there is emerging evidence that this is not necessarily the case and that a dispersed urban form may be more energy efficient. This paper reviews both the historical research supporting compact urban form policy and also reviews more recent research that is indicating the opposite.

The case against compact buildings is essentially twofold. Firstly, that surface area to volume ratio is no longer a good index of energy-use in a building. This is based on an increase in insulation standards, bias assumptions in the modelling of energy use and a shift in energy use within buildings towards more electrical appliances (Lomas, 2010). Secondly, the increasing relevance and evidence of energy used in common areas of compact buildings

(Finch et al., 2010, Heinonen and Junnila, 2014) that results in higher energy use by compact buildings.

This evidence is now supported by empirical evidence of actual energy use from large samples of different building types from both warm, cold and temperate climates (Heinonen and Junnila, 2014, Myers et al., 2005, Steadman et al, 2017). However, when the possibility of generating energy on a roof with photovoltaics (PVs) is taken into account, the net energy flow in a residential building favours non-compact building types with a large roof to floor area ratio: detached buildings trump apartments.

The case against compact urban form due to transport energy-use is based on the introduction and widespread growth of electric vehicles (EVs). EVs are significantly more energy efficient than ICVEs but the energy use (and carbon production) is dependent on how they are charged. If they are charged by PVs mounted on residential roofs, then the energy is comparatively clean and free. Furthermore, smart grids and micro-grids allow for the energy generated to be directed away from the home so that a vehicle need not be at the point of generation in order to benefit. Alternatively, the energy could be directed towards electrically powered public transport (Bloomberg, 2018).

When these disruptive technologies are taken into account, both energy use by buildings and transport favours lower density, non-compact urban form. Therefore, it is argued that policy on urban form should be based on the technologies of the future rather than the past. The New Zealand Government (Stephenson, 2016), Electricity Authority (Electricity Authority, 2017) and electricity distribution companies (Vector, 2018) are now seriously addressing these technologies; those making policies on urban form appear to be lagging behind.

Throughout the following text there are figures that all relate energy (y axis) to an index of urban form (x axis): building height (as a measure of 'up') and urban density (as a measure of 'out'). The figures are indicative only and the importance is in the relative, rather than absolute, values. Hence the units of measurement and values are not included. However, the absolute values can be obtained by referring to the body of work that is cited in the respective figure captions.

Energy and the shape of buildings: limitations in modelling

Early research into energy and built form (March, 1972, Rickaby, 1987, Steadman and Brown, 1987) related energy use of buildings to the ratio of surface area: volume of buildings. Since heat loss from a building is proportional to its surface area and respective material heat flow properties (U values), optimisation of built form focussed on minimising the ratio of surface area to volume ratio resulting in compact built form (Steemers, 2003). Although Steadman et al. (2009) note that there should be a maximum threshold for building depth in order to avoid artificial ventilation and lighting that is required once the depth of rooms exceed the 'passive zone'.

The assumption that heat loss from the envelope is the most relevant index of energy performance has prevailed over time. For example, almost 40 years after March's 'elementary model of Built Form' (March, 1972), Joiner (2010) in an argument for urban intensification,

suggested that, *“By joining houses together or otherwise clustering them, the external envelope of each house can be reduced, with consequent reductions in heat losses.”*

The logical conclusion of this assumption is that housing is more energy efficient if its built form is compact and, given its requirements for natural ventilation and daylight, this will necessarily mean that more vertical forms (high-rise apartments) are more energy efficient than detached houses.

This was the basis of research (Rode et al., 2014) on the relationship between the form of cities and residential heat demand. The results appeared to provide evidence, as well as recommending policy, that tall buildings are an optimum shape due to their relatively low surface to volume ratio and, hence, heat losses.

The results were calculated using the standard heat loss model of $E_{\infty} \sum (U_i A_i)$ (where E is the heat loss, U is the envelope material U values and A is the respective area of the envelope materials). However, this type of analysis becomes a self-fulfilling prophecy that a low surface area: volume ratio will be the optimum since the U values were kept constant in the analysis. The result, adapted from Rode et al (2014), is conceptually illustrated in Figure 1 and indicates an almost inverse-square law. Their results indicated that a two-storey building typically has a heat loss of 3 times that of a ten storey building.

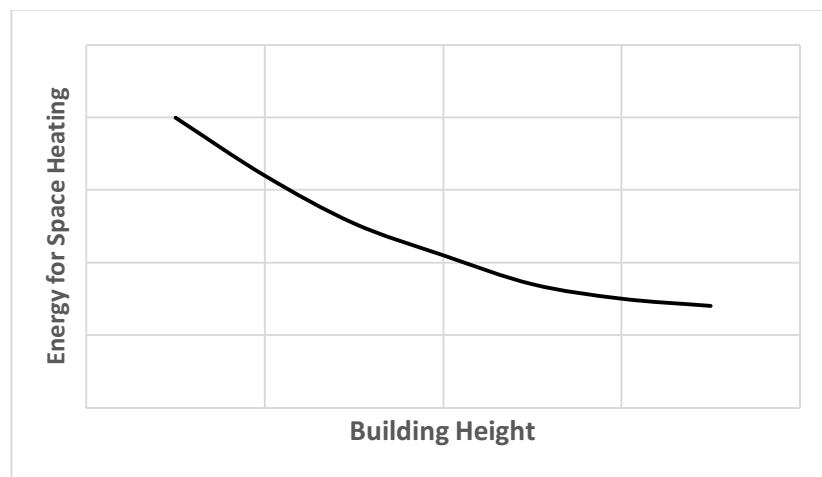


Figure 1: Indicative Trend of energy consumption for space heating by increasing the number of storeys. Adapted from Rode et al, 2014

However, there are a number of assumptions that undermine the results. Firstly, the U values of the existing buildings were outdated and up to 8 times worse than UK building regulations (a minimum legal requirement). This has a profound effect on modelling since, as insulation standards increase, the relative amount of energy used for heating decreases. Hypothetically, as an extreme example, if a material could be found which does not allow heat to flow through it, then surface area, and hence shape of a building, would not be relevant.

Secondly, the assumption that all building typologies (apartments or detached and types between) have the same elevational proportion of glazing, skews the results. For a fair

comparison, the same size living unit (apartment or detached) has the same daylighting needs and should have the same area of glazing. Assuming that the amount of glazing should be proportional to the exposed external wall area can result in about twice as much glass in a detached building.

Added to this is the assumption that there is no heat transfer between adjacent properties in a multi-unit development. Unoccupied units, partial heating and variations in set temperatures all result in greater heat losses from compact housing that does not occur in detached housing.

However, by compacting housing into blocks, another aspect of energy-use becomes more prominent: the heating, lighting and servicing of communal spaces. Lighting and heating corridors, machinery for lifts, ventilation and lighting for car parks, external lighting, mechanical ventilation, pumps, illuminated signage and others amount to a significant energy use. Assessments of these have ranged between about 10% of overall energy use (when heating is included) (Ho, 2012) to about 20% (Finch et al., 2010) in colder climates.

Furthermore, over time the insulation standards of building fabric have increased and an increasing proportion of energy is now used for household appliances and entertainment (Lomas, 2010). This begins to challenge the idea that fabric heat loss is a representative indicator of a building's whole energy usage, particularly building types with communal areas. When all the above assumptions are adjusted (U values, % glazing, heat transfer between units and energy use in common areas) modelling results indicates virtually no correlation between built form and energy use (Figure 2).

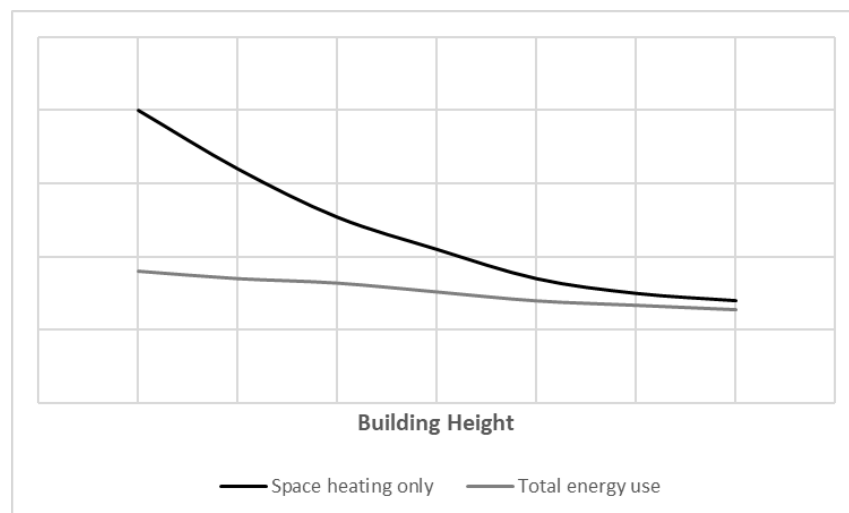


Figure 2: Relative energy use compared to building height taking account of a) space heating only and b) total energy use of a building.

Assumptions in the modelling of energy use can significantly distort the outcome. However, empirical data from a large sample has greater relevance than theory and gives a more reliable picture. This was demonstrated in a report by Myers et al. (2005) which analysed, using actual energy records, the energy use of a sample of 3,854 house of differing types in Sydney, Australia (sub-tropical climate). The results showed that, when energy use in

common areas and for common services are taken into account, high-rise can be the least energy efficient building typology, leaving detached buildings as more energy efficient.

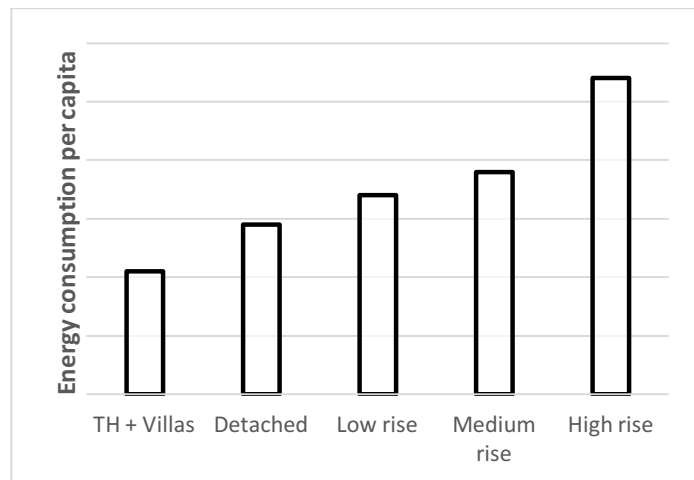


Figure 3: Relative energy consumption in different building types (empirical results from Sydney) Adapted from Myors et al (2005).

This is indicated in Figure 3 and the results, being empirical rather than theoretical, from such a large sample upset the idea that compact (high-rise) built form is more energy efficient. The results of the Sydney study, based on actual energy readings, indicate almost exactly the opposite to the 'Cities and Energy' study (Rode et al., 2014)(Figure 1) which was based on modelling. While the building typologies considered are not exactly the same in the studies, and the climate in Sydney is generally warmer than the European climate, the difference in the results is emphatic.

However, climate may not have such a significant impact since similar research in Finland's sub-arctic climate (Heinonen and Junnila, 2014) (sample of 3,984 dwellings), again based on actual energy use, also identified the same characteristic: detached houses use less overall energy than apartments on a per capita occupancy basis (Figure 4).

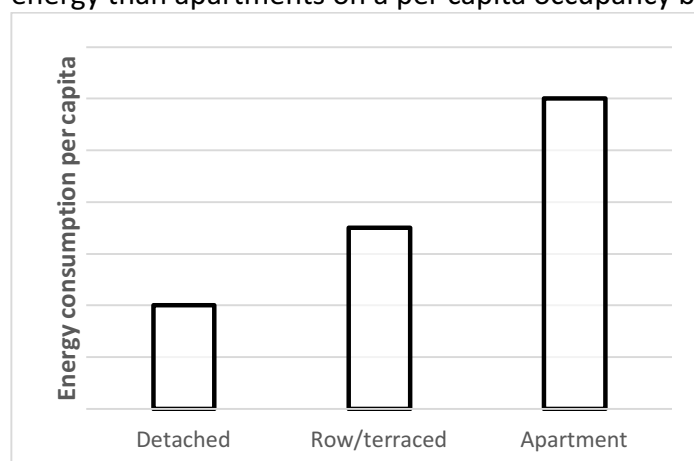


Figure 4: Average per capita energy use in different building types . Adapted from (Heinonen and Junnila, 2014)

A similar result was also identified by research (Steadman et al., 2017) on actual energy use on a large sample (375,295) of London's housing stock in UK (temperate climate) which concluded that high-rise buildings are more energy-intensive than low-rise buildings, "much energy could be saved by discouraging tall buildings and encouraging low-rise in their place".

An important factor in all of these case studies is the size of the samples. The results for Sydney and Finland were based on samples of almost 4,000 dwellings in each case. The results from the study in London was based on about 375,000 dwellings. These extremely large samples iron-out issues of household size and patterns of use and give greater confidence in identifying the correlation of energy use and building type.

The impact of renewable energy on built form.

Since the significant uptake of photovoltaics (PVs) on the roofs of houses, analyses of optimum built forms for reducing energy use now needs to consider not only energy losses from buildings but also energy generated by PVs on those buildings. The important criteria for generating energy becomes the area of PV array (the area being proportional to energy generation) that can be installed on a roof and, in order to compare the merits of different built forms, the ratio of PV area to floor area (floor area being an index of energy consumption). For example, Cheng et al. (2011) identified that "medium to low density housing may in some cases enable a greater saving in CO₂ emissions than higher density development because of the greater amount of space for collection of renewable energy".

Not only do lower housing densities result in better solar access for PVs, compact development reduces solar access for both PVs and passive solar gains. For example, research by Mohajeri et al. (2016) observed that, "When passing from dispersed to compact neighborhoods, the BIPV (building integrated photovoltaics) potential for facades decreases from 20% to 3%, whereas for roofs the BIPV potential decreases from 94% to 79%".

High-rise is not only disadvantaged because of mutual shading that reduces passive heat gains but also because the effective roof area is small compared to the floor area beneath. Whereas, low rise buildings have a high roof area to floor area ratio and can provide a significant amount of electricity for their own needs.

This was demonstrated in research on a cross-section of building types across a city (Byrd et al., 2013). The energy generated by PVs on a building were compared with energy consumption of various built forms. This is indicated in Figure 5 which illustrates a cross-section through Auckland (NZ) and both the energy generated and consumed as a bar chart below (negative values indicate energy generated). Low density, low-rise buildings in the suburbs not only produce enough energy for their own use but also produce an excess that can be exported. Conversely, high-rise consumes considerably more energy than it produces.

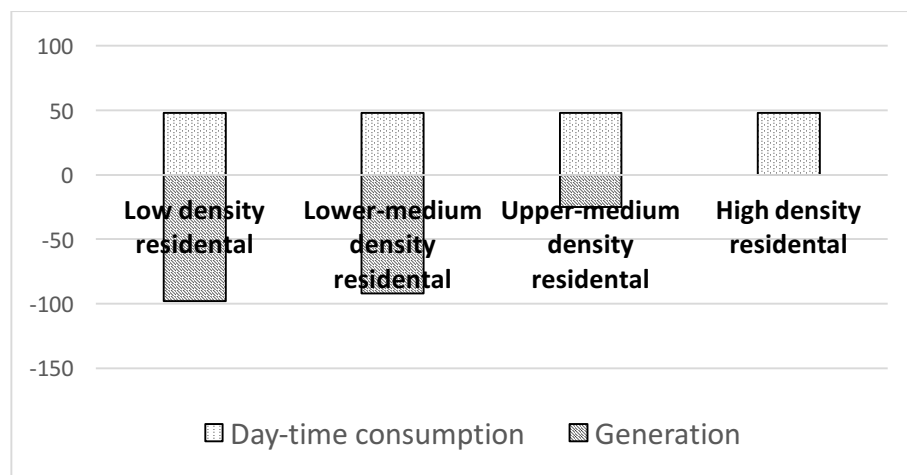


Figure 5: Comparing the potential energy generated from PVs with the energy consumed by the building. Adapted from Byrd et al (2013)

The net energy balance when urban areas have extensive energy generation from rooftop PVs, varies from a considerable surplus in low-density suburbia to an emphatic deficit in high-density areas.

Other studies have also demonstrated that in addition to solar energy, other types of renewable energy sources such as “geothermal heat pump” (Echenique et al., 2012), (Hargreaves et al., 2017) as well as biomass (Ghosh et al., 2006) also have higher potential in lower density urban development.

Optimum built form for reducing energy consumption.

The evidence above, based on actual energy use, indicates that, irrespective of climate, urban form that goes ‘up’ (apartments) is likely to result in greater energy consumption than urban form that goes ‘out’ (detached). Modelling energy use of urban form on the basis of ratio of surface area to volume alone is no longer an accurate indicator of energy use by buildings. However, when energy generated by PVs is taken into account, low-rise housing is more energy efficient. Decentralized energy generation on rooftops combined with its efficient distribution through ‘feed-in’ to the main grid or to micro grids results in low-density, low-rise housing becoming a more energy efficient built form (IEA, 2009). Increasing urban density not only reduces the contribution of solar energy (Margalit, 2016), but can also result in greater energy consumption.

The proportion of energy used for heating and cooling as well as the energy generated by PVs will vary depending on climate. However, the overall trend is a gradual warming and research in the UK (Lomas, 2010) has indicated that for every 1°C average warming, the national energy consumption by housing will decrease by about 6%. In temperate climates, considering the fabric heat loss to be an indicator of the energy performance of a building is becoming an ever cruder method of analyzing the impact of built form on energy consumption as average temperatures rise.

Energy and transportation

Research into the relationship between energy use and urban density was intensified after Newman and Kenworthy's (1989b) publication that graphically illustrated an almost inverse-square relationship between energy use (e) and density (d) such that $e \propto 1/d^n$ as illustrated in Figure 6.

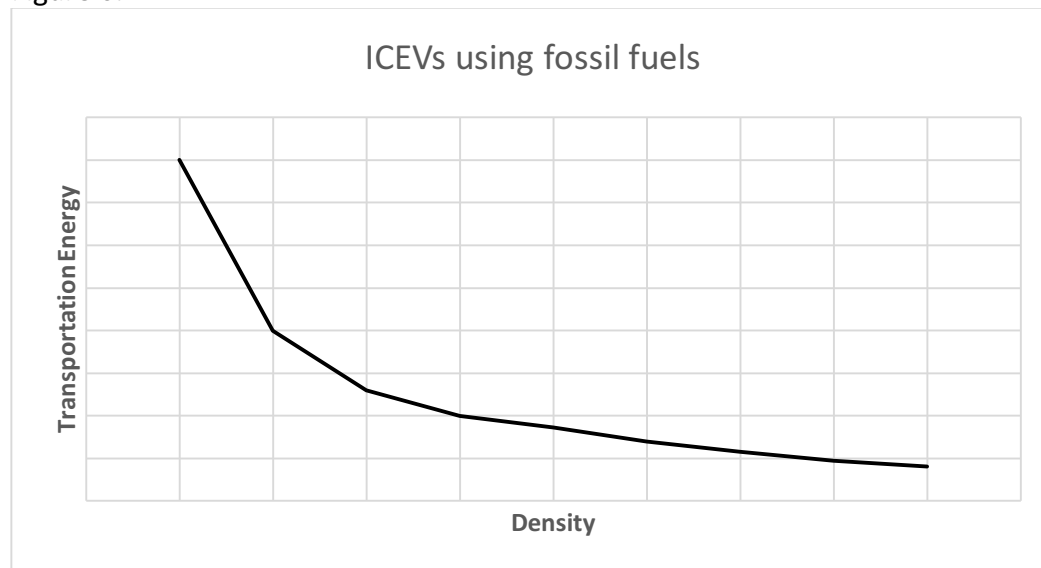


Figure 6: Gasoline use per capita versus population density. (Adapted from Newman & Kenworthy, 1989b)

This research has had some criticism. For example, difference in fuel prices between the cities were not considered (Gomez-Ibanez, 1991) and that it assumes a mono-centric city form (Gordon et al., 1991). It has also been criticised by Breheny (1995) who suggests that the evidence of transport energy use does not support the theory of the inverse-square relationship proposed by Newman and Kenworthy: "Over the last 30 years decentralization has made a trivial contribution to additional energy consumption, implying that efforts to prevent further decentralization – if successful, which is doubtful - will also be trivial in their effect". (Breheny, 1995).

However, Breheny still considers that Newman and Kenworthy's correlation is partially correct but that its magnitude is incorrect. Although it is not quantified, the conclusion might be that the relationship between transport energy and urban density is closer to $e \propto 1/d$ instead of $e \propto 1/d^n$.

More recent research on the relationship of transport energy and urban density has considered the use of electric vehicles powered by decentralized energy supplies (Byrd, 2017). Based on data on existing vehicle travel patterns combined with potential solar energy available on rooftops, it is possible to calculate the extent to which electricity from PVs can displace hydrocarbon based fuels.

The research identified that there is an inverse correlation between urban density and transport energy. That is to say that residential roof-mounted PVs in lower density urban areas can potentially generate more energy than is required for typical transport needs in urban areas. Suburbia can effectively power transport in a city and still have energy spare. This does not necessarily mean that the vehicles need to stay at home to be charged. Nor

does it mean that the electricity has to be used by private transport. The electrification of public transport is growing exponentially (Bloomberg New Energy Finance, 2018) There are various options for distributing renewable energy that is generated by distributive means including the possibility of peer to peer or micro-grids (REN21, 2017). The future use of virtual power plants (VPPs) will also make it possible to utilise energy stored throughout an urban area to be directed towards electrically powered public transport (Niconowicz & Milewski, 2012).

Therefore, when disruptive technologies are implemented, the exact opposite relationship of energy and built form, proposed by Newman and Kenworthy (1989) occurs; such that $e_{\infty} \sim 1/d^n$. This is illustrated in Figure 7. While EVs have not penetrated the market to that extent as yet, the graph indicates a more likely future than a continued reliance on fossil fuel for transport.

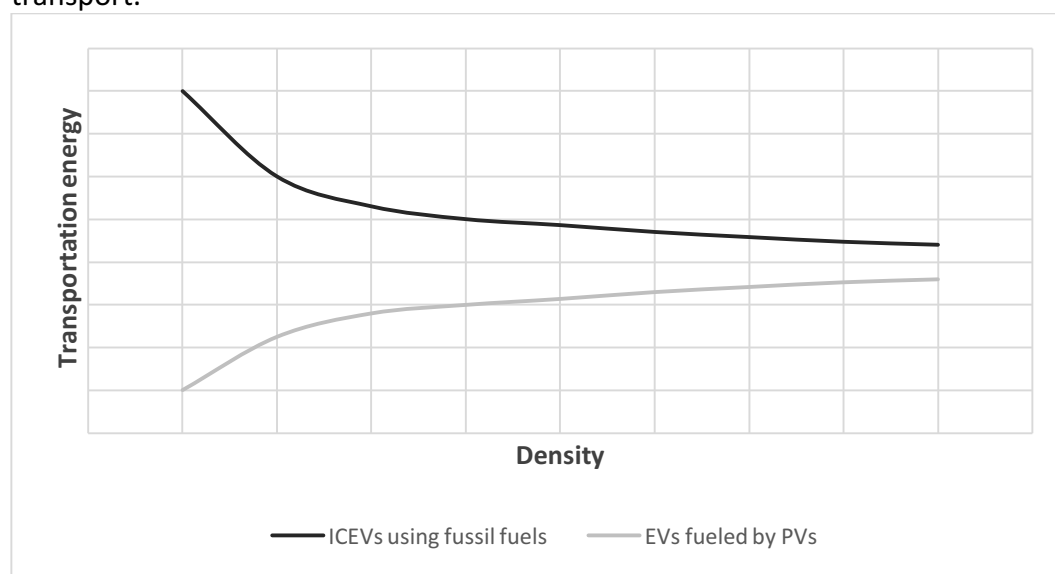


Figure 7: Comparison of transportation energy consumption in case of using ICEVs and EVs. Adapted from Byrd et al 2013

Discussion

In the introduction, the impact of climate on building energy consumption was mentioned, but needs still further consideration. The evidence that compact built form consistently performs worse over differing climates does not necessarily mean that climate is not a factor. A more likely reason, requiring further investigation, is that the insulation standards are higher in countries with colder climates.

Nevertheless, the case studies mentioned above in Australia (sub-tropical), Finland (sub-arctic) and the UK (temperate) have contrasting climates but broadly similar results that do not favour compact buildings. However, solar energy availability will vary considerably between these climates.

Climate change will also have an impact with average temperatures likely to continue to rise resulting in less heat loss in colder climates, more overheating in warmer climates and

increased use of air-conditioning. The combination of increasing internal heat gains, inadequate design for solar protection or natural ventilation, continued climate change as well as market forces promoting air-conditioning, has led to a shift in energy use from winter to summer in temperate climates (Byrd, 2012).

While this could be partially addressed by improved design of buildings, it tends to be multi-unit and high rise buildings that do not shade fenestration or allow for cross-ventilation. The impact of this was highlighted in research in warmer climates (Mandal and Byrd, 2017) and it is not unreasonable to speculate that air-conditioning will spread further in urban areas in temperate climates as average temperatures increase. Therefore, it is likely that this new electricity load in temperate climates will be driven by compact building types.

A further important argument that is relevant to the relationship of energy and urban form is that of 'resilience'; in particular mitigating the impact of electricity blackouts. Tall buildings are inherently more vulnerable to electricity blackouts. Pumps, lifts, emergency lighting and security systems can make this building type almost uninhabitable in a blackout (Byrd and Matthewman, 2014). Whereas building types that are low-rise and have reasonable roof to floor area ratio are less vulnerable and, with self-generation of electricity, can become partially autonomous for energy supply.

Conclusion

The fundamental discussion of the relationship between urban form and energy is concerned with compaction. Compaction of individual buildings ('up') and compaction of the spread of buildings ('out'). Intuition, combined with previous research results has indicated that buildings with a low-ratio of surface area to volume lose less heat and that containment of urban spread (sprawl) results in less transport energy. The simple conclusion from this is that 'up' is better than 'out' for reducing energy consumption.

Subsequent research reviewed in this paper has demonstrated that heat loss from building fabric is not a good indicator of whole-building energy use for compact buildings. When other factors are accounted for (common area energy use, occupancy, energy use for non-space heating) the correlation between built form and energy use is shown to be weak. Case studies in different climates using actual energy data have indicated that compact (tall) buildings perform worse than low-rise buildings. Furthermore, when energy generated on a building is taken into account, the net energy balance of a building strongly favours low-rise buildings rather than compact high-rise.

Research on the relationship between transport energy and urban form has focussed on vehicles with internal combustion engines. Again, the conclusion of this is that urban form should not go 'out' but should be contained by going 'up'. However, as car manufacturers shift production to EVs combined with incentives to assist purchase, these vehicles are likely to dominate the market in years to come. It is a relatively simple thing to then charge these vehicles from electricity generated on rooftops. The result is that suburbia becomes a net energy generator and that travel distance within an urban area has little impact on resource depletion or carbon production. The future use of virtual power plants (VPPs) will also make

it possible to utilise energy stored throughout an urban area to be directed towards electrically powered public transport.

One of the main reasons for this counterintuitive result is the influence of disruptive technologies. The distributed generation of electricity that has the possibility of being directed towards the charging of electric vehicles, for private or public use, changes the assumptions previously made in this field of research.

Current policies on compaction of urban areas have been influenced, among other things, on research that has not taken account of these technological changes. The shape of urban areas of the future should not be determined by the technologies of the past but by the technologies of the future.

References

- ALBINO, V., BERARDI, U. & DANGELICO, R. M. 2015. Smart cities: Definitions, dimensions, performance, and initiatives. *Journal of Urban Technology*, 22, 3-21.
- BLOOMBERG NEW ENERGY FINANCE (2018)
<https://www.bloomberg.com/news/articles/2018-04-23/electric-buses-are-hurting-the-oil-industry> accessed April 2018
- BREHENY, M. 1995. The compact city and transport energy consumption. *Transactions of the institute of British Geographers*, 20, 81-101.
- BYRD, H. 2012. The case for policy changes in New Zealand housing standards due to cooling and climate change. *Journal of Environmental Policy & Planning*, 14, 360-370.
- BYRD, H. 2017. The Power of Suburbia. In: BERGER, A., KOTKIN, J. & GUZMAN, C. B. (eds.) *Infinite Suburbia*. New York: Princeton Architectural Pres.
- BYRD, H., HO, A., SHARP, B. & KUMAR-NAIR, N. 2013. Measuring the solar potential of a city and its implications for energy policy. *Energy policy*, 61, 944-952.
- BYRD, H. & MATTHEWMAN, S. 2014. Exergy and the city: the technology and sociology of power (failure). *Journal of Urban Technology*, 21, 85-102.
- CHENG, V., DESHMUKH, S., HARGREAVES, A., STEEMERS, K. & LEACH, M. A study of urban form and the integration of energy supply technologies. World Renewable Energy Congress-Sweden; 8-13 May; 2011; Linköping; Sweden, 2011. Linköping University Electronic Press, 3356-3363.
- ECHENIQUE, M. H., HARGREAVES, A. J., MITCHELL, G. & NAMDEO, A. 2012. Growing cities sustainably: does urban form really matter? *Journal of the American Planning Association*, 78, 121-137.
- ELECTRICITY AUTHORITY. 2017. Microgrids blockchain and peer to peer.
<https://www.ea.govt.nz/dmsdocument/21749> . accessed April 2018
- EWING, R. & RONG, F. 2008. The impact of urban form on US residential energy use. *Housing policy debate*, 19, 1-30.
- FINCH, G., BURNETT, E. & KNOWLES, W. Energy consumption in mid and high rise residential buildings in British Columbia. Building Enclosure Science & Technology (BEST2) Conference, 2010.

- GHOSH, S., VALE, R. & VALE, B. 2006. Domestic energy sustainability of different urban residential patterns: a New Zealand approach. *International Journal of Sustainable Development*, 9, 16-37.
- GOMEZ-IBANEZ, J. A. 1991. A global view of automobile dependence. *American Planning Association. Journal of the American Planning Association*, 57, 376-378.
- GORDON, P., RICHARDSON, H. W. & JUN, M.-J. 1991. The commuting paradox evidence from the top twenty. *Journal of the American Planning Association*, 57, 416-420.
- GUHATHAKURTA, S. & WILLIAMS, E. 2015. Impact of urban form on energy use in central city and suburban neighborhoods: lessons from the phoenix metropolitan region. *Energy Procedia*, 75, 2928-2933.
- HARGREAVES, A., CHENG, V., DESHMUKH, S., LEACH, M. & STEEMERS, K. 2017. Forecasting how residential urban form affects the regional carbon savings and costs of retrofitting and decentralized energy supply. *Applied Energy*, 186, 549-561.
- HEINONEN, J. & JUNNILA, S. 2014. Residential energy consumption patterns and the overall housing energy requirements of urban and rural households in Finland. *Energy and buildings*, 76, 295-303.
- HO, A. 2012. *Energy Efficient Suburbia-Transforming the Perceived Oxymoron: A Case Study of the Impact of Smart Energy Technologies on Urban Form in Auckland, New Zealand*. University of Auckland.
- IEA (2009), *Cities, Towns and Renewable Energy: Yes In My Front Yard*, OECD Publishing, Paris. <http://dx.doi.org/10.1787/9789264076884-en>
- JOINER, D. 2010. Sustainable Urban Behaviour. *New Zealand Sustainable Building Conference SB10*. Wellington, New Zealand: Department of Building and Housing.
- LOMAS, K. J. 2010. Carbon reduction in existing buildings: a transdisciplinary approach. *Building Research & Information*, 38, 1-11.
- MANDAL, A. & BYRD, H. 2017. Density, Energy and Metabolism of a proposed smart city. *Journal of Contemporary Urban Affairs*, 1, 57-68.
- MARCH, L. 1972. Elementary models of built forms. In: MARTIN, L. & MARCH, L. (eds.) *Urban Space and Structures*. Cambridge University Press.
- MARGALIT, H. 2016. *Energy, Cities and Sustainability: An Historical Approach*, Routledge.
- MOHAJERI, N., UPADHYAY, G., GUDMUNDSSON, A., ASSOULINE, D., KÄMPF, J. & SCARTEZZINI, J.-L. 2016. Effects of urban compactness on solar energy potential. *Renewable Energy*, 93, 469-482.
- MYORS, P., O'LEARY, R. & HELSTROOM, R. 2005. Multi Unit Residential Buildings Energy & Peak Demand Study. https://www.ausgrid.com.au/-/media/Files/Network/Demand-Management/Energy-use-resources/Networks_multi_unit_sumrep_Oct08.pdf . (Accessed March 2018).
- NEWMAN, P. G. & KENWORTHY, J. R. 1989a. *Cities and automobile dependence: An international sourcebook*, Aldershot and Brookfield.
- NEWMAN, P. W. & KENWORTHY, J. R. 1989b. Gasoline consumption and cities: a comparison of US cities with a global survey. *Journal of the american planning association*, 55, 24-37.
- NICONOWICZ, L. & MILEWSKI, J. (2012) Virtual Power Plants-general review: structure, application and optimisation. *Journal of Power Technologies* 92 (3) 135-149
- REN21 2017. Renewables Global Futures Report: Great debates towards 100% renewable energy. Renewable Energy Policy Network.

Byrd, H., Matthewman, S. & Kenney, C. (2018) The Impact of Disruptive Technologies on Future Urban Form in New Zealand's Cities. Urbanism New Zealand Conference, 14-15 May 2018. Wellington, New Zealand

- RICKABY, P. A. 1987. An approach to the assessment of the energy efficiency of urban built form. In: HAWKES, D., OWERS, J., RICKABY, P. & STEADMAN, P. (eds.) *Energy and Urban Built Form*. Butterworth-Heinemann.
- RICKWOOD, P., GLAZEBROOK, G. & SEARLE, G. 2008. Urban structure and energy—a review. *Urban policy and research*, 26, 57-81.
- RODE, P., KEIM, C., ROBAZZA, G., VIEJO, P. & SCHOFIELD, J. 2014. Cities and energy: urban morphology and residential heat-energy demand. *Environment and Planning B: Planning and Design*, 41, 138-162.
- SARRALDE, J. J., QUINN, D. J., WIESMANN, D. & STEEMERS, K. 2015. Solar energy and urban morphology: Scenarios for increasing the renewable energy potential of neighbourhoods in London. *Renewable Energy*, 73, 10-17.
- STEADMAN, P. & BROWN, F. 1987. Estimating the exposed surface area of the domestic stock. In: HAWKES, D., OWERS, J., RICKABY, P. & STEADMAN, P. (eds.) *Energy and urban built form*. Butterworth-Heinemann.
- STEADMAN, P., EVANS, S. & BATTY, M. 2009. Wall area, volume and plan depth in the building stock. *Building Research & Information*, 37, 455-467.
- STEADMAN, P., HAMILTON, I., GODOY-SHIMIZU, D., SHAYESTEH, H. & EVANS, S. 2017. *High-Rise Buildings: Energy and Density* [Online]. UCL Energy Institute Home. Available: <https://www.ucl.ac.uk/bartlett/energy/news/2017/jun/ucl-energy-high-rise-buildings-energy-and-density-research-project-results> [Accessed January 2018].
- STEEMERS, K. 2003. Energy and the city: density, buildings and transport. *Energy and buildings*, 35, 3-14.
- STEPHENSON, J. 2016. The Potential for uptake of Electric Vehicles in New Zealand . http://www.epecentre.ac.nz/docs/green%20grid%20conf%20presentations/8.%20UO-GG-16-CP-JS-01_EV%20presentation.pdf
- VECTOR, (2018) Vector can now offer New Zealanders the very latest in home energy storage <https://www.vector.co.nz/personal/batteries> . Accessed April 2018