

Toolbox of Countermeasures for Rural Two-Lane Curves



Final Report
June 2012



IOWA STATE UNIVERSITY
Institute for Transportation

Sponsored by

Iowa Department of Transportation
Iowa Highway Research Board
(IHRB Project TR-579)
Midwest Transportation Consortium
(InTrans Projects 07-311 and 08-320)

About MTC

The Midwest Transportation Consortium (MTC) is a Tier 1 University Transportation Center (UTC) that includes Iowa State University, the University of Iowa, and the University of Northern Iowa. The mission of the UTC program is to advance U.S. technology and expertise in the many disciplines comprising transportation through the mechanisms of education, research, and technology transfer at university-based centers of excellence. Iowa State University, through its Institute for Transportation (InTrans), is the MTC's lead institution.

About CTRE

The mission of the Center for Transportation Research and Education (CTRE) at Iowa State University is to develop and implement innovative methods, materials, and technologies for improving transportation efficiency, safety, and reliability while improving the learning environment of students, faculty, and staff in transportation-related fields.

Disclaimer Notice

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the information presented herein. The opinions, findings and conclusions expressed in this publication are those of the authors and not necessarily those of the sponsors.

The sponsors assume no liability for the contents or use of the information contained in this document. This report does not constitute a standard, specification, or regulation.

The sponsors do not endorse products or manufacturers. Trademarks or manufacturers' names appear in this report only because they are considered essential to the objective of the document.

Non-Discrimination Statement

Iowa State University does not discriminate on the basis of race, color, age, religion, national origin, sexual orientation, gender identity, genetic information, sex, marital status, disability, or status as a U.S. veteran. Inquiries can be directed to the Director of Equal Opportunity and Compliance, 3280 Beardshear Hall, (515) 294-7612.

Iowa Department of Transportation Statements

Federal and state laws prohibit employment and/or public accommodation discrimination on the basis of age, color, creed, disability, gender identity, national origin, pregnancy, race, religion, sex, sexual orientation or veteran's status. If you believe you have been discriminated against, please contact the Iowa Civil Rights Commission at 800-457-4416 or Iowa Department of Transportation's affirmative action officer. If you need accommodations because of a disability to access the Iowa Department of Transportation's services, contact the agency's affirmative action officer at 800-262-0003.

The preparation of this document was financed in part through funds provided by the Iowa Department of Transportation through its "Agreement for the Management of Research Conducted by Iowa State University for the Iowa Department of Transportation" and its amendments.

The opinions, findings, and conclusions expressed in this publication are those of the authors and not necessarily those of the Iowa Department of Transportation.

Technical Report Documentation Page

1. Report No. IHRB Project TR-579	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Toolbox of Countermeasures for Rural Two-Lane Curves		5. Report Date June 2012	
		6. Performing Organization Code	
7. Author(s) Shauna Hallmark, Neal Hawkins, and Omar Smadi		8. Performing Organization Report No. InTrans Projects 07-311 and 08-320	
9. Performing Organization Name and Address Center for Transportation Research and Education Iowa State University 2711 South Loop Drive, Suite 4700 Ames, IA 50010-8664		10. Work Unit No. (TRAIS)	
		11. Contract or Grant No.	
12. Sponsoring Organization Name and Address Iowa Department of Transportation and Iowa Highway Research Board, Office of Traffic and Safety, 800 Lincoln Way, Ames, IA 50010 Midwest Transportation Consortium, Institute for Transportation, 2711 S. Loop Drive, Suite 4700, Ames, IA 50010-8664		13. Type of Report and Period Covered Final Report	
		14. Sponsoring Agency Code	
15. Supplementary Notes Visit www.intrans.iastate.edu for color pdfs of this and other research reports.			
16. Abstract <p>The Federal Highway Administration (FHWA) estimates that 58 percent of roadway fatalities are lane departures, while 40 percent of fatalities are single-vehicle run-off-road (SVROR) crashes. Addressing lane-departure crashes is therefore a priority for national, state, and local roadway agencies. Horizontal curves are of particular interest because they have been correlated with increased crash occurrence.</p> <p>This toolbox was developed to assist agencies address crashes at rural curves. The main objective of this toolbox is to summarize the effectiveness of various known curve countermeasures.</p> <p>While education, enforcement, and policy countermeasures should also be considered, they were not included given the toolbox focuses on roadway-based countermeasures. Furthermore, the toolbox is geared toward rural two-lane curves.</p> <p>The research team identified countermeasures based on their own research, through a survey of the literature, and through discussions with other professionals. Coverage of curve countermeasures in this toolbox is not necessarily comprehensive.</p> <p>For each countermeasure covered, this toolbox includes the following information: description, application, effectiveness, advantages, and disadvantages.</p>			
17. Key Words countermeasures—crash mitigation—curve safety—curves countermeasure toolbox—rural curves—two-lane roads		18. Distribution Statement No restrictions	
19. Security Classification (of this report) Unclassified	20. Security Classification (of this page) Unclassified	21. No. of Pages 67	22. Price NA

Contents

Figures	v
Tables	vi
Background	1
Acknowledgments.....	2
Overview	3
Additional Information for Selecting Countermeasures	4
Manual on Uniform Traffic Control Devices Guidance.....	4
Crash Reduction Factors.....	5
Countermeasures Covered in this Toolbox.....	5
Advance Curve Warning and Advisory Speed Signing	6
Description.....	6
Application	6
Effectiveness.....	6
Advantages	8
Disadvantages	8
Chevrons and Oversized Chevrons	9
Description.....	9
Application	9
Effectiveness.....	9
Advantages	10
Disadvantages	10
Widening/Adding Paved Shoulders	11
Description.....	11
Application	11
Effectiveness.....	11
Advantages	12
Disadvantages	12
Reflective Barrier Delineation	13
Description.....	13
Application	13
Effectiveness.....	13
Advantages	13
Disadvantages	13
High-Friction Treatments	14
Description.....	14
Application	14
Effectiveness.....	15
Advantages	15
Disadvantages	15
Raised Pavement Markers	16
Description.....	16
Application	16
Effectiveness.....	16
Advantages	17
Disadvantages	17

Edge Lines and Wide Edge Lines	18
Description.....	18
Application.....	18
Effectiveness.....	19
Advantages	21
Disadvantages	21
Transverse Pavement Markings	22
Description.....	22
Application.....	22
Effectiveness.....	23
Advantages	29
Disadvantages	29
Vertical Delineation.....	30
Description.....	30
Application.....	30
Effectiveness.....	31
Advantages	34
Disadvantages	34
Rumble Strips and Rumble Stripes	35
Description.....	35
Application.....	35
Effectiveness.....	40
Advantages	43
Disadvantages	43
On-Pavement Curve Signing.....	44
Description.....	44
Application.....	44
Effectiveness.....	44
Advantages	45
Disadvantages	45
Flashing Beacons	46
Description.....	46
Application.....	46
Effectiveness.....	46
Advantages	47
Disadvantages	47
Dynamic Curve Warning Systems.....	48
Description.....	48
Application.....	49
Effectiveness.....	49
Advantages	52
Disadvantages	52
Pavement Inset Lights.....	53
Description.....	53
Application.....	53
Effectiveness.....	53
Advantages	53
Disadvantages	53
References.....	55

Figures

Figure 1. Combination advisory sign/horizontal alignment sign (Vest et al. 2005).....	7
Figure 2. Oversized chevrons on US 6 in Johnson County, Iowa (Tom Welch, Iowa DOT)	9
Figure 3. Panels of retroreflective sheeting to delineate curves	13
Figure 4. Nighttime view of retroreflective sheeting (McGee and Hanscom 2006)	13
Figure 5. High friction treatment (The Transtec Group, Inc., highfrictionroads.com).....	14
Figure 6. RPMs used in the center of a curve.....	16
Figure 7. Before and after application of wider edge lines (Donnell et al. 2006)	18
Figure 8. Various on-pavement curve markings.....	22
Figure 9. Optical speed bars (VDOT 2006).....	23
Figure 10. Optical speed bar installation on a curve in Oregon.....	24
Figure 11. Optical speed bar design used by Latoski (2009)	24
Figure 12. Transverse pavement markings as a rural gateway traffic calming treatment (Hallmark et al. 2007).....	25
Figure 13. Converging chevrons at entrance to small rural community (Hallmark et al. 2007).....	25
Figure 14. Wundt-Herring pavement marking layout (Shinar et al. 1980).....	26
Figure 15. Equally-spaced transverse lines (Vest et al. 2005)	27
Figure 16. Leading, primary, and work-zone bar pattern (Meyer 1999)	28
Figure 17. Transverse markings on US 460 (Arnold and Lantz 2007).....	29
Figure 18. Delineator posts along a curve (www.pexco.com/Pages/PexcoTrafficRDP.aspx).....	30
Figure 19. Retroreflective treatment on chevron posts day and night.....	30
Figure 20. Post delineators on a curve	31
Figure 21. Post-mounted delineators at 50 ft intervals (Vest et al. 2005).....	31
Figure 22. Sample treatments (Chrysler 2009)	32
Figure 23. Edge-line and centerline rumble strips.....	35
Figure 24. Different types of shoulder rumble strips	37
Figure 25. Different types of centerline rumble strips.....	38
Figure 26. Completed edge-line rumble stripe on a rural highway in Iowa (Hallmark et al. 2010) .	39
Figure 27. Wear at Vandalia/ CR F70 after two years (Hallmark et al. 2011)	42
Figure 28. Rumble stripe depression filled with material (Hallmark et al. 2011).....	43
Figure 29. On-pavement curve sign	44
Figure 30. On-pavement curve markings (Chrysler et al. 2006).....	45
Figure 31. Flashing beacons (Bowman 2012)	46
Figure 32. Flashing beacons on advisory curve sign(Vest et al. 20052)	46
Figure 33. Two examples of dynamic driver feedback signs	48
Figure 34. Sequential dynamic curve warning system (FHWA 2012)	49
Figure 35. I-5 DSFS system in Oregon.....	50
Figure 36. DSFS system in Norfolk, Virginia (Winnett and Wheeler 2002)	51
Figure 37. DSFS system in Bellevue, Washington (City of Bellevue 2009).....	51
Figure 38. Speed warning sign in the Sacramento River Canyon (Tribbett et al. 2000)	52
Figure 39. In-pavement lighting (FHWA 2011)	53

Tables

Table 1. Outline for countermeasure information in this toolbox.....	3
Table 2. CRFs for advance curve warning signs (USDOT 2008).....	7
Table 3. Reduction in non-intersection crashes with upgraded signing and curve delineation in Connecticut (FHWA 2009).....	8
Table 4. Reduction in non-intersection crashes with chevrons installed or added in Washington (FHWA 2009)	10
Table 5. ROR and fixed object CRFs for shoulder widening (USDOT 2008).....	11
Table 6. CRFs for installation of wider edge lines (FHWA 2012).....	21
Table 7. Spacing between transverse markings in advance of curves (based on guidance from the NYSDOT).....	23
Table 8. CRFs for delineators (USDOT 2008).....	31
Table 9. Speed reduction for various treatments (Molino et al. 2010).....	33
Table 10. Driver ability to detect curve direction and severity (Molino et al. 2010).....	33
Table 11. Application of various types of rumble strips (after Nambisan and Hallmark 2011)	36
Table 12. CRFs for two-lane roadways (USDOT 2008 and FHWA 2012)	40
Table 13. WSDOT reduction in crashes using CLRS six months after installation (Hammond 2008).....	41
Table 14. Advisory messages for I-5 dynamic speed- activated feedback sign system (Bertini et al. 2006).....	49

Background

The Federal Highway Administration (FHWA) estimates that 58 percent of roadway fatalities are lane departures, while 40 percent of fatalities are single-vehicle run-off-road (SVROR) crashes (FHWA 2009). Addressing lane-departure crashes is therefore a priority for national, state, and local roadway agencies.

Horizontal curves are of particular interest because they have been correlated with overall increased crash occurrence. Glennon et al. (1985) reported that curves have approximately three times the crash rate of tangent sections and Preston (2009) reported that 25 to 50 percent of severe road departure crashes in Minnesota occurred on curves, even though curves only account for 10 percent of the system mileage.

Shankar et al. (1998) found a relationship between the number of horizontal curves per kilometer and median crossover crashes on divided highways. Farmer and Lund (2002) found that the odds of having a rollover on a curved section were 1.42 to 2.15 times greater than that of having a rollover on a straight section.

The majority of crashes on curves involve lane departures. A total of 76 percent of curve-related fatal crashes are single vehicles leaving the roadway and striking a fixed object or overturning. Another 11 percent of curve-related crashes are head-on collisions (AASHTO 2008).

Curve-related crashes have a number of causes including roadway and driver factors. Environmental factors, such as the roadway surface condition, and vehicle factors, such as the center of gravity, will also have an impact on a driver's ability to safely negotiate a curve.

McLaughlin et al. (2009) evaluated run-off-road (ROR) crashes and near-crashes in a Virginia Tech Transportation Institute (VTTI) 100 car study and found that ROR events were 1.8 times more likely on wet roads than dry, 7.0 times more likely with on roads with snow or ice than dry roads, and 2.5 times higher in the dark than during the daytime.

Degree of curve or radius of curve is the roadway factor most cited in the literature as having an impact on crash risk. Luediger et al. (1988) found that crash rates increase as degree of curve increases. Miaou and Lum (1993) found that truck crash involvement increases as horizontal curvature increases, depending on the length of curve. Vogt and Bared (1998) found a positive correlation between injury crashes and degree of horizontal on rural two-lane road segments. Zegeer et al. (1991) used a linear regression model and found that degree of curve was correlated positively with crashes on two-lane roads.

Schneider et al. (2009) evaluated truck crashes on horizontal curves in Ohio using a Bayesian analysis. The researchers found that curve length, volume, and degree of curvature were correlated to crash frequency.

Preston (2009) examined severe road departure crashes and found that 90 percent of fatal crashes and 75 percent of injury crashes occurred on curves with a radius of less than 1,500 feet.

Milton and Mannering (1998) reported that an increase in radius was associated with decreases in crash frequency.

Other factors that have been correlated to the frequency and severity of curve-related crashes include length of curve, type of curve transition, lane and shoulder widths (Zegeer et al. 1991), preceding tangent length (Milton and Mannering 1998), presence of spirals (Council 1998), grade (Fink and Krammes 1995), and required speed reduction between the tangent and curve.

Hassan and Easa (2003) found that driver misperception of curve sharpness was greatest when vertical curvature was combined with horizontal curvature, particularly when a crest vertical curve is superimposed on a severe horizontal curve or when a sag vertical curve is combined with a horizontal curve.

Driver errors on horizontal curves are often due to inappropriate selection of speed and inability to maintain lane position. The FHWA estimates that approximately 56 percent of ROR fatal crashes on curves are speed related. The amount of speed reduction needed to traverse a curve has an impact on frequency and severity of crashes (Luediger et al. 1988, Anderson et al. 1999, Fink and Krammes 1995).

Driver speed selection at curves depends on both explicit attentional cues and implicit perceptual cues (Charlton 2007). Driver perception of the apparent upcoming curve radius forms the primary basis for making speed and path adjustments. Perception of the sharpness of the curve can be by distorted by topography, presence of a vertical curve, and sight distance (Campbell et al. 2008).

Driver speed prior to entering a curve has a significant effect on ability to negotiate the curve successfully (Preston and Schoenecker 2009). Inappropriate speed selection and lane positioning can be a result of a driver failing to notice an upcoming curve or misperceiving the roadway curvature.

Driver workload plays an important role in driver speed maintenance. Distracting tasks such as radio tuning or cell phone conversations can draw a driver's attention away from speed monitoring, detection of headway changes, lane keeping, and detection of potential hazards (Charlton 2007). Charlton found that drivers approached and entered curves at higher speeds when engaged in cell phone tasks than in non-distraction scenarios.

Other factors include sight distance issues, fatigue, and complexity of the driving situation (Charlton and DePont 2007, Charlton 2007). McLaughlin et al. (2009) evaluated ROR events in the 100 car study and found that distraction was the most frequently-identified contributing factor. Researchers also noted fatigue/impairment and maneuvering errors.

Acknowledgments

The authors would like to thank the Iowa Department of Transportation (DOT) Office of Traffic and Safety (TAS), the Iowa Highway Research Board, and the Midwest Transportation Consortium (MTC) for funding this toolbox. This work does not necessarily reflect the views of the sponsors.

Overview

The main objective of this toolbox is to summarize the effectiveness of various known curve countermeasures. The toolbox focuses on roadway-based countermeasures. Education, enforcement, and policy countermeasures should also be considered, but are not the focus of this toolbox. Furthermore, the focus of this toolbox is on strategies for rural two-lane curves.

The research team identified countermeasures based on their own research, through a survey of the literature, and through discussions with other professionals. The list is not necessarily comprehensive. Each countermeasure that the team was aware of is summarized using the format outlined in Table 1.

Table 1. Outline for countermeasure information in this toolbox

Subsection	Summarizes
Description	Countermeasure
Application	How the countermeasure has been applied, where the countermeasure is most effective, and so forth
Effectiveness	Studies showing whether the countermeasure is effective, information about crash reductions, and speed changes, with the assumption that speed change can be used as a crash surrogate
Advantages	Countermeasure advantages, such as low cost
Disadvantages	Main countermeasure disadvantages, such as long-term maintenance

Countermeasures serve two functions. The first is to reduce the likelihood of a vehicle leaving its lane (either running off the roadway or crossing into an adjacent lane) and the second is to minimize the consequences when a vehicle does leave the roadway (Torbic et al. 2004).

Strategies that are applied generally across a corridor to address lane departure crashes are not summarized in this toolbox, but should be considered as part of a comprehensive approach to reducing crashes on rural roadways.

These other strategies include countermeasures such as the Safety Edge or use of guardrail or cable median barriers. The toolbox also does not include design solutions, such as flattening a curve or side slopes. In addition, be sure to note the following:

- ◆ The effectiveness of the various treatments are estimates only and will vary based on roadway, environmental, and operational conditions.
- ◆ Countermeasures that place a device within the roadway clear zone should follow the *Manual on Uniform Traffic Devices* (MUTCD) and national guidelines for crash worthiness. Countermeasures that include pavement marking or roadway surface treatments should meet skid-resistance requirements.
- ◆ Better delineation of the roadway may increase speeds given drivers are better able to gauge a curve's sharpness.
- ◆ The MUTCD and state and local guidelines should be consulted before selecting countermeasures.
- ◆ Use of countermeasures when not warranted or overuse of countermeasures may result in driver disregard. When not effective, the countermeasures can also require long-term maintenance costs, which are not warranted. As a result, agencies should judiciously select and apply countermeasures.

- ◆ Many of the devices listed are considered supplementary in that they supplement and do not replace traditional traffic control.

Additional Information for Selecting Countermeasures

This toolbox summarizes various countermeasures. Other documents have summarized steps to identify problem locations, conduct safety audits and field visits, etc. As a result, this document does not attempt to summarize existing guidance on the topic.

In addition, the content of this toolbox focuses on countermeasures applied on or near the roadway itself. Strategies to maintain a clear zone, such as removing or shielding obstacles, are not included in this toolbox.

The following resources may provide useful information on general strategies to address curve safety:

- ◆ *NCHRP Report 500: Volume 7: A Guide for Reducing Collisions on Horizontal Curves*. Torbic, Darren J., Douglas Harwood, David K. Gilmore, Ronald Pfefer, Timothy R. Neuman, Kevin L. Slack, and Kelly K. Hardy. National Cooperative Highway Research Program. Washington, DC. 2004.

This report provides guidance for implementation of the American Association of State Highway and Transportation Officials (AASHTO) Strategic Highway Safety Plan. The guide also describes countermeasures.

- ◆ *Driving Down Lane-Departure Crashes: A National Priority*. American Association of State Highway and Transportation Officials. April 2008.
<http://downloads.transportation.org/PLD-1.pdf>.

This guide provides general information about addressing lane departure crashes, provides background on various countermeasures, and provides steps to addressing lane-departure crashes.

- ◆ *Low-Cost Treatments for Horizontal Curve Safety*. McGee, Hugh W. and Fred R. Hanscom. U.S. Department of Transportation. Federal Highway Administration. FHWA-SA-07-002. December 2006.
http://safety.fhwa.dot.gov/roadway_dept/horicurves/fhwasa07002/index.cfm#toc.

This guide provides information about low-cost treatments on curves.

Manual on Uniform Traffic Control Devices Guidance

This toolbox provides information about rural curve treatments. The MUTCD (2009) covers some of the treatments. The MUTCD should be considered the main source of information about selecting and applying traffic control devices. Information from the MUTCD supersedes any information provided in this toolbox.

In some cases, the treatments discussed in this toolbox are considered experimental and require MUTCD approval. Users should consult the MUTCD and their own state and local guidance before application of treatments. Many of the devices listed in this toolbox are considered supplementary in that they supplement and do not replace traditional traffic control. For instance, placing on-pavement speed signing is supplemental to posted speed limit signs.

Accordingly, selected treatments should be placed so that they enhance rather than detract from regular traffic control. In addition, caution should be used so they do not appear to be sending different messages from regular traffic control, which could cause confusion.

Crash Reduction Factors

Crash reduction factors (CRFs) or crash modification factors (CMFs) have been developed for various roadway countermeasures.

A CMF is a multiplicative factor to compute the expected number of crashes after implementing a given countermeasure. A CMF of 0.80 indicates that the expected number of crashes after the treatment would decrease by 20 percent.

A CRF is the expected percentage change in crashes due to a particular treatment. A CRF of 0.80, for instance, indicates that a 20 percent reduction in crashes might be expected with use of the treatment. CRFs can be negative indicating an expected increase in crashes.

CRFs are presented in this toolbox and were identified through a review of existing studies.

“A CRF should be regarded as a generic estimate of the effectiveness of a countermeasure. The estimate is a useful guide, but it remains necessary to apply engineering judgment and to consider site-specific environmental, traffic volume, traffic mix, geometric, and operational conditions, which will affect the safety impact of a countermeasure. The user must ensure that a countermeasure applies to the particular conditions being considered.” (USDOT 2008)

Users are encouraged to consult the source documents. In addition, a clearinghouse for crash reduction factors has been developed by the FHWA (<http://www.cmfclearinghouse.org>).

Countermeasures Covered in this Toolbox

The remainder of this document includes the following toolbox of possible countermeasures that can be used at rural two-lane curves to address safety:

Advance Curve Warning and Advisory Speed Signing.....	6
Chevrons and Oversized Chevrons.....	9
Widening/Adding Paved Shoulders.....	11
Reflective Barrier Delineation	13
High-Friction Treatments	14
Raised Pavement Markers.....	16
Edge Lines and Wide Edge Lines.....	18
Transverse Pavement Markings	22
Vertical Delineation	30
Rumble Strips and Rumble Stripes.....	35
On-Pavement Curve Signing.....	44
Flashing Beacons.....	46
Dynamic Curve Warning Systems	48
Pavement Inset Lights.....	53

Advance Curve Warning and Advisory Speed Signing

Description

Advance curve warning signs are used to alert drivers to the presence of a curve. A speed advisory sign supplements warning signs when an engineering study indicates the need to advise drivers of change in roadway alignment. The purpose is to inform unfamiliar drivers of a possible hazardous situation and recommend a comfortable and safe speed.

However, curve advisory speeds are often inappropriately set. Chowdhury et al. (1998) used a ball bank indicator and measured curve geometry and spot speeds at 28 locations and found that most agencies did not post advisory speeds consistent with generally recommended criteria.

Application

The MUTCD (2009) covers setting curve advisory speeds and use of curve warning and curve advisory speed signs. For horizontal curve signing to be effective, it should be uniformly and consistently displayed so that curves with similar characteristics, such as radius, super elevation, or sight distance, have similar messages (Bonneson et al. 2009).

Several studies, including the following, have reviewed current methods to set advisory speeds and proposed better methods:

- ◆ “Evaluation of Alternative Procedures for Setting Curve Advisory Speeds.” Bonneson, James A., Michael P. Pratt, and Jeff Miles. *Transportation Research Record: Journal of the Transportation Research Board*. No. 2122. Transportation Research Board of the National Academies, Washington, DC. 2009. pp. 9-16.
- ◆ “Assessment of Traffic Control Devices Selection Guidelines for Horizontal Curves.” Pratt, Michael P. and James A. Bonneson. *Transportation Research Record: Journal of the Transportation Research Board*. No. 2122. Transportation Research Board of the National Academies, Washington, DC. 2009. pp. 36-44.
- ◆ *Methodologies for the Determination of Advisory Speeds*. Seyfried, Robert K. and James L. Pline. Institute of Transportation Engineers, Traffic Engineering Council. Washington, DC. 2010.

Effectiveness

Table 2 shows CRFs for installation of advisory signs.

Table 2. CRFs for advance curve warning signs (USDOT 2008)

Crash Type	Crash Reduction Factor	
	Advance Curve Warning*	Advisory Speed
All	30	29
Fatal	55	
Fatal/Injury	10	
Injury	30	13
PDO	8	29

* Rural two-lane curves
 PDO = property damage only

Chowdhury et al. (1998) found that 90 percent of drivers exceeded posted advisory speeds and drivers were more likely to exceed posted advisory speeds of 40 mph or less than advisory speeds of 45 mph or more. However, although compliance was low, the researchers found that drivers did adjust their speeds.

Vest et al. (2005) evaluated different types of warning signs to reduce speed on curves. The researchers tested sites on rural roadways with a sharp curve, history of speed-related incidents, long tangent section before the curve, no vertical grade, and no intersections, driveways, or commercial activity within the curve.

One treatment added bright orange flags on existing curve warning/ advisory speed signs. The speed studies showed a change in average speeds from an increase of 0.1 mph before the flags to a decrease of 1.3 mph at the point of curvature (PC) after the flags and a decrease from 0.1 mph before the flags to a decrease of 1.0 mph after the flags within the curve. Changes in 85th percentile speed ranged from an increase of 0.8 mph before the flags to a decrease of 1.8 mph after the flags at the PC and a decrease of - 0.1 mph (or actually an increase) within the curve after the flags.



Figure 1. Combination advisory sign/horizontal alignment sign (Vest et al. 2005)

The researchers also tested a combination of a horizontal alignment sign placed within the curve in addition to advisory speed signing as shown in Figure 1. The study found a 0.5 mph increase in average speed and a 0.7 mph increase in 85th percentile speeds at the PC. The researchers noted a decrease of 0.5 mph in mean speed and no change in 85th percentile speeds at the center of the curve.

Another study, which was a pooled fund study, evaluated the impact of improved curve delineation (FHWA 2009). The researchers conducted a before-and-after analysis using Empirical Bayes (EB) methods. The study included control sites that were similar to locations where the treatments were applied but did not receive the improved signing.

For this study, Connecticut upgraded existing curve signing to fluorescent yellow sheeting by installing new signs or replacing existing curve ahead or advisory speed warning signs and chevrons and horizontal arrows for curve delineation (MUTCD W1-1 through -6, W1-8, and W1-10).

In this study, the researchers reported a reduction in several types of non-intersection crashes as shown in Table 3.

Table 3. Reduction in non-intersection crashes with upgraded signing and curve delineation in Connecticut (FHWA 2009)

Type	Decrease (%)
Non-intersection	17.8
Lane departure	17.7
Non-intersection during dark	35.3
Lane departure during dark	34.2

The researchers also noted that the treatment was more effective at sites with higher volume.

Charlton and DePont (2007) evaluated various curve treatments using a simulator in New Zealand. Advance warning signs on their own were not as effective at reducing speeds as when used in conjunction with chevron sight boards and/or repeater arrows.

Advantages

- ◆ Low cost

Disadvantages

- ◆ Use of traffic control devices when not warranted can result in additional costs for maintenance and replacement

Chevrons and Oversized Chevrons

Description

Chevrons provide additional emphasis and guidance for drivers. If properly spaced, chevrons can delineate the curve so that drivers are better able to gauge the sharpness of the curve.

Section 2C.04 of the MUTCD (2009) covers chevron alignment sign (W1-8) size. Several agencies, including the Iowa Department of Transportation (DOT), have applied a larger chevron size than suggested by the MUTCD (Figure 2). The idea is that larger chevrons will be more prominent and visible to drivers. These larger chevrons may be particularly useful if sight distance issues exist.



Figure 2. Oversized chevrons on US 6 in Johnson County, Iowa (Tom Welch, Iowa DOT)

Application

Chapter 2 of the MUTCD (2009) covers standard application of chevrons.

No standards exist for use of oversized chevrons. In general, standard chevrons signs are replaced with the next largest size specified in the MUTCD.

A field study by the Texas Transportation Institute (TTI) evaluated the impact of varying the number of chevrons in view around a curve and developed an alternate spacing chart to assist maintenance personnel as reported in the following:

- ◆ “Spacing Chevrons on Horizontal Curves.” Rose, Elisabeth R. and Paul J. Carlson. *Transportation Research Record: Journal of the Transportation Research Board*. No. 1918. Transportation Research Board of the National Academies, Washington, DC. 2005. pp. 84-91.

Effectiveness

The effectiveness of oversized chevrons is unknown.

Installation of chevrons on rural two-lane roadways has a CRF of 35 for all crashes and 20 for fatal and injury crashes (USDOT 2008).

Zador et al. (1987) evaluated the effectiveness of chevrons and other treatments on 46 sites in Georgia and 5 sites in New Mexico. Several control sites were also included and speed and the researchers collected lateral placement data at each curve.

The authors found that, with chevrons at night, drivers moved away from the centerline and vehicle speed and placement variability were slightly reduced with the use of chevrons and raised pavement markings.

Jennings and Demetsky (1983) evaluated chevrons along several rural Virginia curves. The roadway segments had average daily traffic (ADT) between 1,000 and 3,000 vehicles per day (vpd). The researchers found that overall speed and speed variance decreased with use of chevrons. The researchers also recommended chevron installation on curves greater than 7 degrees.

A pooled fund study evaluated the impact of improved curve delineation (FHWA 2009). Washington installed chevrons at sites where chevrons were not previously posted, as well as increased the number of chevrons at locations where they were already present (FHWA 2009). The authors noted a reduction in several crash types as shown in Table 4.

Table 4. Reduction in non-intersection crashes with chevrons installed or added in Washington (FHWA 2009)

Type	Decrease (%)
Non-intersection	4.3
Lane departure	5.9
Non-intersection during dark	24.5
Lane departure during dark	22.1

Re et al. (2010) evaluated application of chevrons and chevrons with a full-post retroreflective treatment at two curves in Texas. Both sites have paved shoulders and a posted speed limit of 70 mph for day and 65 mph for night. One site had an advisory speed of 45 mph while the second site had a speed of advisory of 50 mph.

Each treatment was applied to each site and the researchers collected speed and lateral position before and after using piezoelectric traffic classifiers. Average speeds with the chevrons in place were 1.4 mph lower and, with the full-post chevron treatment, average speeds were 2.2 mph lower. The 85th percentile speeds decreased by 1.3 mph for the scenario with just chevrons and 2.2 mph for the full-post chevrons.

In most cases, the full-post chevrons reduced the percentage of vehicles exceeding 60, 65, and 70 mph. Centerline encroachments decreased by 78 percent with use of the post-mounted delineators (PMDs) and 88 to 93 percent for the chevron treatments.

Advantages

- ◆ Low cost

Disadvantages

- ◆ Use of traffic control devices when not warranted can result in additional costs for maintenance and replacement

Widening/Adding Paved Shoulders

Description

Many rural two-lane roadways do not have paved shoulders due to right of way and resource constraints. Some agencies only add paved shoulders through select horizontal curves on rural two-lane roadways. Provision of a paved shoulder provides additional space for recovery when a vehicle leaves the roadway.

Shoulder widening through a horizontal curve, even without paving, can add some safety benefits. Widening can be done for the inside or outside of the curve or both.

Application

The Iowa DOT design standards indicate that addition of the paved shoulder section or widening should start where the super elevation transition begins before the point of curvature, extend throughout the curve, and end after the normal crown is achieved beyond the point of tangency (Iowa DOT 2008).

Effectiveness

Installation of a shoulder has a CRF of 9 for all crashes (USDOT 2008). Paving shoulders has a CRF of 15. Widening shoulders has the CRFs shown in Table 5 for ROR and fixed object crashes.

Table 5. ROR and fixed object CRFs for shoulder widening (USDOT 2008)

Widened (ft)	CRF for Shoulder Type	
	Paved	Unpaved
from 0 to 2	16	13
from 0 to 4	29	25
from 0 to 6	40	34
from 0 to 8	49	43

No information was available about the effectiveness of adding paved shoulders to just selected curves. However, adding paved shoulders in general has been shown to be effective. An NCHRP study by Jorgensen and Associates (1978) concluded that roads with paved shoulders have lower crash rates than roads with unpaved shoulders of the same width. Hallmark et al. (2010) found an 8.3 percent reduction in the expected number of total crashes each year after shoulders are paved.

Zegeer et al. (1992) evaluated the impact of shoulder width on crashes for state primary, state secondary, and rural two-lane roads in Kentucky. The researchers found that ROR, head-on, and opposite-direction sideswipe crash rates decreased as shoulder width increased from 0 to 9 ft, but the crash rates increased slightly for shoulders of 10 to 12 ft. Hallmark et al. (2010) found a 4.4 percent reduction in total crashes and a 7.8 percent reduction in ROR crashes for every additional foot of right shoulder.

Advantages

- ◆ Selectively adding paved shoulders to curves is not as cost-prohibitive as adding paved shoulders overall
- ◆ Additional or paved shoulders provide other benefits including maintenance benefits, room for stalled vehicles, and locations for enforcement personnel

Disadvantages

- ◆ Cost

Reflective Barrier Delineation

Description

One of the strategies to reduce ROR crashes is to improve curve delineation. When barriers, such as guardrails, are present around a horizontal curve, the barriers provide a natural location to add reflective treatments. Reflective treatments can be placed so that the entire curve can be delineated.

Reflective barrier delineation can be particularly effective at night and during wet weather. Reflectors, such as raised pavement markers, or panels of retroreflective sheeting, as shown in Figures 3 and 4, can be used.



Figure 3. Panels of retroreflective sheeting to delineate curves

Application

Treatment can only be applied when barriers, such as guardrails, are present.

Effectiveness

The FHWA discussed design and application of retroreflective panels (McGee and Hanscom 2006). The authors report on a study where the Oregon DOT (ODOT) applied reflective barrier treatments. However, ODOT had not conducted any type of analysis to evaluate reflective barrier treatment effectiveness in reducing speed or crashes.



Figure 4. Nighttime view of retroreflective sheeting (McGee and Hanscom 2006)

Advantages

- ◆ Low cost
- ◆ Provides additional demarcation of roadside objects (guardrail, median barrier)
- ◆ Enhanced delineation at night and during wet weather

Disadvantages

- ◆ Long-term maintenance and replacement costs

High-Friction Treatments

Description

A vehicle will skid during braking and maneuvering through a curve when frictional demand exceeds the friction force between the roadway and a vehicle's tire. Although agencies should ensure adequate friction throughout a roadway, targeting curves is one strategy that has been used to address problem locations.

Two different methods are used to increase the coefficient of friction between the roadway and vehicle wheels. Pavement grooving creates longitudinal cuts in the pavement surface to increase directional control. This treatment is typically used only in concrete surfaces. Longitudinal grooves improve drainage, which can reduce hydroplaning (McGee and Hanscom 2006).



Figure 5. High friction treatment
(The Transtec Group, Inc., highfrictionroads.com)

The second treatment is use of a high friction surface (HFS) treatment, which applies a binder and aggregate material to select locations on asphalt or concrete pavements. The treatment increases the coefficient of friction and improves skid resistance for dry and wet pavement conditions (Figure 5).

In most cases, the treatment can match the color of the roadway, but different colors are typically available from vendors if agencies want to consider additional delineation (McGee and Hanscom 2006).

Application

McGee and Hanscom (2006) suggest that an appropriate application technique is use of a portable grooving machine to install grooves 3/16 to 3/8 in. wide and 5/32 to 5/16 in. deep with 8 grooves per ft with a random spacing.

High-friction surface treatment is typically applied immediately prior to and through the curve.

Additional guidance about frictional characteristics and performance of pavement surfaces can be found in the following documents:

- ◆ “Guide for Pavement Friction: Background and Research.” *NCHRP Research Results Digest 321*. National Cooperative Highway Research Program. May 2009.
- ◆ “Gaining Traction in Roadway Safety.” Julian, Frank and Steve Moler. *Public Roads*. July/August 2008. Vol. 72, No. 1. www.tfhrcc.gov/pubrds/08july/05htm.

Julian and Moler describe a number of locations around the US where high-friction treatments have been applied.

Effectiveness

Improving pavement friction through grooving has CRFs of 21 and 37 for all crashes (USDOT 2008). Increasing skid resistance has a CRF of 30 for fatal/injury crashes on rural two-lane roadways (USDOT 2008).

McGee and Hanscom (2006) describe a program in New York that identified and installed high-friction treatments at sites with a two-year wet accident proportion that was higher than the average for roadways in the same county.

The New York State DOT (NYSDOT) installed the treatment and reported a reduction in wet-road crashes of 50 percent and a reduction in total crashes of 20 percent.

Julian and Moler (2008) reported that high-friction surfaces reduced total crashes by 25 percent, fatal crashes on wet pavement by 14 percent and fatal crashes on sharp curves by 25 percent.

A study by Reddy et al. (2008) evaluated a high-friction surface treatment applied by the Florida DOT (FDOT) on an on-ramp to I-75. The researchers assessed the friction factor change using skid tests. Results showed an increase in friction number (FN) at 40 mph from 35 to 104.

The researchers compared crash frequency before and after installation of the treatment and reported a decrease in average crashes from 2.5 to 2.0 per year.

The researchers also compared speeds before and after application of the treatment on the ramp using a radar gun, which collected spot speeds at various times of day under wet and dry conditions. Mean speeds decreased by around 6 mph for dry conditions and 3 mph for wet conditions. The number of vehicles traveling 25 mph over the speed limit decreased significantly under both wet and dry conditions.

The authors also summarized a study by the University of Iowa (UI) that evaluated nine projects where anti-icing and anti-skid treatments were applied. The authors reported that snow and ice were less likely to accumulate on the test sections than for control sections and that, when accumulations did occur, the researchers found no bonding of snow and ice to the pavement.

The UI researchers also concluded that fewer chemicals were needed to obtain safe driving conditions on the test sections as compared to the control sections. The researchers also found a statistically significant (Z-test) decrease in the number of vehicles that crossed the pavement edge line after application of the treatment.

Advantages

- ◆ Improves roadway surface friction, which is particularly useful during rain events

Disadvantages

- ◆ Cost

Raised Pavement Markers

Description

Raised pavement markers (RPMs) are placed to provide lane guidance as shown in Figure 6. When drivers cross the RPMs, they may also provide a tactile warning alerting a driver that they have crossed the lane edge.

RPMs may be particularly helpful in delineating the curve at night and during wet weather. Markings can be either retroreflective or non-retroreflective. RPMs can also be recessed in areas where snowplows operate.

Application

RPMs can be used either along the roadway edge (right) or centerline. Maintenance may be an issue for areas where snowplows are used.



Figure 6. RPMs used in the center of a curve

Effectiveness

Zador et al. (1982) evaluated both recessed and raised reflectorized pavement markers on the centerlines of 662 curve sections in Georgia. The curves evaluated had a degree of curvature greater than 6 degrees.

Results of a before-and-after analysis indicated that nighttime crashes were reduced by 22 percent compared to daytime crashes and nighttime single-vehicle crashes were reduced by 12 percent compared to other crash types. In some cases, additional devices, such as warning signs and chevrons, were placed at the site, so not all of the effect can be attributed to the RPM.

Hammond and Wegmann (2001) evaluated the effects of RPMs on number of encroachments, encroachment distance, and average speed at two horizontal curves. The researchers tested RPMs spaced at 20 and 40 ft apart. The researchers found that high degrees of lane encroachments decreased by 7.5 percent, moderate degrees of lane encroachments decreased by 7 percent, and low degrees of lane encroachments decreased by 14.5 percent with the 40 ft spacing. Likewise, the researchers found similar results for the 20 ft spacing. However, the researchers didn't find any conclusive results for changes in average speed.

The American Traffic Safety Services Association (ATSSA 2006) summarized several studies and reported that use of RPMs could reduce total crashes from 7 to 10 percent and could reduce nighttime wet weather crashes by 24 to 33 percent.

Bahar et al. (2004) used data from six states to develop safety performance functions of snowplowable raised pavement markers. The authors found mixed results for rural two-lane roadways. In particular, the models indicated that at low volume (<5,000 vpd) with sharp roadway geometry, RPMs may be correlated to increased crashes.

For snowplowable RPMs, CRFs range from 43 to 24 for nighttime crashes (USDOT 2008 and FHWA 2012).

Advantages

- ◆ Low cost
- ◆ Provide improved delineation at night and during wet weather

Disadvantages

- ◆ Requires regular maintenance to ensure the RPMs don't loosen and cause a secondary safety hazard
- ◆ May be damaged or removed during snowplow operations

Edge Lines and Wide Edge Lines

Description

The MUTCD provides warrants and guidance for use of edge lines that are used on freeways and higher-class roadways. Use on lower-class roadways is based on state and local guidelines and practices, so use is not uniform. Even when not warranted, use of edge lines is widely accepted as being beneficial to drivers (ATSSA 2006).

When applied, the typical edge line width is 4 in. Some agencies have tried use of 8 in. edge lines, which can provide additional delineation, particularly for older drivers.

Drivers have reported that wider edge lines are more noticeable in their periphery vision and can be identified from a greater distance. This means wider edge lines may decrease driver workload, allowing drivers to focus on other complex driving tasks, particularly at night (Donnell et al. 2006).

Use of 8 in. versus 4 in. edge lines through a curve is shown in Figure 7.

Application

Typically, 4 in. edge lines are widened to 6 or 8 in.

Studies have recommended that 8 in. wide edge lines be used only on roadways with 12 ft lanes, unpaved shoulders, and an ADT of 2,000 to 5,000 vpd (Fitzpatrick et al. 2000 and Neuman et al. 2003). In addition, Fitzpatrick et al. (2000) recommend that edge-line widening be used on rural two-lane roads with the following:

- ◆ Frequent heavy snowfall and use of deicing materials and abrasives that tend to deteriorate edge lines
- ◆ Pavement widths less than or equal to 22 ft
- ◆ Roads having paved shoulders more than 6 ft wide



Figure 7. Before and after application of wider edge lines (Donnell et al. 2006)

Gates and Hawkins (2002) summarized that agency practice in implementing wider edge lines suggests they are likely to have the greatest benefit at these locations:

- ◆ Where a higher degree of lane delineation is perceived as necessary for all drivers
 - ◆ Horizontal curves
 - ◆ Roadways with narrow shoulders or no shoulders
 - ◆ Construction work zones
- ◆ Where low luminance contrast of markings is common
- ◆ Where older drivers are prevalent requiring added visibility under all conditions

Hughes et al. (1989) evaluated crashes on 24 ft wide rural roadways with less than 6 ft shoulders and ADT between 2,000 and 5,000 vpd. The authors recommend that wider pavement edge lines may be the most appropriate and cost-effective on roadways with the following characteristics:

- ◆ ADT between 2,000 and 5,300 vpd
- ◆ Roadways with a total pavement width of 24 ft with unpaved shoulders
- ◆ Frequent rainfall

Effectiveness

Installation of edge lines and centerlines indicate an expected CRF of -3 (which is an increase) for all crashes on rural undivided roadways and 24 for injury crashes on all roadway types. Installation of edge-line markings have a CRF of 38 and 44 for all crashes for all roadway types, 30 for ROR crashes, 15 for injury crashes, and 8 for PDO crashes.

Tsyganov et al. (2005) studied rural two-lane highways in Texas and compared crashes for highways with and without edge lines. The authors reported that use of edge lines reduced crashes by 26 percent, with the greatest benefit on curves with lane widths between 9 and 10 ft. The authors also suggested that use of an edge line had some safety impact in reducing nighttime speed-related crashes.

Donnell et al. (2006) studied the effects of using a wider (8 in.) edge line on horizontal curves along rural two-lane Pennsylvania highways. The researchers collected data at 8 sites, 4 treatment sites that had the 8 in. edge line, and 4 comparison sites with the 4 in. edge line. At each site, the comparison site was located upstream of the treatment site.

The researchers measured vehicle lateral position using piezoelectric sensors and observed and noted lane-line encroachment with a human observer. The researchers compared results from the different sites and found a significant degree of variation, which amounted to no significant reduction in speed or encroachment due to the placement of the wide edge lines.

The researchers also evaluated speed profiles and determined there was evidence that wide edge lines influence drivers to slow down earlier at night.

McGee and Hanscom (2006) report on another study in New York, which found a 17 percent reduction in fixed object crashes with use of wider edge lines on rural two-lane roads.

Cottrell et al. (1987) evaluated the safety impact of using 8 in. wide edge lines. The research comparison of crashes before and after installation on three two-lane rural road sections (60.7 miles long) indicated no significant reduction in crashes.

Hall (1987) evaluated 530 miles of rural two-lane highways and concluded that use of 8 in. edge lines did not have a significant impact on crash reduction.

Hughes et al. (1989) evaluated rural two-lane roads in Maine, Ohio, and Texas (with ADTs of 5,000 to 10,000 vpd) and reported that use of 8 in. edge lines compared to 4 in. edge lines did not reduce crash frequency.

A study by TTI compared crashes in Morris County, New Jersey before implementation of 8 in. edge lines on county roads to those after implementation (ATTSA 2006). The researchers found a decrease in fatal and injury crashes of 10 percent compared to a 2 percent overall decrease on control roads. The researchers noted a reduction in single-vehicle fatal and injury crashes of 33 percent for county roads in Morris County compared to a 22 percent decrease on other county roads used as a control.

Gates and Hawkins (2002) summarized the available literature about use of wider pavement markings and surveyed agencies about levels of implementation of wider pavement markings and reasons for use. Since crash studies showing the effectiveness of wider pavement markings are not widely available, the authors summarized indirect safety measures used to justify use of wider markings. Indirect safety measures include driver opinion, visibility measurements, and surrogate safety measures.

Results of the survey of state DOT, Canadian provincial DOTs, and toll road agencies indicate that the majority of agencies have implemented wider pavement markings to improve visibility overall. A number of agencies also use the wider markings specifically for older drivers.

Based on the available literature and summary of agency experience, the researchers concluded that wider pavement markings provide the following driver benefits/positive feedback from drivers as far as improvements:

- ◆ Visibility and long-range detection under nighttime driving conditions (with older drivers deriving the most benefits)
- ◆ Peripheral vision stimulation
- ◆ Lane keeping
- ◆ Driver comfort and aesthetics

In addition, some agencies had concluded that the wider markings have improved service life and greater durability from a visibility standpoint than 4 in. markings due to the increased surface area. However, these findings have not been quantified.

Table 6 shows CRFs for installation of wider edge lines (4 to 6 in.) (FHWA 2012).

**Table 6. CRFs for installation of wider edge lines
(FHWA 2012)**

Crash Type	CRF
All	7.1
Fatal, serious injury, and minor injury	17.1
All daytime	10
Daytime fatal, serious injury, and minor injury	18
All nighttime	2.4
Nighttime fatal, serious injury, and minor injury	11.7
Single vehicle	2
Single vehicle wet road	20
Head-on and sideswipe	14.9

Advantages

- ◆ Only extra cost is additional paint
- ◆ Does not require additional maintenance beyond regular painting
- ◆ May be most advantageous for older drivers
- ◆ Improved service life given a larger surface area may be able to withstand greater material loss due to snowplow abrasion, cracking, and chipping and still provide visibility as compared to a 4 in. edge line

Disadvantages

- ◆ No major disadvantages are noted

Transverse Pavement Markings

Description

Transverse pavement markings are markings that are oriented perpendicular to the direction of travel. These markings include optical speed bars, converging chevrons, and herringbones.

Transverse markings are a low-cost solution and have been used in work zones and along horizontal curves to slow speeds (Katz 2004). Figure 8 shows several different types of transverse markings.

Application

When transverse bars are utilized, they are often either placed in sets or in a pattern in which the bars converge, giving drivers the perception that they're traveling faster than they are or that they are accelerating.

Transverse markings can be spaced at a fixed interval but are frequently spaced so that the spacing between markings narrows as the driver progresses forward. This spacing gives a driver the sense that they are speeding up, which ideally results in drivers slowing down (McGee and Hanscom 2006).

This accelerated spacing assumes that the perception of speed rather than the actual speed affects driver behavior (Meyer 2001).

Several sources have suggested spacing of 4 bars per second. Bars are placed closer together based on how much a driver needs to slow to reach the target speed.

Table 7 shows guidelines for length of the treatment in advance of a horizontal curve based on tangent and advisory speed guidance from the NYSDOT.

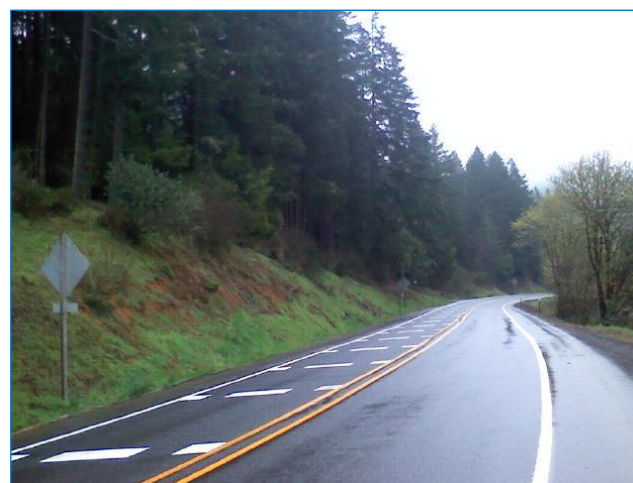
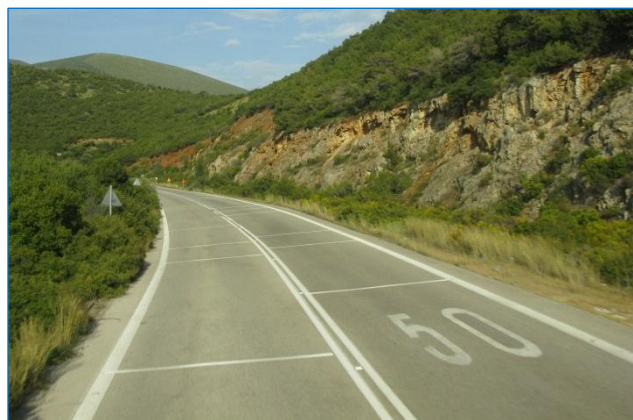
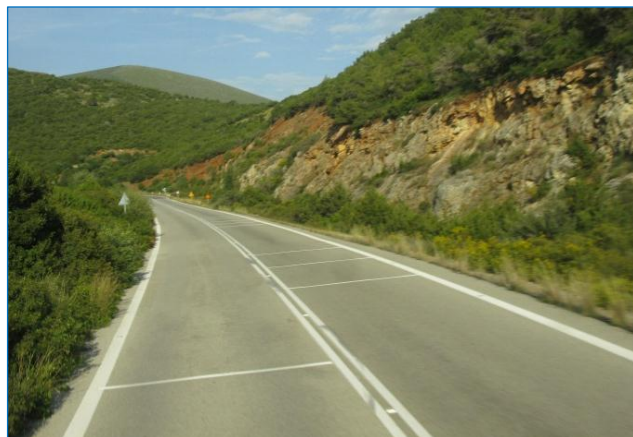


Figure 8. Various on-pavement curve markings

Table 7. Spacing between transverse markings in advance of curves (based on guidance from the NYSDOT)

Curve Advisory Speed (mph)	Tangent Speed (mph)					
	45	50	55	60	65	70
15	300	385	470	565	670	785
20	275	350	440	535	640	755
25	235	315	405	500	600	720
30		270	360	450	560	670
35			300	400	500	620
40				335	440	555
45					370	480
50						405

Treatments can vary in size but typical size for the optical speed bar treatment is 18 in. long by 12 in. wide.

Use and placement of optical speed bars (referred to as speed-reduction markings) are covered under Section 3B.22 of the MUTCD (2009).

The FHWA provides some guidance on installation of transverse treatments in the following document:

- ◆ *Low-Cost Treatments for Horizontal Curve Safety*. McGee, Hugh W. and Fred R. Hanscom. U.S. Department of Transportation. Federal Highway Administration. FHWA-SA-07-002. December 2006.
http://safety.fhwa.dot.gov/roadway_dept/horicurves/fhwasa07002/index.cfm#toc

Effectiveness

Optical Speed Bars

The Virginia DOT (VDOT) tested optical speed bars on a high crash section of Lee Chapel Road in Fairfax County (40 mph) (Arnold and Lantz 2007) as shown in Figure 9. The researchers collected speeds before installation of the optical speed bars, one week after installation, and three months after installation.

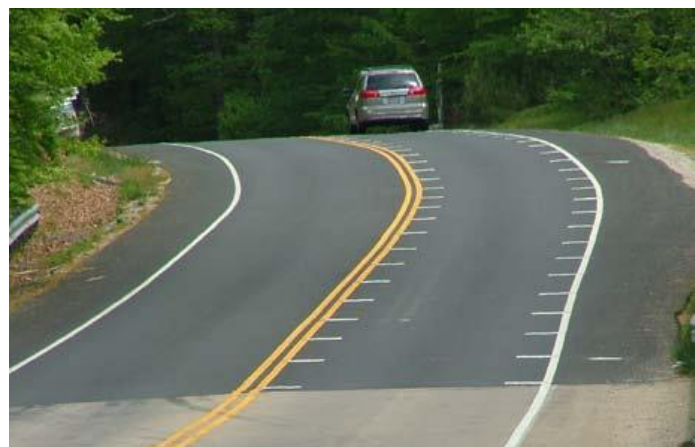


Figure 9. Optical speed bars (VDOT 2006)

The markings were thermoplastic pavement markings (18 x 12 in.). The bars were installed at both entrances to the high-crash section. At the northbound entrance, vehicle speeds increased at the first station by 0.1 for the one-week after period while, at other stations, speeds decreased by 0.2 to 3.9 mph at the one-week after period. At three months, speeds increased by 3.0 mph at the first station and by 1.7 mph at the third station. Speeds decreased by 1.8 and 1.6 mph at stations 2 and 4 at the three-month after period.



Figure 10. Optical speed bar installation on a curve in Oregon

Figure 10 shows another example of optical speed bars on a curve.

McGee and Hanscom (2006) indicated that studies in three states had yielded reductions in 85th percentile speed between 0 and 5 mph.

Latoski (2009) applied optical speed bars on a tangent section of a rural, two-lane highway in Mohave County, Arizona. Latoski's markings were slightly different from typical optical speed bars (Figure 11).

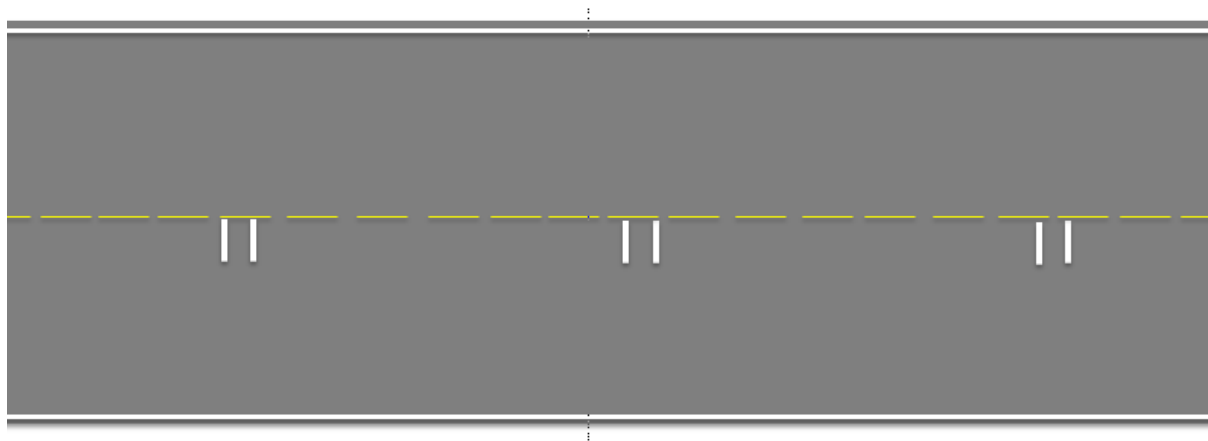


Figure 11. Optical speed bar design used by Latoski (2009)

Each 24 x 8 in. bar is placed transverse to the roadway with two markings spaced 8 in. apart. The spacing between pairs of bars decreases in the direction of travel to give the sensation to drivers that they are speeding up.

Latoski found a 2.0 mph decrease in both mean and 85th percentile speed immediately after installation. At three months, mean speed had decreased by 4.2 mph and 85th percentile speed had decreased by 5.0 mph.

Gates et al. (2008) evaluated the impact of transverse bars on a freeway curve (I-43 to I-94) in Wisconsin. Transverse bars (18 in. wide x 12 in. tall) were placed on the northbound and southbound freeway lanes in 1,000 ft sections.

The bars were placed with continuously decreasing (or accelerated) spacing to provide the perception of increasing speed, so that drivers would slow down. The researchers found decreases of 1.1 to 5.0 mph in average speeds and up to 1.0 in 85th percentile speeds at one month after installation.

Hallmark et al. (2007) evaluated optical speed bars as entrance treatments to rural communities. The bars were 12 in. (parallel to lane line by 18 in. perpendicular to lane line) as shown in Figure 12.



Figure 12. Transverse pavement markings as a rural gateway traffic calming treatment (Hallmark et al. 2007)

The treatments were installed at the south, east, and west community entrances. At the north site, no change in mean speeds occurred. At the west site, a decrease in mean speed of 1 mph was noted while, at the south site, mean speeds decreased by up to 1.9 mph. A decrease of up to 2 mph for the 85th percentile speed occurred at all three sites.

On-Pavement Chevrons

On-pavement chevron markings have been used in several different situations. On-pavement chevron markings have been applied on freeway ramps, in advance of curves, and as the entrance treatment to rural communities. Figure 13 shows application of the treatment in advance of a curve on a rural two-lane roadway.



Figure 13. Converging chevrons at entrance to small rural community (Hallmark et al. 2007)

Drakopoulos and Vergou (2003) evaluated effect of on-pavement chevrons on a freeway-to-freeway connector in Wisconsin. The researchers placed 16 white chevrons in an increasingly close pattern over 610 ft. The researchers found mean speed reduction at the end of pattern from 64 to 49 mph (15 mph) and a 17 mph reduction in 85th percentile speed (from 70 to 53 mph).

Voigt and Kuchangi (2008) evaluated use of converging chevrons on a freeway-to-freeway ramp connector in El Paso, Texas. The researchers measured speed upstream, at the PC, and at the center of the curve before and after installation of the converging chevrons. The site had approximately 18,000 vpd with 2 percent heavy trucks. The posted advisory speed was 30 mph.

At the beginning of the curve, daytime mean and 85th percentile speeds decreased by around 0.7 mph and nighttime speeds decreased around 1.0 mph for the two-month after period. Mean speed decreased by 0.8 mph and 85th percentile speed decreased by 0.9 mph for the six-month after period for the daytime period and both mean and 85th percentile speeds decreased by 1.7 mph for nighttime speeds.

At the center of the curve, mean speeds during both the day and nighttime periods decreased by around 0.4 mph and 85th percentile speeds decreased by 0.6 mph and 0.8 mph for day and nighttime for the two-month after period. At the six-month after period, both mean and 85th percentile speeds during the day increased by around 1 mph. During the nighttime period, mean speeds increased by 0.3 mph and 85th percentile speeds increased by 0.5 mph.

The percentage of vehicles traveling 15 mph over the advisory speed decreased by 3.0 percent for the two-month after period and by 5 percent for the six-month after period at the PC while increases of 0.4 and 6.4 percent occurred for the center of the curve at the two-month and six-month after periods, respectively.

Shinar et al. (1980) evaluated a converging chevron pattern as shown in Figure 14.

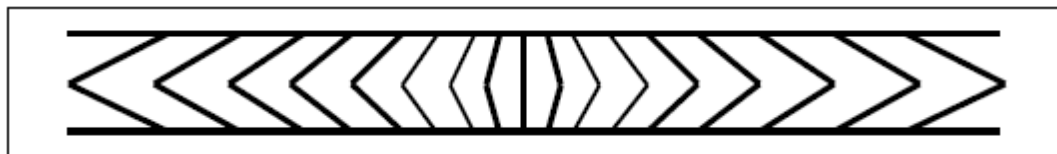


Figure 14. Wundt-Herring pavement marking layout (Shinar et al. 1980)

The treatment was placed across both lanes of traffic 318 ft upstream of a horizontal curve with the pattern ending at the center of the curve. The researchers reported a decrease of 6 mph in the 85th percentile speed.

ATSSA (2006) reported on a study in Columbus, Ohio where a converging chevron was applied at the approach to a double S curve. The two-lane roadway had a posted speed of 35 mph and an advisory speed of 15 mph. The researchers measured speeds before and at 15 months after installation of the treatment and found a reduction in 85th percentile speed of 4 mph.

A converging chevron treatment was applied as the entrance to a rural community in Iowa (Hallmark et al. 2007). The chevrons were spaced consecutively closer and were thinner as drivers crossed them, as they entered the community, as shown in Figure 14.

On-pavement speed signs were also placed at the termination of the chevrons. The posted speed limit within the community was 35 mph. A 1 to 3 mph reduction in mean speed occurred with a 1 to 4 mph reduction in 85th percentile speed.

Herringbone

Charlton and DePont (2007) evaluated various curve treatment using a simulator in New Zealand. The study evaluated 48 participants who drove a simulator route, which replicated a 3.4 km section of a state highway and a 3.5 km section of level road with four horizontal curves with consistent radii (two with 85 km/hr and two with 45 km/hr curves).

The researchers studied several combinations of treatments including the following:

- ◆ Standard advance warning signs with a herringbone pattern pavement
- ◆ Advance warnings with dashed-white centerline
- ◆ Advance warnings with double-yellow lines through the curves
- ◆ Advance warnings followed by centerline and edge-line rumble stripes

The herringbone pattern had similar speed reductions at the PC and curve center to the dashed-white centerline and double-yellow centerline. The authors noted that the herringbone pattern did result in greater flattening of the driver's path through the curve compared to the other treatments.

Transverse Lines

Vest et al. (2005) evaluated different types of warning signs to reduce speed on curves. The researchers tested sites on rural roadways with a sharp curve, history of speed-related incidents, long tangent section before the curve, no vertical grade, and no intersections, driveways, or commercial activity within the curve.

One treatment assessed was placement of transverse lines from the PC backwards into the tangent section as shown in Figure 15.



Figure 15. Equally-spaced transverse lines
(Vest et al. 2005)

The transverse lines were spaced closer as the driver crosses them to give the sensation of speeding.

Results of a speed study indicated

that average speeds ranged from an increase of 2.3 mph to a decrease of 5.9 mph at the PC with almost no change in mean speeds within the curve. Changes in 85th percentile speed ranged from an increase of 2.4 mph to a decrease of 3.6 mph at the PC.

Chrysler et al. (2009) examined the effectiveness of transverse lines treatments placed on a set of S curves. The researchers measured change in speed from an upstream control point to the treatment and did not find a relevant reduction in speed from the before to after period.

Griffin and Reinhart (1995) reviewed 10 studies where transverse speed bars had been placed. Locations included roundabout approaches, stop-controlled intersections, upstream of interstate construction zones, and rural highways.

The studies indicated a consistent speed reduction of 1 to 2 mph and reductions of up to 15 mph in 85th percentile speeds. The authors also indicated that a crash reduction occurred, although they did not state the magnitude. The authors also noted that speed reductions were higher during the day.

Katz et al. (2006) studied the transverse speed bars on vehicle speeds at two rural horizontal curves and a highway exit ramp in New York, Texas, and Mississippi. The researchers collected data upstream of the curve and at the PC and found the optical speed bars were effective in reducing speeds.

At the exit ramp site, the researchers found an approximate 4 mph reduction immediately after and several months after installation of the treatment. The researchers also noted a 5 mph reduction in 85th percentile speed.

At one rural curve site, the decrease in mean speed after adjusting for changes at the upstream control location was 4.6 mph. At the second rural curve site, the researchers found no statistical difference in average speed between the before and after periods.

Meyer (1999) studied the effectiveness of optical pavement marking bars as a means to alert drivers of an approaching work zone, reduce approaching vehicle speeds, and maintain a lower speed over a several-kilometer work zone.

The researchers selected a divided highway segment west of Topeka, Kansas that had annual average daily traffic (AADT) of 18,000 vpd, 20.5 percent of which was estimated to be heavy vehicles.

The work zone selected was a reconstruction project where both directions of traffic were to be carried on either the eastbound or the westbound lanes. Traffic was separated by tubular channelizers and reflective bricks.

The researchers used three patterns in this study, including a leading pattern, primary pattern, and work-zone pattern (Figure 16).




Figure 16. Leading, primary, and work-zone bar pattern (Meyer 1999)

Leading up to the deceleration area (which had the primary pattern), the leading pattern bars had consistent dimensions of 9 ft wide by 3.5 ft wide and a consistent spacing of 20 ft between bars.

The primary pattern consisted of 29 bars that ranged from 42 in. to 24 in. wide (longitudinal) and converged at an estimated deceleration rate of 1 mph per second.

The work-zone pattern consisted of four sets of six bars that were spaced 500 ft between sets.

The researchers collected data using pneumatic road tubes at 10 specified locations within the treatment and determined effectiveness by a change in 85th percentile speed. The researchers found that the optical bars reduced speeds and speed variations in situations that require drivers to decelerate from highway speeds to accommodate a highway work-zone project (Meyer 1999).

Hildebrand et al. (2003) also investigated work-zone traffic calming using transverse bars at a rural highway site in New Brunswick, Canada. The researchers conducted a simple before-and-after speed study over two days during day and nighttime hours. The data sets were comprised of around 100 vehicles in the day and 50 vehicles during the night.

The researchers' speed measurement locations were upstream, immediately upstream, and downstream of the treatment, with speeds recorded for two days, one of which was close to the treatment installation. A test of comparison of two sample means and two sample variances were selected as the analysis methodology, which included a test at the 5 percent significance level.

The researchers concluded that the mean and 85th percentile speeds were reduced (statistically significant) by 3.4 km/hr (2.1 mph) and 3.8 km/hr (2.4 mph) and that the greatest reduction in speed occurred during the nighttime observations.

Furthermore, the researchers concluded that the transverse bars provided an increased level of safety during nighttime conditions due to the high retroreflective capabilities of the pavement markings (Hildebrand et al. 2003).

VDOT installed transverse markings on US 460 at the entrances to a community where the speed transitions from 55 to 45 mph (Arnold and Lantz 2007) as shown in Figure 17.



Figure 17. Transverse markings on US 460 (Arnold and Lantz 2007)

Speeds at the eastbound entrance decreased by 1.2 and 9.6 mph at one location but increased by 4.7 and 9.8 mph at the second (1 week and 3 month after periods, respectively).

At the westbound entrance, speeds decreased by 5.1 and 5.6 mph for the 1 week after period at the two data collection locations.

At the 3 month after period, speeds decreased by 3.4 mph at one location and increased by 1.4 mph at the second.

Advantages

- ◆ Low cost
- ◆ Cost-effective
- ◆ Don't affect vehicle operation
- ◆ Don't have an impact on emergency vehicles
- ◆ Don't have an impact on drainage

Disadvantages

- ◆ Additional maintenance required to maintain markings
- ◆ May be less effective in winter conditions when not visible

Vertical Delineation

Description

Vertical delineators or post-mounted delineators (PMDs) are usually flexible or rigid posts with some amount of reflective surface mounted along the roadside to provide additional delineation as shown in Figures 18, 19, and 20.

Vertical delineators are intended to warn drivers of an approaching curve. PMDs can provide drivers with a better appreciation of the sharpness of the curve, so they can select the appropriate speed before entering the curve, and provide them with continuous tracking information once they are within the curve to help position their vehicles within the travel lane while traversing the curve.

Application

Delineator placement and spacing are covered in Section 3F of the 2009 Edition of the MUTCD.

A study by Chrysler et al. (2005) evaluated delineator spacing and color in a closed-course nighttime study with 24 drivers. The researchers found that drivers are not able to distinguish between single and double delineators, nor could they differentiate fixed versus variable-spaced delineators.

In addition, drivers did not understand the difference between yellow and white delineators. Consequently, the authors suggested use of fixed spacing and elimination of single versus double delineator distinction in the MUTCD.

NCHRP Report 440 (Fitzpatrick et al. 2000) suggested that the cost of the post-mounted delineators is justified for roadways with 1,000 vpd or greater.



Figure 18. Delineator posts along a curve (www.pexco.com/Pages/PexcoTrafficRDP.aspx)



Figure 19. Retroreflective treatment on chevron posts day and night

Effectiveness

Table 8 shows CRFs for installation of delineators in general and for post-mounted delineators on curves.

Table 8. CRFs for delineators (USDOT 2008)

Crash Type	Crash Reduction Factor	
	Delineators in General	Post-Mounted on Curves
All	11	25
ROR	34	
Head-on	67	

ROR = run-off-road



Figure 20. Post delineators on a curve

Carlson et al. (2004) evaluated several delineator treatments and concluded that vertical delineation of any type improves lane position at the entry and mid-point of horizontal curves.

McGee and Hanscom (2006) report on use of delineators along a curve by the Ohio DOT (ODOT). The researchers reported a reduction of 15 percent in ROR crashes.

Vest et al. (2005) evaluated different types of warning signs to reduce speed on curves. The researchers tested sites on rural roadways with a sharp curve, history of speed-related incidents, long tangent section before the curve, no vertical grade, and no intersections, driveways, or commercial activity within the curve.

One treatment evaluated placement of post-mounted delineators placed at 50 ft intervals as shown in Figure 21. Change in mean speed ranged from an increase of 1.6 mph to a decrease of 1.1 mph, while 85th percentile speeds increased 0.4 to 1.9 mph at the PC.

Within the curve, averages speeds ranged from no change to a decrease of 2.0 mph and from no change to a reduction of 2.0 mph in 85th percentile speeds.



Figure 21. Post-mounted delineators at 50 ft intervals (Vest et al. 2005)

Chrysler (2009) and Chrysler et al. (2009) assessed four types of vertical delineation in conjunction including two types of post-mounted delineators (dot PMD and full post), standard chevrons, and chevrons with full retroreflective posts in a closed-course nighttime driving test as shown in Figure 22.

Twenty drivers indicated when they could judge the sharpness of the curve. The drivers were able to assess the sharpness of the curve approximately 250 ft sooner for full PMD and approximately 250 ft sooner using the chevrons with reflectorized posts than they were using the baseline condition, which had only edge-line markings.

In addition, drivers were also shown photos of each treatment and asked to rank treatments by quality of delineation in defining sharpness of the curve. The drivers ranked the chevrons with reflectorized posts the highest and full PMD second.


Drivers also watched video on a laptop to judge when they could perceive the sharpness of the curve. Judgment times were shortest for the chevrons with reflectorized posts for almost all situations.

Re et al. (2010) evaluated application of chevrons and chevrons with a full-post retroreflective treatment at two curves in Texas. Both sites have paved shoulders and a posted speed limit of 70 mph day and 65 mph at night. One site had an advisory speed of 45 mph and the other had an advisory speed of 50 mph.


Each treatment was applied to each site and the researchers collected speed and lateral position before and after. Neither PMD showed a significant decrease in mean speed. Average speeds with the chevrons in place were 1.4 mph lower and, with the full-post chevron treatment, average speeds were 2.2 mph lower.




Baseline (no delineators)

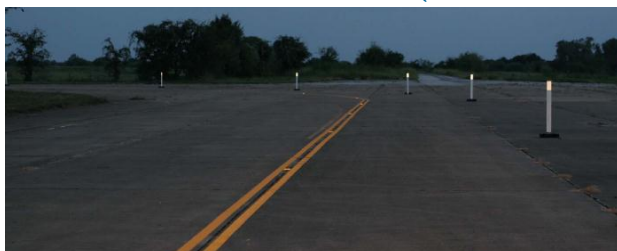

Standard post reflector (dot PMD)

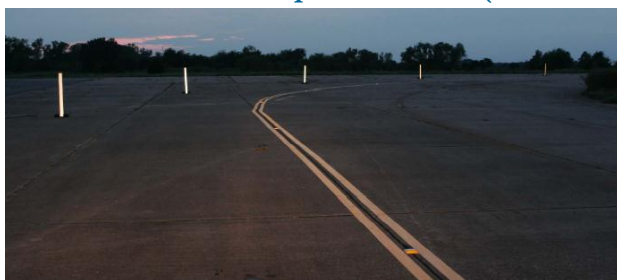

Full post (full PMD)

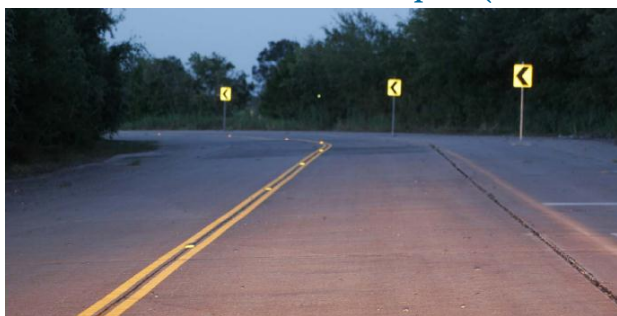

Standard chevron (24 x 30 in.)



Full-post chevron

Figure 22. Sample treatments (Chrysler 2009)

The 85th percentile speeds decreased by 1.3 mph for the scenario with only chevrons and 2.2 mph for the full-post chevrons. In most cases, the full-post chevrons reduced the percentage of vehicles exceeding 60, 65, and 70 mph. Centerline encroachments decreased by 78 percent with use of the PMDs.

Molino et al. (2010) evaluated four low-cost safety treatments on rural two-lane curves in a driving simulator with 36 participants. The test drive included a series of curves (radii of 100 or 300 ft and a deflection angle of 60°) with a baseline condition (no treatments or edge lines) and four curve treatments. Drivers had to slow to negotiate all curves.

Treatments included the following:

- ◆ 4 in. edge lines
- ◆ Standard PMDs on one side of the roadway
- ◆ Standard PMDs on both sides of the roadway
- ◆ PMDs with sequential flashing light-emitting diode (LED) lights

The researchers found all PMDS were more effective in slowing drivers earlier and to a greater degree than just use of edge-line pavement markings. Acceleration was also flatter through the curve with the PMDs as shown in Table 9.

Table 9. Speed reduction for various treatments (Molino et al. 2010)

With Treatment	Speed Reduction (mph)	
	At the PC	At the CC
Sequential flashing PMDs	8.7	4.8
PMDs on both sides of curve	8.0	4.3
PMDs one side of the curve	6.9	3.6
Edge lines	1.9	0.8

PMDs = post-mounted delineators, PC = point of curvature, and CC = center of curve

This simulator study also tested driver ability to detect curve direction and severity. Table 10 shows the results.

Table 10. Driver ability to detect curve direction and severity (Molino et al. 2010)

With Treatment	At Distance (ft)	
	Curve Direction	Curve Severity
None/baseline	225	53
Sequential flashing PMDs	1,288	1,127
PMDs on both sides of curve	355	95
PMDs one side of the curve	426	116
Edge lines	249	72

PMDs = post-mounted delineators

The Crash Modifications Clearinghouse (FHWA 2012) reports a CRF of -4 (which is an increase) for post-mounted delineators for serious and minor injury crashes.

Advantages

- ◆ Low cost

Disadvantages

- ◆ Maintenance costs

Rumble Strips and Rumble Stripes

Description

Rumble strips and stripes provide audible and vibratory alerts to drivers when their vehicles depart the travel lane and notify drivers that a steering correction is needed (Figure 23)

Application

Rumble strip/stripe designs can vary by strip/stripe pattern, installation method, distance from (or placement over) the edge of the travel lane, and the type of roadway on which the strips/stripes are installed. The five most commonly used types of rumble strips/stripes are outlined in Table 11 and described further in the remainder of this section.



Figure 23. Edge-line and centerline rumble strips

The type of rumble strip/stripe selected and its placement should be based on a consideration of unconventional vehicle needs, available shoulder width, pavement age, and installation method.

Basic information about application of rumble strips is summarized in the next section. Other resources include the following:

- ◆ Nambisan, Shashi, and Shauna Hallmark. *Lane-Departure Countermeasures: Strategic Action Plan for the Iowa Department of Transportation*. Center for Transportation Research and Education, Iowa State University. Ames, Iowa. May 2011.

Shoulder Rumble Strips

Table 11 provides a summary of types of shoulder rumble strips.

Milled-in shoulder rumble strips are installed by cutting or grinding the pavement surface as shown in Figure 24, typically using carbide teeth attached to a 24 in. diameter rotating drum. The indentations formed are approximately 1/2 in. deep, 7 in. wide parallel to the travel lane, and 12 to 16 in. long perpendicular to the travel lane (Umbs 2001).

The indentations are spaced approximately 12 in. from center to center and offset 4 to 12 in. from the edge of the travel lane. Some states place an asphalt fog seal over the rumble strips to prevent oxidation and moisture buildup (Umbs 2001).

Rolled-in shoulder rumble strips are installed using a steel wheel roller with half-sections of metal pipe or solid steel bars welded to the roller face. The compaction operation presses the shape of the pipe or bar into the hot-mix asphalt (HMA) shoulder surface. The resultant indentation (shown in Figure 24) is generally 1 in. deep and 18 to 35 in. long, perpendicular to the travel lane. The indentations are usually spaced 8 in. from center to center and offset 6 to 12 in. from the travel lane edge (Umbs 2001).

Table 11. Application of various types of rumble strips (after Nambisan and Hallmark 2011)

Type	Width (in.)	Length (in.)	Spacing (in.)	Depth (in.)	Height (in.)	Advantages	Disadvantages
Milled-in	7	12–16	12	0.5	n/a	Shallower indentations into the roadway Can be installed on existing or new roadway shoulders	Difficult installation on older or worn pavement Fog sealant that some manufacturers use on the rumble strips, may prevent edge line material from adhering to the surface
Rolled-in	2–2.5	18–35	8	1	n/a	Less expensive to install than other rumble strip designs Can be installed as part of the pavement rolling operation	Indentations may not provide enough driver warning due to size Installation depends on pavement temperature
Formed-in	2–2.5	16–35	1	1	n/a	Can be installed as part of the pavement installation process	Indentations may not provide enough driver warning due to size More expensive than milled-in and rolled-in rumble strips Contractor-dependent, with limited inspection techniques
Raised	varies	varies	varies	varies	0.25–0.5	Highly visible at night and in rainy conditions Provides vehicle guidance at night	May not provide enough driver warning due to size and/or material Relatively expensive installation and maintenance costs Snow plow blade tends to remove the device
Edge-line	7	4, 8, 12, 16	12	.5	n/a	Can be installed in the absence of a paved shoulder Enhanced edge-line pavement visibility at night and in rainy conditions	Vehicles have a greater chance of traveling over rumble strip and pavement marking Increased outside noise levels due to the greater chance of vehicles traveling over them

Shoulder Rumble Strips

Table 11 provides a summary of types of shoulder rumble strips. Figure 24 shows examples of various types.

Milled-in shoulder rumble strips are installed by cutting or grinding the pavement surface as shown in Figure 24, typically using carbide teeth attached to a 24 in. diameter rotating drum. The indentations formed are approximately 1/2 in. deep, 7 in. wide parallel to the travel lane, and 12 to 16 in. long perpendicular to the travel lane (Umbs 2001).

The indentations are spaced approximately 12 in. from center to center and offset 4 to 12 in. from the edge of the travel lane. Some states place an asphalt fog seal over the rumble strips to prevent oxidation and moisture buildup (Umbs 2001).

Rolled-in shoulder rumble strips are installed using a steel wheel roller with half-sections of metal pipe or solid steel bars welded to the roller face. The compaction operation presses the shape of the pipe or bar into the hot-mix asphalt (HMA) shoulder surface. The resultant indentation (shown in Figure 24) is generally 1 in. deep and 18 to 35 in. long, perpendicular to the travel lane. The indentations are usually spaced 8 in. from center to center and offset 6 to 12 in. from the travel lane edge (Umbs 2001).

Rolled-in rumble strips must be installed while the asphalt is at the proper temperature. Colder-than-optimal asphalt temperatures may lead to shallow indentations, while warmer-than-optimal asphalt temperatures may lead to problems with compaction and shoulder stability (Umbs 2001).

Formed-in shoulder rumble strips are installed by pressing a corrugated form onto a newly-placed and -finished concrete surface. The resulting indentations, shown in Figure 24, are approximately 1 in. deep and 2 to 35 in. long, perpendicular to the travel lane. The indentations may be continuous, but are generally in groups of five to seven depressions spaced approximately 50 ft apart and offset from the travel lane about 12 in. (FHWA 2001).



Milled-in (Morena 2003)



Rolled-in (Morena 2003)



Formed-in (Morena 2003)



Edge-line

Figure 24. Different types of shoulder rumble strips

Centerline Rumble Strips

Centerline rumble strips (CLRS) are generally specified to be installed where a high risk of cross-centerline crashes has been noted. However, to enhance safety, some states have adopted a general policy to install CLRS on all rural two- or four-lane undivided roadways eventually.

Most state transportation agencies place the CLRS on no passing centerline pavement markings, while only a few agencies install CLRS on all types of centerline markings (Russell and Rys 2000).

Generally, CLRS are installed in no-passing areas, high-crash roadway segments, and high-crash curve locations to warn drivers of a change in roadway geometry. Some states have also installed CLRS on long stretches of straight roadways to help prevent cross-centerline crashes due to driver fatigue.

Many states specify the discontinuation of CLRS just prior to certain roadway structures, such as bridges and tunnels. Finally, a generally-accepted practice is to discontinue CLRS within rural driveways and intersections.

Several different centerline rumble strip patterns have been used as shown in Figure 25.


Commonly, rumble strips are 0.5 in. deep and are spaced 12 in. from center to center. The length of the rumble strip varies from 4 to 18 in., depending on the state transportation agency, design templates, or installation considerations. The following sections describe common CLRS patterns that have been used in the US.



Continuous (Kar and Weeks 2001)



18 in. continuous (Iowa DOT)

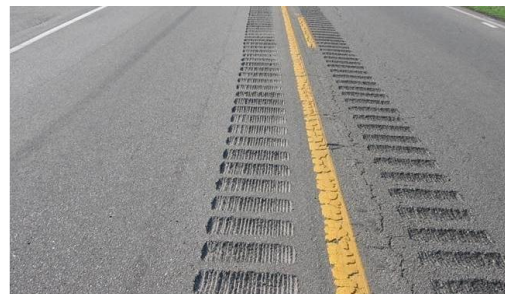

Two sets of continuous on outside of centerline markings (Troy 2007)



Alternating CLRS (Michigan DOT 2009)

Figure 25. Different types of centerline rumble strips

Edge-Line Rumble Stripes

For roads where paved shoulders are not a viable option, due to cost, narrow shoulders, or right-of-way restrictions, an alternative process has been devised, which involves milling narrow-width rumble strips directly along the existing pavement edge, followed by placement of standard edge-line pavement markings over the milled areas, resulting in rumble stripes. (These edge-line rumble stripes are sometimes called rumble stripes.)

Rumble stripes are a relatively new innovation that combine the beneficial effects of edge lines and rumble strips, while enhancing the longevity and wet-condition visibility of painted markings. With rumble stripes, the edge-line paint markings are applied directly over the rumble strip indentations, resulting in a near-vertical painted face for improved wet-condition visibility.

Some agencies are using edge-line rumble stripes on two-lane paved roadways with unpaved shoulders. Rumble strips grooved into the pavement edge can provide some alert to drivers crossing the edge line.

In addition, when the edge-line pavement marking is painted through the rumble strip, the grooved surface of the rumble strip facing the driver can provide a near-vertical surface, which enhances edge-line pavement marking visibility at night and during rainy conditions. Figure 26 shows an example of this treatment.



Figure 26. Completed edge-line rumble stripe on a rural highway in Iowa (Hallmark et al. 2010)

Edge-line shoulder rumble strips/stripes increase edge-line marking visibility and longevity because part of the line paint is located within the rumble strip/stripe depression. This feature is particularly advantageous in climates where ice and snow are present, where raised pavement markers cannot be used due to probable snowplow damage.

Effectiveness

Table 12 shows CRFs for rumble strips on two-lane roadways.

**Table 12. CRFs for two-lane roadways
(USDOT 2008 and FHWA 2012)**

Crash Type	Rumble Strip	
	Centerline	Shoulder Rural
All	14	13
Fatal/Injury		18
Injury	15	
Head-on	55	

Charlton and DePont (2007) evaluated various curve treatments using a simulator in New Zealand. The study evaluated 48 participants who drove a simulator route, which replicated a 3.4 km section of a state highway and a 3.5 km section of level road with 4 horizontal curves with consistent radii (2 with 85 km/hr and 2 with 45 km/hr curves).

The researchers studied several combinations of treatments including standard advance warning signs with a herringbone pattern pavement, advance warnings with dashed white centerline, advance warnings with double yellow lines through the curves, and advance warnings followed by centerline and edge-line rumble stripes.

The researchers found that the centerline and edge-line rumble strip pattern had lower speeds at the PC and curve center than the other three treatments.

Anund et al. (2007) studied the effect of four types of rumble strips on sleepy drivers in an advanced moving driving simulator in Sweden and Finland. One set of rumble strips was roughly similar to what is used for edge-line rumble stripes with dimensions of 7 in. wide by 0.8 in. long at a spacing of 11.2 in. apart and a depth of 0.6 in. The researchers evaluated 35 subjects who had worked the night shift before participating in the study over a straight section of road alternating a particular type of rumble strips.

Shoulder Rumble Strips

The NYSDOT and New York State (NYS) Thruway Authority similarly installed 4,000 miles of milled-in rumble strips on state highways for their joint Safe-Strip program. Using one year of uniform before-and-after crash data, the agencies found a 65 to 70 percent decrease in ROR crashes (NYSDOT 1997).

A study encompassing 699 miles of state highways in Connecticut with milled-in shoulder rumble strips found that installing the rumble strips reduced single-vehicle fixed-object crashes by 33 percent and ROR crashes by as much as 48.5 percent based on a comparison of three years of before-after data (Smith and Ivan 2005).

Centerline Rumble Strips

Persaud et al. (2004) conducted a before-and-after study to investigate the effectiveness of CLRS on more than 210 miles of rural undivided two-lane roads in seven states. An empirical Bayes before-after analysis accounting for regression to the mean concluded that injury crashes decreased 14 percent and frontal and opposing-direction sideswipe injury crashes decreased 25 percent.

Kar and Weeks (2009) evaluated CLRS at 14 northern Arizona locations, including arterials, minor arterials, and collectors. A review of crash data three years prior to and three years after installation indicated that cross-centerline crashes accounted for 36 percent of the total fatal and serious injury crashes before installation. The authors found a 61 percent decrease in fatal and serious injury crashes after installation.

In a similar study that focused on a winding two-lane canyon highway, the Colorado DOT (CDOT) investigated the effectiveness of 17 miles of 12 in. long CLRS (Outcalt 2001). The authors compared four years of before and after data and found a 34 percent decrease in head-on crashes and a 36.5 percent decrease in opposite sideswipes crashes. During the same period, AADT increased by 18 percent.

The data also indicated that the CLRS had drawbacks, including an increased danger to motorcyclists and bicyclists, increased noise levels, and accelerated wear on the centerline pavement markings.

A broader study of 518 miles of roadway conducted by the Washington State Department of Transportation (WSDOT) investigated the effectiveness of CLRS using a before-and-after crash analysis that compared one year of crash data before installation to six months of crash data after installation (Hammond 2008). The data indicated the reductions shown in Table 13.

Table 13. WSDOT reduction in crashes using CLRS six months after installation (Hammond 2008)

Collision Type	Decrease (%)
Fatal and serious injury	28
All cross-centerline	26
Fatal and serious injury for cross-centerline	50

Similarly, an extensive before-and-after crash study performed in Minnesota showed that the installation of CLRS on selected two-lane highways led to a statistically significant 25 percent reduction in fatal and A severity crashes per year in the after period (Briese 2006). In addition, before-and-after crash data showed a 3 percent reduction in total crashes per year with a 9 percent increase in AADT for the studied segments.

Edge-Line Rumble Stripes

The Mississippi DOT (MDOT) installed edge-line rumble stripes on a two-lane roadway and conducted a before-and-after crash study (ATTSA 2006). The study found that right-side ROR crashes were reduced by 25 percent after installing the rumble stripes.

The Texas Transportation Institute (TTI) evaluated the impact of edge-line rumble stripes on traffic operations. The evaluation found that shoulder encroachment decreased by 46.7 percent after installing edge-line rumble stripes (Miles et al. 2005).

Pratt et al. (2006) evaluated centerline and edge-line rumble strips (ERS) where the rumble strips were placed directly on the marked edge line along a five-mile segment. The rumble strips were 0.5 in. deep, 7 in. long, and 12 in. wide at 12 in. spacing with a 4 in. edge line.

The researchers evaluated shoulder encroachments for both curved and tangent sections. The authors found a reduction of 46.7 percent for all categories of encroachments. Inadvertent shoulder encroachments decreased from 616 to 359 from the before to after period.

The researchers also recorded lateral encroachment onto the shoulder and noted a decrease in shoulder encroachment from 10.6 to 18.5 in. The researchers also noted a 71.8 percent decrease in number of vehicles striking the right edge line.

A recent study of the Missouri Smooth Roads Initiative (SRI) included 61 sites and more than 320.5 miles of both edge-line rumble stripes and shoulder rumble stripes. The authors conducted a before-and-after analysis using an empirical Bayesian analysis. Overall, the researchers found that the SRI program showed a statistically-significant eight percent decrease in fatal and disabling injury crashes and a six percent decrease in fatal and all injury crashes. However, the analysis only included one year of after data (Potts et al. 2008).

Hallmark et al. (2011) evaluated edge-line rumble stripes along six sites in Iowa. One of the advantages that have been attributed to rumble stripes is additional visibility of the pavement marking. It is thought that the shape of the rumble stripe itself provides a raised (vertical) surface so that the markings are more visible at night and particularly when some amount of precipitation is on the pavement surface.

In addition, the depression protects part of the pavement marking, which can lead to reduced wear. Consequently, the researchers evaluated pavement marking wear over time. Iowa receives a significant amount of snow from December through March. Road maintenance in Iowa is aggressive and includes scraping and the use of salt and sand. As a result, winter maintenance is harsh on pavement markings.

The researchers visited several sites two years after application of the rumble stripes and conducted a qualitative assessment of pavement marking wear. At all of the sites, a significant portion of the regular pavement markings, which were flush with the pavement surface, had been worn away by the snowplows, while much of the marking within the rumble stripe remained. As a result, the rumble stripe was successful in preserving the pavement marking (as shown in Figure 27), which will lead to improved visibility.

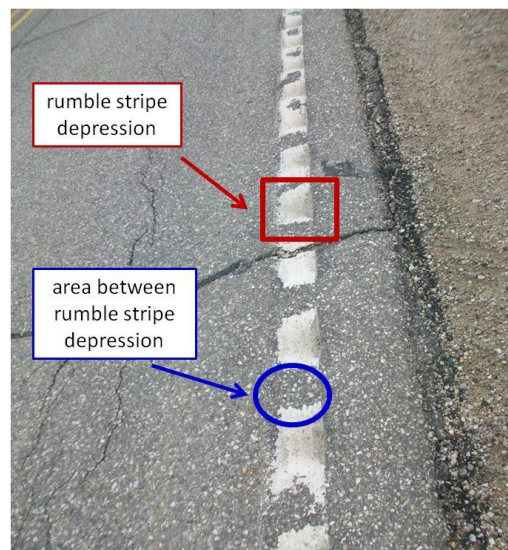


Figure 27. Wear at Vandalia/CR F70 after two years (Hallmark et al. 2011)

One problem that the researchers noted with the rumble stripes is that material (sand, gravel, and dirt) tends to accumulate within the stripe as shown in Figure 28.

The team evaluated lane position before and after installation of edge-line rumble stripes as a surrogate measure of safety, given only a short after period was available for a crash analysis.

Average offset from the lane center decreased by more than 1 ft for two locations during the daytime period. Average offset decreased by 0.2 to 0.6 ft for three sites and increased at one site by 0.4 ft.

The vehicle wheel path moved closer to the lane center for all six sites for the nighttime period but was not statistically significant at the 95 percent level of confidence for the County Road (CR) W13 south and P53 locations.



Figure 28. Rumble stripe depression filled with material (Hallmark et al. 2011)

The change was about 1.5 ft for three of the sites. On average, improvement in offset from the lane center was higher for the nighttime period than for the daytime period (Hallmark et al. 2011).

In a summary of low-cost strategies, ATSSA (2006) indicated that, at one year after installation, edge-line rumble stripes can have retroreflectivity levels up to 20 times higher than an equivalent flat line under wet-weather conditions. The vertical face provides additional advantage during wet conditions and at night and the recess may protect paint against snowplow damage.

Advantages

- ◆ When the paint line is placed with the rumble strip, improved pavement marking wear may result
- ◆ Can be placed in existing or new pavement

Disadvantages

- ◆ Some agencies have received noise complaints
- ◆ Cost
- ◆ May affect bicyclist and horse-drawn vehicles
- ◆ Depressed grooves may fill with dirt or debris

On-Pavement Curve Signing

Description

On-pavement markings show a curve sign in advance of the curve. The treatment may also show the speed limit. A common design is shown in Figure 29.

Application

The Pennsylvania DOT (PennDOT) applied the advanced curve warning markings in advance of horizontal curves. Arnold and Lantz (2007) suggest avoiding use of the markings when there are intersecting roadways or driveways that could lead to driver confusion. The authors also suggest treating the most hazardous curve first when compound curves are present.



Figure 29. On-pavement curve sign

PennDOT used MUTCD (2009) Table 2C-4 to determine where to place the advanced curve warning signs upstream of the PC.

Although no guidance was found for on-pavement posted speed markings, placing markings at the same location as for advisory signs would allow the driver sufficient time to react and adjust their speed.

Effectiveness

Charlton (2007) used 30 volunteers in a driving simulator to look at three types of curve warnings over 45, 65, and 85 km/hr (28, 40.4, and 52.8 mph) curves. Drivers reacted to hands-free cell phone tasks during the study to assess driver workload.

Curve treatments included a regular curve advisory and advisory speed sign, a chevron sight board with the curve advisory speed, and on-pavement markings with the curve advisory speed and transverse markings.

At the 85 km/hr (52.8 mph) curve, the chevron sight board was the most effective, especially at curve approach and entry points. Both the chevron sight board and pavement markings were accompanied by lower 65 km/hr (40.4 mph) curves speeds, even with cell phone tasks.

All of the warnings worked reasonably well for severe curves regardless of demands for cell phone tasks. However, at the 45 km/hr (28 mph) curve, driver speeds were lowest at all stages with presence of the pavement markings than for the other treatments.

Chrysler and Schrock (2005) examined the effectiveness of pavement markings consisting of words and symbols on reducing speeds in rural highway curves. The researchers tested four different markings including transverse lines, CURVE AHEAD, and CURVE 55 MPH pavement markings (Figure 30). The researchers also tested pavement markings with a curve symbol plus 50 MPH on an urban curve.

Each of the markings was applied to the roadway with the majority applied 400 ft after the standard curve warning sign with text that was approximately 8 ft tall.

The researchers measured change in speed from an upstream control point to the treatment and found the following:

- ◆ No speed changes with the CURVE AHEAD signing
- ◆ Speeds reduced by 4 mph for the CURVE 55 MPH, although an analysis of variance indicated that the difference was not statistically significant
- ◆ Reduction of 7 mph for the curve symbol plus 50 MPH markings at the urban location (divided four-lane highway)



Figure 30. On-pavement curve markings (Chrysler et al. 2006)

Retting and Farmer (1998) studied the use of pavement markings in the tangent section leading up to a curve and their effects of speed. The researchers conducted this study on a suburban two-lane secondary road in Northern Virginia.

The study site had a sharp left curve with a speed limit of 35 mph leading up to the curve and then an advisory speed of 15 mph. The researchers used before-and-after data collection on both a test site and a control site.

At the test site, 8 ft tall white letters spelled SLOW, along with two white lines perpendicular to the flow of traffic and a left curving arrow (similar to that shown in Figure 29).

The researchers recorded speed downstream of the PC but after the pavement markings on the test site and then upstream in the curve. Results showed a daytime decrease in mean speed of 1.1mph from 34.3 mph to 33.2 mph (1.1 mph) and a 5.6 percent decrease in drivers exceeding 40mph.

At night, the researchers observed a decrease of 1.6 mph for the mean speed and a decrease in drivers exceeding 40 mph of 6.1 percent. Late night mean speed dropped 3.4 mph and drivers exceeding 40 mph dropped 16.9 percent.

Retting et al. (2000) evaluated use of the on-pavement SLOW marking on a sharp left curve with minimal sight distance on a rural two-lane road in Virginia. The roadway had 10 ft lanes with narrow shoulders. The word SLOW, along with a left turn arrow, were placed in advance of the curve with 18 in. edge lines after the markings in advance of the curve. Speeds were reduced from 34.3 to 33.2 mph.

Advantages

- ◆ Low cost

Disadvantages

- ◆ Markings are typically placed in the traveled way, which may result in additional maintenance costs

Flashing Beacons

Description

Flashing beacons are traffic signals with one or more signal sections that operate in a flashing mode (Figure 31). Flashing beacons can be used to provide warning for various applications as described in Chapter 4L of the MUTCD (2009). Flashing beacons provide notice to drivers that conditions are changing ahead. Flashing beacons are used in conjunction with the appropriate signing.



Application

Use of flashing beacons is covered in Chapter 4L of the MUTCD (2009).

Effectiveness

A CRF of 30 was reported for installation of flashing beacons in conjunction with curve advance warning signs (USDOT 2008).

Vest et al. (2005) evaluated different types of warning signs to reduce speed on curves. The researchers tested sites on rural roadways with a sharp curve, history of speed-related incidents, long tangent section before the curve, no vertical grade, and no intersections, driveways, or commercial activity within the curve.

At some sites, two 6 in. flashing lights were mounted on the upper portion of the sign as shown in Figure 32.

The beacons were visible to drivers only at night. At one site, a decrease of 1.8 mph in average speeds occurred at the PC and a decrease of 0.2 mph occurred at the other (nighttime speeds).



Figure 31. Flashing beacons (Bowman 2012)



Figure 32. Flashing beacons on advisory curve sign (Vest et al. 20052)

Only one site reported results at the center of the curve, showing a 0.8 mph increase in nighttime average speeds.

Advantages

- ◆ Low cost

Disadvantages

- ◆ Requires a power source
- ◆ Little information on effectiveness is available

Dynamic Curve Warning Systems

Description

Dynamic curve warning systems (DCWSs) are traffic control devices that are programmed to provide a message to drivers exceeding a speed threshold (Figure 33). A DCWS consists of a speed-measuring device, which may be loop detectors or radar, and a message sign that displays feedback to drivers who exceed a predetermined speed threshold.

The feedback may be the driver's actual speed, a message such as SLOW DOWN, or activation of a warning device such as beacons or a curve warning sign.

The utility of this particular intelligent transportation system (ITS) application is that these systems specifically target drivers who are speeding rather than all drivers. In this way, the system "interacts" with an individual driver and may lead to better compliance, given the message appears more personalized.

Dynamic speed feedback sign (DSFS) systems are one type of DCWS (top of Figure 33) that have been used to reduce vehicle speeds successfully and, subsequently, crashes in applications such as traffic calming on urban roads.

Another type of DCWS is a sequential dynamic curve warning system (SDCWS), which consists of a series of solar-powered, LED-enhanced chevron signs that are installed throughout a curve (Figure 34).

Typically, the system is set up via radar to flash only when a driver exceeds a set speed threshold. When the signs light up, they usually light up, in sequence, as the driver progresses through the curve. When the system is not activated, drivers are presented with regular chevron signs.

The FHWA is currently evaluating the effectiveness of this system in four states (www.fhwa.dot.gov/hfl/partnerships/safety_eval/brochure_tapco.cfm).



Dynamic speed feedback sign



Dynamic curve advisory feedback sign

Figure 33. Two examples of dynamic driver feedback signs

Application

Given DCWSs are often expensive, they have typically been applied selectively to high-crash curve locations. Sign vendors should also be consulted as to whether their systems are MUTCD-compliant.

Effectiveness

Dynamic speed-activated feedback sign systems have been used in only a few cases to reduce speeds and warn drivers of upcoming curves. The systems have been used more extensively for a number of other related applications. A summary of information about curve- and non-curve-related applications follows.

Bertini et al. (2006) studied the effectiveness of a dynamic speed-activated feedback sign system on Interstate 5 (I-5) near Myrtle Creek, Oregon on a curve with an AADT of 16,750 vpd and an advisory speed of 45 mph.

The system consisted of two displays that provided different messages to drivers based on the speed detected as shown in Table 14 and Figure 35.



Figure 34. Sequential dynamic curve warning system (FHWA 2012)

Table 14. Advisory messages for I-5 dynamic speed-activated feedback sign system (Bertini et al. 2006)

Sign Panel	Detected Speed (mph)		
	Under 50	50-70	Over 70
1	CAUTION	SLOW DOWN	SLOW DOWN
2	SHARP CURVES AHEAD	YOUR SPEED IS XX MPH	YOUR SPEED IS OVER 70 MPH

The DSFS system was put in place alongside one of the existing signs in both the north and southbound directions. Each system consisted of the actual dynamic message sign, a radar unit, a controller unit, and computer software.

Results indicated that, after installation of the DSFS system, passenger vehicle speeds were reduced by 2.6 mph and commercial truck speeds were reduced by 1.9 mph, with the results being statistically significant at the 95 percent confidence level. Results of a driver survey indicated that 95 percent of drivers surveyed said that they noticed the DSFS system and 76 percent said that they slowed down due to the system.

A vehicle-activated curve warning sign was tested on three curves on two-lane roads in the United Kingdom as shown in Figure 36 (Winnett and Wheeler 2002). The signs were blank when drivers were under the 50th percentile speed.

Mean speeds were reduced by 2.1 to 6.9 mph and the speed reductions were maintained over time. Crash data were available for two sites and the researchers found that crashes decreased 54 percent at one site and 100 percent at the other.

The City of Bellevue, Washington evaluated DSFS systems as curve advisory warnings for two curves as shown in Figure 37. Both curves were on urban arterials with 35 mph speed limits and 25 mph advisory speeds. One sign showed a 3.3 mph reduction in 85th percentile speed and the other showed a 3.5 mph reduction.

Preston and Schoenecker (1999) also evaluated the safety effect of a DSFS System on County Highway 54 in Minnesota, which is a two-lane rural roadway with a speed limit of 55 mph and an AADT of 3,250 vpd. The curve has an advisory speed of 40 mph.

The DSFS system had a changeable message sign and radar unit. The researchers conducted a field test over a four-day period with a unit that consisted of a closed circuit TV camera, a VCR, and a personal computer. (A portable trailer housed the entire system.)



Northbound signs before and after



Southbound signs before and after

Figure 35. I-5 DSFS system in Oregon

The sign displayed the following:

- ◆ CURVE AHEAD from 6 to 10 am, 11 am to 2 pm, and 4 to 7 pm
- ◆ No message during other times of the day unless activated

The team randomly evaluated whether vehicles negotiated the curve successfully based on curve messages. Vehicles that crossed a left or right lane line on one or more occasions were defined as not negotiating the curve successfully.

The team found that approximately 35 percent of the drivers who received the static message were unable to negotiate the curve successfully. Vehicles that received the CURVE AHEAD sign were more likely to negotiate the curve successfully, but the difference was not statistically significant. Only 26 percent of vehicles that received the CURVE AHEAD – REDUCE SPEED sign were unable to negotiate the curve successfully, and the difference was statistically significant at the 90 percent level of confidence.

Mattox et al. (2007) looked at the effectiveness of a DSFS system on secondary highways in South Carolina. This system consisted of radar device and a 4 x 4 ft yellow sign with 6 in. lettering reading YOU ARE SPEEDING IF FLASHING. In addition, there were two 1 x 1 ft orange flags and a type B flashing beacon light.

The researchers collected data in a before-and-after study upstream of the sign, at the sign, and downstream of the sign. Results showed a significant reduction in speed at the sign and downstream of the sign. Overall, mean and 85th percentile speeds were reduced by approximately 3 mph.

A report by the California Department of Transportation (Caltrans 2010) provided a summary of the effectiveness of safety treatments in one California district. A changeable message sign was installed at five locations along I-5 to reduce truck collisions. The study reported that truck crashes decreased from 71 to 91 percent at four of the sites while truck crashes increased by 140 percent at one site.



Figure 36. DSFS system in Norfolk, Virginia (Winnett and Wheeler 2002)



Figure 37. DSFS system in Bellevue, Washington (City of Bellevue 2009)

A study by the 3M Company evaluated driver speed back signs in the United Kingdom. Signs were tested at various locations in Doncaster including semi-rural roadways. The signs displayed the approaching driver speed. The sites had speed limits of 40 mph and reductions up to 7 mph in 85th percentile speeds.

Tribbett et al. (2000) evaluated dynamic curve warning systems for advance notification of alignment changes and speed advisories at five sites in the Sacramento River Canyon with 7,650 to 9,300 vpd on I-5 in California. Messages used by the researchers included curve warnings (shown in Figure 38) and driver speed feedback.

Decreases in mean truck speeds occurred for three sites (from 1.9 to 5.4 mph) and decreases in mean passenger speeds occurred for four sites (from 3.0 to 7.8 mph).

Advantages

- ◆ Can be targeted to drivers who are exceeding a certain speed threshold

Disadvantages

- ◆ Cost



Figure 38. Speed warning sign in the Sacramento River Canyon (Tribbett et al. 2000)

Pavement Inset Lights

Description

In-pavement lighting has been used in applications such as nighttime delineation of crosswalks. These lights have the ability to increase the visibility of horizontal curves, particularly during nighttime and wet weather (Figure 39).



Figure 39. In-pavement lighting (FHWA 2011)

Application

In-pavement lighting is most appropriate for locations with a large number of nighttime or adverse weather crashes.

Effectiveness

Shepard (1977) installed pavement inset lights along a 5.8 mile section of I-64 in Virginia. The intent was to provide guidance during fog conditions. Unidirectional airport runway lights were installed in the pavement edge along each side of roadway in both directions with the lights spaced 200 ft apart on tangent sections and 100 ft on curves.

The researchers collected and analyzed traffic flow data before and after installation of the inset lights and evaluated vehicle speeds, headway, queues, and lateral placement. The researchers measured lateral placement by installing tape switches of different lengths on the right side of the traffic lane. The researchers collected data under six different fog-density categories.

The researchers found a significant decrease in mean speeds during the day while noting a significant increase in nighttime speed. The researchers also found an increase in speed differentials for various cases during day and night and a decrease in nighttime headway and queuing. The researchers noted that the lighting was only effective when fog of a certain density was present.

Advantages

- ◆ Can be targeted to nighttime and wet-weather crashes

Disadvantages

- ◆ Cost
- ◆ May require maintain regular maintenance to ensure lights are functioning
- ◆ Small potential for lights to dislodge and pose safety risk

References

- 3M. A Before and After Study of 3M Driver Feedback Signs. Updated 2006.
- AASHTO. *Driving Down Lane-Departure Crashes: A National Priority*. American Association of State Highway and Transportation Officials. April 2008.
<http://downloads.transportation.org/PLD-1.pdf>.
- ATSSA. *Low Cost Local Road Safety Solutions*. American Traffic Safety Services Association. Fredericksburg, Virginia. March 2006.
- Anderson, I. B., K. M. Bauer, D. W. Harwood, and K. Fitzpatrick. "Relationship of Safety of Geometric Design Consistency Measures for Rural Two-Lane Highways." Transportation Research Board 78th Annual Meeting, National Research Council, Washington, DC. 1999.
- Anund, Anna, Goran Kecklund, Anna Vadeby, Magnus Hjalmdahl, and Torbjorn Akerstedt. "The Alerting Effect of Hitting a Rumble Strip – A Simulator Study with Sleepy Drivers." *Accident Analysis and Prevention*. Vol. 40. 2008. pp. 1970-1976.
- Arnold, E. D. and K. E. Lantz. Evaluation of Best Practices in Traffic Operations and Safety: Phase I: Flashing LED Stop Sign and Optical Speed Bars. Virginia Transportation Research Council. VTRC 07-R34. June 2007.
- Bahar, Geni, Calvin Mollett, Bhagwant Persuad, Craig Lyon, Alison Smiley, Tom Smahel, and Hugh McGee. *NCHRP Report 518: Safety Evaluation of Raised Pavement Markers*. National Cooperative Highway Research Program. Washington, DC. 2004.
- Bertini, Robert L., Chris Monsere, Casey Nolan, Peter Bosa, and Tarek Abou El-Seoud. *Field Evaluation of the Myrtle Creek Advance Curve Warning System*. SPR 352. FHWA-OR-RD-05_13. Portland State University. June 2006.
- Bonneson, James A., Michael P. Pratt, and Jeff Miles. "Evaluation of Alternative Procedures for Setting Curve Advisory Speeds." *Transportation Research Record: Journal of the Transportation Research Board*. No. 2122. Transportation Research Board of the National Academies, Washington, DC. 2009. pp. 9-16.
- Bowman, Dean. *Michigan's Initiatives for Reducing Highway Fatalities*.
<http://downloads.transportation.org/2008SCOD/VanPortFleet%20Successes%20Presentation.ppt>. Accessed May 2012.
- Briese, M. *Safety Effects of Centerline Rumble Strips in Minnesota*. Minnesota Department of Transportation. MN/RC-2008-44. 2006.
- Caltrans. *District 2 Safety Report*. California Department of Transportation. Draft, January 2010.
- Campbell, John L., Christian M. Richard, and Jerry Graham. *NCHRP Report 600b: Human Factors Guidelines for Road Systems*. Collection B: Chapters 6, 22, 23. National Cooperative Highway Research Program. Washington, DC. 2008.
- Carlson, Paul J., Elisabeth R. Rose, and Susan T. Chrysler. *Research Recommendations for Delineator and Chevron Applications*. Texas Transportation Institute. Project Summary Report O-4052-S. 2004.
- Charlton, Samuel G. "The Role of Attention in Horizontal Curves: A Comparison of Advance Warning, Delineation, and Road Marking Treatments." *Accident Analysis and Prevention*. Volume 39. 2007. pp. 873–885.
- Charlton, S. G., and J. J. DePont. *Curve Speed Management*. Land Transport New Zealand Research Report 323. July 2007.
- Chowdhury, Mashrur A., Davey L. Warren, Howard Bissell, and Sunil Taori. "Are the Criteria for Setting Advisory Speeds on Curves Still Relevant?" *ITE Journal*. February 1998. pp. 32-45.

- Chrysler, Sue. Texas Transportation Institute. “Visibility of Delineators and Chevrons with Reflectorized Posts.” Visibility Symposium. 2009.
- Chrysler, Susan T., Jon Re, Keith S. Knapp, Dillon S. Funkhouser, and Beverly T. Kuhn. *Driver Response to Delineation Treatments on Horizontal Curves on Two-Lane Roads*. Texas Transportation Institute. FHWA/TX-09/-5772-1. May 2009.
- Chrysler, Susan T., and Steven D. Schrock. *Field Evaluation and Driver Comprehension Studies of Horizontal Signing*. FHWA/TX-05/0-4471-2. Texas Transportation Institute. February 2005.
- Chrysler, Susan T., Paul J. Carlson, and Alicia Williams. “Simplifying Delineator Application for Horizontal Curves.” *Transportation Research Record: Journal of the Transportation Research Board*. No. 1918. Transportation Research Board of the National Academies, Washington, DC. 2005. pp. 68-75.
- City of Bellevue Transportation Department, Washington. *Stationary Radar Sign Program: 2009 Report*.
- Cottrell, B. H., D. Lee, J. Molino, and K. S. Opiela. “Can Pavement Marking Curve Delineation Improve the Consistency of Vehicle Speed and Lane Position? Results from A Nighttime Driving Experiment.” Proceedings of the Transportation Research Board Annuals Meeting. Paper #07-0943. Washington, DC. 2007.
- Council, F. M. “Safety Benefits of Spiral Transitions on Horizontal Curves on Two-Lane Rural Roads.” *Transportation Research Record: Journal of the Transportation Research Board*. No. 1635. Transportation Research Board of the National Academies, Washington, DC. 1993. pp. 10-17.
- Donnell, Eric T., Mason D. Gemar, and Ivette Cruzado. *Operational Effects of Wide Edge Lines Applied to Horizontal Curves on Two-Lane Rural Highways*. Pennsylvania Transportation Institute, Pennsylvania State University. University Park, Pennsylvania. November 2006.
- Drakopoulos, A., and G. Vergou. *Evaluation of the Converging Chevron Pavement Marking Pattern in One Wisconsin Location*. AAA Foundation for Traffic Safety, Washington, DC. July 2003.
- Farmer, Charles M, and Adrian K. Lund. “Rollover Risk of Cars and Light Trucks after Accounting for Driver and Environmental Factors.” *Accident Analysis and Prevention*. Vol. 34. 2002. pp. 163–173.
- Fink, K. L., and R. A. Krammes. “Tangent Length and Sight Distance Effects on Accident Rates at Horizontal Curves on Rural Two-Lane Highways.” *Transportation Research Record: Journal of the Transportation Research Board*. No. 1500. Transportation Research Board of the National Academies, Washington, DC. 1995. pp. 162-168.
- FHWA. Safety Evaluation of Improved Curve Delineation, Tech Brief. FHWA-HRT-09-046. August 2009.
- FHWA. *Manual on Uniform Traffic Control Devices for Streets and Highways*. 2009 Edition. U.S. Department of Transportation, Federal Highway Administration. December 2009. http://mutcd.fhwa.dot.gov/pdfs/2009r1r2/pdf_index.htm
- FHWA. *Highways for LIFE Technology Partnership Program. Light Emitting Diode Raised Pavement Markers*. Federal Highway Administration. 2011. http://www.fhwa.dot.gov/hfl/partnerships/safety_eval/led.cfm. Accessed March 2012.
- FHWA. *Sequential Dynamic Curve Warning System*. Federal Highway Administration, Highways for Life. http://www.fhwa.dot.gov/hfl/partnerships/safety_eval/brochure_tapco.cfm. Accessed May 2012.
- FHWA. Crash Modification Factors Clearinghouse. Federal Highway Administration. <http://www.cmfclearinghouse.org>. Accessed June 2012.

- Fitzpatrick, K., K. Balke, D. W. Harwood, and I. B. Anderson. *NCHRP Report 440: Accident Mitigation Guide for Congested Rural Two-Lane Highways*. National Cooperative Highway Research Program. Washington, DC. 2000.
- Gates, Timothy J., and H. Gene Hawkins. *The Use of Wider Longitudinal Pavement Markings*. Texas Transportation Institute. March 2002.
- Gates, Timothy J., Xiao Qin, and David A. Noyce. “Effectiveness of Experimental Transverse-Bar Pavement Marking as Speed-Related Treatment on Freeway Curves.” *Transportation Research Record: Journal of the Transportation Research Board*. No. 2056. Transportation Research Board of the National Academies, Washington, DC. 2008. pp. 95-102.
- Glennon, John C., Timothy R. Neuman, and Jack E. Leisch. *Safety and Operational Considerations for Design of Rural Highway Curves*. Federal Highway Administration. FHWA/RD-86-035. December 1985.
- Griffin, Lindsay I., and Robert N. Reinhart. *Patterns that Have Been Developed to Reduce Traffic Speeds and Crashes*. AAA Foundation for Traffic Safety. August 1995.
- Hall, J. “Evaluation of Wide Edgelines.” *Transportation Research Record: Journal of the Transportation Research Board*. No. 1114. Transportation Research Board of the National Academies, Washington, DC. 1987. pp. 21-27.
- Hallmark, Shauna, Tom McDonald, and Robert Sperry. *Evaluation of Rumble Stripes on Low-Volume Rural Roads in Iowa—Phase II*. Center for Transportation Research and Education, Iowa State University. Ames, Iowa. July 2011.
- Hallmark, Shauna, Thomas J. McDonald, Ye Tian, and David Andersen. *Safety Benefits of Paved Shoulders*. Center for Transportation Research and Education, Iowa State University. Ames, Iowa. August 2010.
- Hallmark, Shauna L, Eric Peterson, Eric Fitzsimmons, Neal Hawkins, Jon Resler, and Tom Welch (Iowa DOT). *Evaluation of Gateway and Low-Cost Traffic-Calming Treatments for Major Routes in Small Rural Communities*. Center for Transportation Research and Education, Iowa State University. Ames, Iowa. November 2007.
- Hammond, Jeffrey L., and Frederick J. Wegmann. “Daytime Effects of Raised Pavement Markers on Horizontal Curves.” *ITE Journal*. August 2001. pp. 38-41.
- Hammond, Paula J. *The Gray Notebook: WSDOT’s Quarterly Performance Report on Transportation Systems, Programs and Department Management*. Washington State Department of Transportation. August 2008. www.wsdot.wa.gov/NR/rdonlyres/C22B87B4-2899-43FA-9C66-E86ADA21A873/0/GrayNotebookJune08.pdf.
- Hassan, Y. and S. M. Easa. “Effect of Vertical Alignment on Driver Perception of Horizontal Curves.” *Journal of Transportation Engineering*. Vol. 129, No. 4. pp. 399-407.
- Hildebrand, E. D., F. R. Wilson, and J. J. Copeland. “Speed Management Strategies for Rural Temporary Work Zones.” Proceedings of the Canadian Multidisciplinary Road Safety Conference XIII. Banff, Alberta: Canadian Association of Road Safety Professionals. 2003.
- Hughes, W. E., H. W. McGee, S. Hussain, and J. Keegel. *Field Evaluation of Edge Line Widths*. Federal Highway Administration. FHWA-RD-89-111. Washington, DC. 1989.
- Iowa DOT. Paved Shoulders. Design Manual, Chapter 3, Cross Sections, 3C-4. Iowa Department of Transportation. www.iowadot.gov/design/dmanual/03c-04.pdf. Revised June 30, 2008.
- Jennings, B. and M. Demetsky. *Evaluation of Curve Delineation Signs*. Report VHTRC 84-R16. Virginia Highway and Transport Research Council. Charlottesville, Virginia. 1983.
- Jorgensen and Associates, Inc. *NCHRP Report 197: Cost and Safety Effectiveness of Highway Design Elements*. National Cooperative Highway Research Program. Washington, DC. 1978.
- Julian, Frank and Steve Moler. “Gaining Traction in Roadway Safety.” *Public Roads*. July/August 2008. Vol. 72, No. 1. www.tfhrcc.gov/pubrds/08july/05htm

- Kar, K. and R. S. Weeks. "The Sound of Safety." *Public Roads*. Vol. 72, No. 4. 2009.
- Katz, Bryan J. *Pavement Markings for Speed Reduction*. Science Applications International Corporation. McLean, Virginia. December 2004.
- Katz, B. J., D. E. Duke, and H. A. Rakha. Design and Evaluation of Peripheral Transverse Bars to Reduce Vehicle Speeds. Transportation Research Board 85th Annual Meeting Compendium of Papers. CD-ROM. 2006.
- Latoski, Steven P. "Optical Speed Zone for Rural Two-Lane Highways." *ITE Journal*. March 2009. pp. 30-35.
- Luediger L., E. M. Choueiri, J. C. Hayward, and A. Paluri." Possible Design Procedure to Promote Design Consistency in Highway Geometric Design on Two-Lane Rural Roads." *Transportation Research Record: Journal of the Transportation Research Board*. No. 1195. Transportation Research Board of the National Academies, Washington, DC. 1988. pp. 111-122.
- Mattox, James H., Wayne A. Sarasua, Jennifer H. Ogle, Ryan T. Eckenrode, and Anne Dunning. "Development and Evaluation of a Speed Activated Sign to Reduce Speeds in Work Zones." Proceedings of the 2007 Annual Meeting of the Transportation Research Board. January 2007.
- McGee, Hugh W. and Fred R. Hanscom. *Low-Cost Treatments for Horizontal Curve Safety*. U.S. Department of Transportation. Federal Highway Administration. FHWA-SA-07-002. December 2006.
http://safety.fhwa.dot.gov/roadway_dept/horcurves/fhwasa07002/index.cfm#toc
- McLaughlin, S. B., J.M. Hankey, S.G. Klauer, and T.A. Dingus, T. A., *Contributing Factors to Run-Off-Road Crashes and Near-Crashes*. National Highway Traffic Safety Administration. DOT HS 811 079. January 2009.
- Meyer, Eric. "A New Look at Optical Speed Bars". *ITE Journal*. November 2001. pp. 44-48.
- Miaou, Shaw-Pin and Harry Lum. "Statistical Evaluation of the Effects of Highway Geometric Design on Truck Accident Involvements." *Transportation Research Record: Journal of the Transportation Research Board*. No. 1407. Transportation Research Board of the National Academies, Washington, DC. 1993. pp. 11-24.
- Miles, J. D., P. J. Carlson, M. P. Pratt, and T. D. Thompson. *Traffic Operational Impacts of Transverse, Centerline, and Edgeline Rumble Strips*. Report FHWA/TX-05/0-4472-2. Texas Transportation Institute, College Station, Texas. 2005.
- Milton, John and Fred Mannering. "The Relationship among Highway Geometric, Traffic-Related Elements, and Motor-Vehicle Accident Frequencies." *Transportation*. Vol. 25. 1998. pp. 395-413.
- Meyer, E. "Application of Optical Speed Bars to Highway Work Zones." *Transportation Research Record: Journal of the Transportation Research Board*. No. 1657. Transportation Research Board of the National Academies, Washington, DC. 1999. pp. 48-54.
- Michigan DOT. 2009. Unpublished email transmittal of photos. (Nambisan and Hallmark 2011).
- Molino, John A., Bryan J. Katz, Megan B. Hermsillo, Erin E. Dagnall, and Jason F. Kennedy. Simulator Evaluation of Low-Cost Safety Improvements on Rural Two-Lane Undivided Roads: Nighttime Delineation for Curves and Traffic Calming for Small Towns. FHWA-HRT-09-061. U.S. Department of Transportation, Federal Highway Administration. February 2010.
- Morena, D. "Rumbling Toward Safety." *Public Roads*. Vol. 67. No. 2. November/December 2003.
- Nambisan, Shashi and Shauna Hallmark. *Lane-Departure Countermeasures: Strategic Action Plan for the Iowa Department of Transportation*. Center for Transportation Research and Education, Iowa State University. Ames, Iowa. May 2011.

- NCHRP. "Guide for Pavement Friction: Background and Research." *NCHRP Research Results Digest 321*. National Cooperative Highway Research Program. Washington, DC. May 2009.
- Neuman, Timothy R., Ronald Pfeffer, Kevin L. Slack, Kelly Kennedy Hardy, Forrest Council, Hugh McGee, Leanne Prothe, and Kimberly Eccles. *NCHRP Report 500: Guidance for Implementation of the AASHTO Strategic Highway Safety Plan, Volume 6: A Guide for Addressing Run-Off-Road Collisions*. National Cooperative Highway Research Program. Washington, DC. 2003.
- NYS DOT. *Policy for the Use of Safety Shoulder Rumble Strips*. New York State Department of Transportation. Office of Engineering. 1997.
- Outcalt, W. *Bicycle-Friendly Rumble Strips: Nationwide Survey*. Colorado Department of Transportation. CDOT-DTD-R-2001-4. 2001.
- Persuad, Bhagwant, Richard A. Retting, and Craig A. Lyon. "Crash Reduction Following Installation of Centerline Rumble Strips on Rural Two-Lane Roads." *Accident Analysis and Prevention*. Vol. 36. 2004. pp. 1073-1079.
- Potts, Ingrid B., Douglas W. Harwood, Courtney D. Bokenkroger, and Jessica M. Hutton. *Benefit-Cost Evaluation of MoDOT's Total Striping and Delineation Program*. Midwest Research Institute and the Missouri Department of Transportation. OR09-014. November 2008.
- Pratt, Michael P. and James A. Bonneson. "Assessment of Traffic Control Devices Selection Guidelines for Horizontal Curves." *Transportation Research Record: Journal of the Transportation Research Board*. No. 2122. Transportation Research Board of the National Academies, Washington, DC. 2009. pp. 36-44.
- Pratt, Michael P., Jeffrey D. Miles, and Paul J. Carlson. "Evaluation of Operational Impacts of Installation of Centerline and Edge-line Rumble Strips." *Transportation Research Record: Journal of the Transportation Research Board*. No. 1973. Transportation Research Board of the National Academies, Washington, DC. 2006. pp. 80-88.
- Preston, Howard and Ted Schoenecker. *Potential Safety Effects of Dynamic Signing at Rural Horizontal Curves*. Minnesota Local Road Research Board. December 1999.
- Re, Jonathan M., H. Gene Hawkins, Jr., and Susan T. Chrysler. "Assessing Benefits of Chevrons with Full Retroreflective Signposts on Rural Horizontal Curves." *Transportation Research Record: Journal of the Transportation Research Board*. No. 2149. Transportation Research Board of the National Academies, Washington, DC. 2010. pp. 30-36.
- Reddy, Vivek, Tapan Datta, Peter Savolainen, and Satya Pinapaka. *Evaluation of Innovative Safety Treatments: A Study of the Effectiveness of Tyregrip High Friction Surface Treatment*. HNTB Corporation, Fort Lauderdale, Florida. January 2008.
- Retting, Richard A., and Charles M. Farmer. "Use of Pavement Markings to Reduce Excessive Traffic Speeds on Hazardous Curves." *ITE Journal*. September 1998. pp. 30-36.
- Retting, R. A., H. W. McGee, and C. M. Farmer. "Influence of Experimental Pavement Markings on Urban Freeway Exit-Ramp Traffic Speeds." *Transportation Research Record: Journal of the Transportation Research Board*. No. 1705. Transportation Research Board of the National Academies, Washington, DC. 2000. pp. 116-121.
- Rose, Elisabeth R. and Paul J. Carlson. "Spacing Chevrons on Horizontal Curves." *Transportation Research Record: Journal of the Transportation Research Board*. No. 1918. Transportation Research Board of the National Academies, Washington, DC. 2005. pp. 84-91.
- Russell, E. R. and M. J. Rys. *NCHRP Synthesis 339: Centerline Rumble Strips*. National Cooperative Highway Research Program. Washington, DC. 2005.

- Schneider, William H., IV, Karl Zimmerman, Dan Van Boxel, and Srutha Vavilikolanu. "Bayesian Analysis of the Effect of Horizontal Curvature on Truck Crashes Using Training and Validation Data Sets." *Transportation Research Record: Journal of the Transportation Research Board*. No. 2096. Transportation Research Board of the National Academies, Washington, DC. 2009. pp. 41-46.
- Seyfried, Robert K. and James L. Pline. *Methodologies for the Determination of Advisory Speeds*. Institute of Transportation Engineers, Traffic Engineering Council. Washington, DC. 2010.
- Shankar, Venkataraman N., Richard B. Albin, John C. Milton, and Fred L. Mannering. "Evaluating Median Crossover Likelihoods with Clustered Accident Counts: An Empirical Inquiry Using the Random Effects Negative Binomial Model." *Transportation Research Record: Journal of the Transportation Research Board*. No. 1635. Transportation Research Board of the National Academies, Washington, DC. 1998. pp. 44-57.
- Shepard, Frank D. *Traffic Evaluation of Pavement Inset Lights for Use During Fog*. Virginia Highway and Transportation Research Council. Charlottesville, Virginia. VHTRC 78-R25. December 1977.
- Shinar, D., T. H. Rockwell, and J. Malecki. "The Effects of Changes in Driver Perception on Rural Curve Negotiation." *Ergonomics*. Vol. 23. 1980. pp. 263-275.
- Smith, E. and J. Ivan. "Evaluation of Safety Benefits and Potential Crash Mitigation Due to Shoulder Rumble Strip Installation on Freeways in Connecticut." Transportation Research Board Annual Meeting, Washington, DC. January 2005.
- Torbic, Darren J., Douglas Harwood, David K. Gilmore, Ronald Pfefer, Timothy R. Neuman, Kevin L. Slack, and Kelly K. Hardy. *NCHRP Report 500: Volume 7: A Guide for Reducing Collisions on Horizontal Curves*. National Cooperative Highway Research Program. Washington, DC. 2004.
- Tribbett, Lani, Patrick McGowen, and John Mounce. *An Evaluation of Dynamic Curve Warning Systems in the Sacramento River Canyon*. Western Transportation Institute. April 2000. www.coe.montana.edu/wti/wti/pdf/42861_Final.pdf.
- Troy, S. A. "Low Cost Evaluations." Presented at the FHWA Low Cost Pooled Fund TAC Meeting, Virginia. 2007.
- Tsyganov, Alexei R., Randy B. Machemehl, and Nicolas M. Warrenchuk. *Safety Impact of Edge Lines on Rural Two-Lane Highways*. Center for Transportation Research, University of Texas at Austin. FHWA/Tx-05/-5090-1. September 2005.
- Umbs, R. M. *Technical Advisory: Roadway Shoulder Rumble Strips*. U.S. Department of Transportation, Federal Highway Administration. FHWA-T 5040.35. 2001. http://safety.fhwa.dot.gov/roadway_dept/pavement/rumble_strips. Accessed April 2011.
- US DOT. *Toolbox of Countermeasures and Their Potential Effectiveness for Roadway Departure Crashes*. U.S. Department of Transportation, Federal Highway Administration. FHWA-SA-07-013. August 2008.
- Vest, Adam, Nikoforos Stamatiadis, Adam Clayton, and Jerry Pigman. *Effect of Warning Signs on Curve Operating Speeds*. Kentucky Transportation Center. KTC-05-20/SPR-259-03-1F. August 2005.
- Vogt, Andrew, and Joe Bared. "Accident Models for Two-Lane Rural Segments and Intersections." *Transportation Research Record: Journal of the Transportation Research Board*. No. 1635. Transportation Research Board of the National Academies, Washington, DC. 1998. pp. 18-29.
- Winnett, M. A. and A. H. Wheeler. *Vehicle Activated Signs—A Large Scale Evaluation*. Road Safety Division, Department for Transport. TRL548. 2002.

- Zador, Paul L., Paul H. Wright, and Ronald S. Karpf. *Effect of Pavement Markers on Nighttime Crashes in Georgia*. Insurance Institute for Highway Safety. Washington, DC. August 1982.
- Zegeer, Charles V., Richard Stewart, Forrest M. Council, Donald W. Reinfurt, and Elizabeth Hamilton. "Safety Effects of Geometric Improvements on Horizontal Curves." *Transportation Research Record: Journal of the Transportation Research Board*. No. 1356. Transportation Research Board of the National Academies, Washington, DC. 1992. pp. 11-19.