

Technical University of Denmark



Mechanical–biological treatment: Performance and potentials. An LCA of 8 MBT plants including waste characterization

Montejo, Cristina; Tonini, Davide; Márquez, María del Carmen; Astrup, Thomas Fruergaard

Published in:
Journal of Environmental Management

Link to article, DOI:
[10.1016/j.jenvman.2013.05.063](https://doi.org/10.1016/j.jenvman.2013.05.063)

Publication date:
2013

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):
Montejo, C., Tonini, D., Márquez, M. D. C., & Astrup, T. F. (2013). Mechanical–biological treatment: Performance and potentials. An LCA of 8 MBT plants including waste characterization. *Journal of Environmental Management*, 128, 661-673. DOI: 10.1016/j.jenvman.2013.05.063

DTU Library
Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Mechanical-biological treatment: Performance and potentials. An LCA of 8 MBT plants including waste characterization

Montejo, C.; Tonini, D.; Márquez, M. C.; Astrup, T. F.

* Corresponding author: dait@env.dtu.dk

Phone: 0045 45251699

Accepted version of the article:

Montejo, C.; Tonini, D.; Márquez, M. C.; Astrup, T. F.
Mechanical-biological treatment: Performance and potentials. An LCA
of 8 MBT plants including waste characterization. J. Environ. Manage.
2013, 128, 661–673.

This version did not undergo proof-reading and final journal editing. When referring to this work, please cite the journal publication stated above.

Highlights:

- ✓ We assessed the environmental performances of 8 MBT-based management systems
- ✓ Environmental performance was directly related to materials and energy recovery
- ✓ For the OFMSW, anaerobic digestion was favourable over direct composting
- ✓ Optimization of materials and biogas-energy recovery are recommended
- ✓ Optimal RDF management depends on marginal energy assumptions and C sequestration

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

**Mechanical-biological treatment: performance and potentials. A LCA
of 8 MBT plants including waste characterization**

Cristina Montejo^{*a}, Davide Tonini^b, María del Carmen Márquez^a, Thomas Astrup^b

^a Department of Chemical Engineering, University of Salamanca, Plaza de los Caídos 1-5, 37008 Salamanca, Spain.

^b Department of Environmental Engineering, Technical University of Denmark, Miljoevej, Building 115, 2800 Kgs. Lyngby, Denmark.

*Corresponding author. Tel: +34 923 294 479; Fax: +34 923 294 574. E-mail: cmontejo@usal.es

1
2
3 **Abstract**

4 In the endeavour of avoiding presence of biodegradable waste in landfills and increasing
5 recycling, mechanical-biological treatment (MBT) plants have seen a significant
6 increase in number and capacity in the last two decades. The aim of these plants is
7 separating and stabilizing the quickly biodegradable fraction of the waste as well as
8 recovering recyclables from mixed waste streams. In this study the environmental
9 performance of eight MBT-based waste management scenarios in Spain was assessed
10 by means of life cycle assessment. The focus was on the technical and environmental
11 performance of the MBT plants. These widely differed in type of biological treatment
12 and recovery efficiencies. The results indicated that the performance is strongly
13 connected with energy and materials recovery efficiency. The recommendation for
14 upgrading and/or commissioning of future plants is to optimize materials recovery
15 through increased automation of the selection and to prioritize biogas-electricity
16 production from the organic fraction over direct composting. The optimal strategy for
17 refuse derived fuel (RDF) management depends upon the environmental compartment
18 to be prioritized and the type of marginal electricity source in the system. It was
19 estimated that, overall, up to ca. 180-190 kt CO₂-eq. y⁻¹ may be saved by optimizing the
20 MBT plants under assessment.
21
22
23
24
25
26
27
28
29
30
31

32
33 **Keywords:** MBT, LCA, waste composition, biological treatment, material recovery,
34 RDF
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 **Glossary:**

4 AC: Acidification

5
6 ECS: Eddy current system

7
8 ETs: Ecotoxicity in soil

9
10 ETwc: Ecotoxicity in water (chronic)

11
12 GHG: Greenhouse gas

13
14 GW: Global warming

15
16 HDPE: High density polyethylene

17
18 HTa: Human toxicity via air

19
20 HTs: Human toxicity via soil

21
22 HTw: Human toxicity via water

23
24 HRT: Hydraulic retention time

25
26 LCA: Life cycle assessment

27
28 LDPE: Low density polyethylene

29
30 MBP: Mechanical-biological pretreatment

31
32 MBS: Mechanical-biological stabilization

33
34 MBT: Mechanical-biological treatment

35
36 MBTP: Mechanical-biological treatment plant

37
38 MSW: Municipal solid waste

39
40 NE: Nutrient enrichment

41
42 OFMSW: Organic fraction of municipal solid waste

43
44 PET: Polyethylene terephthalate.

45
46 POF: Photochemical ozone formation

47
48 RDF: Refuse derived fuel

49
50 rMSW: Residual municipal solid waste

51
52 SGR: Spoiled groundwater resources

53
54 SOD: Stratospheric ozone depletion

55
56 VOCs: Volatile organic compounds

57
58 VS: Volatile solids

59
60 WEEE: Waste electrical and electronic equipment

61
62 ww: wet waste

1
2
3 **1. Introduction**

4 From 1990 to 2010, about 180 MBT plants have been installed in Europe (ECN, 2009)
5 with the aim of avoiding the presence of biodegradable waste in landfills, according to
6 the European Directive 1999/31/CE (CEC, 1999). These plants combine mechanical
7 separation of different fractions contained in household waste with stabilization of
8 organic matter by means of biological processes such as anaerobic digestion or
9 composting. According to Bilitewski et al. (2011), two main types of MBT technology
10 exist: A) mechanical-biological pretreatment (MBP), where the organic fraction is
11 separated and biologically stabilized prior to landfilling and recyclables as well as RDF
12 are recovered from the residual coarse fraction, and B) mechanical-biological
13 stabilization (MBS) or biodrying, which first composts the waste for drying prior to
14 extraction of a larger RDF fraction. MBP aims at stabilizing the organic to minimize gas
15 as well as leachate emissions in landfill while MBS maximizes the RDF and materials
16 recovery. Within this general classification, multiple variations can be found and it can
17 be stated that probably there are no two identical plants.
18
19
20
21
22
23
24
25
26

27 The proliferation of these facilities was particularly remarkable in Spain where
28 the waste treatment capacity was increased by 5 million tonne by installation of 50 new
29 MBT plants (MMA, 2006). Particularly, in the region of Castilla y León (Spain), where
30 more than 1.2 million tonne of waste are generated annually, 11 MBT plants have been
31 built serving a population of 2.5 million of inhabitants within 94,223 km². It should be
32 noticed that selective source-segregation (separate collection of metals and plastic
33 containers along with glass and paper) corresponds to only 12% (as for 2009) of the
34 total collected waste (MMA, 2010), the remaining 88% being residual MSW. All the
35 residual MSW generated in this region is sent to MBT prior to landfilling.
36
37
38
39
40

41 Over the last ten years these plants have been in service, no specific assessments
42 on their environmental performances have been performed. To this respect life cycle
43 assessment (LCA) is a useful tool allowing for a holistic and systematic assessment of
44 both direct and indirect environmental impacts of a selected system. LCA includes
45 impact categories ranging from climate change (greenhouse gas (GHG) emissions) to
46 human health impacts associated with the release of toxic substances, and to
47 environmental impacts caused by physical changes of the land. In the literature a few
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 LCA studies specifically focusing on MBT plants exist: for example Abeliotis et al.
4 (2012) assessed the environmental profile of a MBT plant located in Athens; a MBTP
5 sited in Liossia (Greece) was included in the study of Papageorgiou et al. (2009); Bovea
6 et al. (2010) considered this option as one of the MSW management scenarios in their
7 Spanish case study and Juniper (2005) reviewed a number of MBT plants in Europe and
8 reported associated environmental performances. In these studies, however, the input
9 waste as well as the RDF composition was not experimentally determined and in the
10 case of Juniper (2005) the focus was specifically on the UK waste management system.
11 What was generally missing was an assessment taking into account plant-specific (and
12 experimentally investigated) waste compositions as well as local conditions including
13 actual plants efficiencies (i.e. materials and energy recovery) and type of marginal
14 energy [source](#) replaced. These may significantly affect the LCA results as was reported
15 by De Feo and Malvano (2009) when several waste management scenarios were
16 analyzed and MBT plant was one of them.
17
18
19
20
21
22
23
24

25 Bearing in mind these grey areas of the research, the objective of the present is
26 to provide an insight into the impacts that the current operation of these waste treatment
27 plants has on the environment. LCA results can be used as technical support for
28 decision-making processes since, frequently, appropriate modifications in the
29 management strategy can induce significant environmental savings. Therefore, the aims
30 of this study were: i) to assess the current environmental performance of eight selected
31 MBT plants with different operational system and waste input in order to illustrate the
32 processes contributing with significant environmental burdens or benefits; ii) to
33 compare the environmental performances of the eight MBT plants provided they treated
34 the same waste input and to illustrate the role played by the waste composition and the
35 technical performance of the individual plants (i.e. disregarding the effects of the
36 different waste compositions); iii) to highlight potential environmental improvements
37 which could be induced by changes in the management system (including both the MBT
38 technology and the associated downstream processes, e.g. RDF landfilling).
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4
5
6 **2. Methodology**

7 **2.1 The geographical region assessed: Castilla y León**

8
9 The region of Castilla y León (Spain) covers an area of 94,223 km² and has a population
10 of 2.5 million of inhabitants. More than 1.2 million tonne of waste are generated
11 annually. In the last decade 11 MBT plants have been built to treat source-segregated
12 and residual MSW (the second being 88% of the generated as mentioned earlier). Eight
13 out of these 11 plants were operating at full capacity when this research was conducted
14 and, therefore, were included in this study representing at least 80% of the residual
15 waste treatment capacity of the region. These plants can generally be classified as MBP:
16 the organic fraction is biologically stabilized after recovery of recyclables and RDF.
17 Two types of waste are received and independently treated in these facilities: i) a mix of
18 plastic and metal containers collected in separate bins (i.e. derived from household
19 source-segregation) are manually divided into a number of fractions such as ferrous
20 metals, aluminium containers, beverage cartons, LDPE (low density polyethylene),
21 HDPE (high density polyethylene) and PET (polyethylene terephthalate). ii) Residual
22 waste from households, hereinafter called 'residual MSW' (rMSW), is screened in
23 rotary sieves (trommels); the fine fraction from trommels mostly consists of organic
24 matter and is sent either to anaerobic digestion or to composting; selected recyclable
25 materials are recovered from the coarse fraction after separation of the organic. The
26 remaining fraction (RDF), representing about 40% by weight of the input rMSW, is
27 currently baled and sent to landfill. The focus of this study is on the treatment of the
28 rMSW only.
29
30
31
32
33
34
35
36
37
38
39
40
41
42

43 **2.2 MBT plants in Castilla y León: general description**

44
45 In Castilla y León the rMSW is collected and transported by collection trucks to the
46 local MBT plant. Here a first manual selection station removes bulky items to avoid
47 possible subsequent blockages. The waste stream is then conveyed to the trommel
48 where a size separation is performed. The coarse fraction is conveyed to the second
49 manual selection station where recyclable materials such as beverage cartons, LDPE,
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 HDPE and PET are separated and recovered. The residual (or RDF) is baled and sent to
4 landfill after removal and recovery of ferrous and aluminium metals by magnets and
5 eddy current systems (ECS). The fine fraction from the trommel (hereinafter named
6 organic fraction of MSW, i.e. OFMSW) is conveyed to biological treatment after
7 removal of ferrous and aluminium metals similarly to RDF. The biological treatment
8 may be of two types: I) combined anaerobic digestion and post-composting and II)
9 direct composting. Since the main difference among the plants is the biological
10 treatment, the eight MBT plants under assessment can be classified according to two
11 groups: i) *MBT type I*, where the OFMSW from the trommels is anaerobically digested
12 (hydraulic retention time, i.e. HRT, of about 20 days) and the produced biogas
13 combusted in gas motors to generate electricity and (in two cases) partly used for
14 heating the process, and ii) *MBT type II*, where the OFMSW is composted in tunnels
15 (about 20 days) and further sent to maturation windrows. In plants *type I* the digestate is
16 also further introduced into composting tunnels for about 15 days in order to stabilize
17 the undegraded organic matter and to later dry the product in maturation windrows.
18
19
20
21
22
23
24
25
26
27

28 **2.3 Waste characterization**

29
30 Eight MBT plants operating at full-capacity were investigated for a period of two years.
31 Several technical visits were conducted in different seasons, main technical features
32 inspected and samples of inputs and outputs collected and analyzed. As a result, global
33 material balances were developed for each individual MBT plant and recovery
34 efficiencies, i.e. distribution of the selected waste material fractions among the output
35 streams (i.e. transfer coefficients) were calculated.
36
37
38
39

40 The first step was to characterize the rMSW input to each plant so to define the
41 eight individual waste compositions (in terms of waste material fractions). For each
42 individual MBT plant, 16 samples (each of about 1000 kg rMSW) were taken from the
43 reception ditch. The samples were divided into quarters and two opposite sectors were
44 taken; the subsample was mixed and divided again into quarters, two of which selected
45 to compose the final sample (ca. 250 kg). This was manually sorted into 19 waste
46 material fractions according to MODECOM procedure (ADEME, 1998) and weighted
47 *in situ*.
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 In order to define an overall mass balance for the MBT plants the RDF and the
4 OFMSW were also characterized. The RDF composition was determined using the
5 same approach as for the input rMSW (16 samples were collected; 19 waste material
6 fractions were sorted and weighted from the final sample of 250 kg). For the OFMSW,
7 due to the smaller size, (smaller than 90 cm), 16 samples of 50 kg were collected. Once
8 all these streams were analyzed, the amount of recyclable materials recovered in the
9 mechanical processes can be calculated by means of a global mass balance. Similarly,
10 transfer coefficients (i.e. distribution of the waste material fractions among the output
11 streams) for selected waste materials were calculated for each individual MBT plant.
12
13
14
15
16
17
18

19 **2.4 Functional unit definition**

20 The functional unit of the LCA was the treatment of 1 tonne of wet rMSW (i.e. residual
21 MSW left-over after source-segregation at the household) with the purpose of
22 stabilizing the organic matter in order to achieve a final stabilized compost material
23 (BOE, 2005; Hogg et al., 2002). The geographical scope was Spain (Castilla y Leon).
24 The temporal scope can be approximated with '2013-2015' as technologies efficiencies,
25 waste composition and amount, transport distances and marginal energy sources ~~ies~~
26 refer to current knowledge and practices (in other words, no forecasting has been made).
27 The environmental impacts were assessed for a time horizon of 100 years, from the
28 moment when the rMSW was collected. The 'zero burden' approach was applied: all
29 upstream emissions associated with generating the waste were omitted from the LCA.
30 The chemical composition of each waste material fraction was assumed from Riber et
31 al. (2009). The boundary of the system was set at the point of rMSW collection; further
32 impacts and savings associated with downstream utilization of produced electricity (e.g.
33 from biogas or RDF combustion) and landfilling of residuals (e.g. rejects, RDF,
34 eventual incineration residuals, etc.) was accounted for by system expansion following
35 the principles of consequential LCA (Finnveden et al., 2009; ISO 2006a, ISO 2006b).
36 This implied that the products generated by the system (e.g. electricity and recycled
37 materials) substituted the relative marginal products in the market. In the particular case
38 of electricity, the marginal technology was assumed to be natural gas-fired power plants
39 based on MITYC (2011) and IDAE (2010). These indicate a trend on increasing the
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 energy provision by expanding the capacity of natural gas-based power production
4 while keeping coal and fuel oil steady. This assumption is also in accordance with other
5 recent LCA studies having Spain as geographical scope (e.g. Meneses et al., 2012). The
6 influence of this choice was tested by assessing the LCA results also for the case of coal
7 as marginal fuel-source for electricity production. For landfilling, the system was
8 credited with the savings associated with carbon sequestration over the considered 100
9 years horizon.
10
11
12
13

14 15 16 **2.5 Impact assessment**

17 The assessment was carried out according to the LCA method EDIP 1997 (Wenzel et
18 al., 1997). The assessment included several impact categories covering potential
19 burdens to air, soil, surface and groundwater and potential hazards to humans. These
20 categories were divided into three main groups: non-toxic environmental impact
21 categories (global warming – GW, photochemical ozone formation – POF, stratospheric
22 ozone depletion – SOD, acidification – AC and nutrient enrichment – NE) and toxic
23 environmental impact categories (ecotoxicity in soil – ETs and in water (chronic) –
24 ETwc, human toxicity via soil – HTs, via water – HTw and via air – HTa). To these,
25 another specific category (spoiled groundwater resources –SGR) was added in order to
26 include in the assessment the potential impacts associated with contamination of
27 groundwater. The SGR is calculated based on the amount of groundwater that may be
28 contaminated from an input of leachate by diluting the leachate to the drinking water
29 standards, as described by the guidelines provided by WHO (2006). This assumes that
30 groundwater is used as drinking water resource in the region under assessment.
31
32
33
34
35
36
37
38
39

40 In the LCA-modelling it was assumed that emissions of biogenic carbon dioxide
41 are neutral with respect to GW (i.e. global warming emission factor equals 0). With
42 respect to landfilling, this dictates that biogenic carbon left in the landfill after the LCA
43 time horizon considered (100 years) is considered as an avoided emission of carbon
44 dioxide and therefore a negative contribution (i.e. a saving) was assigned (Christensen
45 et al., 2009).
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 The assessment was facilitated with the waste management-dedicated LCA
4 software EASEWASTE (Kirkeby et al., 2006). The results were expressed as
5 characterized values (e.g. kg CO₂-eq. tonne⁻¹ ww).
6
7
8
9

10 **2.6 LCA scenarios**

11 For each type of MBT (*I* and *II*), four corresponding waste management scenarios
12 (based on the eight MBT plants investigated) were assessed: MBTP I-1, MBTP I-2,
13 MBTP I-3 and MBTP I-4 corresponding to *type I* and MBTP II-1, MBTP II-2, MBTP
14 II-3 and MBTP II-4 corresponding to *type II*. The LCA included two sets of scenarios:
15 the first set (a) consisted of the selected eight waste management scenarios (i.e. MBTP
16 I-1, MBTP I-2, MBTP I-3, MBTP I-4, MBTP II-1, MBTP II-2, MBTP II-3, MBTP II-4)
17 where the waste composition was specific for each individual plant (as investigated).
18 The second (b) consisted of the same eight waste management scenarios with the
19 difference that the waste input to the individual MBT plants was the same (average
20 waste composition for the region, see section 3). The latter allows for comparing the
21 technical performance of the individual MBT plants (including further treatments)
22 disregarding the effects of different waste compositions. The system boundary is
23 exemplified in Figure 1 for the case of scenario MBTP I-3 (a). A total of 16 scenarios
24 were therefore assessed: 8 (scenarios, i.e. I-1 to II-4) x 2 waste compositions (i.e. a and
25 b) = 16.
26
27
28
29
30
31
32
33
34
35
36

37 In addition, the potentials for optimizing the environmental performance of the
38 assessed waste management scenarios were evaluated by analyzing the following
39 changes in the management system: i) RDF incineration instead of landfilling. ii)
40 Optimization of the biological treatment: this consisted on modelling the biological
41 treatment in all the scenarios conformingly with the best performing digestion process
42 (that is, MBTP I-2, see Table 1). iii) Optimization of materials recovery: the potentials
43 for GHG savings associated with improved materials recovery at the MBT plants were
44 quantified. It was assumed that the MBT plants were upgraded with additional
45 installation of the following automatic selection units: optical separator for hard plastic
46 (4.7 kWh tonne⁻¹ ww), PET (1.5 kWh tonne⁻¹ ww), soft plastic (assumed as for hard
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 plastic), glass (glass breaker and optical glass sorting, 20 kWh tonne⁻¹ ww), aluminium
4 (ECS, 0.88 kWh tonne⁻¹ ww) and ferrous metals (magnet, 2.4 kWh tonne⁻¹ ww). Data
5 were based on Combs (2012). Paper and cardboard were included in the analysis
6 (manual separation was assumed). However, improved recovery of these may be limited
7 by the contamination with organic and the results have to be regarded only as upper
8 potentials.
9

10
11
12 Notice that in the present study no sensitivity analysis-dedicated section is
13 presented as the main scenario uncertainties associated with choices about type of
14 marginal energy source, carbon sequestration in landfills, variation of the waste
15 composition and changes in the management systems were tested and integrated within
16 the results section (3.1-3.3 and related Figures).
17
18
19
20

21
22 *Figure 1*
23
24

25 **2.7 Waste treatment technologies**

26 *2.7.1 MBT plants*

27
28 Each individual MBT plant was modelled as a combination of mechanical separation
29 and biological treatment. The recovery efficiencies of the selected waste material
30 fractions were calculated based on the experimental data. The consumption of energy of
31 each machine and operation occurring at the plant under assessment was based on
32 Combs (2012). The average electricity consumption of the assessed plants for the
33 mechanical and manual operations was estimated to 15 kWh tonne⁻¹ ww. The biological
34 treatments for both types of MBT plants were modelled according to Boldrin et al.
35 (2011) with respect to N₂O, CH₄ and NH₃ emissions. The purpose of the biological
36 treatment is the stabilization (aerobic or anaerobic or in combination) of the degradable
37 organic matter in order to achieve a final composted material having low methane
38 potential (typically < 20 Nm³ tonne⁻¹ ww) which allows sustainable landfilling with
39 decreased environmental impacts especially with respect to gas and leachate generation
40 (Stegmann, 2010; Cossu et al., 2003). The residual methane potential of the stabilized
41 organic matter was assumed 15 Nm³ tonne⁻¹ ww according to previous studies
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 (Manfredi et al., 2010a). The corresponding CH₄ emissions occurring in the landfill
4 were accounted for in the LCA.
5
6
7
8
9

10
11 *MBT type I*

12 Biological treatment in *MBT type I* was modelled as a combination of anaerobic
13 digestion and post-composting. The OFMSW screened from the trommels, after a
14 pretreatment based on water addition, was fed to the anaerobic reactor in a continuous
15 flow process. The biogas net electricity production was based on specific data from the
16 plants operators (Table 1). The methane content in the biogas was 65% per volume. The
17 fugitive methane emissions from the reactor were set to 1% of the produced CH₄ based
18 on recent LCA studies (Böriesson and Berglund, 2006; Jungbluth et al., 2007; Hamelin
19 et al., 2011.). Unburned methane in the gas engine was assumed 434 g CH₄/MJ
20 combusted based on Nielsen et al. (2010). After ca. 20 days, the digestate was sent to
21 post-composting. The post-composting phase consisted of about 20 days in composting
22 tunnels (see section *MBT type II*) followed by a maturation period of about 2 months in
23 order to achieve a final stabilized quality. The carbon degradation during post-
24 composting was estimated based on mass balances (see supporting information, SI).
25 Emissions of CH₄, N₂O and NH₃ were considered the main products of degradation (see
26 section *MBT type II*). According to current practices, the final product (compost,
27 currently used as daily cover in the adjacent landfills) was landfilled despite the
28 refinement was carried out. Similarly, the reject of this refining process was also
29 landfilled.
30
31
32
33
34
35
36
37
38
39
40
41
42

43 *Table 1*
44
45

46
47 *MBT type II*

48 Biological treatment in *MBT type II* was modelled as composting tunnels based on a
49 full-scale operating plant located in Italy (Boldrin et al., 2011). The degradation of each
50 material fraction was modelled as a percentage of the VS content in the incoming waste;
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 this corresponded to about 70% VS degradation for organic waste such as animal and
4 vegetable food waste, 60% for yard waste, 10-20% for paper and cardboard fractions
5 and 5% for beverage cartons and textiles. OFMSW and electricity consumption (about
6 20-25 kWh tonne⁻¹ ww depending on the plant) were the main inputs to the composting
7 process whereas compost, rejects from refining processes and emissions of CH₄, N₂O
8 and NH₃ were the main outputs. According to Boldrin et al. (2011), the fugitive CH₄
9 emissions were set to 0.2% of the degraded carbon, N₂O emissions to 1.4% of the
10 degraded nitrogen. About 98.5% of the degraded nitrogen was in the form of NH₃ of
11 which 99% was assumed oxidized in biofilters (Boldrin et al. 2011) which are the
12 current air treatment system at the assessed plants. The compost and the rejects were
13 assumed landfilled according to current practices.
14
15
16
17
18
19
20
21

22 *2.7.2. Associated waste treatment technologies*

23 The remaining waste treatment technologies associated to the MBT plants (collection
24 and transport, landfilling, recycling and incineration) are thoroughly detailed in the
25 supporting information (SI).
26
27
28
29

30 **3. Results and discussion**

31
32 The composition of the rMSW as well as RDF of the individual MBT plants is shown in
33 Table 2 along with the average rMSW composition for the region. This included two
34 additional MBT plants located in Castilla y León (which are not addressed in this
35 study). The recovery efficiencies (i.e. percent of each individual waste material
36 recovered) calculated for each individual MBT plant is detailed in Table 3.
37
38
39

40 On a wet basis, the rMSW was composed by about 50% organic matter, 14%
41 paper and cardboard and 11% plastics. Based on trommel separation, the recovery
42 efficiencies for organic matter (i.e. share sent to biological treatment) were above 80%
43 for all plants. However, these 'organic' streams contained high percentages of improper
44 materials as highlighted in previous studies (Montejo et al., 2010). Paper, cardboard,
45 glass, beverage cartons and the different types of plastic are recovered manually in these
46 MBT plants hence recovery efficiencies varied widely. Ferrous and aluminium metals
47 were mechanically separated, therefore the relative recovery efficiencies were generally
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 higher compared with the remaining waste materials. The residual (named RDF) was
4 mainly composed of organic matter (about 25%), paper and cardboard (about 30%) and
5 plastic (about 25%). This fraction is currently landfilled (Montejo et al., 2011) despite
6 its high calorific value (up to 18 MJ kg⁻¹ ww). For the scenarios under assessment a
7 biogenic carbon balance is also reported (Table S1).
8
9

10
11
12 *Table 2*

13
14 *Table 3*

15
16
17
18 The LCA results for the eight scenarios are shown in Figure 2-3. These included the a)
19 ‘waste-specific’ results (i.e. environmental impacts associated with the individual
20 scenarios provided the waste input is specific for each individual MBT plant) and b)
21 ‘waste-average’ results (where the waste input is the average for ‘Castilla y León’ for all
22 the scenarios). The latter allows for comparing the technical performance of the
23 individual MBT plants disregarding the effects associated with differences in the waste
24 compositions. The impacts of the principal processes involved have been detailed in the
25 charts. The processes were grouped into: i) Transportation (waste collection and
26 transport of recovered materials and rejects), ii) Mechanical treatment (mechanical
27 material recovery), iii) Biological processes (composting or combined process with
28 anaerobic digestion and post-composting), iv) Recycling (facilities where recovered
29 materials are reprocessed) and v) Landfilling (of all the compost, rejects and RDF
30 generated). Impacts/savings for the individual waste management scenarios were
31 obtained by subtracting the avoided impacts (negative values in the figures) from the
32 induced impacts (positive values). Any net value below the zero axes thus indicates an
33 environmental improvement as compared with the fossil fuel reference (in which
34 electricity is provided by natural gas and materials are produced from virgin resources;
35 no environmental burden is assumed embedded in the waste input). In addition, the
36 overall LCA results in the case of coal being the marginal source for electricity
37 production are also displayed (‘cross indicator’). Notice that the discussion in section
38 3.1-3.3 (e.g. numerical LCA results reported) focuses on the case where natural gas is
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 the marginal energy source, unless otherwise specified. Normalized LCA results were
4 also calculated and can be found in the SI.
5
6

7
8 *Figure 2*

9
10 *Figure 3*

11 12 13 **3.1 'Waste-specific' results (current performance)**

14 15 *3.1.1 Non-toxic impact categories*

16
17 On GW all the scenarios contributed with environmental savings. This was expected as
18 a zero-burden approach is assumed. However, the magnitude of the savings varied
19 depending on the scenario (which relates to the type of MBT plant, i.e. *I* or *II*) and on
20 the type of marginal energy source considered, that is, natural gas or coal. The choice of
21 natural gas determines that the energy recovery processes are less beneficial on GW
22 compared with choosing coal. This is also expected as coal has a significantly higher
23 GHG emission factor than natural gas (in this study: 1.1 vs. 0.49 kg CO₂-eq. kWh⁻¹).
24
25 This finally implicates that, when natural gas is the marginal energy source, most GHG
26 savings are provided by other processes than energy recovery's, for example recycling
27 or carbon sequestration in the landfill. The overall GW savings ranged from -340 for
28 MBTP II-1 (*type II*) to -120 kg CO₂-eq. tonne⁻¹ ww for MBTP II-2 (*type II*). There was
29 no clear evidence that scenarios with *type I* were better than *II* or vice versa. In fact, as
30 opposed to previous studies on similar subjects (e.g. Manfredi et al., 2011; Boldrin et
31 al., 2011) where anaerobic digestion of the organic matter was concluded to be
32 favourable over direct composting, in the present this was not the case. The primary
33 reason for this was the wide variation of energy and materials recovery efficiencies
34 across the eight scenarios. For example, MBTP I-1 and MBTP I-2 had high electricity
35 recovery but scarce materials recovery efficiencies. In addition, methane production was
36 lower than in the other *MBT type II*. Second, in the aforementioned studies coal was
37 generally assumed as marginal energy source; this determined significantly higher
38 benefits associated with the energy recovery processes.
39
40
41
42
43
44
45
46
47
48
49
50

51 For all the scenarios the environmental savings were primarily associated with
52 (Figure 2a): (1) recycling, (2) landfilling (carbon sequestration) and (3) biological
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 processes (substitution of fossil fuel through energy produced during anaerobic
4 digestion). (1) Recycling determined significant savings in all scenarios; these were
5 largely dependent on the total amount of recovered materials (i.e. product of plant
6 separation efficiency and input material amount) particularly with respect to i) paper, ii)
7 plastic and iii) metals. The greatest savings were found for MBTP II-1, MBTP II-2 and
8 MBTP II-4 (-250, -240 and -230 kg CO₂-eq. tonne⁻¹ ww, respectively) which also
9 showed the highest recovery efficiencies for these recyclables (Table 3). These results
10 are in agreement with previous studies focused on recycling of different materials
11 (Damgaard et al., 2009; Manfredi et al., 2011; Merrild et al., 2009; Merrild et al., 2012;
12 Tonini [and Astrup et al.](#) (2012a)). (2) Landfilling of compost (that is, stabilized organic)
13 and RDF resulted in significant GW benefits for all the scenarios (ranging between -200
14 (MBTP II-4) and -140 (MBTP I-4) kg CO₂-eq. tonne⁻¹ ww); these savings were
15 completely associated with carbon sequestration whereas minor impacts (about 15-25
16 kg CO₂-eq. tonne⁻¹ ww) were a consequence of residual methane emissions and energy
17 consumption for the operations. Between 84% and 91% of the total biogenic carbon
18 sequestered was associated with the RDF and between 9% and 16% with compost and
19 rejects from the biological treatment (see Table S1). These results are in agreement with
20 the findings of previous studies (e.g. Manfredi et al., 2009, Manfredi et al., 2010b, and
21 Manfredi et al., 2011) where potential savings associated with carbon sequestration
22 were illustrated for different waste types. (3) Biological processes resulted in GW
23 savings only for MBTP I-2 when natural gas was the marginal energy [source](#) thanks to
24 the significant electricity recovery. When coal was the marginal energy [source](#) also
25 MBTP I-1 achieved net GHG savings. For all the scenarios, the GHG emissions (CO₂-
26 eq. tonne⁻¹ ww) ranged from -7 to 48 in the case of natural gas and -48 to 75 kg in the
27 case of coal. As shown by the results for MBTP I-3 and MBTP I-4, a gross electricity
28 efficiency of 13-14% was not sufficient to assure 'GHG-neutrality' to the biological
29 treatment itself (i.e. to compensate the impacts due to the emissions and consumptions)
30 neither in the case of natural gas nor coal as marginal [energiesenergy sources](#). However,
31 an optimized use of the biogas-energy through, for example, maximization of the
32 electricity production and later use of the waste heat from the gas engine to heat the
33 digestion process may drastically increase the associated GHG savings. Additional
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 environmental impacts were caused by mechanical treatment to separate organic matter
4 and recyclables (ca. 8.5 kg CO₂-eq. tonne⁻¹ ww due to energy consumption) and
5 transportation (between 17 and 40 kg CO₂-eq. tonne⁻¹ ww depending on the amount of
6 recyclables transported).
7
8

9 The results for AC and NE followed a similar trend among the assessed
10 scenarios. On both categories recycling was the most important contributor to the
11 savings. All the other processes determined environmental impacts, primarily related to
12 (the order reflecting the relevance): NH₃ emissions from composting (biological
13 processes), NH₃ and PO₄³⁻ from landfilling (leachate) and NO_x (transportation). On NE
14 NO_x and NH₃ emissions exceeded the avoided N-emissions associated with recycling
15 determining an overall impact on this category in all the addressed scenarios. This was
16 not the case for AC where only one scenario performed with a net impact (MBTP II-2)
17 due to scarce materials recovery efficiencies at the MBT. This could be avoided by, for
18 example, optimizing metals (particularly aluminium) recovery.
19
20
21
22
23
24

25 Regarding the remaining non-toxic categories, no remarkable differences among
26 the scenarios were found in the categories SOD and SGR (Table S3). Here the impact
27 was totally caused by landfilling (due to CFCs and ammonia emissions to groundwater
28 through leachate). On POF impacts were primarily caused by transportation (VOCs)
29 and to a minor extent by landfilling and biological processes (fugitive CH₄ emissions).
30
31
32
33
34

35 *3.1.2 Toxic impact categories*

36 As illustrated in Figure 3a, the results on the toxic categories ETwc, HTw and HTs
37 highlighted the benefits associated with recycling to which all the environmental
38 savings were connected across the different scenarios. As a consequence, the scenarios
39 with highly efficient recovery of recyclables at the MBT plant achieved the greatest
40 performances. Particularly, the recovery efficiency of aluminium determined the
41 performances on ETwc, HTs and, to a minor extent, also on HTw: the higher the overall
42 recovery at the MBT (see Table 3) the better the results; the impacts were mostly due to
43 transportation and landfilling as a consequence of metals emissions (through leachate)
44 and uncombusted hydrocarbons (transportation). On ETwc only the scenarios with
45 aluminium recovery efficiency at the MBT above 60% achieved environmental savings
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 (that is, MBTP I-1, MBTP I-2, MBTP I-4 and MBTP II-4); the impacts from transport
4 and landfilling were comparable for all scenarios. On HTw the performance was mainly
5 related to energy and aluminium recovery (and consequent avoided emissions from
6 fossil fuel combustion and virgin material production): the scenarios with direct
7 composting and scarce recovery efficiencies (that is, MBTP II-2, MBTP II-3 and MBTP
8 I-4) performed therefore worst. All the assessed scenarios performed with impacts on
9 HTa (Table S3); this was principally attributed to VOCs emissions from transportation.
10 The impacts on ETs (not shown) were negligible compared with the remaining
11 categories.
12
13
14
15
16
17
18

19 **3.2 ‘Waste-average’ results (current performance)**

20 Figure 2b-3b allows for comparing the scenarios disregarding the effects associated
21 with the differences in the waste composition thus gaining insight into the technical
22 performances of the MBT plants investigated. The results for GW highlighted that,
23 generally, the performance of the scenarios with *MBT type I* was better than *type II*
24 provided high electricity recovery (e.g. MBTP I-1 and MBTP I-2). It should be noted
25 how the overall magnitude of the GW performance was affected by the changes in the
26 waste composition. The paramount average variation of GHG savings between case a
27 and b (i.e. absolute average GHG variation of the eight scenarios) corresponded to about
28 22%. The largest variation was seen for MBTP II-2 (40% net increase of GHG savings)
29 as a consequence of the increased content of ferrous metals, paper and cardboard in the
30 input waste composition.
31
32
33
34
35
36
37

38 The results for AC and NE reflected the overall materials recovery (and
39 consequent recycling) efficiency: MBTP II-4 performed best thanks to higher recovery
40 for aluminium, plastic, cartons and paper compared with the remaining scenarios.
41 However, as opposed to AC, on NE all the scenarios contributed with environmental
42 impacts as a consequence of higher N-emissions from composting and landfills in
43 comparison with the avoided N-emissions connected to recycling. Yet, efficient material
44 recovery at MBT has the potential to mitigate the overall NE impact (e.g. see MBTP II-
45 4). The impacts on the remaining non-toxic categories (POF, SOD and SGR) were
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 primarily due to landfilling and transportation as earlier described; the magnitude was
4 comparable for all the scenarios (Table S3).
5

6 On ETwc and HTs the results were mainly affected by the amount of recovered
7 aluminium (which determines the most significant savings on these categories as earlier
8 described): the scenarios having the lowest recovery efficiency at the MBT (MBTP I-3,
9 MBTP II-1 and MBTP II-2, see Table 3) were the worst. It can be noticed that the
10 overall performance of MBTP I-1 and MBTP II-4 decreased in (b) compared with (a) as
11 a result of the diminished share of aluminium in the average ‘Castilla y León’ waste
12 composition compared with the specific waste input to these plants (Table 2). In HTw
13 the major savings were associated with recycling of paper and aluminium and also, to a
14 minor extent (when natural gas is the marginal ~~energy~~ source) energy recovery, as earlier
15 described. The combination of no-energy as well as low materials recovery determined
16 net impacts in the case of MBTP II-2. This also applied to MBTP I-4 and to all
17 scenarios with *MBT type II* when coal was the marginal energy source. All the
18 addressed scenarios contributed with comparable impacts (see Table S3) on HTa; these
19 were primarily attributed to transportation as earlier described.
20
21
22
23
24
25
26
27
28
29

30 **3.3 Potentials for optimizing the environmental performance**

31 Figure 4-5 shows the environmental consequences in terms of benefits and/or impacts
32 associated with potentially improved waste management scenarios (i, ii and iii). The
33 bars in Figure 4 indicate the net difference in the environmental impact or saving
34 between the improved and the baseline scenario that is set to zero and used as reference
35 (i.e. Δ saving or Δ impact = improved value – baseline value): a bar pointing towards
36 negative values indicates that the improved scenario achieved increased environmental
37 savings compared with the baseline (and viceversa). The waste-specific scenarios were
38 used as baseline. Figure 4(i) shows the variation in the environmental performance in
39 the case that RDF was incinerated instead of landfilled. Figure 4(ii) shows the variation
40 when the organic matter is anaerobically digested with optimized energy recovery (see
41 section 2.6) instead of ‘directly’ composted.
42
43
44
45
46
47
48
49

50 Figure 5 shows the paramount average GHG emissions (i.e. average of the eight
51 scenarios) associated with 100% material recovery at the MBT or, alternatively, 100%
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 material incineration, relative to the baseline LCA results. These were set to zero and
4 used as reference. Thus, any value below zero represents a saving compared with the
5 baseline (and viceversa). Table S4 reports the detailed results for the individual
6 scenarios. This analysis was performed to illustrate the potentials for GHG savings
7 associated with the management of the individual waste materials.
8
9

10 The results (Figure 4-5) showed that from a GHG perspective significant
11 environmental improvements may be achieved by a combination of the following (the
12 order reflecting the relevance): 1) increased materials recovery (primarily metals and
13 plastic) and 2) optimized biological treatment of OFMSW. Incineration of RDF (instead
14 of landfilling) was beneficial only if coal was the marginal energy [source](#). These results
15 are in agreement with Arena et al. (2003) where one MBT plant was considered as one
16 of the waste management scenarios. Overall, optimization of metals and plastic
17 recovery should be prioritized. This would enhance the environmental performance on
18 all environmental categories (exemplified in Figure 5 for GW). The associated savings
19 varied across the scenarios depending upon the waste composition. In the case of paper
20 and cardboard, additional savings from improved recovery are dramatically dependent
21 upon the assumptions regarding C sequestration and therefore the considered time
22 horizon. If C sequestered was not accounted, the additional savings from paper
23 recycling compared with landfilling would be much more significant (Figure 5 and
24 Table S4).
25
26
27
28
29
30
31
32
33
34

35 Optimization of the biological treatment also induced additional GW savings
36 (between -8 and -93 kg CO₂-eq. tonne⁻¹ ww). Note that biogas may also provide
37 additional benefits in relation to storability and flexibility of use in the perspective of
38 future energy systems with increased penetration of wind and other fluctuating
39 renewables such as photovoltaic and tides (among the others: Lund, 2007; Mathiesen et
40 al., 2011a; Mathiesen et al., 2011b; Tonini and Astrup, 2012b).
41
42
43
44

45 As aforementioned RDF incineration decreased the GW performances compared
46 with landfilling when C sequestration was accounted for along with natural gas as
47 marginal energy [source](#). The reason for this was that the CO₂ savings from avoided
48 natural gas combustion were largely compensated by waste-specific CO₂ emissions
49 (from plastic). As opposite to this, the GHG performance was instead improved
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 compared with the baseline (landfilling) when coal was the marginal energy [source](#)
4 (Figure 4). This indicates that RDF should be used to substitute for fossil fuels with
5 higher emission factor than that of coal (see also 3.3.1). Additionally, RDF incineration
6 strongly mitigated the impact potential on all the remaining categories, particularly on
7 SGR. The latter was on average reduced down to ca. 1/3 of the current impact potential.
8
9

10
11
12 *Figure 4*

13
14 *Figure 5*

15
16
17 *3.3.1 Energy from RDF: effects of energy efficiency, plastic recovery and fuel*
18 *substituted on GW*

19
20 As aforementioned RDF incineration resulted in worse GHG performance compared
21 with the baseline (landfilling) when natural gas was the marginal energy [source](#). This
22 may change if: 1) the electricity efficiency of the combustion process increases, 2)
23 sorting and recovery of plastic at the MBT is applied prior to RDF incineration, and 3)
24 the substituted fuel has higher CO₂ emission factor than that of natural gas. The first (1)
25 was assessed by identifying the net electricity efficiency ($\eta_{\text{power plant}}$) that should be
26 achieved at the dedicated RDF incinerator (or a generic power plant) in order to equal
27 the same GHG savings of the baseline (where plastic along with the remaining RDF is
28 landfilled and carbon from paper and organic is sequestered). The calculation was
29 performed according to Equation S1 (SI). Similarly, for the second (2), the plastic
30 recovery efficiency (η_{rec}) that should be achieved at the individual MBT plants to equal
31 the GHG performance of the baseline was evaluated. The calculation was performed
32 according to Equation S2 (SI). The third (3) was earlier exemplified in the case of coal
33 as marginal energy [source](#) (section 3.3). However, Equation S3 (SI) allows recalculating
34 the specific CO₂ emission factor that the ‘substituted fuel’ (EF_{fuel}) should assume in the
35 individual MBT scenarios to equal the GHG performance of the baseline. As reported in
36 Table S5, a net electricity efficiency of 49-53% should be achieved to equal the GHG
37 performance of the baseline. Alternatively, recovery efficiency at the MBTs greater than
38 85-100% should be achieved for the considered recyclable plastic fractions (see SI). The
39 CO₂ emission factor of the ‘fuel substituted’ varied between 67 and 72 kg CO₂-eq. MJ⁻¹
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 depending on the scenario (Table S5). Thus, the substitution of any fuel having
4 emission factor above this range would induce net GHG savings compared with the
5 baseline (RDF landfilling). This might be the case, for example, of substitution of light
6 oil, heavy fuel oil or coal (emission factors greater than 80 kg CO₂-eq. MJ⁻¹).
7
8
9

10 **3.4 Perspectives**

11
12 The results of this research suggest that the assessed MBT plants, even if recently
13 commissioned, aim at a safe disposal (e.g. stabilization of the OFMSW prior to
14 landfilling) rather than at maximizing energy and materials recovery. In this
15 perspective, large potentials exist to optimize the environmental performance, thereby
16 changing the perception on MSW from ‘waste to be disposed’ to ‘resource and energy
17 carrier’. Table S6 presents an overview of the total annual GHG savings that could be
18 achieved in each individual MBT plant by optimizing biogas-energy and materials
19 recovery (RDF is assumed landfilled). A total was also estimated. Overall, the estimated
20 potential for GHG emission savings equalled ca. 180,000-190,000 tonne CO₂-eq. y⁻¹
21 depending on the assumption for the marginal electricity source.
22
23
24
25
26
27
28

29 The fact that the biggest savings are associated with recovery/recycling along
30 with the scarce GHG performance of RDF incineration (under the assumptions made
31 about marginal electricity source and carbon sequestration) highlight that optimization
32 of materials recovery is crucial, if the focus is mitigating GHG emissions. Future studies
33 should thus focus on evaluating alternative options to maximize recycling: these should
34 include source-segregation strategies to be integrated with optimized mechanical-
35 biological treatment. In addition, optimal strategies for energy recovery from RDF
36 should also be further evaluated, likely including heat recovery (for example for
37 industry or for district heating/cooling), co-firing in dedicated large scale power plants
38 or in cement kilns, to maximize the total energy recovery.
39
40
41
42
43
44
45

46 **4. Conclusion**

47
48 From a GHG perspective the results documented that the environmental performance of
49 the current waste management is primarily connected with material recovery, carbon
50 sequestration in landfill and energy recovery through anaerobic digestion of the organic
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3 matter. The waste composition principally affected the magnitude of the benefits
4 associated with recycling. These varied widely across the assessed scenarios depending
5 on both waste composition and recovery efficiencies at the MBT. On the remaining
6 environmental categories the performance was primarily dictated by the amount of
7 recovered materials.
8
9

10
11 Overall, MBT plants with efficient energy recovery from the biogas performed
12 better. High recovery efficiency for paper, plastic and metals determined significant
13 environmental savings on the non-toxic categories whereas high recovery efficiency for
14 aluminium induced considerable benefits on the toxic.
15
16

17 The recommendation for upgrading and/or commissioning of future plants is therefore
18 to optimize materials recovery through increased automation of the selection and to
19 prioritize biogas-electricity production from the OFMSW (with further re-use of the
20 waste heat within the digestion process) over direct composting. The optimal strategy
21 for RDF management depends upon the environmental compartment to be prioritized
22 and the type of marginal energy source in the system. To this respect, further
23 investigations are needed.
24
25
26
27
28
29

30 **Supporting information**

31 Additional information on: life cycle inventory of waste treatment technologies, carbon
32 balance and LCA results is available free of charge via the Internet at
33 <http://www.sciencedirect.com>.
34
35
36

37 **Acknowledgements**

38 The authors gratefully acknowledge the financial support from the Junta de Castilla y
39 León (Spain).
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

5. References

- Abeliotis, K., Kalogeropoulos, A., Lasaridi, K., 2012. Life Cycle Assessment of the MBT plant in Ano Liossia, Athens, Greece. *Waste Manage.* 32, 213-219.
- ADEME, 1998. Agence de l'Environnement et de la Maîtrise de l'Energie. MODECOM TM: Method for characterization of domestic waste. ADEME. Paris, pp. 61.
- Arena, U., Mastellone, M.L., Perugini, F., 2003. The environmental performance of alternative solid waste management options: a life cycle assessment study. *Chem. Eng. J.* 96, 207-222.
- Bilitewski, B., Oros, C., Christensen T.H., 2011. Mechanical Biological Treatment, in Christensen T.H. (Ed), *Solid Waste Technology and Management*. Willey & Sons, London.
- BOE, 2005. RD 824/2005 on fertilizer products. *Boletín Oficial del Estado* de 19 de julio de 2005, 171, 25592-25669. Available on web: <www.boe.es/boe/dias/2005/07/19/pdfs/A25592-25669.pdf>
- Boldrin, A., Neidel, T.L., Damgaard, A., Bhandar, G.S., Møller, J., ~~and~~ Christensen, T.H., 2011. Modelling of environmental impacts form biological treatment of organic municipal waste in EASEWASTE. *Waste Manage.* 31, 619-630.
- Börjesson, P., ~~and~~ Berglund, M., 2006. Environmental systems analysis of biogas systems - Part I: Fuel-cycle emissions. *Biomass Bioenerg.* 30, 469-485.
- Bovea, M.D., Ibáñez-Forés, V., Gallardo, A., Colomer-Mendoza, F.J., 2010. Environmental assessment of alternative municipal solid waste management strategies. A Spanish case study. *Waste Manage.* 30, 2383-2395.
- CEC, 1999. Council Directive 1999/31/EC on the landfill of waste. *Official Journal of the European Communities* L 182/1. Available at: http://www.central2013.eu/fileadmin/user_upload/Downloads/Document_Centre/OP_Resources/Landfill_Directive_1999_31_EC.pdf (accessed 12.12).
- Christensen, T.H., Gentil, E., Boldrin, A., Larsen, A.W., Weidema, B.P., Hauschild, M., 2009. C balance, carbon dioxide emissions and global warming potentials in LCA-modelling of waste management systems. *Waste Manage. Res.* 27, 696-706.
- Combs, A.R., 2012. Life Cycle Analysis of Recycling Facilities in a Carbon Constrained World. MS thesis, NC State Dept of Civil, Construction, and Environmental Engineering, North Carolina, USA.

1
2
3 Cossu, R., Raga, R., Rossetti, D., 2003. The PAF model: an integrated approach for
4 landfill sustainability. *Waste Manage.* 23, 37-44.

5
6 | Damgaard, A., Larsen, A.W., Christensen, T.H., 2009. Recycling of metals: accounting
7 of greenhouse gases and global warming contributions. *Waste Manage. Res.* 27, 773-
8 780.

9
10 | De Feo, G., Malvano, C., 2009. The use of LCA in selecting the best MSW
11 management system. *Waste Manage.* 29, 1901-1915.

Formatted: English (U.S.)

12
13 ECN, 2009. Personal Communication with Josef Barth, Managing Director, European
14 Compost Network (ECN).

15
16 Finnveden, G., Hauschild, M.Z., Ekvall, T., Guine, J., Heijungs, R., Hellweg, S.,
17 | Koehler, A., Pennington, D., Suh, S., 2009. Recent developments in Life Cycle
18 Assessment. *J. Environ. Manage.* 91, 1-21.

19
20 | Hamelin, L., Wesnaes, M., Wenzel, H., Petersen, B.M., (2011). Environmental
21 Consequences of Future Biogas Technologies Based on Separated Slurry. *Environ. Sci.*
22 *Technol.* 45, 5869-5877.

23
24 Hogg, D., Barth, J., Favoino, E., Centemero, M., Caimi, V., Amlinger, F., Devliegher,
25 W., Brinton, W., Antler, S., 2002. Comparison of compost standards within the EU,
26 Northamerica and Australasia” Main report. The Waste and Resources Action
27 Programme. Available at:
28 [http://www.compostingvermont.org/pdf/WRAP_Comparison_of_Compost_Standards_](http://www.compostingvermont.org/pdf/WRAP_Comparison_of_Compost_Standards_2002.pdf)
29 [2002.pdf](http://www.compostingvermont.org/pdf/WRAP_Comparison_of_Compost_Standards_2002.pdf) (accessed 12.12).

30
31 | IDAE, (2010). Spain’s national renewable energy action plan 2011-2020. Available at:
32 [http://pvtrin.eu/assets/media/PDF/EU_POLICIES/National%20Renewable%20Energy](http://pvtrin.eu/assets/media/PDF/EU_POLICIES/National%20Renewable%20Energy%20Action%20Plan/202.pdf)
33 [%20Action%20Plan/202.pdf](http://pvtrin.eu/assets/media/PDF/EU_POLICIES/National%20Renewable%20Energy%20Action%20Plan/202.pdf) or at
34 http://ec.europa.eu/energy/renewables/action_plan_en.htm (accessed 12.12).

35
36 | ISO, 2006a. Environmental Management-Life Cycle Assessment-Principles and
37 Framework. 2nd ed. 2006; ISO 14040.

38
39 | ISO, 2006b. Environmental Management-Life Cycle Assessment-Requirements and
40 Guidelines. 1st ed. 2006; ISO 14040.

41
42 | Jungbluth, N., Chudacoff, M., Dauriat, A., Dinkel, F., Doka, G., Faist, E.M.,
43 Gnansounou, E., Kljun, N., Schleiss, K., Spielmann, M., Stettler, C., Sutter, J., 2007.
44 Life Cycle Inventories of Bioenergy. Uster (Switzerland): Swiss Centre for Life Cycle
45 Inventories, ESU-services, Ecoinvent report No 17.

1
2
3 Juniper Consultancy Services Ltd., 2005. MBT: a Guide for Decision Makers:
4 Processes-Policies-Markets. Available at: [http://www.wmaa.asn.au/event-
6 documents/2012skm/awt/or/Summary-Report.pdf](http://www.wmaa.asn.au/event-
5 documents/2012skm/awt/or/Summary-Report.pdf) (accessed 12.12).

7 Kirkeby, J.T., Hansen, T.L., Birgisdóttir, H., Bhandar, G.S., Hauschild, M.Z.,
8 Christensen, T.H., 2006. Environmental assessment of solid waste systems and
9 technologies: EASEWASTE. *Waste Manage. Res.* 24, 3-15.

10
11 Lund H., 2007. Renewable energy strategies for sustainable development. *Energy* 32,
12 912–919.

13
14 Manfredi, S., Christensen, T.H., Scharff, H., 2009. Landfilling of waste: accounting of
15 greenhouse gases and global warming contributions. *Waste Manage. Res.* 27, 825-836.

16
17 Manfredi, S., Christensen, T.H., Scharff, H., Joeri, J., 2010a. Environmental assessment
18 of low-organic waste landfill scenarios by means of life-cycle assessment modelling
19 (EASEWASTE). *Waste Manage. Res.* 28(2), 130-140.

20
21 Manfredi, S., Tonini, D., Christensen, T.H., 2010b. Contribution of individual waste
22 fractions to the environmental impacts from landfilling of municipal solid waste. *Waste
23 Manage.* 30, 433-440.

24
25 Manfredi, S., Tonini, D., Christensen, T.H., 2011. Environmental assessment of
26 different management options for individual waste fractions by means of life-cycle
27 assessment modelling. *Resour. Conserv. Recycl.* 55, 995-1004.

28
29 Mathiesen, B.V., Lund, H., Hvelplund, F.K., Connolly, D., Bentsen, N.S., Tonini, D.,
30 Hansen, K., [2011a](#). CEESA 100% Renewable Energy Scenarios towards 2050. Aalborg
31 (Denmark): Aalborg University. ~~;[2011a](#);~~ <http://www.ceesa.plan.aau.dk> (accessed
32 12.12).

33
34 Mathiesen, B.V., Lund, H., Karlsson, K., 2011b. 100% Renewable energy systems,
35 climate mitigation and economic growth. *Appl. Energy* 88, 488–501.

36
37 Meneses, M., Pasqualino, J., Castells, F., 2012. Environmental assessment of the milk
38 life cycle: The effect of packaging selection and the variability of milk production data.
39 *J. Environ. Manage.* 107, 76-83.

40
41 Merrild, H., Damgaard, A., Christensen, T.H., 2009. Recycling of paper: accounting of
42 greenhouse gases and global warming contributions. *Waste Manage. Res.* 27, 746-753.

43
44 Merrild, H., Larsen, A.W., Christensen, T.H., 2012. Assessing recycling versus
45 incineration of key materials in municipal waste: The importance of efficient energy
46 recovery and transport distances. *Waste Manage.* 32, 1009-1018.

1
2
3 MITYC, 2011. Ministerio de Industria, Turismo y Comercio. La energía en España
4 2010. Secretaría General Técnica, Madrid. Available at
5 [http://www.minetur.gob.es/energia/balances/balances/librosenergia/energia_espana_201](http://www.minetur.gob.es/energia/balances/balances/librosenergia/energia_espana_2012_2ed.pdf)
6 [2_2ed.pdf](http://www.minetur.gob.es/energia/balances/balances/librosenergia/energia_espana_2012_2ed.pdf) (accessed 12.12).

7
8 MMA, 2006. Medio Ambiente en España 2005. Ministerio de Medio Ambiente. Centro
9 de publicaciones, Secretaria General Técnica. Available at:
10 [http://www.marm.es/es/estadistica/temas/estadisticas-ambientales/index2010-10-](http://www.marm.es/es/estadistica/temas/estadisticas-ambientales/index2010-10-29_23.19.09.1624.aspx)
11 [29_23.19.09.1624.aspx](http://www.marm.es/es/estadistica/temas/estadisticas-ambientales/index2010-10-29_23.19.09.1624.aspx) (accessed 12.12).

12
13 MMA, 2010. Ministerio de Medio Ambiente. Perfil ambiental de España 2010. Centro
14 de publicaciones. Secretaría Técnica. Available at:
15 http://www.magrama.gob.es/es/ministerio/servicios/publicaciones/D_Gesti%C3%B3n_r
16 [esiduos_tcm7-164926.pdf](http://www.magrama.gob.es/es/ministerio/servicios/publicaciones/D_Gesti%C3%B3n_r) (accessed 12.12)

17
18
19
20 Montejo, C., Costa, C., Ramos, P, Márquez, M.C., 2010. Analysis of the presence of
21 improper materials in the composting process performed in ten MBT plants. *Bioresour.*
22 *Technol.* 101, 8267-8272.

23
24 Montejo, C., Costa, C., Ramos, P, Márquez, M.C., 2011. Analysis and comparison of
25 municipal solid waste and reject fraction as fuels for incineration plants. *Appl. Therm.*
26 *Eng.* 31, 2135-2140.

27
28
29 Nielsen, M., Nielsen, O., Thomsen, M., 2010. Emissions from decentralised CHP plants
30 2007. Environmental project no. 07/1882. Project report 5 – Emission factors and
31 emission inventory for decentralised CHP production. National Environmental Research
32 Institute, Aarhus University. Available at: <http://www.dmu.dk/Pub/FR786.pdf> (accessed
33 12.12).

34
35
36 Papageorgiou, A., Karagiannidis, A., Barton, J.R., Kalogirou, E., 2009. Municipal solid
37 waste management scenarios for Attica and their greenhouse gas emission impact.
38 *Waste Manag. Res.* 27, 928-937.

39
40 Riber, C., Petersen, C., Christensen, T.H., 2009. Chemical composition of material
41 fractions in Danish household waste. *Waste Manage.* 29, 1251–1257.

42
43 Stegmann, R., 2010. Landfilling: MBP Waste Landfills, in Christensen T.H. (Ed) *Solid*
44 *Waste Technology & Management*. John Wiley & Sons, Ltd, pp. 788-799.

45
46
47 Tonini, D., Astrup, T., 2012a. Life-cycle assessment of a waste refinery process for
48 enzymatic treatment of municipal solid waste. *Waste Manage.* 2012, 32, 165-76.

49
50
51 Tonini, D., Astrup, T., 2012b. Life-cycle assessment of biomass-based energy systems:
52 a case study for Denmark. *Appl. Energy* 99, 234-246.

1
2
3 Wenzel, H., Hauschild, M.Z., Alting, L., 1997. Environmental Assessment of Products.
4 Methodology, tools and case studies in product development. Vol 1. Chapman & Hall,
5 London, England.
6

7
8 World Health Organization, WHO, 2006. Guidelines for Drinking-water Quality – First
9 addendum to third edition. Volume 1. ISBN 92 4 154696 4. WHO Press, 20 Avenue
10 Appia, 1211 Geneva 27, Switzerland.
11

12 13 **Figures captions**

14
15
16 Figure 1. Illustration of the LCA system boundary for the case of MBTP I-3 (a) (*MBT*
17 *type I*). rMSW: Residual municipal solid waste. MBTP: Mechanical-biological
18 treatment plant. OFMSW: organic fraction of MSW (i.e. fine fraction screened by
19 trommels). RDF: refuse derived fuel. FE: Ferrous metals. NFE: Non-ferrous metals. C
20 sequestered refers to the carbon stored in landfill after the considered 100 years horizon.
21 Values rounded to 2 significant digits. Experimental data.
22







23
24
25 Figure 2. Characterized environmental impacts on selected non-toxic categories: process
26 contributions. a: waste-specific model results; b: waste-average model results
27

28
29 Figure 3. Characterized environmental impacts on selected toxic categories: process
30 contributions. a: waste-specific model results; b: waste-average model results
31

32
33 Figure 4. Environmental consequences (selected non-toxic categories) associated with
34 the potentially improved waste management scenarios (i and ii). The error bars indicate
35 the net difference in the environmental impact or saving between the improved and the
36 baseline scenario (i.e. Δ saving or Δ impact = improved value – baseline value). Model
37 results.
38

39
40 Figure 4(cont.). Environmental consequences (selected toxic categories) associated with
41 the potentially improved waste management scenarios (i and ii). The error bars indicate
42 the net difference in the environmental impact or saving between the improved and the
43 baseline scenario (i.e. Δ saving or Δ impact = improved value – baseline value). Model
44 results.
45

46
47 Figure 5. Paramount average GHG savings (kg CO₂-eq. tonne⁻¹ ww) associated with
48 100% waste material recovery at the MBT or, alternatively, 100% waste material
49 incineration, relative to the baseline LCA results. REC: 100% recycling of the selected
50 waste material; INC: 100% incineration of the selected waste material. The ‘square’
51 indicates the GHG saving in the case that C sequestration was not accounted for in the
52 baseline. Model results
53
54
55
56
57
58
59
60
61
62
63
64
65

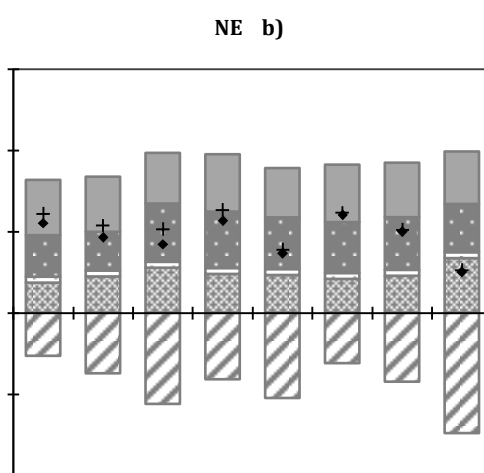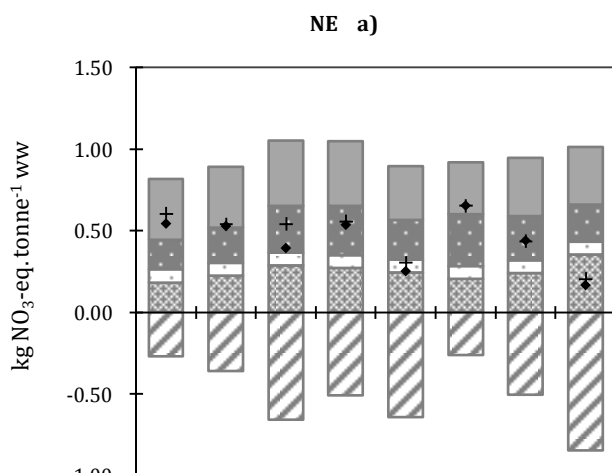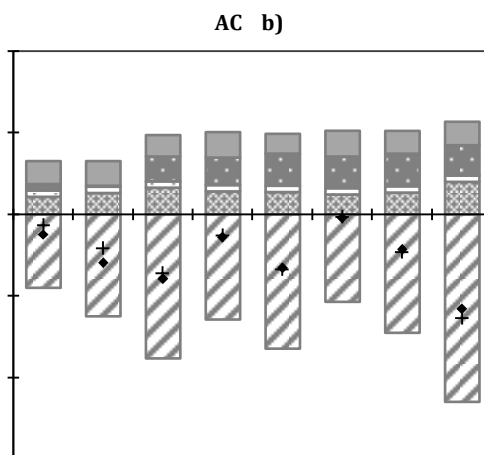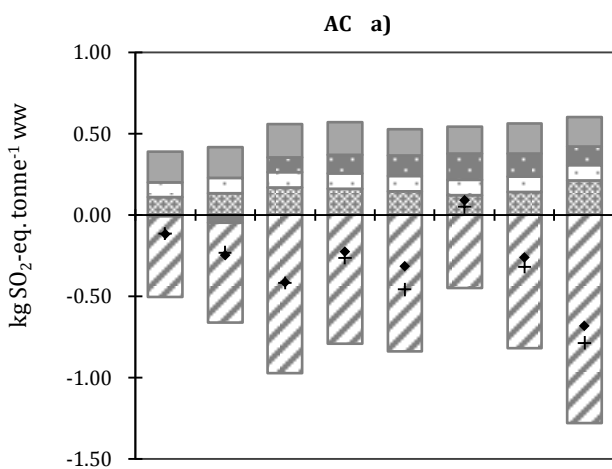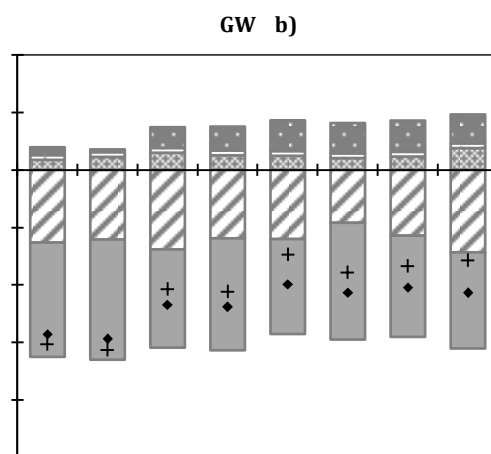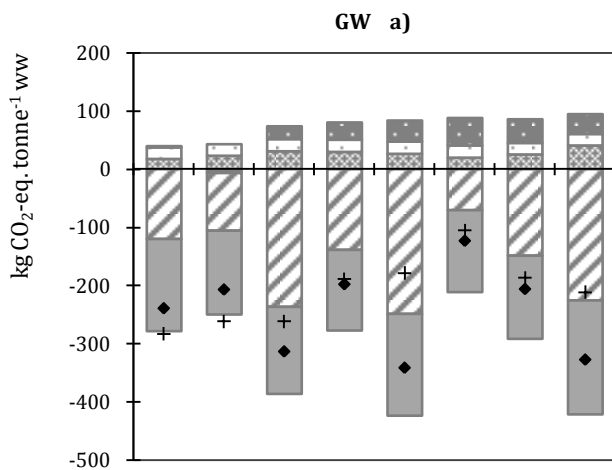

MBTP MBTP MBTP MBTP MBTP MBTP MBTP MBTP
I-1 I-2 I-3 I-4 II-1 II-2 II-3 II-4

MBTP MBTP MBTP MBTP MBTP MBTP MBTP MBTP
I-1 I-2 I-3 I-4 II-1 II-2 II-3 II-4

Transportation

Mechanical treatment







Biological processes

Recycling









Landfill

Total Natural Gas







Total Coal

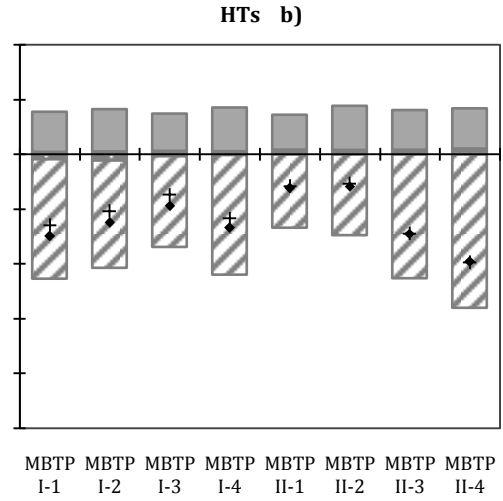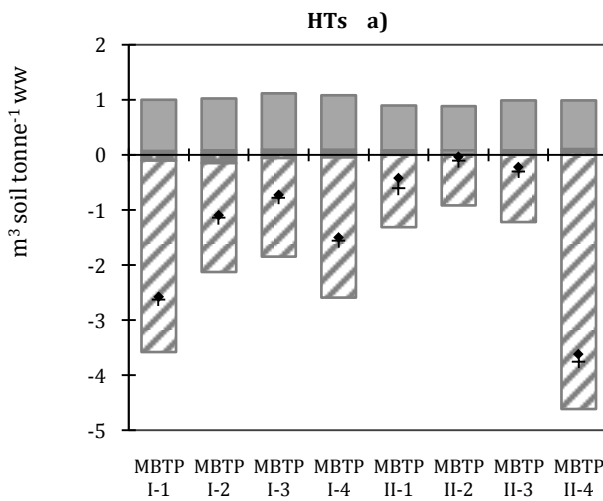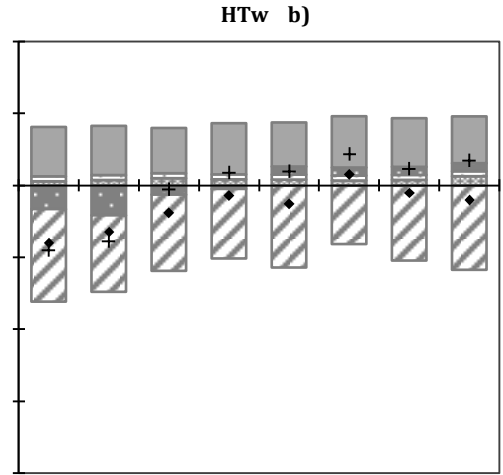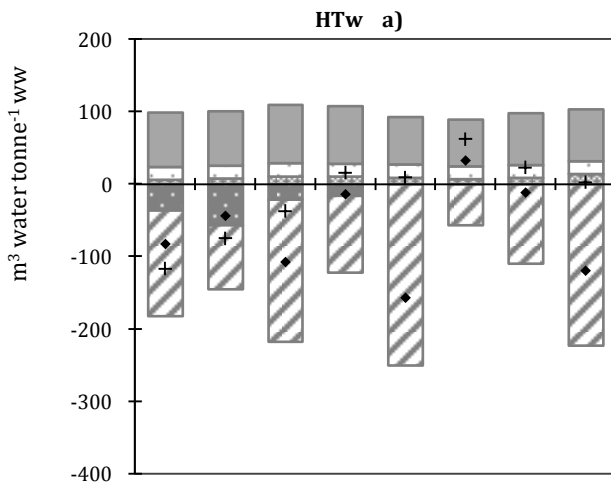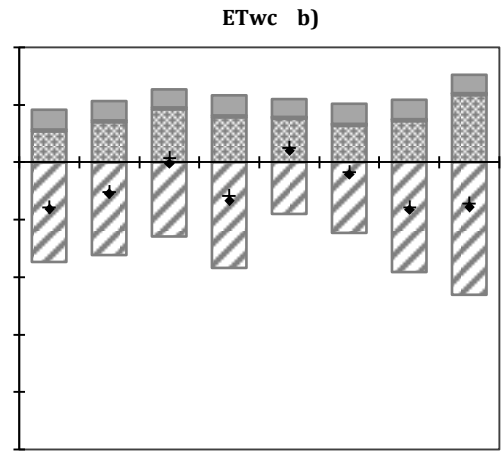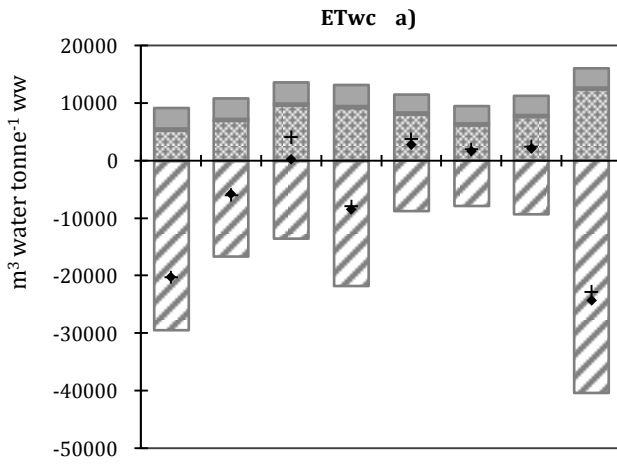

- Transportation
- Mechanical treatment
- Biological processes
- Recycling
- Landfill
- ♦ Total Natural Gas
- + Total Coal

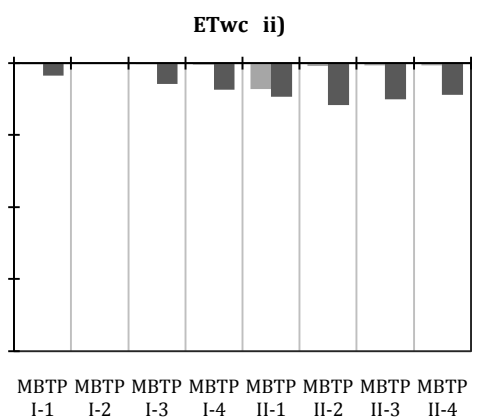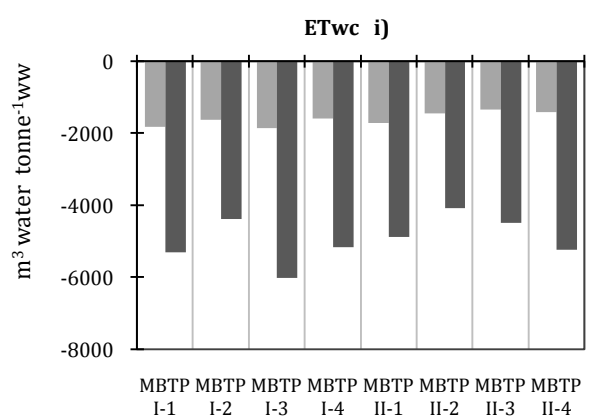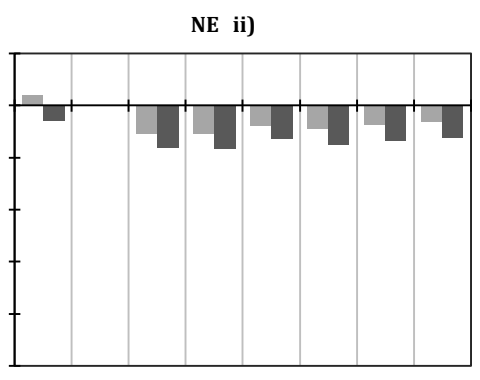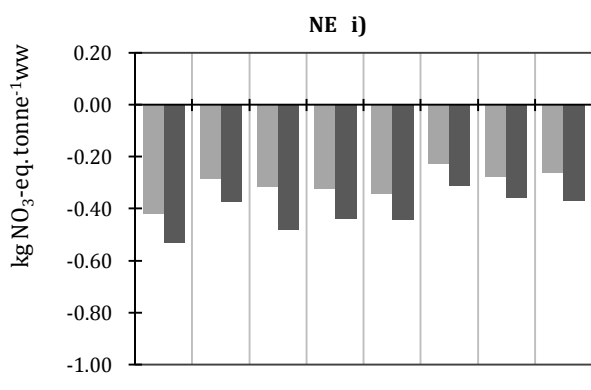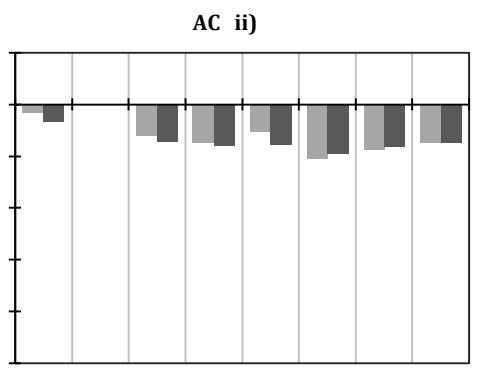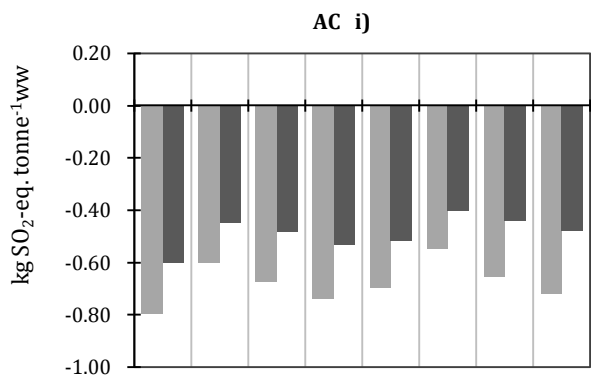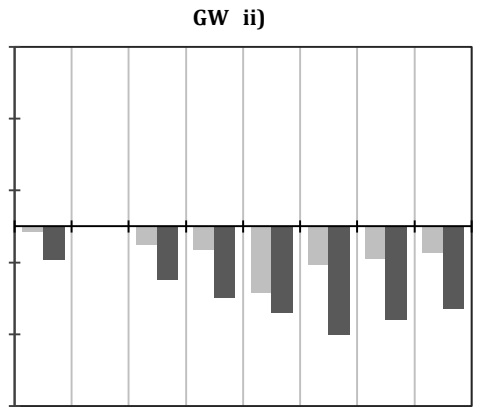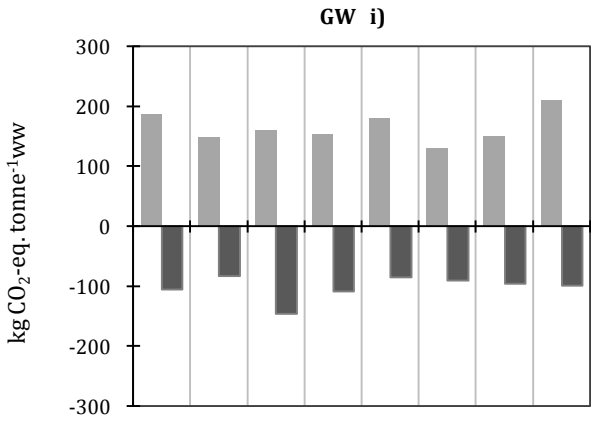


■ Natural Gas ■ Coal

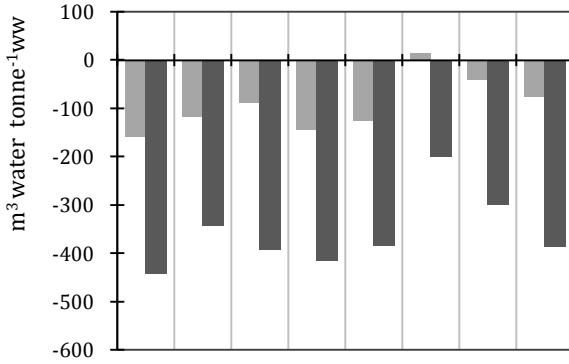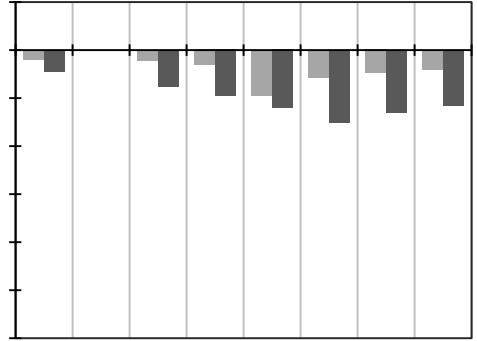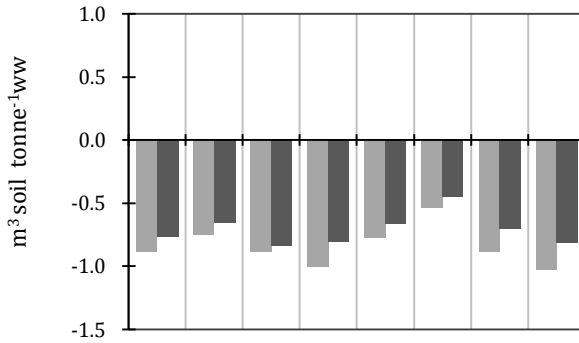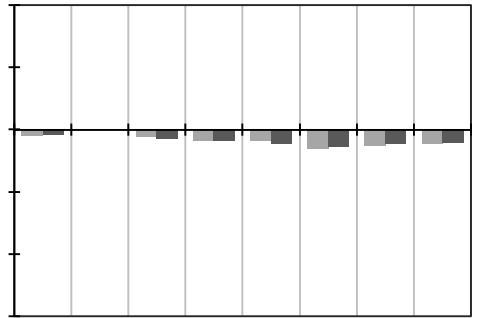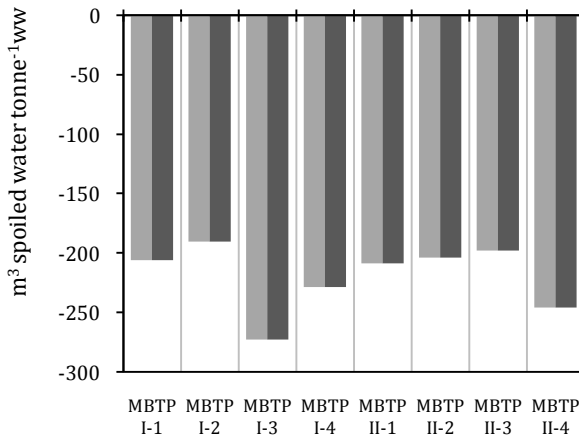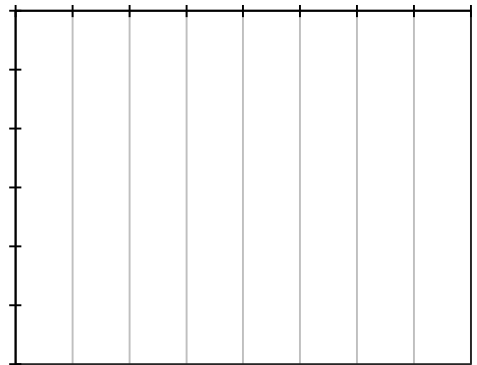HTw i)**HTw ii)****HTs i)****HTs ii)****SGR i)****SGR ii)**

■ Natural Gas

■ Coal

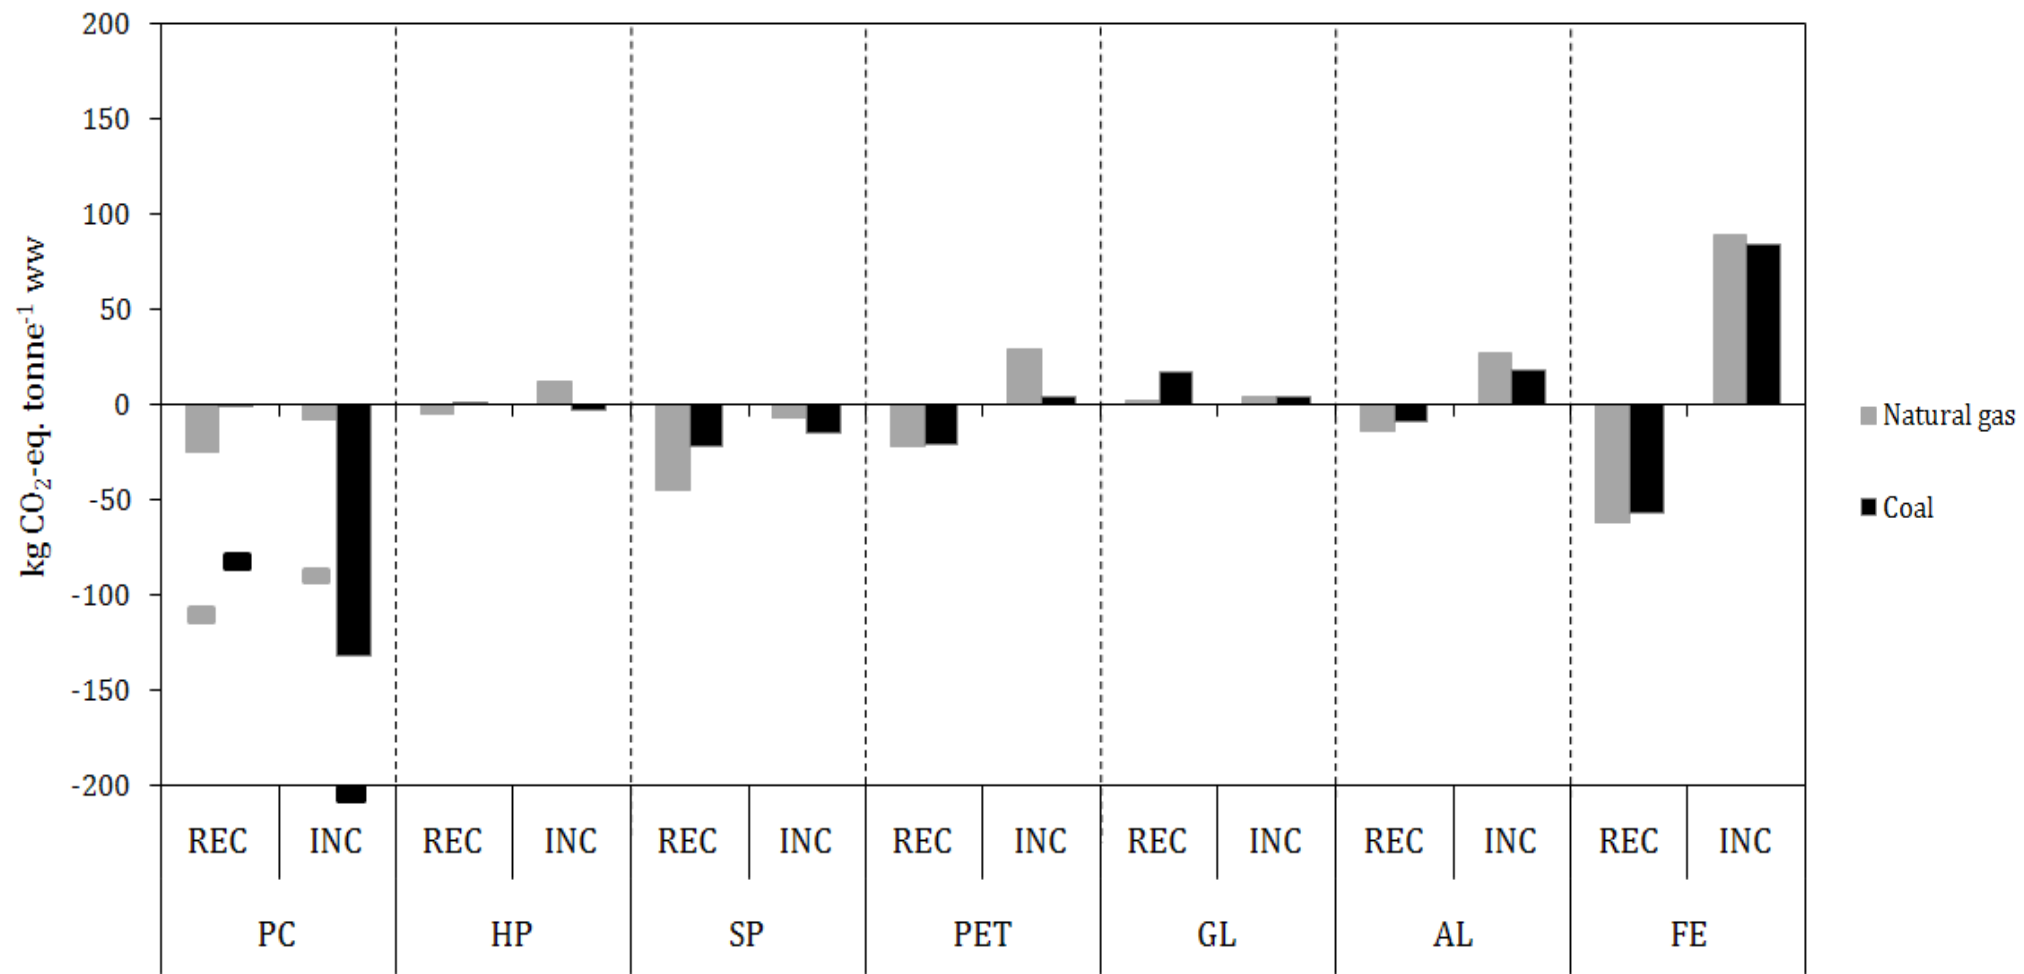

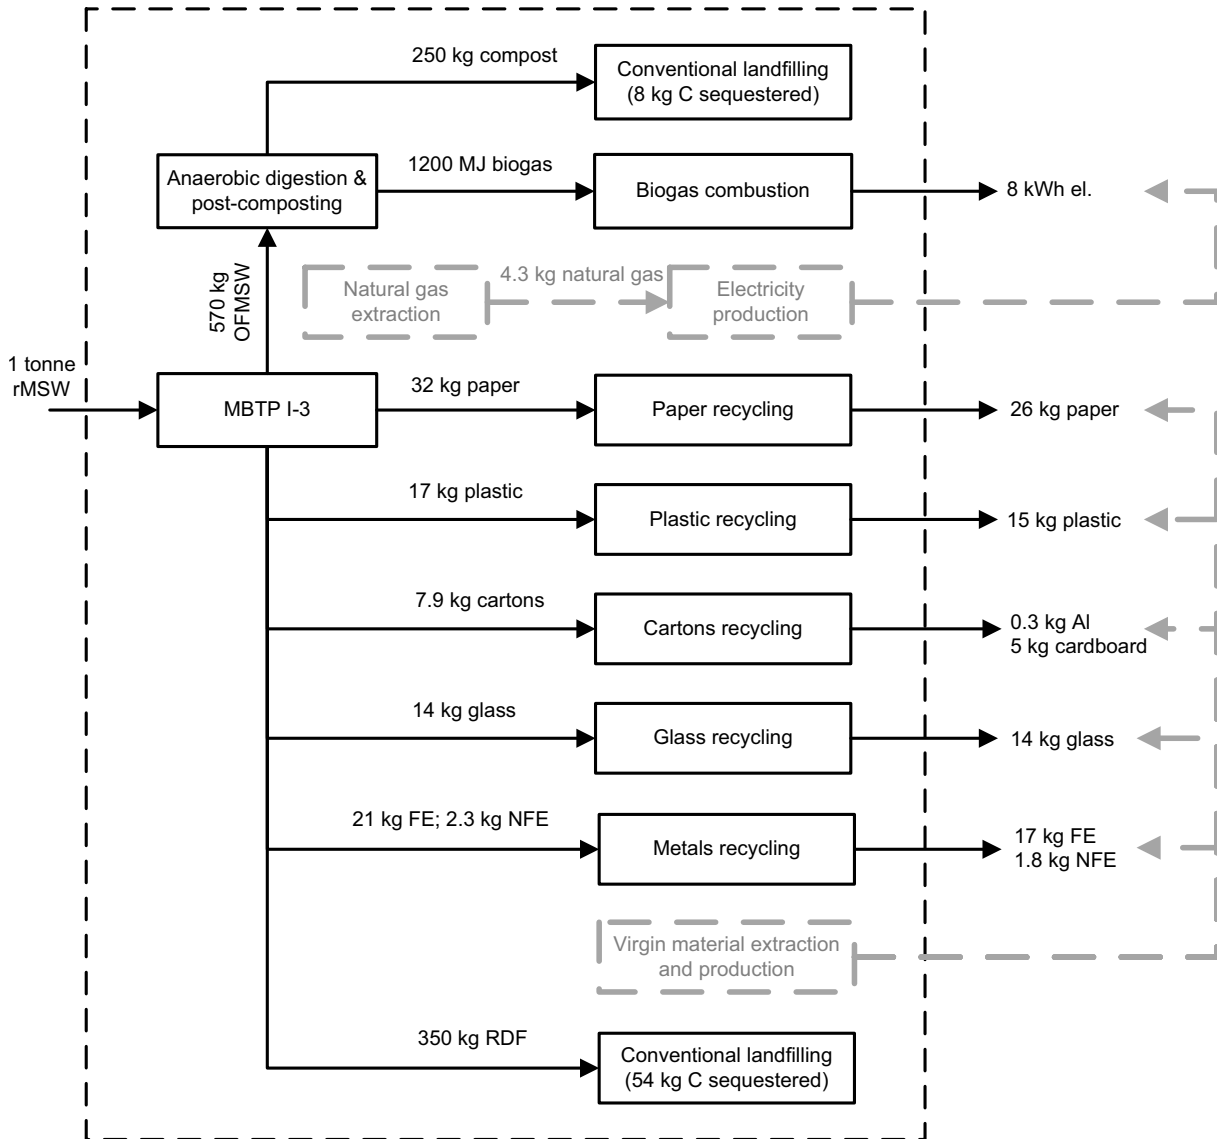


Table 1. Net methane and electricity production at the MBT plants in the LCA scenarios with *MBT type I*. In MBTP I-3 and MBTP I-4 a share of the biogas is combusted in boiler to heat the reactor. MBTP I-1 and I-2 use waste heat from the gas engine. Values rounded to two significant digits. [Data provided from plant operators.](#)

Scenario	CH ₄ production (Nm ³ tonne ⁻¹ DM)	CH ₄ production (Nm ³ tonne ⁻¹ ww)	Electricity production (kWh Nm ⁻³)	η _{el} (%)
MBTP I-1	110	43	2.4	37
MBTP I-2	130	52	2.3	36
MBTP I-3	140	58	0.91	14
MBTP I-4	110	46	0.83	13

Table 3. Recovery efficiencies (percent in wet basis, kg ww recovered kg⁻¹ ww input): percent of individual waste materials (e.g. hard plastic, paper and cardboard, etc.) recovered at the assessed MBT plants. Values rounded to two significant digits. [Experimental data](#).

Waste material fraction	MBTP	MBTP	MBTP	MBTP	MBTP	MBTP	MBTP	MBTP
	I-1	I-2	I-3	I-4	II-1	II-2	II-3	II-4
Organic matter	93	90	87	85	89	90	87	81
Paper and cardboard	1.1	0.2	17	1.0	39	0.5	2.2	32
Hard plastic (HDPE)	0.7	24	34	2.7	8.7	1.5	4.6	36
Plastic bottles (PET)	11	28	33	4.9	43	40	48	24
Soft plastic (LDPE)	0.4	10	31	39	6.0	1.4	8.8	60
Glass	12	12	4.7	4.6	49	5.0	8.0	9.3
Ferrous metals	84	68	58	74	54	57	60	35
Aluminium metals	77	61	47	72	33	42	72	95
Beverage cartons	9.6	60	65	57	56	65	71	65

Supporting information

[Click here to download e-component: Supporting Information_revised_v3.docx](#)

Supplementary data (SD) for:

Journal of Environmental Management

Mechanical-biological treatment: performance and potentials. An LCA of 8 MBT plants including waste characterization

Cristina Montejo^{*a}, Davide Tonini^b, María del Carmen Márquez^a, Thomas Fruergaard Astrup^b

^a Department of Chemical Engineering, University of Salamanca, Plaza de los Caídos 1-5, 37008 Salamanca, Spain.

^b Department of Environmental Engineering, Technical University of Denmark, Miljoevej, Building 115, 2800 Kgs. Lyngby, Denmark.

*Corresponding author. Tel: +34 923 294 479; Fax: +34 923 294 574. E-mail: cmontejo@usal.es

This SD document includes text, tables, and equations with details on the life cycle inventory of the waste treatment technologies used in the assessment and on the LCA results.

Table of Contents

1. Life cycle inventory	S4
1.1 Collection and transport	S4
1.2 Recycling	S4
1.3 Landfilling.....	S5
1.4 RDF incineration.....	S6
2. Results.....	S8
2.1 Biogenic carbon balance	S8
2.2 Normalized LCA results	S9
2.3 Potential GHG savings from recovery/recycling.....	S11
2.4 Energy from RDF (break-even points): mathematical approach.....	S12
2.5 Estimation of overall potential for GHG savings by optimizing MBT plants.....	S15
References.....	S17

1. Life cycle inventory

1.1 Collection and transport

Collection was modelled by its diesel consumption per tonne of wet waste collected (3.27 L diesel tonne⁻¹ ww) according to Larsen et al. (2009a). Each recyclable fraction mechanically recovered in the MBT plant was baled, stored separately, and sent to recycling facilities. The fuel consumption for transportation to the recycling plants was modelled based on Eisted et al. (2009). The fuel consumption ranged from 0.04 L diesel km⁻¹ tonne⁻¹ RDF to 0.2 L diesel km⁻¹ tonne⁻¹ plastic. Distances were based on current destination of the recovered products which are 200 km for glass, 250 km for paper, 300 km for metals, 700 km for transportation of both plastics and beverage cartons, and 2 km for transport of compost, rejects, and RDF to the landfill.

1.2 Recycling

Each individual waste material fraction recovered in the MBT plants was assigned a specific recycling technology. The recycling processes were modelled by implementing a combination of two parameters: technical substitution and market substitution. The percentage of technical substitution represents the material loss in the recycling process since losses occur during processing. The amount of recycled material is thus a percentage of the input waste material. The percentage of market substitution is related to the market acceptance of the recycled product. Recycled materials substitute similar products made with virgin material avoiding impacts generated by the original manufacturing; the market substitution is thus estimated as a percentage of the avoided production.

Paper and aluminium recycling technologies were based on generic European data (EDIP database). The material loss during the processes was set to 18% and 21% respectively and market substitution was set to 100% for both materials according to Schmidt and Strömberg (2006). Technologies for plastic recycling were based on data from existing facilities in Denmark and Sweden. HDPE and LDPE substituted for similar materials produced from virgin resources with an efficiency of 90% and the material loss reached 10%. In the case of PET, recycled material avoided 100% virgin production and technical substitution was set to 97%, i.e. 3% of material was lost during the process. A glass recycling technology based on remelting of glass cullet to manufacture new bottles was selected. Both technical and market substitutions were assumed 100%. Ferrous materials recovered through magnets in MBT plants are shredded and new sheets are made from the scraps; process and

consumption were based on a Swedish facility. Steel losses were set to 13% and the market substitution to 100%. The data of these processes were taken from the EDIP database. Additionally, energy and GHG performances of these recycling processes can be found in: Merrild et al. (2009) for paper and cardboard, Astrup et al. (2009a) and Bernstad et al. (2011) for different plastic materials, Damgaard et al. (2009) for metals, Larsen et al. (2009b) for glass.

With respect to beverage cartons, these were assumed composed of 74% paper, 22% polyethylene and 4% aluminium (Tetra Pak, 2004). The first step in recycling is to divide the recovered cartons into their individual components. To this purpose, a process similar to paper repulping is performed recovering the paper fraction by means of water addition. However, process efficiency is lower than original repulping because of the presence of polymer and aluminium layers. Beverage carton fiber has desirable properties and can be made into folding boxboard, corrugation fluting, and other products. The cardboard market substitution was set to 90%. The mixed stream of polyethylene and aluminium is subjected to pyrolysis processes recovering thus aluminium powder which market substitution was assumed 100%. The heat resulting from pyrolysis is used to dry the paper fibers. The overall material loss in the processes was 22% corresponding to the plastic content of beverage cartons. The energy consumption was set to 75 kWh tonne⁻¹ of beverage cartons based on the life cycle inventory of containers systems for wine (Franklin, 2006).

For example with respect to GHG emission savings the net (i.e. including the environmental burdens of the recycling process itself) CO₂-eq. savings associated with recycling 1 tonne of, respectively, aluminium, ferrous metal, paper, hard and soft plastic, plastic bottles, glass, and beverage cartons equalled (assuming natural gas as marginal) 8200, 5800, 720, 1200, 2400, 680, 260, and 1000 kg CO₂-eq. tonne⁻¹ ww.

1.3 Landfilling

Stabilized organic material (compost), RDF, and rejects from compost refinement were landfilled. The landfill was modelled as a conventional landfill (Manfredi and Christensen, 2009). This technology involved suitable collection systems of leachate generated because of degradation, leachate treatment process, gas collection system, flaring and oxidizing compost layer on the top of the landfilled waste. The assessed 100-year horizon was divided in four time periods to better represent the different operational conditions of the landfill cells (Manfredi and Christensen, 2009). It was assumed that 80% of the landfill gas generated was collected during the second (duration: 8 years) and third period (duration: 35 years) whilst

was not collected in the first (duration: 2 years) and last (duration: 55 years). 100% of the collected gas was assumed burnt in the flare as this is the current management scenario in the geographical region assessed. Composition of leachate and landfill gas was defined according to previous studies (Manfredi and Christensen, 2009).

1.4 RDF incineration

Although in the assessed reference scenarios RDF was landfilled (in accordance with the current waste management system in the assessed geographical region), potential changes in RDF management have been studied. This translated into dedicated incineration of RDF in place of the current landfilling.

The incinerator was modelled based on the technology described in Tonini and Astrup (2012). The incinerator was assumed being a grate-fired incinerator equipped with wet flue gas cleaning, selective non-catalytic reduction (SNCR) of NO_x, Hg and dioxin removal by activated carbon. The gross electricity efficiency of the incinerator was assumed 30%, relative to the lower heating value (LHV) of the waste input, representing state-of-the-art incinerators combusting high-energy content materials and provided with flue-gas condensation (DEA, 2012, ISWA, 2006). Internal electricity consumption at the plant was 65 kWh tonne⁻¹ ww plus an additional 0.42 L tonne⁻¹ ww of oil as auxiliary fuel, and 0.66 kg NaOH tonne⁻¹ ww and 7.9 kg CaCO₃ tonne⁻¹ ww for flue gas cleaning (Astrup et al., 2009b; Fruergaard and Astrup, 2011). The air emissions were divided into process-specific (independent on waste composition, e.g. NO_x, SO₂, CO) and waste-specific (determined by output transfer coefficients). Selected air emissions can be found in Tonini and Astrup (2012). Bottom ashes were assumed utilized as construction material substituting natural gravel following the approach of Birgisdottir et al. (2007). Air pollution control (APC) residues were assumed to be utilized in the backfilling of old salt mines following the approach of Fruergaard et al. (2010).

2. Results

2.1 Biogenic carbon balance

Table S1 details the biogenic carbon balance for the scenarios under assessment.

Table S1. Biogenic carbon balance from model results (kg C); rMSW: residual MSW input to the MBT plant; RDF: refuse derived fuel; CP: composted material (including rejects); Loss: biogenic C degraded (or found in recycled materials); a: waste-specific results; b: waste-average results.

MBTP	rMSW		Outputs of MBT				Sequestration in landfill				Loss	
			RDF		CP		RDF		CP			
	a	b	a	b	a	b	a	b	a	b	a	b
I-1	183	183	71	77	39	37	53	58	9	8	121	117
I-2	176	183	68	87	37	33	50	63	9	8	117	112
I-3	190	183	75	68	36	37	54	50	8	8	128	125
I-4	169	183	72	84	33	34	50	60	8	8	111	116
II-1	206	183	73	62	35	35	55	47	8	8	143	128
II-2	176	183	65	87	38	33	46	62	9	8	121	113
II-3	181	183	69	70	38	39	49	51	9	9	123	123
II-4	190	183	88	74	29	32	65	51	7	7	112	125

2.2 Normalized LCA results

The normalized LCA results (for both waste-specific and waste-average scenarios) are reported in Table S3. Table S2 reports the EU-15 normalization references used to calculate the normalized LCA results (expressed in the unit: mPE tonne⁻¹ ww). One PE corresponds to the environmental load caused by one average EU-15 citizen in one year covering all activities in life.

Table S2. Normalization references in the LCA method EDIP97 (Stranddorf et al., 2005).

Category	Acronym	Physical basis	Normalization reference EU-15	Unit
Global warming	GW	Global	8,700	kg CO ₂ -eq. person ⁻¹ y ⁻¹
Photochemical ozone formation	POF	Regional	25	kg C ₂ H ₄ -eq. person ⁻¹ y ⁻¹
Stratospheric ozone depletion	SOD	Global	0.103	kg CFC-11-eq. person ⁻¹ y ⁻¹
Acidification	AC	Regional	74	kg SO ₂ -eq. person ⁻¹ y ⁻¹
Nutrient enrichment	NE	Regional	119	kg NO ₃ -eq. person ⁻¹ y ⁻¹
Ecotoxicity in soil	ETs	Regional	964,000	m ³ soil person ⁻¹ y ⁻¹
Ecotoxicity in water chronic	ETwc	Regional	352,000	m ³ water person ⁻¹ y ⁻¹
Human toxicity via soil	HTs	Regional	127	m ³ soil person ⁻¹ y ⁻¹
Human toxicity via water	HTw	Regional	50,000	m ³ water person ⁻¹ y ⁻¹
Human toxicity via air	HTa	Regional	60,900,000,000	m ³ air person ⁻¹ y ⁻¹
Spoiled groundwater resources	SGR	Regional	130	m ³ groundwater person ⁻¹ y ⁻¹

Table S3. Normalized LCA result (mPE tonne⁻¹ ww) for all the assessed non-toxic and toxic environmental categories. Values rounded to two significant digits. NG/Coal: natural gas/coal as marginal fuel for electricity production. Values rounded to two significant digits.

		GW		AC		NE		POF		SOD		SGR		ETwc		HTa		HTs		HTw	
		a	b	a	b	a	b	a	b	a	b	a	b	a	b	a	b	a	b	a	b
MBTP I-1	NG	-27	-33	-1.6	-1.7	4.6	4.7	1.2	0.9	2.3	1.2	3,000	3,100	-57	-23	2.0	2.1	-20	-12	-1.7	-1.6
	CO	-33	-35	-1.5	-0.9	5.1	5.1	0.7	0.7	1.4	1.3	3,000	3,100	-58	-22	2.0	2.2	-21	-10	-2.3	-1.8
MBTP I-2	NG	-24	-34	-3.4	-4.0	4.5	3.9	1.7	1.2	2.4	1.5	3,000	3,100	-16	-16	2.5	2.5	-8.6	-10	-0.88	-1.3
	CO	-30	-36	-3.1	-2.8	4.5	4.5	1.1	1.1	1.4	1.7	3,000	3,100	-17	-15	2.4	2.5	-9.0	-8.2	-1.5	-1.6
MBTP I-3	NG	-36	-27	-5.6	-5.4	3.3	3.6	1.7	1.6	2.6	1.2	3,100	3,000	0.6	-0.6	3.0	2.9	-5.7	-7.4	-2.2	-0.76
	CO	-30	-24	-5.6	-4.9	4.6	4.3	2.1	1.7	1.6	1.4	3,100	3,000	12	2.1	4.2	3.1	-6.1	-5.8	-0.74	-0.12
MBTP I-4	NG	-23	-27	-3.1	-1.9	4.5	4.8	2.0	1.5	2.5	1.6	3,100	3,100	-24	-19	2.9	2.7	-12	-11	-0.31	-0.29
	CO	-22	-24	-3.5	-1.8	4.7	5.3	1.7	1.6	1.6	1.8	3,100	3,100	-22	-17	3.1	2.9	-12	-9.2	0.32	0.34
MBTP II-1	NG	-39	-23	-4.3	-4.5	2.1	3.1	1.3	1.3	1.9	1.0	2,400	2,300	7.8	5.7	2.3	2.6	-3.3	-4.8	-3.1	-0.52
	CO	-21	-17	-6.2	-4.6	2.6	3.3	1.7	1.4	1.2	1.1	2,400	2,300	11	7.1	2.8	2.7	-4.8	-4.6	0.19	0.39
MBTP II-2	NG	-14	-25	1.2	-0.3	5.5	5.1	1.6	1.3	2.1	1.6	2,300	2,600	4.6	-5.9	2.5	2.5	-0.2	-4.6	0.65	0.31
	CO	-12	-20	0.7	-0.2	5.5	5.2	1.3	1.4	1.4	1.7	2,300	2,600	5.6	-5.0	2.6	2.6	-0.9	-4.3	1.2	0.86
MBTP II-3	NG	-24	-23	-3.5	-2.9	3.7	4.2	1.4	1.1	2.3	1.2	2,600	2,600	5.9	-23	2.7	2.6	-1.7	-11	-0.23	-0.21
	CO	-22	-19	-4.3	-3.1	3.7	4.3	1.2	1.2	1.4	1.4	2,600	2,600	7.1	-22	2.8	2.6	-2.4	-11	0.46	0.45
MBTP II-4	NG	-38	-25	-9.2	-7.9	1.4	2.1	1.9	2.0	2.2	1.4	2,600	2,400	-69	-22	3.1	3.3	-28	-15	-2.4	-0.41
	CO	-24	-18	-11	-8.6	1.7	2.2	2.2	2.1	1.6	1.5	2,600	2,400	-65	-20	3.5	3.5	-30	-16	0.06	0.69

2.3 Potential GHG savings from recovery/recycling

Table S4 details the potential GHG savings (kg CO₂-eq. tonne⁻¹ ww) associated with 100% waste material recovery or, alternatively, 100% waste material incineration at the individual MBT scenarios relative to the baseline LCA results. The average GHG savings are displayed in Figure 5 of the main manuscript.

Table S4. Potential for GHG savings (kg CO₂-eq. tonne⁻¹ ww) associated with 100% waste material recovery or, alternatively, 100% waste material incineration at the individual MBT scenarios relative to the baseline LCA results. The values are reported for the case of natural gas as marginal electricity source. The results for the case of coal as marginal electricity source are provided only as average of the 8 MBT scenarios (line “Average (CO)”). REC: 100% recycling of the selected waste material; INC: 100% incineration of the selected waste material. PC: paper and cardboard; HP: hard plastic (HDPE); SP: soft plastic (LDPE); PET: polyethylene terephthalate; GL: glass; AL: aluminium; FE: ferrous metals. NG: natural gas as marginal electricity source; CO: coal as marginal electricity source. Values rounded to two significant digits. Model results.

MBTP	PC		PC ^a		HP		SP		PET		GL		AL		FE	
	REC	INC	REC	INC	REC	INC	REC	INC	REC	INC	REC	INC	REC	INC	REC	INC
MBTP I-1 (NG)	-17	-3.6	-85	-72	-4.9	8.5	-61	-24	-27	20	4.0	2.9	-17	58	-17	99
MBTP I-2 (NG)	-1.1	7.9	-57	-48	-8.7	20	-48	-16	-30	35	0.5	4.7	-19	31	-30	69
MBTP I-3 (NG)	-34	-13	-110	-92	-4.8	16	-44	-4.7	-19	25	2.3	3.0	-21	20	-100	150
MBTP I-4 (NG)	-10	1.7	-71	-60	-8.2	13	-55	1.0	-33	21	2.0	3.1	-13	36	-38	110
MBTP II-1 (NG)	-42	-15	-100	-75	-3.2	7.5	-50	-18	-16	27	5.6	6.6	-27	14	-44	55
MBTP II-2 (NG)	-3.3	6.9	-64	-54	-4.8	8.5	-38	-15	-21	33	3.5	2.5	-14	11	-41	58
MBTP II-3 (NG)	-42	-25	-110	-89	-4.6	8.7	-57	-19	-24	48	-3.0	5.6	-4.2	12	-82	130
MBTP II-4 (NG)	-18	0.4	-78	-60	-5.4	18	-26	16	-21	22	0.5	4.3	-3.3	71	-67	38
Average (NG)	-25	-7	-89	-72	-5.0	12	-45	-7	-22	29	2.2	4.2	-14	27	-62	90
Average (CO)	-1.0	-130	-65	-200	1.0	-3.3	-22	-14	-20	5.3	17	4	-9.2	18	-56	84

^a Without accounting for carbon sequestration from paper/cardboard in landfill in the baseline LCA results.

2.4 Energy from RDF (break-even points): mathematical approach

Follows the list of the equations used to calculate the break-even points for:

- ✓ The net electricity efficiency ($\eta_{\text{power plant}}$) that should be achieved at the dedicated RDF incinerator (or a generic power plant) in order to equal the same GHG savings of the baseline (where plastic along with the remaining RDF is landfilled and carbon from paper and organic is sequestered). This was done according to Eq. S1.
- ✓ The plastic recovery efficiency (η_{rec}) that should be achieved at the individual MBT plants to equal the GHG performance of the baseline (where plastic along with the remaining RDF is landfilled and carbon from paper and organic is sequestered; only sorting of PET, soft, and hard plastic were considered). This was done according to Eq. S2.
- ✓ The specific CO₂ emission factor that the ‘substituted fuel’ (EF_{fuel}) should have in the individual MBT scenarios to equal the GHG performance of the baseline (where plastic along with the remaining RDF is landfilled and carbon from paper and organic is sequestered). This was done according to Eq. S3.

The solutions for Eq. S1-S3 (i.e. break-even points) are summarized in Table S6.

$$GHG_{\text{baseline}} = -LHV_{\text{RDF}} \cdot RDF \cdot \eta_{\text{power plant}} / 3.6 \cdot EF_{\text{NG}} + C_{\text{foss}} \cdot RDF \cdot 44 / 12$$

Eq. S1

Where:

GHG_{baseline} : GHG savings achieved in the baseline (landfilling RDF) (kg CO₂)

RDF: amount of RDF combusted (kg ww)

LHV_{RDF} : LHV of the RDF (MJ kg⁻¹ ww)

$\eta_{\text{power plant}}$: electricity efficiency of the power plant (%) (unknown)

EF_{NG} : assumed GHG emission factor for natural gas (0.49 kg CO₂-eq. kWh⁻¹)

C_{foss} : C fossil content in the RDF (kg C kg⁻¹ ww)

Notice that the only unknown is $\eta_{\text{power plant}}$. The ‘minus’ is used to maintain consistency with the results discussion (manuscript) where environmental savings are reported as negative values. The C_{foss} content of the material fractions constituting the RDF was assumed according to Riber et al. (2009) as reported in section 2.4 of the manuscript. The terms 3.6 and 44/12 are conversion factors (MJ to kWh and C to CO₂).

$$GHG_{baseline} = -LHV_{RDF^*} \cdot RDF^* \cdot \eta_{inc} / 3.6 \cdot EF_{NG} + C_{foss} \cdot RDF^* \cdot 44 / 12 - \eta_{rec} \cdot (Pot_{PET\ recycl} + Pot_{SP\ recycl} + Pot_{HP\ recycl})$$

Eq. S2

Where:

$GHG_{baseline}$: GHG savings achieved in the baseline (landfilling RDF) (kg CO₂)

RDF^* : amount of RDF recalculated without the plastic sorted (kg ww)

LHV_{RDF^*} : LHV of the RDF^* recalculated without the plastic sorted (MJ kg⁻¹ ww)

η_{inc} : electricity efficiency of the incinerator (30%, see section 1.4 of this document)

EF_{NG} : assumed GHG emission factor for natural gas (0.49 kg CO₂-eq. kWh⁻¹)

C_{foss} : C fossil content in the RDF^* (kg C kg⁻¹ ww)

η_{rec} : recovery efficiency for the plastic material fractions (%) (unknown)

$Pot_{PET\ recycl}$: potential GHG saving associated with 100% recovery of PET (kg CO₂ tonne⁻¹ ww)

$Pot_{SP\ recycl}$: potential GHG saving associated with 100% recovery of soft plastic (kg CO₂ tonne⁻¹ ww)

$Pot_{HP\ recycl}$: potential GHG saving associated with 100% recovery of hard plastic (kg CO₂ tonne⁻¹ ww)

$Pot_{PET\ recycl}$, $Pot_{SP\ recycl}$, $Pot_{HP\ recycl}$ can be found in Table S5 (recalculated from Table S4, where the potential GHG savings from recovery/recycling are reported relative to the GHG baseline results, i.e. as net ΔCO_2 -eq.).

The only unknown in Equation S2 is η_{rec} . The ‘minus’ is used to maintain consistency with the text where savings are reported as negative values and impacts as positive.

$$GHG_{baseline} = -LHV_{RDF} \cdot RDF \cdot \frac{EF_{fuel}}{1000} + C_{foss} \cdot RDF \cdot 44 / 12$$

Eq. S3

Where:

$GHG_{baseline}$: GHG savings achieved in the baseline (landfilling RDF) (kg CO₂)

RDF : amount of RDF combusted (kg ww)

LHV_{RDF} : LHV of the RDF (MJ kg⁻¹ ww)

EF_{fuel} : emission factor of the fuel substituted (g CO₂-eq. MJ⁻¹) (unknown)

C_{foss} : C fossil content in the RDF (kg C kg⁻¹ ww)

The only unknown in Equation S3 is EF_{fuel} . 1000 is a conversion factor (g CO₂ to kg CO₂).

Table S5. Potential for GHG savings (kg CO₂-eq. tonne⁻¹ ww) associated with 100% material recovery of the “recyclable” plastic fractions (i.e. 100% of the “recyclable share” of each plastic fraction) at the individual MBT scenarios (absolute values, recalculated from Table S4). The values are reported for the case of natural gas as marginal electricity source. HP: hard plastic (HDPE); SP: soft plastic (LDPE); PET: polyethylene terephthalate. Values rounded to two significant digits. Model results.

MBTP	HP	SP	PET
MBTP I-1	-4.9	-61	-30
MBTP I-2	-12	-54	-42
MBTP I-3	-8.5	-65	-28
MBTP I-4	-8.5	-91	-35
MBTP II-1	-3.7	-53	-28
MBTP II-2	-4.9	-39	-35
MBTP II-3	-4.9	-63	-47
MBTP II-4	-9.7	-69	-28

Table S6. Solutions for Eqs. S1-S3 (break-even points). EF_{fuel}: CO₂ emission factor of the fuel substituted (g CO₂-eq. MJ⁻¹). $\eta_{\text{power plant}}$: electricity efficiency (% relative to LHV); η_{rec} : efficiency of plastic separation (% input). Note that for η_{rec} a value >100% means that the separation of recyclable plastic is not sufficient to equal the GHG savings of the baseline, and additional recovery of non-recyclable plastic would be needed.

MBTP	$\eta_{\text{power plant}}$ (Eq. S1)	η_{rec} (Eq. S2)	EF _{fuel} (Eq. S3)
MBTP I-1	52%	>100% (>67%) ^b	70
MBTP I-2	51%	95% (78%) ^b	70
MBTP I-3	50%	>100% (>67%) ^b	69
MBTP I-4	50%	90% (65%) ^b	68
MBTP II-1	53%	>100% (>70%) ^b	72
MBTP II-2	49%	95% (67%) ^b	67
MBTP II-3	49%	85% (65%) ^b	67
MBTP II-4	50%	>100% (>72%) ^b	68

^b Overall plastic recovery efficiency (in brackets) calculated on the total plastic input (that is the sum of recyclable and non-recyclable plastic fractions).

2.5 Estimation of overall potential for GHG savings by optimizing MBT plants

Table S7 details the total annual GHG savings that could be achieved in each individual MBT plant under assessment by optimizing biogas-energy and materials recovery (RDF is assumed landfilled). The GHG savings reported for material recovery and biological treatment build on previous results (section 3.3 and Figure 4-5 of the main manuscript).

Table S7. Overall potential for GHG savings in the 8 MBT plants under assessment. NG/CO: natural gas/coal as marginal for electricity production. Values are rounded to two significant digits. Model results.

MBTP	Material recovery		Biological treatment		rMSW treated tonne y ⁻¹	Potential GHG savings (tonne CO ₂ -eq. y ⁻¹)	
	NG	CO	NG	CO		CO	NG
I-1	-140	-74	-8	-46	310,000	-47,000	-37,000
I-2	-140	-78	0	0	86,000	-12,000	-6,700
I-3	-220	-150	-26	-74	84,000	-21,000	-19,000
I-4	-160	-92	-33	-100	280,000	-53,000	-53,000
II-1	-180	-110	-93	-120	28,000	-7,600	-6,400
II-2	-120	-67	-54	-150	106,000	-19,000	-23,000
II-3	-210	-140	-45	-130	47,000	-12,000	-13,000
II-4	-140	-89	-38	-120	95,000	-17,000	-19,000
TOTAL					1,000,000	-190,000	-180,000

References

Astrup, T., Fruergaard, T., Christensen, T.H., 2009a. Recycling of plastics: accounting of greenhouse gases and global warming contributions. *Waste Manage Res.* 27, 763-772.

Astrup, T., Møller, J., Fruergaard, T., 2009b. Incineration and co-combustion of waste: accounting of greenhouse gases and global warming contributions. *Waste Manage Res.* 27, 789-799.

Bernstad, A., la Cour Jansen, J., Aspegren, H., 2011. Life cycle assessment of a household solid waste source separation programme: a Swedish case study. *Waste Manage. Res.* 29(10), 1027-1042.

Birgisdottir, H., Bhandar, G., Hauschild, M.Z., Christensen, T.H., 2007. Life cycle assessment of disposal of residues from municipal solid waste incineration: recycling of bottom ash in road construction or landfilling in Denmark evaluated in the ROAD-RES model. *Waste Manage.* 27, S75-S84.

Damgaard, A., Larsen, A.W., Christensen, T.H., 2009. Recycling of metals: accounting of greenhouse gases and global warming contributions. *Waste Manage. Res.* 27, 773-780.

DEA, 2012. Danish Energy Agency. Technology data for energy plants - Generation of Electricity and District Heating, Energy Storage and Energy Carrier Generation and Conversion. Danish Energy agency, Copenhagen, Denmark. Available at: http://www.ens.dk/Documents/Netboghandel%20-%20publikationer/2012/Teknologikatalog_2012.pdf (accessed 12.12).

Eisted, R., Larsen, A.W., Christensen, T.H., 2009. Collection, transfer and transport of waste: accounting of greenhouse gases and global warming contribution. *Waste Manage. Res.* 27, 738-745.

Franklin Associates, 2006. Life cycle inventory of container systems for wine. Final report prepared for Tetra Pak Inc. by Franklin Associates, a division of ERG Prairie village, KS.

Fruergaard, T., Astrup, T., 2011. Optimal utilization of waste-to-energy in an LCA perspective. *Waste Manage.* 31, 572-582.

Fruergaard, T., Hyks, J., Astrup, T., 2010. Life-cycle assessment of selected management options for air pollution control residues from waste incineration. *Sci. Total Environ.* 408, 4672-4680.

ISWA, 2006. International Solid Waste Association. Energy from Waste. State of the Art Report. Statistics 5th Edition. Copenhagen, Denmark: ISWA Working Group on Thermal Treatment of Waste. Available at:

[http://www.google.dk/search?q=International+Solid+Waste+Association+\(ISWA\).+Energy+from+Waste.+State+of+the+Art+Report.+Statistics+5th+Edition&sugexp=chrome,mod=15&sourceid=chrome&ie=UTF-8](http://www.google.dk/search?q=International+Solid+Waste+Association+(ISWA).+Energy+from+Waste.+State+of+the+Art+Report.+Statistics+5th+Edition&sugexp=chrome,mod=15&sourceid=chrome&ie=UTF-8) (accessed 12.12).

Larsen, A.W., Vrgoc, M., Lieberknecht, P., Christensen, T.H., 2009a. Diesel consumption in waste collection and transport and its environmental significance. *Waste Manage. Res.* 27, 652-659.

Larsen, A.W., Merrild, H., Christensen, T.H., 2009b. Recycling of glass: accounting of greenhouse gases and global warming contributions. *Waste Manage. Res.* 27, 754-762.

Manfredi, S., Christensen, T.H., 2009. Environmental assessment of solid waste landfilling technologies by means of LCA-modeling (EASEWASTE). *Waste Manage.* 29, 32-43.

Merrild, H., Damgaard, A., Christensen, T.H., 2009. Recycling of paper: accounting of greenhouse gases and global warming contributions. *Waste Manage. Res.* 27, 746-753.

Riber, C., Petersen, C., Christensen, T.H., 2009. Chemical composition of material fractions in Danish household waste. *Waste Manage.* 29, 1251-1257.

Schmidt, A., Strömberg, K., 2006. "Genanvendelse i LCA - systemudvidelse." Rep. No. Miljønyt Nr. 81, Miljøstyrelsen. Available at: <http://www2.mst.dk/udgiv/publikationer/2006/87-7052-165-4/pdf/87-7052-166-2.pdf> (accessed 12.12).

Stranddorf, H.K., Hoffmann, L., Schmidt, A., 2005. Påvirkningskategorier, normalisering og vægtning i LCA – opdatering af udvalgte UMIP97-data. Danish Ministry of the Environment, Miljønyt n. 77. Available at: <http://www2.mst.dk/udgiv/publikationer/2005/87-7614-572-7/pdf/87-7614-573-5.pdf> (accessed 12.12)

Tetra Pak, 2004. Environmental Report 2004 Sweden. Available on line at: www.corporateregister.com/a10723/tps04-env-swe.pdf (accessed 12.12)

Tonini, D., Astrup, T., 2012. Life-cycle assessment of a waste refinery process for enzymatic treatment of municipal solid waste. *Waste Manage.* 2012, 32, 165-76.