

CENTRE FOR ADVANCED  
SPATIAL ANALYSIS  
Working Paper Series



Paper 20

---

HOW LAND-USE-  
TRANSPORTATION  
MODELS WORK

---

Paul M. Torrens



Centre for Advanced Spatial Analysis

University College London

1-19 Torrington Place

Gower Street

London WC1E 6BT

Tel: +44 (0) 20 7679 1782

Fax: +44 (0) 20 7813 2843

Email: [casa@ucl.ac.uk](mailto:casa@ucl.ac.uk)

<http://www.casa.ucl.ac.uk>

[http://www.casa.ucl.ac.uk/working\\_papers.htm](http://www.casa.ucl.ac.uk/working_papers.htm)

Date: April 2000 (edited for style November 2000)

ISSN: 1467-1298

© Copyright CASA, UCL.

<b>ABSTRACT.....</b>	<b>6</b>
<b>1 INTRODUCTION.....</b>	<b>6</b>
<b>2 WHY LAND-USE–TRANSPORTATION MODELS?.....</b>	<b>7</b>
2.1 JUSTIFYING URBAN SIMULATION.....	7
2.2 THE EMERGENCE OF URBAN MODELLING.....	8
<b>3 MODEL CLASSIFICATION.....</b>	<b>9</b>
3.1 BASIC MODELS.....	9
3.2 MATHEMATICAL MODELS.....	10
3.3 LAND-USE–TRANSPORTATION MODELS.....	11
<b>4 DESCRIPTIVE AND ANALYTICAL URBAN MODELS.....</b>	<b>11</b>
4.1 THE VON THUNEN MODEL.....	11
4.2 CONCENTRIC ZONE THEORY.....	13
4.3 WEDGE OR RADIAL SECTOR THEORY.....	14
4.4 MULTIPLE-NUCLEI THEORY.....	15
<b>5 GENERAL STRUCTURE OF THE LAND-USE–TRANSPORTATION MODEL.....</b>	<b>16</b>
<b>6 MODELLING TECHNIQUES.....</b>	<b>17</b>
6.1 SPATIAL INTERACTION MODELS.....	18
6.1.1 <i>Production constraints</i> .....	21
6.1.2 <i>Attraction constraints</i> .....	22
6.1.3 <i>Production-attraction constraints</i> .....	23
6.1.4 <i>Entropy-maximizing models</i> .....	24
6.2 SPATIAL CHOICE MODELS.....	28
6.2.1 <i>Discrete choice models</i> .....	28
6.2.2 <i>Non-hierarchical logit models</i> .....	30
6.2.3 <i>Nested logit models</i> .....	31
6.3 BID-RENT THEORY.....	33

<b>7</b>	<b>INDIVIDUAL MODEL COMPONENTS (SUB-MODELS)</b> .....	<b>34</b>
7.1	THE LAND USE SYSTEM .....	35
7.1.1	<i>Location</i> .....	35
7.1.2	<i>The land development process</i> .....	41
7.1.3	<i>Supply, demand, and equilibrium</i> .....	43
7.2	THE TRANSPORT SYSTEM .....	45
7.2.1	<i>Potential demand modelling and trip generation</i> .....	46
7.2.2	<i>Trip distribution</i> .....	47
7.2.3	<i>Modal split</i> .....	48
7.2.4	<i>Trip assignment (route choice)</i> .....	48
7.2.5	<i>Accessibility</i> .....	49
7.2.6	<i>Generalized costs of travel</i> .....	53
7.3	INTEGRATING LAND USE AND TRANSPORTATION.....	54
7.4	SIMULATING PLANNING AND PUBLIC POLICY .....	55
<b>8</b>	<b>THE FAILURES OF LAND-USE–TRANSPORTATION MODELS</b> .....	<b>56</b>
8.1	THE UNDOING OF URBAN MODELING.....	56
<b>9</b>	<b>IN DEFENSE OF URBAN MODELLING</b> .....	<b>57</b>
9.1	URBAN MODELS WEATHER THE STORM .....	57
9.2	ADVANCING URBAN MODELLING .....	59
9.2.1	<i>Dynamics</i> .....	59
9.2.2	<i>Detail</i> .....	60
9.2.3	<i>Interfacing with the user</i> .....	60
9.2.4	<i>Flexibility</i> .....	60
9.2.5	<i>Behavioural realism</i> .....	61
9.2.6	<i>Zonal geography</i> .....	61
<b>10</b>	<b>CONCLUSIONS</b> .....	<b>62</b>
10.1	WEAVING COMPLEXITY INTO THE SIMULATION FRAMEWORK.....	62

10.2 ENGAGING THE USER THROUGH VISUALIZATION AND APPLICATION .....	65
10.3 CONCLUSIONS .....	66
<b>REFERENCES .....</b>	<b>68</b>

## ABSTRACT

This working paper serves as an introductory reference for those studying the application of land-use–transportation models to the simulation of urban systems. The paper is by no means comprehensive, but aims to provide the reader with a foundation in the basic principles underlying land-use–transportation models and to set those principles in the context of urban management and urban studies. The paper opens with taxonomy of urban simulation models and a treatment of descriptive and analytical models. This serves to situate land-use–transportation models in the context of a broader simulation environment. The paper then reviews land-use–transportation models according to their simulation techniques and individual components. Towards the second half of the paper, the discussion moves to a critical overview of urban simulation and deals with model weaknesses and strengths in a holistic fashion, before concluding with a discussion of some innovations in academic research that are likely to shape future models.

## 1 INTRODUCTION

Computer simulation models combine theory, data, and algorithms to arrive at an abstract representation of the character and functioning of the land-use–transportation system. Ideally, once a simulation has been calibrated against a known scenario, the model may be used to make predictions about the future state of that system. Land-use–transportation models are a particular class of model used to simulate how land-use and transportation systems operate. They were first put to use in the management of urban systems to facilitate long-range planning, to simulate the potential outcomes of decisions affecting the cities, and as a laboratory for testing ideas and hypotheses relating to urban systems. Since their inception, they have steadily grown in sophistication and their use has become widespread. However, land-use–transportation models are uncertain tools—as with any model there is a degree of abstraction in their representation of real-world systems and processes. Urban simulation is also a relatively unique modelling problem. The urban systems commonly represented in urban models—economic, social, and environmental—are notoriously difficult to simulate. Land-use–transportation models are often used to support decisions that have profound influences upon people’s lives. Also, policies and ideas about the city are often difficult to experiment with. Equally, the pace of change in urban areas is often such that models have a hard time keeping up with the phenomena they are simulating.

In the past, researchers and model developers were restricted by their theoretical knowledge about the city and how it might be simulated as well as being constrained by technological limitations. Nevertheless, the simulation environment is now appropriate for the infusion of new ideas into urban modelling. This paper is intended to serve as an introduction to land-use–transportation models at a pace and level of detail that will make them accessible to the reader as well as serving

as a reference resource.<sup>1</sup> The paper deals largely with the techniques that are most prevalent in operational land-use–transportation models, simply because those ideas form an important foundation on which to advance urban modelling. Some new emerging techniques in academic research are introduced, however.

The paper proceeds in Section 2 with a brief overview of modelling and a treatment of the introduction of models in planning. Taxonomy of models is then developed in Section 3, setting land-use–transportation models in the context of a broader simulation environment. Some important descriptive and analytical urban models are mentioned in Section 4, followed by an introduction to the general structure of the land-use–transportation model in Section 5. Some key modelling techniques are described in detail in Section 6, providing the reader with a foundation in the simulation methods that will feature in subsequent sections. Individual model components are then discussed in Section 7, beginning with the land-use system, and followed by the transport system and integrated methods for representing the two. In Section 8 the paper moves into a discussion of the relative merits and shortcomings of land-use–transportation modelling and concludes in Section 9 with a consideration of the future of urban simulations.

## **2 WHY LAND-USE–TRANSPORTATION MODELS?**

### **2.1 JUSTIFYING URBAN SIMULATION**

There are some powerful rationales for applying simulation models to the study and management of urban systems. In Europe, concerns about the sustainability of our cities is driving a concerted effort to model their functioning in a bid to forecast future urban patterns. Meanwhile, in the United States there exists legislation that both directly and indirectly encourages the development of simulation models of various urban phenomena. This legislation includes the Clear Air Act Amendments:

---

<sup>1</sup> For a more thorough review of specific operational models, the reader is referred to Barra, 1989; Cambridge Systematics, 1991; Government of Ireland, 1995; Landis, 1994, 1995; Landis and Zhang, 1998; Miller et al., 1998; Oryani and Harris, 1996; Putman, 1989, 1992; Waddell, 1998a, 1998b; Wegener, 1983, 1994, 1996. For general treatments of modelling principles, see Batty 1976; Putman 1979, 1983; Barra 1989; Fotheringham and O’Kelly 1989; Putman 1989; Cambridge Systematics and Group 1991; Putman 1992; Government of Ireland 1995; Oryani and Harris 1996; Australian Bureau of Transportation Economics 1998; Miller, Kriger et al. 1998; Fotheringham, Brunsdon et al. 2000.

[CAAA \(1990\)](#), the Intermodal Surface Transportation Efficiency Act: [ISTEA \(1991\)](#), and ISTEA's successor, the Transportation Equity Act for the Twenty First Century: [TEA-21 \(1997\)](#).

CAAA, ISTEA, and TEA-21 incorporate legislative provisions that mandate land-use–transportation modelling mostly in its capacity to serve as decision support systems for policies designed to mitigate urban air problems. However, other initiatives—such as the Travel Model Improvement Program: [TMIP \(1992\)](#), which was established by the Federal Highway Administration; the Federal Transit Administration; the Office of the Secretary, U.S. Department of Transportation; and the U.S. Environmental Protection Agency—have been introduced specifically to encourage improvements in land-use–transportation modelling.

Other justifications for urban simulation models include the functionality that they offer by allowing us to test theories and practices about urban systems in a controlled computer environment. Proceeding from a simulation model, we can evaluate the merits of theories relating to urban phenomena and test the application of policy measures (such as growth management, congestion pricing, and pollution mitigation schemes) to various scenarios for urban futures.

## 2.2 THE EMERGENCE OF URBAN MODELLING

Before proceeding with a discussion of the mechanics of land-use–transportation models, it is perhaps useful to begin with a review of their history and the academic and social environments that spawned their introduction into urban planning.

Modelling first became widely applied to urban planning at the beginning of the 1960s. Its adoption coincided with a general transformation of the character of planning as one identified as architecture-writ-large to one rooted less intuitively but grounded more objectively (Batty, 1994). In short, urban modelling emerged as part of an effort to better quantify and mathematically represent the conditions upon which decisions were made. To facilitate this, model developers, began to poach analytical methodologies from other disciplines—human ecology, mathematics, geography, operations research, linear programming, regional science, and economics—modellers were relentless in their pilfering of scientific techniques that might be applied to urban phenomena. There were a number of motivating forces driving these changes.

The 1960s was a time of insecurity about the intellectual credentials of urban studies (including both urban geography and urban planning) as a social science (Sayer, 1979). While neighbouring



disciplines were quantifying heavily over this period, modelling was, in a sense, a bandwagon which urban studies researchers felt compelled to jump on in a bid to legitimize the scholarly merits of their academic pursuits and professional activities.

Underlying and supporting this motivation was a sense of “technological optimism” (Klosterman 1994). Urban models were first used in a period in which it was felt that the scientific successes of the time (telecommunications, medicine, agriculture, physics, chemistry, and, of course, computers) could be applied as efficiently and, it was hoped, as successfully to the social realm.

At full swing in their popularity by the early-1960s, urban models were being developed for several cities in the United States. Large-scale modelling projects were funded in Pittsburgh, San Francisco, the Penn-Jersey corridor, and elsewhere. Models were also developed for several European cities. At first they were introduced with the aim of solving land-use and transportation questions, later being employed with the goal of addressing a wider range of urban problems.

### **3 MODEL CLASSIFICATION**

#### **3.1 BASIC MODELS**

Of course, urban models come in many flavours. These range in variety from basic to mathematical in character, with a respective diversity of theoretical foundations, purposes, and functionality of use. Nevertheless, a general taxonomy of urban models is presented here as a framework within which the reader can situate land-use–transportation models. Basic models rarely contain the capacity for prediction. They may be classified into three main groups: scale, analogue, and conceptual.

Also known as iconic, scale models are amongst the most well known models. Broadly speaking, they are scaled-down versions of reality, usually without any functional or predictive capacity. Essentially, they differ from reality only in size. Examples include wooden block models and architectural mock-ups.

In analogue models, size is transformed, but so are some of the properties of the thing that is actually being modelled. The most familiar analogue model, in a geographic sense, is the map. Here size is reduced (as with the scale model), but so also are some of the properties of the thing being modelled. For example, in a map scale is reduced, but features are also symbolized (Thomas and Huggett, 1980).

A conceptual model generally expresses how we think a system works. Usually, conceptual models are presented as arrows that illustrate links or relationships, and boxes representing system components.

### 3.2 MATHEMATICAL MODELS

Mathematical models take the ideas encapsulated in a conceptual model and transform them into mathematical symbology, enabling conceptual ideas to be tested (and in some cases, permitting predictions to be made). The validity of mathematical models can then be evaluated by comparing their predictions against observed data. Under the heading of mathematical models there exist a myriad of sub-classifications, with a variety of goals and techniques. At the broadest level, we can consider mathematical models to be either normative or deterministic in their goals.

Normative models proceed with assumptions about how a system *ought* to behave. Deterministic models, on the other hand, proceed on the assumption that natural, physical laws control the behaviour of the system being simulated; and that once these laws have been uncovered, the behaviour of the system can be predicted. As with predictive models, deterministic models are loosely based on a set of behavioural relationships. Their application to the land-use–transportation problem is usually concerned with accounting for changes in the spatial pattern of land-use and transportation systems. They may also be employed to predict or assess the impacts of changes in exogenous variables or in policies targeted at those systems (Government of Ireland, 1995). Two important sub-classes of predictive model are probabilistic and optimizing models.

Probabilistic models are deterministic in their assumptions, but are distinct from the broad class of predictive models in that they express the initial assumptions of the model as a set of probabilities. In this sense they infuse an element of chance into the simulation process, so that predictions made by probability models are stated with a known degree of error or tolerance. In this way, probabilistic models focus on a *range of possible outcomes* rather than single predictions (Thomas and Huggett, 1980).

Optimizing models apply optimization theory to urban simulation—they assume that the distribution of urban activities can be allocated so as to optimize some objective function (e.g., the cost of transportation). The models generally have constraints placed on them to ensure that the system being simulated matches what can be observed.

### 3.3 LAND-USE–TRANSPORTATION MODELS

Land-use–transportation models belong to the mathematical family of models. They are composed of independent land-use and travel models, with mechanisms for coupling the two—either loosely or in a more integrated fashion.

Land-use models are used to predict demographic and economic measures of land-based activities. These measures describe the population (usually in terms of income and employment) and built-space environment (e.g., floor space) for a given urban area.

Travel models (specifically, travel demand models) are used to predict travel patterns on a transportation network. This class of models aim to simulate travel patterns as a function of human activities (commonly considered in terms of land uses) as well as the characteristics of the transport network (commonly considered in terms of accessibility)(Miller et al., 1998).

Integrated land-use–transportation models are used to simulate the *interaction* of the land use system and the transport system. Generally, this interaction is simulated by means of feedback mechanisms. The nature of this interaction will be explored further in later sections.

## 4 DESCRIPTIVE AND ANALYTICAL URBAN MODELS

Much of the contemporary land-use–transportation modelling effort has proceeded on a foundation of descriptive or analytical models that have been steadily developed since the beginning of the Twentieth Century. Among the more influential of these have been the von Thunen model, concentric zone theory, wedge or radial sector theory, and multiple-nuclei theory. While many of these models are weak in their theoretical justifications, outmoded in their capacity to describe today’s cities, and limited in their predictive powers; they have provided both an important environment for urban simulation and a base upon which contemporary efforts can be built. The important differentiating factor between descriptive or analytical models and land-use–transportation models is that descriptive or analytical models offer explanations as to how various urban phenomena emerge, but they generally abstract from questions of *why* those patterns materialize.

### 4.1 THE VON THUNEN MODEL

Based on a series of simplifying assumptions, von Thunen described a model that would account for a spatial distribution of sites across a theoretical geographic area that would have varying rent-

generating capacities dependent upon transportation costs and distance from a central site. Von Thunen's model was highly generalized and was based on a series of simplifying assumptions (Krugman, 1996):

1. The space in which the model was framed was assumed to be an infinite or boundless, flat, and featureless plane, over which climatic conditions and natural resources were uniformly distributed
2. The central attracting area was assumed to be a central market
3. Transportation to this central market was assumed to be by horse and cart
4. An allowance for the production and sale of different goods was made, but these goods were regarded as differing in bulk, therefore having varying costs of transportation from point of production to the central market
5. For each of these products, transport costs were assumed to vary with distance from the point of production to the point of sale at the central market
6. The profits to be gleaned from the cultivation of one hectare of land were assumed to be the same for each product

Based on these assumptions, and operating over the hypothetical space that von Thunen proposed, he argued that agricultural land uses would segregate into a spatially hierarchic structure akin to that demonstrated in Figure 1. (As we will see later, the idea is not at all different from bid-rent theory, which draws heavily from the von Thunen model in inspiration.)

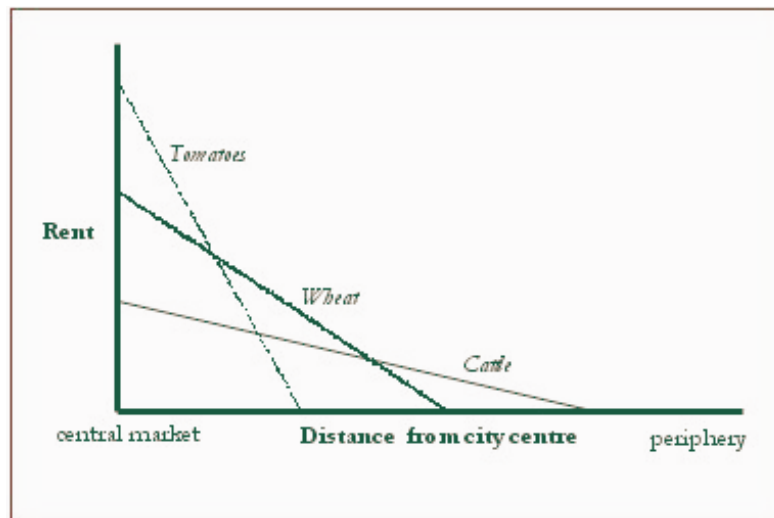


Figure 1. The spatial organization of agricultural land uses proposed by the von Thunen model.


#### 4.2 CONCENTRIC ZONE THEORY

EW Burgess developed the concentric zone theory of urban land use in the mid-1920s based on an examination of the historical development of Chicago through the 1890s. It contrasts from the von Thunen approach in being *descriptive* rather than *analytical* (Harvey, 1996). The concentric zone theory of urban land use is based on the assumption that a city grows by expanding outwards from a central area, radially, in concentric rings of development.

Burgess classified the city into five broad zones (Figure 2):

1. The central business district (CBD): the focus for urban activity and the confluence of the city's transportation infrastructures
2. The zone of transition: generally a manufacturing district with some residential dwellings
3. The zone of factories and working men's homes: this zone was characterized by a predominantly working class population living in older houses and areas that were generally lacking in amenities
4. The residential zone: this band comprised newer and more spacious housing for the middle classes

5. The outer commuter zone: this land use ring was dominated by better quality housing for upper class residents and boasted an environment of higher amenity

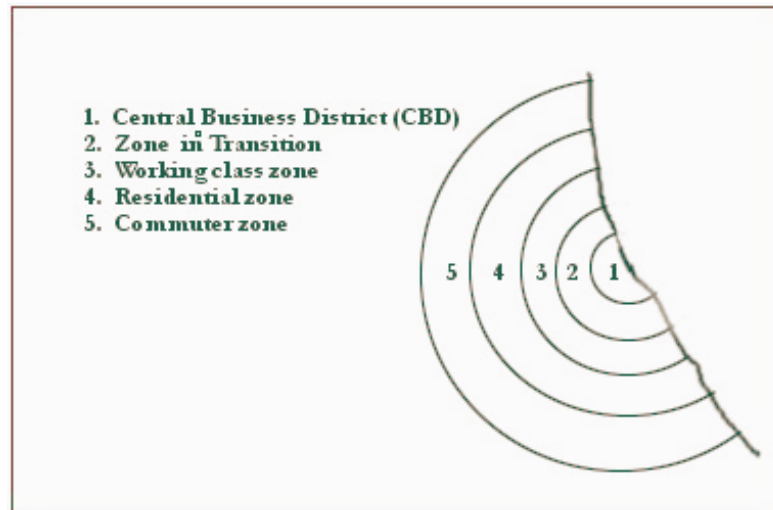

*Figure 2. The Burgess model of Chicago (after EW Burgess, 1925; Carter, 1981).*

While useful in a descriptive sense for explaining the location of land uses in a monocentric city, both the work of Burgess and von Thunen has (by extrapolation to urban cases), not surprisingly, come under heavy criticism. Amongst the complaints levelled have been accusations that the models are too rigid to ever accurately represent actual land patterns (the monocentric city assumption is perhaps the largest flaw). They have also been accused of overlooking the important influence of topography and transport systems on urban spatial structure and have been criticized for failing to accommodate the notion of special accessibility and ignoring the dynamic nature of the urban land use pattern (Harvey, 1996).

#### 4.3 WEDGE OR RADIAL SECTOR THEORY

Development of the wedge or radial sector theory of urban land use is generally attributed to the work of Hoyt (1939). Hoyt's model concerns itself primarily with the location of residential uses across urban areas; it refers to business location only in an indirect fashion. The model seeks to

explain the tendency for various socio-economic groups to segregate in terms of their residential location decisions. In appearance, Hoyt's model owes a great deal to Burgess's concentric zone model: Hoyt presents wedge-like sectors of dominant urban land use, within which he identifies concentric zones of differential rent. The model suggests that, over time, high quality housing tends to expand outward from an urban centre along the fastest travel routes. In this way, Hoyt transforms Burgess's concentric zones into radial or sectoral wedges of land use (Figure 3).

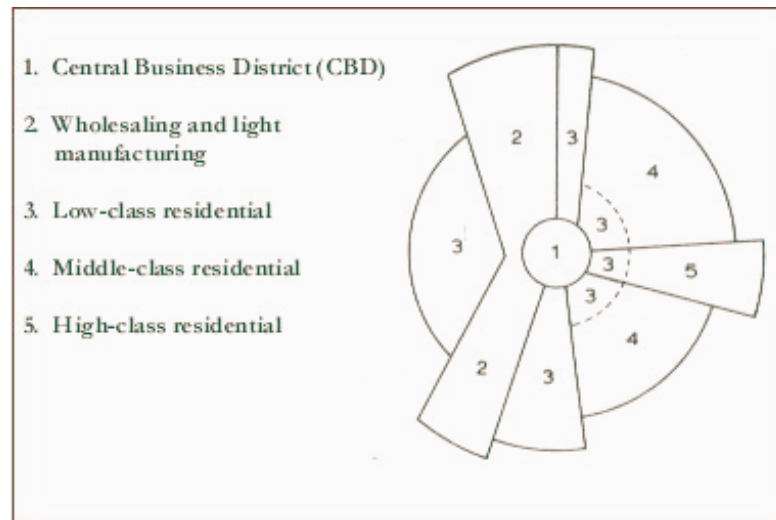


Figure 3. Hoyt's sector model (after H. Hoyt, 1939; Carter, 1981).

The innovative element in Hoyt's model was in considering *direction*, as well as distance, as a factor shaping the spatial distribution of urban activity. Hoyt's model also goes further than its predecessors in recognizing that the CBD is not the sole focus of urban activity (Kivell, 1993). One major criticism, however, is that the model overlooks the location of employment, which itself is the major determinant of residential location (Harvey, 1996).

#### 4.4 MULTIPLE-NUCLEI THEORY

The work of Harris and Ullmann (1945) in developing a multiple-nuclei theory of urban land use is amongst the most innovative descriptive or analytical urban models. Their model is based on the premise that large cities have a spatial structure that is predominantly *cellular*. This, they explain, is a consequence of cities' tendencies to develop as a myriad of nuclei that serve as the focal point for agglomerative tendencies. Harris and Ullmann propose that around these cellular nuclei, dominant land uses and specialized centres may develop over time.

The novelty in multiple-nuclei theory lies in its acknowledgement of several factors that strongly influence the spatial distribution of urban activity: factors such as topography, historical influences, and special accessibility. The theory is also innovative in its recognition of the city as polycentric (Figure 4). In this sense, it moves closer to explaining why urban spatial patterns emerge.

Our attentions will now switch to land-use–transportation models—a class of predictive mathematical simulations that take many of the theoretical concepts introduced by descriptive and analytical models and operationalize them by infusing them with empirical data and testing them in practice.

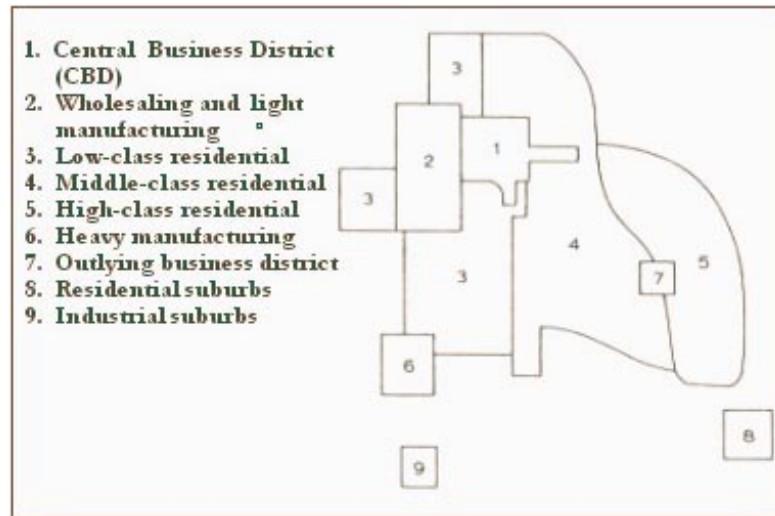


Figure 4. Diagram illustrating Harris and Ullman's multiple nuclei model (after CD Harris and EL Ullman, 1945; Carter, 1981).

## 5 GENERAL STRUCTURE OF THE LAND-USE–TRANSPORTATION MODEL

As intuition would suggest, land-use–transportation models couple two distinct systems: land-use and transport. Embedded beneath the umbrella of these two systems, however, lies an interconnected web of sub-models representing various sub-systems and processes at work within the city. Depending on the peculiarities of the model in question, these sub-models may exist in isolation from each other, they may be loosely associated, or may be well connected via such mechanisms as feedback loops.

Generally, a number of key components underpinning the land-use–transportation model may be described. These include, at the top-most level, a mechanism handling land-use and a separate



model to describe transport. The land-use module depends, in varying degrees; on sub-models for location, land development, and an equilibrium mechanism that balances forces of demand and supply. The transport system is traditionally simulated via a four-step process beginning with potential demand modelling and trip generation, proceeding through trip distribution and modal split, and concluding with trip assignment (Figure 5).

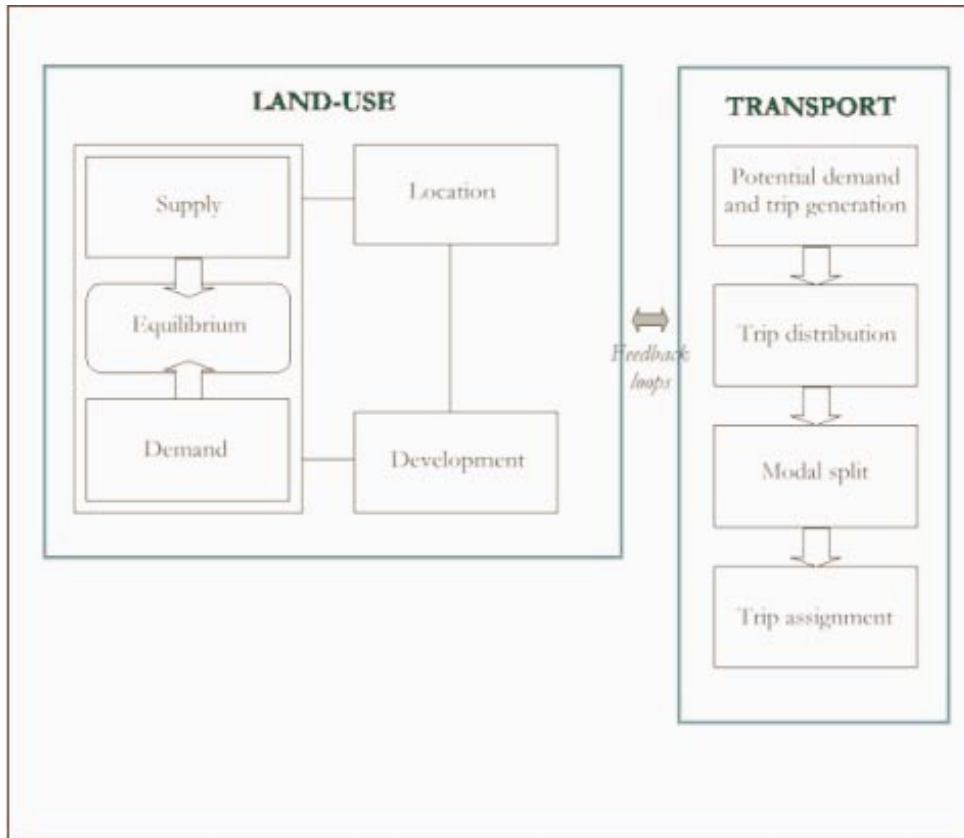


Figure 5. The general structure of a land-use–transportation model.

## 6 MODELLING TECHNIQUES

The discussion of land-use–transportation models will now proceed with a summary of some of the key mathematical principles that form the mechanics of most simulations, followed by a detailed treatment of the various components that comprise the generic model. In Section 6.1 we discuss spatial interaction models in both their basic and constrained forms. Section 6.2 deals with spatial choice models. Section 6.3 then shifts the discussion to bid-rent models.

## 6.1 SPATIAL INTERACTION MODELS

The main engine of the generic land-use–transportation model has traditionally been the spatial interaction model or variants thereof. The spatial interaction model features in land-use–transportation simulation in its representation of flows of both trips and activities between areas of the city. While many contemporary simulation packages are moving away from spatial interaction modelling as a baseline simulation technique, it is worth examining the assumptions and mathematics underpinning its application to land-use–transportation models, as the technique is still quite widely used in practice.

A spatial interaction model is generally employed to predict the size and direction of spatial flows using independent variables that measure some structural property of the spatial area being modelled. For example, the spatial pattern of journey-to-work flows might be predicted using structural variables such as the distribution of workers, the distribution of employment, and the costs of travelling to work.

Based on mathematical assumptions that resemble Newton’s law of gravitational attraction, gravity models are a particular instance of the broader class of spatial interaction models. Newton asserted that the force of attraction,  $F$ , between two bodies is the product of their masses,  $m_1$  and  $m_2$ , divided by the square of the distance between them,  $d_{12}^2$ :

$$F = G \cdot m_1 m_2 / d_{12}^2 \quad (i)$$

where  $G$  is a universal constant: the pull of gravity.

Translating this into a geographical context, we could regard force as the number of flows (e.g., trips) between two regions and treat mass as a structural variable such as population size. With these base calculations we can measure a region’s capacity either to generate or to attract trips, representing distance either in physical terms or in some surrogate form (e.g., travel cost or travel time).

There are a number of important assumptions underlying the simple gravity model. It is assumed that the size of any flow is proportional to ( $\propto$ ) a structural variable  $W_i$  at the point of origin for a trip. ( $W_i$  measures the capacity of a region to attract trips.) For studies where the flows are numbers

of people,  $W_i$  is often defined as the population of the origin region. Mathematically this is represented as:

$$T_{ij} \propto W_i \quad (\text{ii})$$

which asserts that the magnitude of the flow leaving any region  $i$  will grow or decline linearly as the population size ( $W_i$ ) of the region changes.

It is also assumed that the size of  $T_{ij}$  (the volume of flows between  $i$  and  $j$ ) is proportional to a structural variable  $W_j$  that measures the trip-attraction capacity of the region where the flow *ends*. Again, attractiveness is often measured by the population size of the destination region, or commonly as the level of employment at the destination:

$$T_{ij} \propto W_j \quad (\text{iii})$$

which asserts that the magnitude of the flow arriving in any zone  $j$  will grow or decline linearly as the size of opportunities in the destination region change.

Another assumption concerns the measure of distance between the origin region  $i$  and destination region  $j$ . It is assumed that the amount of interaction between the two regions,  $T_{ij}$ , *declines* in proportion with the square of the distance  $d_{ij}^2$  between the two regions:

$$T_{ij} \propto \frac{1}{d_{ij}^2} \quad (\text{iv})$$

$$\text{or, } T_{ij} \propto d_{ij}^{-2} \quad (\text{v})$$

The validity of this proposition is often justified with data for different types of interaction that show that there is an element of distance decay in urban travel, i.e., that short-distance flows occur

more frequently than long-distance flows do. However, apart from adhering to Newtonian principles, there is no theoretical justification for expecting flows to decline exactly with the square of distance between regions. For this reason, it makes more geographical sense to allow distance to be raised to some power  $\alpha$  and to rewrite the assumption more generally as:

$$T_{ij} \propto d_{ij}^{-\alpha} \tag{vi}$$

The exact value assigned to  $\alpha$  will depend on the available empirical evidence. Raising  $\alpha$  to progressively higher powers steepens the gradient of the curve such that the number of short-distance interactions is increased relative to the number of long-distance interactions. For this reason the value of  $\alpha$  is said to measure the *frictional effect of distance*.

When the three gravity model assumptions are woven into a cohesive framework, the basic gravity model formula is obtained:

$$T_{ij} = k \cdot \frac{W_i W_j}{d_{ij}^\alpha} \tag{vii}$$

Put simply, this states that flows are a result of push and pull factors. Specifically, that the flow between two places is a function of the ability of an origin to generate flows (e.g., trips), the capacity of a destination to attract these flows, the distance over which the flow must pass, and some weighting mechanism that discourages flows over long distances. In the above equation, the attraction and generation propositions are incorporated by the multiplication of the terms  $W_i$  and  $W_j$ . Division by some power of distance produces the distance-decay effect,  $\alpha$ .  $k$  is a scaling constant; it needs to be included because the independent variables  $W_i$  and  $W_j$  are not measured in units of flow (Thomas and Huggett, 1980).

Significant variations on this basic description of the gravity model include the production-constrained model, the attraction-constrained model, the production-attraction-constrained model, and the entropy-maximizing model. The motivation behind applying these enhancements to the basic framework is to provide some form of balancing or accounting in the predictions that the

model makes. Or, put another way, the notion of the constraint serves as a proxy for the theoretical notion of market equilibrium. (Although the inclusion of constraints in the gravity model is perhaps more a function of its weakness in matching observed and predicted flows than of any desire to reconcile the technique with urban economic theory.) The mechanics of the constrained gravity model will be explored in detail next.

### 6.1.1 Production constraints

Essentially, constraints serve to straightjacket a model into reconciliation with known information. A production constrained gravity model is one in which the total number of flows leaving an origin  $i$  is already known. This knowledge is incorporated into the model design. To recap, let us restate the original gravity model equation and then examine how that formulation changes with the application of a production constraint. The basic gravity model may be formulated as follows:

$$T_{ij} = k \cdot \frac{W_i W_j}{d_{ij}^\alpha} \quad (\text{viii})$$

The production-constrained model is a confined version of this formula, where the following constraint is satisfied:

$$\sum_j^n T_{ij} = O_i \quad (\text{ix})$$

Here,  $\sum_j^n$  sums the values of  $O_i$  (usually a value for the population size of a trip origin zone) across all destinations  $j$ ;  $T_{ij}$  is the predicted flow between origin  $i$  and destination  $j$ ; and  $O_i$  is the known total number of flows beginning in origin zone  $i$ . What the production constraint secures, then, is that the sum of all flows predicted as originating in zone  $i$  actually conform to the total number of flows that we *know* originated in that zone. We know how many trips left origins in the

urban system in advance of beginning the simulation process, so we can constrain the model to prevent over- or under-predicting of this figure.

Adding the production constraint to the model yields:

$$T_{ij} = A_i O_i W_j c_{ij}^{-\alpha} \quad (\text{x})$$

where  $T_{ij}$  is the predicted flow of trips (or a flow of any commodity in the urban system) between origin  $i$  and destination  $j$ ,  $O_i$  is the total known number of trips beginning in origin  $i$ ,  $W_j$  is the attractiveness of destination  $j$  for the flow (e.g., floor space or employment), and  $c_{ij}^{-\alpha}$  is cost of travel between  $i$  and  $j$  with a distance decay effect applied.  $A_i$  has replaced  $k$  in the basic model. Here,  $A_i$  is a scaling constant for each origin  $i$  that ensures that the sum of the flows leaving zone  $i$  for destinations  $j$  sum to the *known* total zonal flow count. In this sense,  $A_i$  is the ratio between the known flow from  $i$  and the sum of the unscaled predicted flows leaving origin  $i$  for destination  $j$ . Mathematically this can be represented as:

$$A_i = \frac{O_i}{\sum_j^n O_i W_j c_{ij}^{-\alpha}} \quad (\text{xi})$$

### 6.1.2 Attraction constraints

In an attraction-constrained model, we know how many trips have reached destinations  $j$  in an urban system. Again, the predicted trip matrix is made to satisfy a constraint, this time in the form:

$$\sum_i^n T_{ij} = D_j \quad (\text{xii})$$

where  $D_j$  is the known number of trips reaching a destination  $j$  (e.g., the number of jobs at a destination  $j$ , or perhaps the allure of shopping facilities there).

Incorporating the constraint fully into our basic gravity model yields the formula:

$$T_{ij} = B_j D_j W_i c_{ij}^{-\alpha} \quad (\text{xiii})$$

where  $D_j$  is the known number of trips reaching destination  $j$ ,  $W_i$  is the attractiveness of origin  $i$  as a residential location, and  $c_{ij}^{-\alpha}$  is cost of travel between  $i$  and  $j$  with a distance decay effect applied.  $B_j$  is a scaling constant; for any destination zone  $j$ ,  $B_j$  is calculated as the ratio between the known number of jobs in that destination ( $D_j$ ) and the sum of the unscaled unpredicted journey-to-work flows arriving in destination zone  $j$  from each origin zone  $i$  (Thomas and Huggett, 1980). Mathematically,  $B_j$  is derived from:

$$B_j = \frac{D_j}{\sum_i^n D_j W_i c_{ij}^{-\alpha}} \quad (\text{xiv})$$

The attraction constrained gravity model may be considered to be a residential location model in the sense that it uses knowledge of the distribution of jobs, the residential attractiveness of each zone, and journey-to-work costs to assign workers to households in the city.

### 6.1.3 Production-attraction constraints

The singly constrained gravity model (either of the production- or attraction-constrained models in isolation) essentially becomes a location model. However, if both flow origins and flow destinations are constrained in the model framework, our attention returns to predicting the size of individual flows ( $T_{ij}$ ) (Thomas and Huggett, 1980). In production-attraction constrained models, the predicted

flows are asked to satisfy two constraints simultaneously (the production and attraction constraints already discussed):

$$\sum_j^n T_{ij} = O_i \tag{xv}$$

$$\text{and } \sum_i^n T_{ij} = D_j \tag{xvi}$$

Incorporating these into the basic gravity formula yields:

$$T_{ij} = A_i O_i B_j D_j c_{ij}^{-\alpha}, \tag{xvii}$$

with the scaling properties  $A_i$  and  $B_j$  defined as before.

#### 6.1.4 Entropy-maximizing models

The notion of entropy offers a theoretical framework for spatial interaction models. Based on statistical mechanics, entropy is concerned with finding the degree of likelihood of the final state of a system. Data for urban systems are not usually abundantly available. We therefore need a method for making reasoned estimates of the likely state of an urban system using the information that we do know. In this sense, we maximize entropy subject to constraints of known information.

There are two important concepts in entropy that are applied to urban contexts—the macrostate and the microstate. If we consider our urban system to be comprised of flows between origins and destinations, we may think of the macrostate description of our system as being the numbers of individuals or items flowing between origins and destinations. This macrostate is composed of many microstates—descriptions of the actual individuals or items that make up a macrostate. Just as there are many possible arrangements of individuals that could make up a subway train of two hundred commuters travelling from one location to another, there are many possible microstates that can make up a given macrostate.



The number of microstates associated with any given macrostate can be calculated as:

$$R = \frac{N!}{\prod_i^n N_i!} \quad (\text{xviii})$$

where  $R$  is the number of microstates associated with any given macrostate for the system,  $N$  is the number of individuals or items assigned to a set of categories,  $N_i$  is the number of individuals in a category  $i$ ,  $N!$  is the factorial value of  $N$ :  $N(N-1)(N-2)(N-3)\dots(N-n)$ , and  $\prod_i^n$  is the product of a factorial value.

Framed in this context, the problem of modelling spatial flows then becomes one of maximizing entropy—choosing the macrostate associated with the largest number of microstates (Barra, 1989; Fotheringham et al., 2000; Fotheringham and O'Kelly, 1989). If we consider our flows to be trips from origin  $i$  to destination  $j$ , we can substitute  $T$  (the total number of trips made in our system) and  $T_{ij}$  (the individual flow of trips from an origin to destination) for  $N$  and  $N_i$  in the above equation:

$$R = \frac{T!}{\prod_{ij} T_{ij}!} \quad (\text{xix})$$

In dealing with something as complex as an urban system, a modeller can end up with many possible states to pick from in her or his choice set. As with the basic gravity model, constraints may be introduced into the entropy-maximizing framework, allowing us to reduce the choice set of predicted trip matrices down to a manageable level. This constraint is placed on the state description as:

$$\sum_i^n \sum_j^n T_{ij} c_{ij} = C \quad (\text{xx})$$

where  $c_{ij}$  is the cost of travel from zone  $i$  to zone  $j$ , and  $C$  is the overall expenditure available for those trips.

Once an entropy value has been approximated, it needs to be maximized to arrive at a solution to our problem of identifying the most likely trip matrix from a potentially infinite number of possible forms. The maximization of the entropy value involves the use of Lagrange multipliers (a technique for evaluating maxima or minima of a function subject to one or more equality constraints). Essentially, the Lagrange multipliers serve as weightings to ensure that the constraints within the model are met. Incorporating constraints, the model may be expressed mathematically as:

$$L = \ln W + \sum_i^n \tau_i \left( O_i - \sum_j^n T_{ij} \right) + \sum_j^n \alpha_j \left( D_j - \sum_i^n T_{ij} \right) + \beta \left( C - \sum_{ij} T_{ij} c_{ij} \right) \quad (\text{xxi})$$

where  $L$  is the function to be maximized subject to constraints;  $\tau_i$  is the Lagrange multiplier associated with a production constraint;  $\alpha_j$  is the multiplier associated with an attraction constraint (and if both production and attraction constraints are included the model may be considered to be doubly constrained); and  $\beta$  is the multiplier associated with a cost constraint. The trip matrices that maximize  $L$ , i.e., the most likely distributions of trips in the urban area, are solutions of the calculation:

$$\frac{\partial L}{\partial T_{ij}} = 0 \quad (\text{xxii})$$

To solve this equation we make use of Stirling's approximation when the values of  $T_{ij}$  are large:

$$\log x! = x \log x - x \quad (\text{xxiii})$$

We may also maximize  $\ln R$  instead of  $R$  such that:

$$\frac{\partial L}{\partial T_{ij}} = -\ln T_{ij} - \tau_i - \tau_j - \beta c_{ij} \quad (\text{xxiv})$$

Setting the equation to zero and solving yields:

$$T_{ij} = \exp(-\tau_i - \tau_j - \beta c_{ij}) \quad (\text{xxv})$$

One of the innovative features of the entropy approach to spatial interaction modelling is that it provides a theoretical (albeit derived from statistical mechanics) for a *family* of spatial interaction models. By substituting the above equation in place of  $T_{ij}$  in our constraint models already explored in Section 6.1 we derive entropy versions. For the origin constraint, the equivalent entropy model is derived as:

$$\sum_{ji}^n T_{ij} = O_i \text{ becomes } \exp(-\tau_i) = O_i \left[ \sum_j^n \exp(-\tau_j - \beta c_{ij}) \right]^{-1} \quad (\text{xxvi})$$

and for the destination constraint, the equivalent equation is:

$$\sum_i^n T_{ij} = D_j \text{ becomes } \exp(-\tau_j) = D_j \left[ \sum_i^n \exp(-\tau_i - \beta c_{ij}) \right]^{-1} \quad (\text{xxvii})$$

To see how this results in a full spatial interaction model, we simply add our scaling constants,  $A_i$  and  $B_j$ :

$$T_{ij} = O_i D_j \exp(-\beta c_{ij}) A_i B_j \quad (\text{xxviii})$$

This represents the entropy spatial interaction model in its general form. From that equation, four versions may be derived: origin-constrained, destination-constrained, doubly-constrained, and unconstrained.

## 6.2 SPATIAL CHOICE MODELS

### 6.2.1 Discrete choice models

As has already been mentioned, there is little theoretical justification to support the notion that urban systems operate in a fashion akin to Newtonian gravity. At the start of the 1970s, some serious criticisms were levelled against gravity-type formulations of land-use–transportation models. In reaction to this, modellers began to develop simulations that were more behaviourally grounded. One avenue of development that was widely embraced was that of discrete choice modelling. Broadly speaking, discrete choice models (which derive from decision theory) are concerned with explaining phenomena in terms of decision-making. While they function in a fashion that resembles spatial *interaction* models, they are actually concerned with spatial *choice*. The most widely used manifestation of the discrete choice model in urban simulation is the random utility model and variations thereof.

Random utility models proceed on a number of assumptions. The first assumption specifies that each decision-maker is faced with a discrete set of choice alternatives—a choice is either made or not made. The second assumes that an individual (or a group of individuals) will settle upon one decision from a larger set of available options in such a way that the most utility, or satisfaction, is yielded. Contextualizing this in an urban sense, we might think of a household making a location decision amongst a set of given locations that a city has to offer so that a combination of utilities is maximized (e.g., cost, amenities, quality of the school system, etc.). The third assumption in random utility models is that choices are made in a probabilistic fashion—decision-makers have a likelihood of making certain choices. Finally, it is assumed that the utility of a decision can be divided into two components: one measuring ‘strict utility’: the fixed and measurable attributes of utility, and the other dealing with stochastic utility: an error or disturbance term that reflects the unobserved attributes of a given decision (Barra, 1989; Golledge and Stimson, 1997).

Mathematically, we can build up a formula for the random utility model based on these assumptions. The notion of *utility maximization* can be expressed as:

$$U_{ik} > U_{ij} \quad \forall k \neq j, j = 1, \dots, n \quad (\text{xxix})$$

where  $U_{ik}$  is the utility of a decision-maker  $i$  making choice  $k$ ;  $U_{ij}$  is the utility of a decision-maker  $i$  making choice  $j$ ; and  $\forall k \neq j, j = 1, \dots, n$  asserts that  $j$  stands for all choices other than  $k$ . Simply then, the above formula establishes a framework for a decision to be chosen from a set of alternatives.

Introducing the idea of *probabilistic* decision-making develops the random utility formula further:

$$P_{ik} = \Pr[U_{ik} > U_{ij}] \quad \forall k \neq j, j = 1, \dots, n \quad (\text{xxx})$$

where  $P_{ik}$  is the probability of a decision-maker  $i$  choosing alternative  $k$ ; and Pr is a probabilistic expression. This assigns likelihood to various choices from a set of alternatives.

Adding the assumption that utility may be distilled to a ‘*strict utility*’ and *stochastic* component yields the final random utility model formula:

$$P_{ik} = \Pr[V_{ik} + E_{ik} > V_{ij} + E_{ij}] \quad \forall k \neq j, j = 1, \dots, n \quad (\text{xxxii})$$

where  $V_{ik}$  and  $V_{ij}$  are the ‘*strict utility*’ components of an individual  $i$ ’s choices of  $k$  and  $j$  respectively and  $E_{ik}$  and  $E_{ij}$  are the stochastic elements of the utility calculation for choices  $k$  and  $j$ . Additional elements may be added to this formula to weight the probability calculation, e.g., variables representing the socio-economic characteristics of a decision maker.

The random utility model has many similarities to the entropy-maximizing gravity model. There are important differences though. Their similarities may be in large part a function of the set of assumptions upon which they are formulated, rather than their theoretical justifications or actual mechanics. There is also a difference in the way the two approaches handle the assumptions under which they operate, particularly in how they order them. Entropy models assume choices to be random from the outset, then narrow the choice set with the application of constraints. Random

utility models, on the other hand, start out with an assumption of a rational choice base, and introduce a random element as they proceed (Government of Ireland, 1995).

### 6.2.2 Non-hierarchical logit models

The most common derivative of the random utility model is the multinomial logit model. The logit model expresses the decision choice as a function of the utility of choosing one alternative over another. The model is derived by making assumptions regarding the random component of utility,  $E_{ij}$ .

A common assumption is that the distribution of  $E_{ij}$  follows a Weibull distribution (also known as a double exponential or extreme value type I distribution). The assumption of a Weibull distribution affords the utility calculation a greater degree of mathematical tractability. Applying the Weibull function to the random component of utility leads to McFadden's logit model, in the form:

$$P_{ik} = \frac{\exp[V_{ik}(X_k, S_i)]}{\sum_j^n \exp[V_{ij}(X_j, S_i)]} \quad (\text{xxxii})$$

where  $X_k$  and  $X_j$  are the choice specific attributes of choices  $k$  and  $j$  respectively (e.g., in terms of trip-making, this could represent costs, time, etc.); and  $S_i$  is the individual-specific attributes of choice  $k$  (e.g., the decision-maker's income, level of auto ownership, etc.). In short then, the McFadden logit model states that the probability of a decision-maker choosing an alternative  $k$  from a set of available alternatives is a function of the attributes of the available alternatives and the decision-maker's own characteristics (Government of Ireland, 1995).

The non-hierarchical logit formulation suffers from some serious weaknesses however. Behaviourally, the logit framework assumes that individuals evaluate every available alternative to their decision before settling on an optimal one. In practice, cities generally offer far too many competing alternatives to any given decision to be completely evaluated in this manner. Rather, decision-makers, be they individuals or groups, are more likely to settle on a final decision from a small subset of the available alternatives that are globally available to them throughout the entire urban system. A *hierarchical* decision-making strategy is thus more likely to be employed than an optimizing strategy (Fotheringham and O'Kelly, 1989). Structurally, logit models exhibit

weaknesses owing to the independence from irrelevant alternatives problem and the assumption of regularity. The problem of independence from irrelevant alternatives (popularly known in transport modelling as the ‘red-bus-blue-bus conundrum’) lies in the fact that logit models assume that the ratio of probabilities of an individual selecting two alternatives is irrelevant from the addition of an extra alternative. Yet, the introduction of additional alternatives is generally quite relevant in spatial terms. Closely related to this is the idea of regularity, which refers to the notion that within the logit framework it is not possible to change the probability of selecting an alternative by adding another alternative to the choice set (Fotheringham and O’Kelly, 1989). In the context of an urban system this assumption holds little value; it leaves the decision-making process unaffected by any offer of additional choices to a decision-maker.

### 6.2.3 Nested logit models

The nested logit model departs from the basic logit formulation by introducing hierarchy into the decision-making process. Nested models assume that decision-makers process information about choices in a chained fashion and that the modeller is aware of the form of that chain. In this sense they attempt to circumvent the weaknesses of the non-hierarchical model by assuming that decision makers make choices sequentially, rather than wading through every available option at once.

A common application of the nested model is to travel choice. Various sequential stages in the decision to travel can be identified, e.g., whether or not to make a trip; where to go; by what mode a trip should be made; and on what route to travel. This method of simulation abstracts from irrelevant (or less relevant) information regarding the decision, and focuses the choice on the set of alternatives that are most applicable. Mathematically, this results in a set of conditional probabilities for each of the sequential stages in the decision-making process. Aggregating these probabilities yields the likelihood of a choice being made such that:

$$P(a.b.c.d) = P(a)P(b | a)P(c | a,b)P(d | a,b,c) \quad (\text{xxxiii})$$

where  $a$ ,  $b$ ,  $c$ , and  $d$  refer to the four sequential stages in the decision hierarchy (e.g., whether to travel, destination, mode, and route). It is important that the estimation process begin with the last

step in the hierarchy and work its way back to the beginning in order to ensure that the strict utilities are preserved throughout the process (Government of Ireland, 1995).

Formulating the nested model in spatial terms, decision-makers can be regarded as choosing options from a set of clusters. Continuing with our trip-making analogy, we now have individual trip-makers (or perhaps groups of trip-makers) who make decisions about their trips but also have to consider a range of spatial options in which to focus those choices. Mathematically, this can be represented as:

$$P_{is} = \frac{\exp(V_{is}) \left[ \sum_{k \in s} \exp(V_{ik}) \right]^\sigma}{\sum_s \exp(V_{is}) \left[ \sum_{k \in s} \exp(V_{ik}) \right]^\sigma} \quad (\text{xxxiv})$$

where  $P_{is}$  is the probability that a decision-maker  $i$  will select a particular spatial cluster  $s$  to focus its decision in;  $\sum_{k \in s} \exp(V_{ik})$  is termed an ‘inclusive value’ and describes the attractiveness of a cluster as a function of the individual alternatives available within that cluster (Fotheringham and O’Kelly, 1989); and  $\sigma$  represents the extent to which decision-makers process their information hierarchically, and ranges in value from zero to one, with  $\sigma = 1$  denoting decision-makers who do not process their information hierarchically at all.

Once a decision-maker has selected a given spatial cluster,  $s$ , to narrow her choice set, all that remains is for an option (or alternative),  $k$ , to be settled upon. The likelihood of a decision-maker selecting a particular alternative  $k$ , *within the selected spatial cluster  $s$* , is then calculated as:


$$P_{ik \in s} = \frac{\exp(V_{ik})}{\sum_{k \in s} \exp(V_{ik})} \quad \forall k \in s \quad (\text{xxxv})$$

and the probability of a decision-maker selecting  $k$  *from the set of all alternatives* is:



Spatial choice models are perhaps more appropriate representations of how land-use and transportation systems organize than spatial interaction models, but they suffer from weaknesses. Notably, it is widely understood that the distinctions between choice categories may often be fuzzy rather than discrete. Spatial choice models do not commonly accommodate this.

### 6.3 BID-RENT THEORY

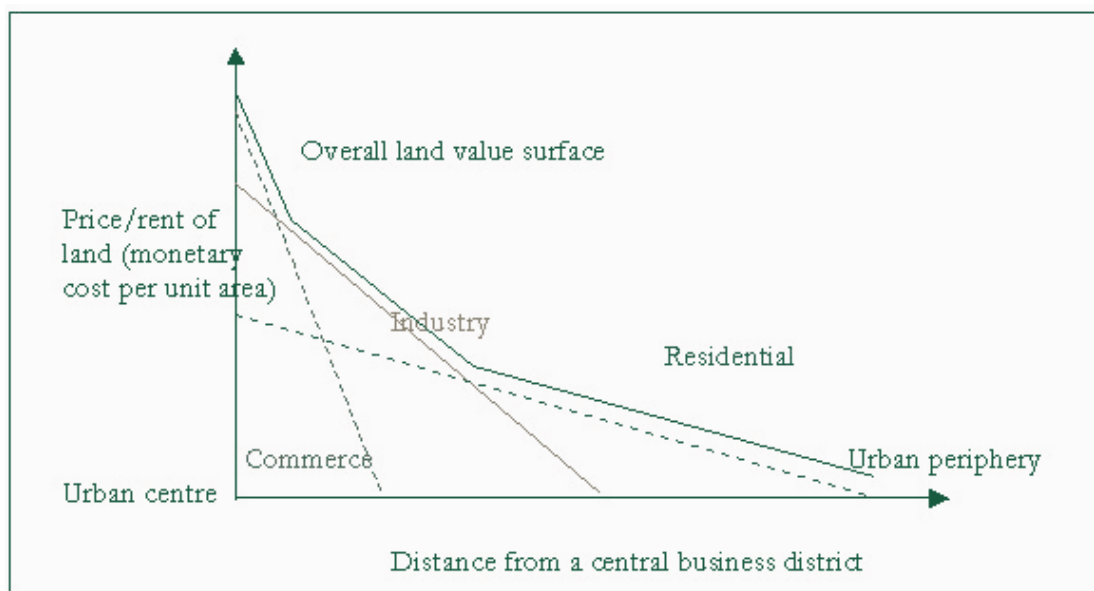

*Figure 6. Diagram illustrating land use patterns distributed spatially across a theoretical city according to bid-rent theory*

The final modelling technique, which along with spatial interaction and spatial choice, underlie the most common land-use–transportation models is bid-rent theory. Bid-rent theory (popularized by Alonso) owes a great deal to the von Thunen model that we explored in Section 4, as Figure 6 illustrates. Proceeding from a set of simplifying assumptions (notably, monocentric cities and a limited range of land uses), bid-rent theory offers an explanation of the spatial distribution of urban activities. The central argument of bid-rent theory is that land uses will organize geographically based on their capacity to compete for land rents. That capacity to compete is controlled by the

value, profit, or utility that an activity places on accessibility to a central urban core. Given these considerations, land uses will tend towards a spatial arrangement akin to that illustrated in Figure 6—with businesses located close to the urban core and industry and residences situated towards the urban periphery.

While the notion of bid-rents has enjoyed a wide application in urban modelling, and has a limited theoretical justification, the theory does not easily transfer to practice. The utility function, in particular, can be difficult to calculate. Often, it involves a monetary component (e.g., travel time and/or travel cost related to distance from work). But in many circumstances the utility function also contains non-monetary conditions that are difficult to cost—the availability of space, fresh air, peace and quiet; location prestige; neighbours; family ties; etc. (Balchin and Kieve, 1977). Nevertheless, bid-rent theory enjoys a pivotal position in many operational land-use–transportation models and is an important ingredient in their formulation.

A variant of bid-rent models—hedonic price models—has gone further towards operationalizing some of the factors that weigh into the bid-rent calculation. Hedonic price models distil real estate values into constituent components (e.g., land value, structure value, number of bedrooms in property, proximity to schools, etc.), each of which has an associated value. Often these models can be incredibly disaggregated. However, they are weakened to some extent by their reliance on price as a framework for formulating ideas about the dynamics of urban systems. Also, because of privacy concerns, price data can be difficult to obtain, especially data spanning multiple time periods. Moreover, many things are difficult to price.

## **7 INDIVIDUAL MODEL COMPONENTS (SUB-MODELS)**

With a grounding in the important modelling principles common to land-use–transportation models behind us, the discussion now moves onto a treatment of the various sub-models that make up land-use–transportation models. In Section 7.1 simulation of the land use system will be described in terms of location, development, and equilibrium; then the focus will shift in Section 7.2 to a representation of the transport system, discussed in terms of potential demand modelling and trip generation, trip distribution, modal split, trip assignment, accessibility, and the generalized costs of travel. Ways of integrating the land-use and transport systems in a simulation are then mentioned in Section 7.3, as are the introduction of policy elements to the modelling framework in Section 7.4.

The essential components of the land use system, in terms of land-use–transportation modelling, are location and development.

### **7.1.1 Location**

The urban land use system is largely modelled by simulating the mechanisms that affect the spatial location of urban activities in a city. The most important of these location factors for simulation purposes—accessibility—will be discussed in more detail in later sections. A number of other important geo-economic concepts underpin land-use–transportation models, serving as proxies for the complex interactions and motivations driving urban location. Among these are the ideas of bid-rent, travel costs, inertia (stability in the occupation of land), topography, climate, planning, and size.

As the discussion surrounding bid-rent theory alluded to, not all land uses in the city have the same location considerations. It is useful, therefore, within a land-use–transportation model, to decompose the location decision to represent a broad classification of the most important land uses in a city. Residential location and firm location are essential considerations, and occasionally industrial location is modelled.

#### *7.1.1.1 Residential location*

There are three main theories explaining the rationales underlying urban residential location: bid-rent theory, travel cost minimization theory, and travel cost and housing cost trade-off theory. Expressing the household location decisions of two households in a monocentric city in a bid-rent framework generates bid-rent curves such as those displayed in Figure 7.

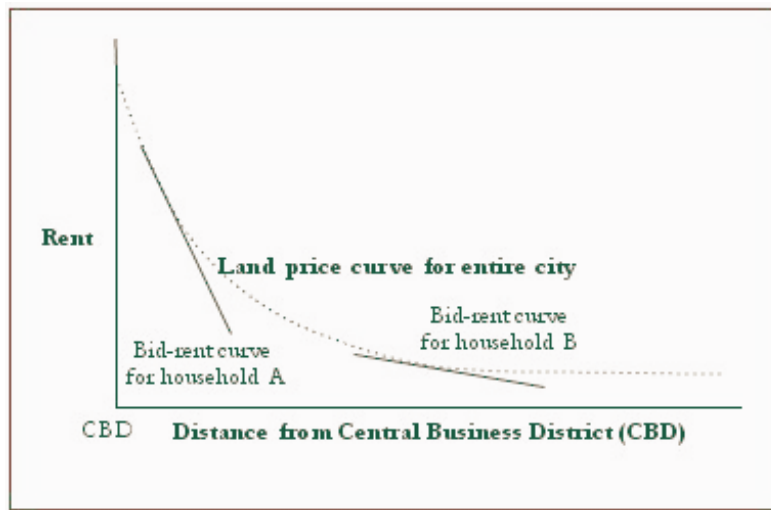


Figure 7. Diagram illustrating a residential bid-rent curve for a monocentric city.

When seeking out a location (in this conceptual, economic sense), each household pursues a location on the bid-rent curve where the *land price curve* touches the bid-rent-curve nearest the origin, i.e., a household seeks the location that yields the greatest utility at current market rents (Harvey, 1996). The shape of a household's bid-rent curve is dependent upon their particular situation (tastes, income, etc.). For example, a young family (household B) will generally require space and access to schools. Its bid-rent curve is likely to be relatively flat as a result (implying that a household is more likely to locate in the suburbs). On the other hand, single people, the elderly, or families consisting mainly of wage earners (household A), are likely to have steeper bid-rent curves, and may favour locations closer to the CBD.

*Travel cost minimization theory* assumes that the only consideration in the residential location decision is that households select locations that reduce their need to travel. If we consider a city with jobs located in a central core, this implies that the most sought after locations would be close to the CBD, while the less popular areas would be concentrated on the urban fringe. Socio-economically, this would suggest concentrations of wealthy households in the central city, with poorer households towards the urban periphery. In reality, the cost of travel is not the only residential location factor affecting the decisions of households; factors such as open space and quality of housing muddy the issue and the opposite is generally true: the poor end up closer to the CBD and the rich live farther out. Also, jobs are increasingly located in the suburbs. Nevertheless, travel cost minimization theory does have some relevance to household location (particularly through the notion of accessibility).

*Travel cost and housing cost trade-off theory* assume that households trade off the competing influence of housing cost and travel cost in making their residential location decision. This implies, in geographic terms, that land values will be higher close to a central business district and lower towards the periphery. While this is largely true in practice, there are many complicating factors, both economic and non-economic. High-income households may not have to trade off housing cost against travel cost, because they may be able to afford both. People who can afford to live close to the CBD may elect not to because they wish to enjoy the amenities on offer in the suburbs (e.g., environment, space, and for reasons of segregation). Because of the dearth of available space in central cities, outer areas generally offer a wider range of opportunities for the construction of new and expensive houses. Also, transportation innovations may make outer locations more accessible to a CBD than inner suburban areas. This is significant; jobs are increasingly relocating to peripheral sites. Additionally, location decisions may be heavily reliant on the availability of income and mortgage finance, which is often distributed aspatially within a given metropolitan area. And there may be a time lag before households react to changes in housing costs.

There are also many non-economic reasons that play equally important roles in affecting household location decisions. For example, some households may have a low degree of mobility in their decision to move. There may also be more pressing familial reasons why a household seeks to move, and governing the type of real estate they may demand, e.g., changes in employment, marriage, family size, and age.

### 7.1.1.2 Business location

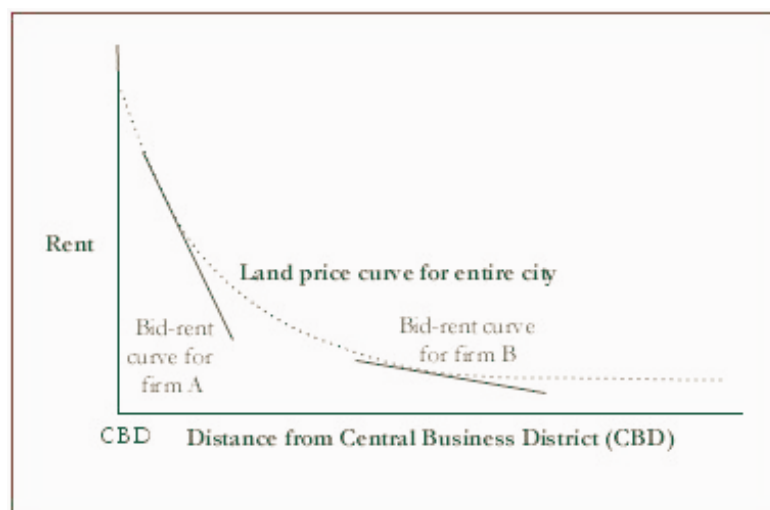


Figure 8. Diagram illustrating a business bid-rent curve for a monocentric city.

Households may desire central areas as much as other urban land uses, but they can rarely hope to outbid uses such as industry and business (unless the residences compose multi-storey blocks of residential units) because they cannot derive as much profit (or utility) as those other uses. In terms of bid-rent, firms generally out-bid all other activities in the urban location decision, simply because they can derive the most profit from occupying a particular site. In this sense, they tend to have the steepest bid-rent curves (Figure 6). We find that firms tend to locate where the *land price curve* touches the bid-rent curve. At that point, the most profitable location at current market rents is realised, which is often in, or close to, the CBD. However, firms requiring large sites may have a flatter bid-rent curve (firm B), and may locate in suburban areas or towards the urban periphery (Figure 8).

#### 7.1.1.3 *Industrial location*

Industrial land uses have the same need for proximity to central sites as do firms. Their location motivation is also similar to that of firms: availability of labour, access to transportation, auxiliary services, etc. However, their need for central locations is not as great. As a result, industries are not as well equipped to compete for central sites and their rent gradients tend to be flatter than those of commercial firms.

In recent years there have been significant changes in the location behaviour of most urban land-uses because of advances in the provision of transport infrastructure, changing socio-demographics amongst urban populations, and alterations in the spatial structure of the city. While these reorganizations have affected all urban land uses, the impact of these changes has been particularly profound for manufacturing industry and its location within metropolitan areas. Manufacturing uses have been persuaded or forced out of central locations largely because of developments in the provision of roadways—the contemporary wave of road building has focused mainly in outer urban areas. Nevertheless, a large degree of inertia remains for centrally located manufacturing industry, fuelled by traditional preferences for downtown sites and the benefits of external economies of agglomeration in central areas.

#### 7.1.1.4 *Simulating location via the Lowry framework*

One way of handling the idea of location in a simulation sense is via the *Lowry framework*. Conceived of in his *Model of Metropolis* (1964), the framework proceeds on the premise that the

place of employment governs the place of residence—jobs decide where people live. In the Lowry framework, employment is divided into basic (mainly manufacturing) and non-basic (mainly service) sectors. The framework takes basic employment (which must be exogenously supplied) together with endogenously derived service employment and uses them to estimate the location of residents. This estimate of residential location is then fed back into the model to predict the location of service employment. The model then proceeds iteratively through these steps, assigning activities to urban locations.

Lowry's assumption that basic industry should be exogenously determined (outside the model) was based on his observations that basic industry has specialized site requirements and external markets, and that its location decisions are independent of the residential population (Oryani and Harris, 1996). However, Lowry suggested that service employment be endogenously derived (within the model) since its location decisions are closely related to residential demand. He also assumed that the residential location decision was made in relation to both combined service and basic employment.

Distilling the Lowry framework to its two principal mechanisms—residential and firm location—presents a clearer idea of how the model operates. In the residential component, population (or households) are assigned to residential locations in origin zones based on their places of employment in destination zones. Two main factors are used to govern this location assignment process: zonal attractiveness and distance. For households, zonal attractiveness can be characterized by variables such as floor space; housing prices or rents; availability of schools, shops, health services, leisure and recreation facilities, etc. The other factor—distance between places of residence and work—may be considered in physical terms or as the cost of traversing that distance in monetary costs or time expenditure.

In the service employment (firm) component, firm location is directly linked to residential location, implying that service employment is located either alongside, or soon after, residences. The major factors driving service employment are governed to be accessibility to consumers and rental costs for work sites.

The Lowry model is expressed mathematically as a series of singly constrained spatial interaction models. It proceeds sequentially and iteratively through four main stages. In the first step, basic and service employment totals are combined and this figure is used to estimate total employment in a destination zone. (Service employment totals are usually set to zero in the first iteration.) Mathematically this takes the form:

$$E_j = E_j^b + E_j^s \quad (\text{xxxvii})$$

where  $E_j$  is an estimate of total employment in destination zone  $j$ ;  $E_j^b$  is an estimate of basic employment in zone  $j$ ; and  $E_j^s$  is an estimate of service employment in zone  $j$ .

The employment estimate value ( $E_j$ ) is fed into another equation in the second stage to estimate how residents should be allocated to an origin zone  $i$ :

$$R_{ij} = E_j \mu B_j W_i^\alpha \exp(-\beta^r c_{ij}) \quad (\text{xxxviii})$$

where  $R_{ij}$  is the estimated number of residents that live in origin  $i$  and work in destination  $j$ ;  $E_j$  is an estimate of total employment in destination zone  $j$  (supplied by the first stage);  $\mu$  is a population-to-employment ratio;  $B_j$  is a parameter that ensures that the correct number of residents is allocated to zone  $i$ , i.e., that  $\sum_i R_{ij} = E_j \mu$ ;  $W_i^\alpha$  is the attractiveness of zone  $i$  (e.g., in terms of floor space for residents);  $\beta^r$  regulates the effect of transport costs on the distribution of residents; and  $c_{ij}$  is the cost of travel from  $i$  to  $j$ .

In the third stage, service employment is allocated to destination zones  $j$  based on places of residence in zones  $i$  (calculated in the previous step):

$$E_{ij}^s = R_i s A_i W_j^\alpha \exp(-\beta^s c_{ij}) \quad (\text{xxxix})$$

where  $E_{ij}^s$  is an estimate of the number of service workers living in zone  $i$  and working in destination zone  $j$ ;  $R_i$  is the number of residents in origin zone  $i$ ;  $s$  is a service employment-to-population ratio;  $A_i$  ensures that the correct number of service employees is allocated to zone  $j$ , i.e., that  $\sum_j E_{ij}^s = R_i s$ ; and where  $A_i = \sum_j W_j^\alpha \exp(-\beta^s c_{ij})$ .

In the fourth stage, calculation then passes back to the first step. Here, service employment is added back to exogenous basic employment. At each subsequent iteration, a number of residents and



service employees are added to the calculation, but this number grows progressively smaller with each iteration, eventually converging to zero.

The basic framework can be extended to add realism to the model. For example, service employment may be disaggregated within the model to accommodate a variety of services (e.g., retailing, education, healthcare, etc.).

### 7.1.2 The land development process

Another important component of the generic land-use–transportation model, along with location, is the simulation of land development (although many models overlook this component). In theoretical terms, a need to increase the available supply of land in a given urban area is prompted by excess demand for urban real estate. Developers will develop a site if they judge that they can turn a profit. A number of factors weigh in on this profit calculation, however. Developers calculate *profit margins*; these are a function of the trade-off between input costs (the costs of developing a site) and the expected selling price of the development. The actual acquisition price of the site for development is normally valued by the *residual method of valuation*. If a developer is able to acquire a site for a price below its residual value, she or he can (potentially) turn a profit by developing that site. The residual value may be calculated according to the following equation:

$$V = M - C - P \quad (xl)$$

where:  $V$  refers to the residual value of a development site (often expressed per annum),  $M$  refers to the market value of the finished product,  $C$  refers to the full costs of development, and  $P$  refers to the developer's required profit on gross development value (Adams, 1994).

There may be a range of input costs associated with land development, including expenses such as land, labour, materials, fixed costs, marketing, the costs of capital, fees, and interest charges (Adams, 1994; Bramley et al., 1995). (Interest charges strongly influence development on the supply side—if interest charges go up, the cost of borrowing capital for development rises.) However, the determination of a profit calculation is further complicated by the issue of the timing of land acquisition in relation to the sale of the development as this impacts upon the cost of the land and the turnover time of capital (Bramley et al., 1995).

### 7.1.2.1 Land banking

All developers will land bank (withhold land from development) to a certain degree. Land will generally need to be held from development for a minimum of two years, simply for operational reasons (Bramley et al., 1995). However, many developers (as well as landowners) may withhold land from development for speculative reasons if they think that the profits to be gleaned from the future sale price of the land can at least offset their costs in holding the land over the duration of the development. Money invested in development is essentially dead money until it is recouped at the time of sale. If the money used to develop a site has been borrowed, it is a liability over the time of the development. The capital that would have been realised from the development and sale of a tract of land could alternatively be invested by other means, potentially generating a profit over the entire development period (which, in many cases, spans several years). Additionally, a developer must also bear in mind the cost of property taxes that may need to be paid on the land over the timeline of the development. The considerations influencing the decision to hold land speculatively from development may be thus generalized in the following functional relationship:

$$t_o = f(i, i^*, r, r^*, s, n, g, P) \quad (\text{xli})$$

where  $t_o$  is the optimum time period for holding land from development for speculative reasons;  $i$  is the individual investor's interest rate (which varies amongst individuals depending on their ability and capacity to invest, and the quantity and quality of their investment opportunities);  $i^*$  is the discounted expected percentage return on an alternative investment;  $r$  is the net rate of return on the land;  $r^*$  is the discounted expected percentage return on the land (which should include a risk premium);  $s$  is the marginal personal income tax rate assessed to the landowner;  $n$  is the number of years in the speculator's time horizon (depending on their forecast of land demand);  $g$  is a subjective discount factor reflecting risk; and  $P$  is a property tax (Bahl, 1968).

In terms of operationalizing these sorts of functional relationships into a simulative framework within land-use-transportation models, traditional efforts have been weak (if existent at all). Supply-side modelling (development and redevelopment) is, in many cases, simply absent from simulative frameworks (notable exceptions include UrbanSim, under development at the University of Washington (Waddell 1998a; 1998b)).

### 7.1.3 Supply, demand, and equilibrium

Because land-use–transportation models are overwhelmingly rooted in urban economic theories about how urban systems work, much of their mechanics is phrased econometrically. On the broadest economic level, urban land use manifests itself spatially through a complex trade-off between supply, demand, and equilibrium. Because the supply of and demand for land are generally in a state of disequilibrium, there is usually a scarcity or excess of land available for different uses within the city at any given time.

#### 7.1.3.1 *Urban land supply*

The *total* supply of land in any given urban area can generally be regarded as being largely fixed (or inelastic)—for the most part, new land cannot be readily created or destroyed. Of course, there are exceptions: land may be gained or forfeited through territorial acquisitions or losses, or through land reclamation or destruction. Additionally, land may be brought into supply as urban areas expand beyond their peripheries and encroach upon agricultural hinterlands. While the total supply of land is largely static, the *available* supply of land at any one time is dynamic due to factors such as intensity of use, planning policies that might permit or deny development, physical constraints, improvements in building technology, and the behavioural choices of landowners who might withhold land from development for various reasons.

#### 7.1.3.2 *The demand for urban land*

The demand for land in a city is a function of the conceived profitability or utility of its use by existing or potential users. Because of the relatively fixed nature of urban land supply, it reacts quite slowly to increases or decreases in demand. Therefore, it is demand that is the real determinant of urban land prices.

Demand itself is really determined by two factors: use value and exchange or sale value (Kivell, 1993). The use value of urban land refers to the demand that it generates from users who wish to actually utilize the land for some purpose. Essentially, use value is derived from the functional use of the land, e.g., as a business or a site for the manufacture of certain goods. Exchange value derives from the sale of land at a profit to another user. Additionally, there are other factors that influence the demand for urban land, including interest rates, allowances for risk, and expectations of capital gain.

### *7.1.3.3 Reconciling supply and demand through the urban land market*

The forces of supply and demand come together in the urban land market. Ideally, at any given time, the competition between land supply and demand would reach a state of equilibrium in which a balance was struck between the two. In a perfectly competitive market, rapid shifts in price would balance the demand for land with the quantity supplied. Such markets would eliminate surpluses and overcome shortages quickly (Adams, 1994). However, the urban land market is anything but ideal, and generally tends towards a state of disequilibrium at any moment. This tendency towards disequilibrium (or lagged response of supply to demand) is the result of several inefficiencies in the urban land market. These include the imperfect knowledge of buyers and sellers; the betrayal of conditions of perfect competition (because property is often dominated by few buyers and sellers); the uniqueness of supply (in terms of quality, age, configuration, and location); barriers to ease of entry and exit of buyers and sellers to the market such as high transaction costs; infrequent transactions—land and property are bulky goods, acquired infrequently; externalities (costs of benefits arising from an activity that do not accrue to the person or group engaging in the activity); geographical inertia; the immobility of land; time-absorption in the development of land; the influences of conservation policies; the monopoly power of some agencies such as planning authorities, property companies, and mortgage institutions; and the role of non-monetary factors such as sentiment, symbolism, and pride of ownership (Adams, 1994; Balchin and Kieve, 1977; Kivell, 1993).

### *7.1.3.4 Modelling equilibrium using constraints*


As previously mentioned in Section 6, the application of constraints to basic models serves as a proxy for equilibrium in the generic land-use–transportation model. Of course, the theoretical justification for this is weak. The very notion of equilibria in urban systems is debatable. Additionally, the introduction of constraints is likely to be a result of inadequacies in the behaviour of the model, rather than a theoretical foundation. Nevertheless, the constraint does serve as a vague mechanism for reconciling demand and supply within the model.

Other, more theoretically justified methods of reconciling demand and supply in land-use–transportation include the notion of market clearing. In a simulative framework that incorporates price information (land prices, rents, etc.), market clearing is represented by adjusting prices to

balance the demand for space (generated by competing uses) with the supply of space in the urban system<sup>2</sup>.

## 7.2 THE TRANSPORT SYSTEM

The second major component of a land-use–transportation model, simulated alongside land-use, is the transport system. The traditional way of characterizing the transportation system in urban simulation models is a four-stage process. This process begins with modelling travel demand and generating an estimate of the amount of trips expected in the urban system. The second phase, trip distribution, allocates the trips generated in origin zones to destinations in the urban area. The third phase is modal split. Here trips are apportioned to various modes of transport (e.g., by automobile or public transportation). The four-stage simulation process concludes with a trip assignment module that takes estimated trips that have been generated, distributed, and sorted by mode, and loads them onto various segments of the transport network. Transport simulation usually proceeds sequentially amongst these four stages in the order in which they are described above (Figure 10).

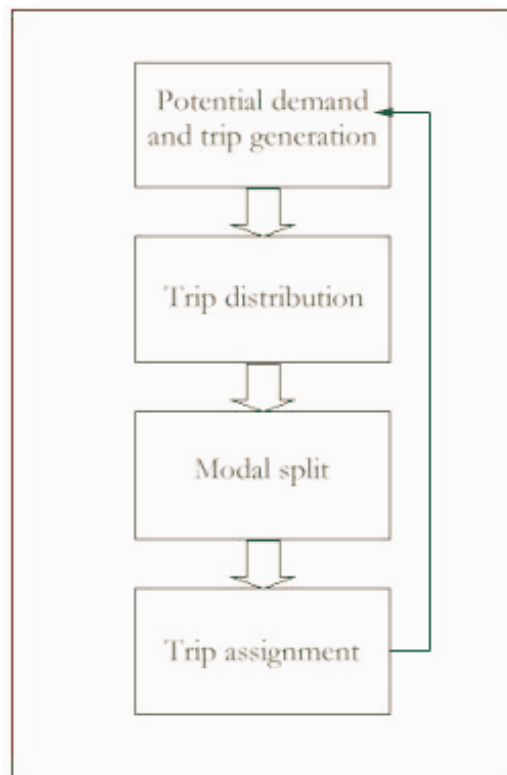

*Figure 10. Diagram illustrating the four-step modelling process for transport.*

---

<sup>2</sup> For a description of a market-clearing mechanism used in an operational model, see Waddell, 1998a, 1998b.

### 7.2.1 Potential demand modelling and trip generation

Potential travel demand (an estimate of the volume of trips likely to be made in a given urban area and time) can be derived for both journey-to-work trips, trips for other purposes (e.g., leisure, or shopping), or aggregated as a total measure of trips for all purposes.

Demand for journey-to-work trips can be derived from location models at the land use level using figures for residential occupation:

$$Q_{ij}^w = R_{ij} \quad (\text{xlii})$$

where  $Q_{ij}^w$  is the potential demand for work trips between an origin and destination (from  $i$  to  $j$ ) and  $R_{ij}$  is the number of residents that live in  $i$  and work in  $j$ , i.e., the population that drives the demand.

Demand for trips for other purposes is derived from an origin-constrained spatial choice model:

$$Q_{ij}^n = R_i A_i (W_j^n)^\alpha \exp(-\beta^n c_{ij}^n) \quad (\text{xliii})$$

where  $Q_{ij}^n$  is potential demand for non-work-related trips from  $i$  to  $j$  for each purpose  $n$  (e.g., for shopping or leisure);  $R_i$  is the number of residents living in origin zone  $i$ ;  $A_i$  is a balancing factor that ensures that the simulated  $R_i$  is equal to an exogenously-determined  $R_i$ , and where  $A_i = \sum_j (W_j^n)^\alpha \exp(-\beta^n c_{ij}^n)^{-1}$ ;  $W_j^n$  is the attractiveness of destination zone  $j$  for activity  $n$  (e.g., the floor space occupied by shops); and  $c_{ij}^n$  is the composite cost of travel from zone  $i$  to zone  $j$ .

Combining these two demand functions, we can estimate total demand for all trips across all purposes by adding potential demand for non-work-related trips over activity  $n$  to potential demand for work-related trips:

$$Q_{ij} = \sum_n Q_{ij}^n + Q_{ij}^w \quad (\text{xliv})$$

where  $Q_{ij}$  is total demand for travel from origin  $i$  to destination  $j$ .

Once potential demand has been calculated, the simulation proceeds to trip generation. The trip generation phase transforms estimates of *potential* travel demand into *actual* trips, taking into consideration the generalized cost of making those trips (Government of Ireland, 1995). The function for transforming demand into actual trips often takes the form:

$$T_{ij}^n = Q_{ij}^n [a^n + b^n \exp(-\beta^n c_{ij}^n)] \quad (\text{xlv})$$

where  $T_{ij}^n$  is the total number of trips between zones  $i$  and  $j$  for activity  $n$ ;  $Q_{ij}^n$  is the potential demand for trips from  $i$  to  $j$  for activity  $n$ ;  $a^n + b^n$  is the maximum number of trips that must be made ( $a^n$  is the minimum number of trips that must be made);  $\beta^n$  regulates the slope of trips to the cost of those trips (for work and school trips, this value is usually set to zero to illustrate their relative inelasticity); and  $c_{ij}^n$  is the generalized composite cost of travel between zones  $i$  and  $j$ . Put simply, what this function ensures is that as the cost of travel increases, the number of trips made tends to decrease.

### 7.2.2 Trip distribution

The trip distribution stage takes actual trips from the trip generation model and matches them with trips attracted to destination zones (Oryani and Harris, 1996). In this sense, the distribution phase simulates the distribution of predicted trips (predicted for origin zones) to destinations. Often the distribution mechanism employed is the gravity model. Here, the number of trips made between and origin and destination is governed to be proportional to some measure of the destination zone's 'mass' (e.g., the volume of activity opportunities there) and inversely proportional to some measure of travel impedance. The formulation of the trip distribution model is the same as that mentioned in the gravity models referred to in Section 6 and will not be detailed here.

### 7.2.3 Modal split

The modal split sub-model is concerned with estimating what proportion of trips is made by each defined mode of travel from an origin to a destination zone. In mathematical terms, this is most commonly expressed as a multinomial logit model. The logit model represents the mode choice as a function of the disutility or cost of using one mode of travel (e.g., private automobile) over another (e.g., public transit). Often the logit model may be specified hierarchically to circumvent the ‘red bus-blue bus’ conundrum. The non-hierarchical logit model will generally take the form:

$$T_{ij}^{nk} = T_{ij}^n \frac{\exp(-\beta^n c_{ij}^{nk})}{\sum_k \exp(-\beta^n c_{ij}^{nk})} \quad (\text{xlvii})$$

where  $T_{ij}^{nk}$  is the number of trips between  $i$  and  $j$  by mode  $k$  for activity  $n$ ;  $T_{ij}^n$  is the total number of trips between  $i$  and  $j$  for activity  $n$ ; and  $\frac{\exp(-\beta^n c_{ij}^{nk})}{\sum_k \exp(-\beta^n c_{ij}^{nk})}$  is the share of trips made by each mode  $k$  between  $i$  and  $j$  for activity  $n$ .

### 7.2.4 Trip assignment (route choice)

The trip assignment or route choice phase takes estimated trips, already sorted by mode, and assigns them to routes on the transport network. Again, the technique used to express this mathematically is usually by means of a multinomial logit model (although with capacity constraints added). This may generally take the form:

$$T_{ij}^{nkp} = T_{ij}^{nk} \frac{\exp(-\beta^n c_{ij}^{nkp})}{\sum_p \exp(-\beta^n c_{ij}^{nkp})} \quad (\text{xlviii})$$



where  $T_{ij}^{nkp}$  is the number of trips between  $i$  and  $j$  made by mode  $k$  via path  $p$  for activity  $n$ ;  $T_{ij}^{nk}$  is the total number of trips made by mode  $k$  for activity  $n$  between zones  $i$  and  $j$ ; and  $\frac{\exp(-\beta^n c_{ij}^{nkp})}{\sum_p^n \exp(-\beta^n c_{ij}^{nkp})}$  is path  $p$ 's share of the total number of trips between  $i$  and  $j$  by mode  $k$  for activity  $n$ .

### 7.2.5 Accessibility

The notion of accessibility is a key ingredient in many of the individual components of a land-use–transportation model. Accessibility may be broadly defined as the ease with which activities at a given destination may be reached from an origin location using a particular mode of transport. Couched in land use terms, accessibility determines the profitability and utility of locating a use in a given area of the urban expanse by affecting the cost of movement in terms of distance, time, and convenience. Put simply, the greater the accessibility of a particular location, and the greater the importance of accessibility to a specific land use, the higher the valuation afforded a piece of land. Ever defiant of adhering to simple explanations, land-use–transportation models handle accessibility in a divided fashion, bisecting accessibility into two components: general and special.

General accessibility—proximity to *all* other urban uses and facilities—is largely dependent upon transportation costs. Firms require general accessibility to the factors of production and to markets, while households require general accessibility to things like work opportunities, shops, schools, and recreational facilities.

Special accessibility refers to a spatial clustering of activities within the broader pattern of urban land use governed by general accessibility. Special accessibility affects location through two mechanisms: external economies of concentration and external economies of complementarity. External economies of *concentration* refer to the pooling of attractions. For firms, an external economy of concentration could be a pool of trained labour or common services; for households that concentration might be of a community that is large enough in size to support specialist hospitals. Of course, diseconomies of concentration—generated by the likes of overcrowding or traffic congestion—could have a repellent effect on location decisions. External economies of *complementarity* occur when location decisions are made so as to benefit from proximity to other

uses or activities. For example, smaller shops situating themselves parasitically beside dominant retailers, or households locating near to parks (Balchin and Kieve, 1977).

Mathematically, there exist a diversity of mechanisms for describing accessibility. The basic format for measuring accessibility is as a function of opportunities in a destination zone and the cost of travel between an origin and that destination—accessibility as a function of the attraction of the destination and the ease of reaching it. One of the simpler expressions of this kind is the summation of spatial separation:

$$A_i = \sum_{j=1}^n d_{ij} \quad (\text{xlviii})$$

where  $A_i$  is a measure of the accessibility of an origin zone  $i$ , and  $\sum_{j=1}^n d_{ij}$  represents the distance between origin zone  $i$  and destination zone  $j$ , summed across all destination zones  $j$  (Lee and Goulias, 1997).

The above measure may be more closely fitted to a city by including some form of distance decay parameter, reflecting the notion that people are less inclined to make longer journeys. There are a number of ways in which distance decay can be added to the basic summation formula above. The parameter may be added as a constant in the form:

$$A_i = \sum_{j=1}^n d_{ij}^{-k} \quad (\text{xlix})$$

where  $-k$  represents the effect of distance decay on the accessibility of an origin zone (Lee and Goulias, 1997). Alternatively, a *negative exponential function* could be applied to the basic formula to describe a more realistic form of distance decay:

$$A_i = \sum_{j=1}^n \exp(-\beta d_{ij}) \quad (1)$$

where  $-\beta$  now represents distance decay (in a negative exponential form). There are some complications with the negative exponential expression, however. Its main failing is that it describes distance-decay as a rapid drop in accessibility with distance from a centre. One way to circumscribe this flaw is to describe distance-decay as a *Gaussian function*. The Gaussian function has the advantage of offering a smoother characterization of distance-decay, more akin to real-world patterns. The Gaussian description of distance-decay represents accessibility decline initially as a slow abatement from an origin  $i$ , with a smooth tapering to zero as distance from that origin increases:

$$A_i = \sum_{j=1}^n \exp\left(\frac{-d_{ij}^2}{v}\right), \text{ with } v = 2d_{\bullet}^2 \quad (\text{li})$$

or, rewriting the equation with all terms included we get:

$$A_i = \sum_{j=1}^n \exp\left[\left(\frac{d_{ij}}{d_{\bullet}}\right) / (-2)\right] \quad (\text{lii})$$

where  $v$  is a constant, and  $d_{\bullet}^2$  is the square of the distance from origin  $i$  at which accessibility is deemed to decline at the most rapid rate (Lee and Goulias, 1997).

Other ways of expressing accessibility mathematically include measures based on *gravity* formulations, and *isochrones*. As we have seen, gravity-type accessibility measures introduce a weight representing the ‘mass’ of opportunities at a destination zone and incorporate some indicator of the cost of travel between origin and destination:

$$A_i = \sum_{j=1}^n O_j c_{ij} \quad (\text{liii})$$

where  $O_j$  corresponds to the mass of opportunities at destination zone  $j$ , and  $c_{ij}$  represents the costs of travel between origin  $i$  and destination  $j$ .

Isochronic accessibility measures (also known as cumulative opportunities measures) centre on the notion of accessibility over a given travel time (Lee and Goulias, 1997; O'Sullivan, 2000b). They answer questions of the form: given a time budget of X hours, how far can I get in the city? They may be expressed, for example, in the following form:

$$A_i = \sum_{n=1}^{1,0} \frac{R_n}{0.5n} \quad (\text{liv})$$

Where  $A_i$  is the isochronic accessibility of an origin zone  $i$ ,  $R_n$  is the number of destinations that can be reached within the  $n^{\text{th}}$  annulus (i.e., in this example, between  $0.5n$  km and  $0.5*(n-1)$  km) from the origin zone  $i$ ), and  $0.5n$  represents a 5 km opportunity.

Other forms of accessibility measure derive from random utility theory. As already noted, in utility-based measures, the probability of an individual making a particular choice depends on the utility (welfare) of that choice relative to the utility of all choices. Assuming that an individual assigns a utility to each destination available to them in their trip-making decision (or perhaps a utility is assigned to both destination and mode of travel) in some specified choice set,  $C$ , and that individual selects the alternative that maximizes his or her utility, then accessibility may be defined as the denominator of a multinomial logit model (also known as the logsum), such that:

$$A_n = \ln \left[ \sum_{\forall C_n} \exp(V_{n(C)}) \right] \quad (\text{lv})$$

Where:  $A_n$  is the accessibility measure for an individual,  $n$ ;  $C_n$  is the choice set for a person,  $n$ ; and  $V_{n(C)}$  is the observable temporal and spatial transportation components of the utility of choice  $C$  for person  $n$ . The logsum,  $\ln \sum$ , indicates the desirability of the full choice set  $C$ . Specifying the utility function necessitates the inclusion of variables that represent the attributes of each choice (reflecting individual tastes and preferences: the attractiveness of the destination, the travel impedance that must be overcome to reach the destination, and the socio-economic characteristics of the individual or household making the trip).

### 7.2.6 Generalized costs of travel

An important component of location decisions (and indeed of many of the calculations we have already reviewed) is the idea of travel cost. There are three main ways in which the costs of travel are considered in land-use–transportation models: travel time, composite costs of travel, and changes in consumer surplus.

Travel time on a particular path (a proxy for travel cost) is a function of the ratio of path volume to path capacity (the amount of traffic on a road versus the amount a road can handle). Mathematically, this is expressed as:

$$T_Q = T_0 \left[ 1 + \alpha \left( \frac{Q}{Q_{\max}} \right)^n \right] \quad (\text{Ivi})$$

where  $T_Q$  is travel time at a given traffic flow  $Q$ ;  $\alpha$  is a parameter to be estimated by the model;  $Q$  is the traffic flow expressed as vehicles per hour; and  $Q_{\max}$  is the practical capacity of the route.

The composite costs of travel between zones  $i$  and  $j$  by a transport mode  $k$  can be derived by aggregating  $c_{ij}^{nkp}$  (the cost of travel between  $i$  and  $j$  for activity  $n$ , by transport mode  $k$ , along path  $p$ ) over all paths  $p$  (the subscript  $p$  denoting aggregation over all paths):

$$c_{ij}^{nk} = \frac{1}{\beta^n} \ln \left[ \sum_p^n \exp(-\beta^n c_{ij}^{nkp}) \right] \quad (\text{Ivii})$$

where  $c_{ij}^{nk}$  is the composite cost of travel between zones  $i$  and  $j$  by mode  $k$  for activity  $n$ ;  $\beta^n$  regulates the slope of trips to their cost (this value is usually set to zero for work and school trips, reflecting their general inelasticity); and  $c_{ij}^{nkp}$  is the composite cost of travel between zones  $i$  and  $j$  by mode  $k$  over path  $p$  for activity  $n$ .

Similarly, the composite costs of travel between zones  $i$  and  $j$  can be obtained by aggregating  $c_{ij}^n$  over all modes  $k$  (the subscript  $k$  denoting aggregation over all modes  $k$ ):

$$c_{ij}^n = \frac{1}{\beta^n} \ln \left[ \sum_k^n \exp(-\beta^n c_{ij}^{nk}) \right] \quad (\text{lviii})$$

where  $c_{ij}^n$  is the composite cost of travel between  $i$  and  $j$  for activity  $n$ ; and  $c_{ij}^{nk}$  is the composite cost of travel between  $i$  and  $j$  by mode  $k$  for activity  $n$ .

Changes in consumer surplus can be derived at both the route choice and the mode choice level. However, to avoid double counting in models, usually only consumer surplus at mode choice level needs to be evaluated. Again, this calculation is performed mathematically as:

$$\Delta W = -\frac{1}{\beta^n} \ln \left[ \frac{\sum_k^n T_{ij}^{nk} \exp(-\beta^n c_{ij}^{nk}) (2)}{\sum_k^n T_{ij}^{nk} \exp(-\beta^n c_{ij}^{nk}) (1)} \right] \quad (\text{lix})$$

where  $\Delta W$  is the change in consumer surplus; (2) is the scenario being evaluated, and (1) is the base case against which scenario (2) is being evaluated.

### 7.3 INTEGRATING LAND USE AND TRANSPORTATION

In previous modelling efforts, land use variables were treated as being exogenous to the transport system. However, in recognition of the interdependence of land-use and transportation, there have been recent attempts to link land-use models to transport models in an integrated fashion. In such cases there is an explicit treatment of the connective feedbacks linking the two systems.

There are two main ways of linking land-use and transport models. The first is via an *instantaneous* link at the trip distribution stage of the model. Here, the land use system provides the transport system with estimates of the location and volume of potential trips. The second is through a *time-lagged* link to the activity location stage of the model via the notion of accessibility. At this level, accessibility affects travel costs, which in turn impacts upon urban activity location. The inclusion of these feedback mechanisms in integrated models marks an innovative departure from

conventional four-step models, which assume a uni-directional relationship between land-use and transport (Government of Ireland, 1995).

There are a number of reasons why land-use and transportation should be regarded as integrated and co-dependent systems in an urban simulation framework. For many years it has been understood that land-use (and even the expectation of land-use) has the capacity to influence transportation and travel behaviour in urban areas, and vice-versa (Cervero, 1989). Additionally, there is quite a broad legislative motivation supporting their representation as an integrated system, particularly in terms of their impact on urban air quality (e.g., ISTEA, TEA-21, and CAAA).

However, the representation of the two systems in an integrated fashion within a modelling framework has been hampered by a variety of factors, creating an unnecessary disconnect between the two, particularly in terms of data availability and scenario evaluation. Organizational structures often treat land-use planning separately from that of transportation planning. Additionally, the two are often split along professional lines: land use planning is commonly the realm of urban planners and geographers; transportation planning is often the domain of engineers and economists (Miller et al., 1998). Some hold the belief that land-use and transportation are not actually that closely linked. Justifications for this have been offered, claiming that in some locations road systems are so ubiquitous that their influence on land use is minimal, and that transport is regarded as a minor factor in firm and household location decisions (Government of Ireland, 1995).

#### 7.4 SIMULATING PLANNING AND PUBLIC POLICY

The way in which planning and policy influences land-use–transportation systems is generally simulated through the introduction of changes to exogenously determined variables such as population and basic employment.

The policy scenarios commonly applied to land-use–transportation models may be classified into four categories: regulatory, pricing, investment, and welfare (Government of Ireland, 1995). Regulatory policy applications refer to those that place controls on the use of space or time in a city (e.g., reserving road space for high occupancy vehicle lanes and the introduction of parking controls). Pricing policy applications are those designed to impact the price of land, buildings, or transport (e.g., fuel or emissions taxes, road tolls, congestion pricing, parking charges, and the subsidization of public transit). Investment policy applications are those intended to influence

infrastructure. Additionally, land-use–transportation models can be linked to economic modules to assess the welfare implications of various policies.

## 8 THE FAILURES OF LAND-USE–TRANSPORTATION MODELS

The focus of the paper now shifts away from the nuts and bolts of land-use–transportation models. In Sections 8 and 9 we step back from the mechanics of simulation and evaluate models from the perspective of the user and the researcher. Section 8 considers urban models critically, while Section 9 looks ahead and explores the emerging technologies and ideas that are likely to shape model development in the future.

### 8.1 THE UNDOING OF URBAN MODELING

“Much as in any aspect of social science, mathematical modelling has its enthusiasts and its skeptics. The enthusiasts accuse the skeptics of not understanding the models, and the skeptics in turn accuse the enthusiasts of not understanding the reality” (Smith, 1998).

Having been developed with fervour at the beginning of the decade, by the close of the 1960s, efforts to develop successful large-scale land-use–transportation models had deteriorated and the novelty value of the models had waned substantially. Few large-scale urban models had been completed, and those that had fell short of their goals.

There are a variety of possible explanations as to what environment engendered such scepticism regarding urban simulation. Batty (1979) contends that the early-1960s represented a phase of immaturity in the evolution of planning as a discipline and that the turbulent popularity of modelling characterized growing pains of a sort. To many in the planning profession, he argues, urban models were perceived as a threat. Urban models were treated with growing hostility because they represented a “clash of cultures” between advocates of the idea of planning as science (the quest for pure knowledge) and those who believed in planning as design (the basis for effective action). Compounding these negative feelings were broader trends sweeping America and Europe in the 1970s and a general rejection of the scientific optimism that had been so prevalent in the 1960s.

In the social sciences, these changing times impacted heavily upon the nature of academic inquiry. Within planning there was a shift from *efficiency* to *equity* (Batty, 1994). The quantitative methods



developed in the 1960s to address questions of efficiency simply had little relevance in a discipline now concerned largely with equity.

As the social climate changed, so too did the character of the city. Urban structure was changing: monocentric cities spawned additional nuclei, which in turn began to challenge the traditional dominance of the downtown and infrastructure provision switched its emphasis towards the suburbs, altering the spatial pattern of urban accessibility. Urban modelling efforts, which were slow to adapt to rapid changes in the character of the city, became outmoded in many instances.

It is perhaps useful to explore the criticisms levelled at urban models at the end of the 1960s, as a benchmark against which we might consider contemporary land-use–transportation models. Large-scale urban models developed in the 1960s were at times accused of unnecessary complexity, while at others being rebuked for their simplicity. Critics disapproved of their expense, voracious appetite for data, hyper-comprehensiveness, mechanical organization, inadequate resolution, lack of transparency, poor dynamics, and inability to replicate their results; while denouncing their ‘black box’ approach to simulation. Others contended that the models were fraught with distorting error and that they failed to advance theory while falling short of informing practice. Some argued that the models’ reliance on the assumption of predictability doomed them to failure from the outset, that they were unsuitable as tools to describe many urban phenomena, and that a lack of evaluative measures undermined their effectiveness at the close of the modelling process<sup>3</sup>.

## **9 IN DEFENSE OF URBAN MODELLING**

### **9.1 URBAN MODELS WEATHER THE STORM**

In the contemporary modelling environment, innovations in computing and geography have largely nullified many of the criticisms hurled at urban models. Perhaps most important have been the dramatic advances in computer hardware. Labouring models that gobble up budgets and processing time are now largely a thing of the past. Advances in areas such as graphics cards and parallel processing have also enabled modellers to simulate urban systems in ways that were not previously possible.

---

<sup>3</sup> For a thorough and detailed review of this debate the reader is referred to Batty, 1979, 1994; Harris, 1994; Klosterman, 1994; Lee, 1973, 1994; Openshaw, 1979; Sayer, 1979; and Smith, 1998.

Additionally, there has been a relative explosion in the provision of urban data since the 1960s. Lee's (1973) original criticism of data sets comprising 30,000 pieces of information are now dwarfed by the contents of files commonly held on planners' desktop machines, let alone the wealth of information available from official agencies such as the Bureau of the Census. Additionally, the wealth of digital imagery and land coverage at fine scales has quite successfully mitigated resolution concerns. While this has meant that models have become far more consumptive in terms of data, some would argue that the proliferation of urban information has improved models. As Harris 1994 notes, "The need for and the use of extensive data sets result from planners' responsibility to act with full information and not from the nature of the models".

With advances in computing power and data provision have come other innovations in computing that have helped urban modellers to overcome some of their previous difficulties. Improvements in software (particularly geographic information systems), programming methods, modelling skills, and knowledge have greatly facilitated this. A proliferation of technical journals devoted to urban modelling, coupled with improvements in the volume and quality of modelling literature has contributed substantially to the greying of the 'black box' approach. These innovations have also reduced the cost of developing and using urban models. Indeed, models may be less costly than other planning alternatives that might achieve the same goals.

Modelling has also benefited from advances in what we know about urban systems. Particularly, modellers have, in recent years, become better equipped to handle the complexity of the systems that they simulate. The incorporation of notions of self-organization, chaos theory, fractal geometry, catastrophe theory, bifurcation, and non-linear dynamics in urban models has greatly improved their capabilities in this regard. (Although it should be noted that these particular innovations are, for the most part, academic rather than operational ventures.)

Of course, some would argue that the criticisms aimed at urban models were largely unfair to begin with. The main thrust of this argument lies in the idea that much of the failures of urban modelling to advance planning practice are the fault of professional practitioners themselves. Users commonly put models to uses for which they were never intended. Additionally, there is a tendency for users to attribute real-world interpretation to model results. In this sense assumptions of predictability are not always those of the modellers, but are instead a function of users' oversights. Additionally, the integration of urban models with practice is often hindered by organizational limitations. In this sense, it is not the computer hardware or software that is flawed, rather it is difficulties with "orgware" that makes it difficult for organizations to embrace urban models (Batty, 1994).

Much of urban modelling's deficiency in informing theory is in large part a by-product of deficiencies in theory itself rather than urban modelling. Many of the difficulties that have plagued urban models are a manifestation of a deeper flaw in the underlying theory of cities. Also, the idea that there was an optimal plan, one best answer to an urban problem, has passed through theory to urban models. Such naive beliefs fail to recognize that the solution space of all plans is, in most cases, infinite (Batty, 1994). As a discipline rooted in societal concerns, planning is often pressurized to supply immediate solutions to urban problems. Hence, planning is at a disadvantage relative to other disciplines. Sciences such as urban modelling should be allowed to develop slowly from theory, not as quick-solutions to pressing problems.

Nevertheless, a portion of the guilt must be attributed to urban modellers, especially those in academia. Users get little advice about how to apply models to real-world problems. While there exists, in great detail, an extensive methodology for the construction of models, a methodology of model use is comparatively scarce (Openshaw, 1979). Equally, there are still many challenges facing urban models.

## 9.2 ADVANCING URBAN MODELLING

A good point of reference for contemporary advances in urban modelling (as well as fault-finding) is the Travel Model Improvement Program. In assessing what is needed from urban models, the Program has outlined several avenues for development for future modelling ventures. Amongst the key points raised by the Program are the need to better represent dynamics in models, the appropriate level of detail that the models should address, issues of interfacing with the model user, the flexibility of land-use–transportation models, incorporating an enhanced degree of behavioural capacity, and re-evaluating the treatment of zonal geography.

### 9.2.1 Dynamics

Land-use–transportation models must have the capacity to represent the city's ability to change its character over time. These dynamics are generally ill represented in models. Dynamic functionalities usually enter the model in an indirect sense. Cross-sectional data—data that span dates, with little information about the intervening period—are commonly used as a proxy for dynamics. Clearly, this is a poor substitute, but is often the only available option. At best, cross-sectional data across multiple time periods, perhaps yearly on an incremental basis spanning two

fixed dates, is used. While this is rich in the information that it offers, there are logistical problems with its application to land-use–transportation models: these data sets have become available only relatively recently and for calibration purposes may not offer much of a historical record to evaluate model results against. Ideally, dynamics should enter the model in a more explicit fashion, perhaps through simulation techniques like cellular automata or agent-based modelling, which are inherently dynamic and spatial in their formulation.

### **9.2.2 Detail**

Land-use–transportation modellers need to determine an ‘optimal’ level of spatial resolution for their simulations. In particular, the models would do well to disaggregate their representations of various components; notably households, land-use, and employment. Households should be broken down into several socio-economic groupings, land-use into a more diverse range of activities, and employment into a wider collection of sectors. There are a number of ways in which this could be achieved within the land-use–transportation modelling structure, most notably through the micro simulation of land markets and the manipulation and transformation of data to the required level of detail using geographic information systems.

### **9.2.3 Interfacing with the user**

It is vitally important that models be developed with the end-user in mind. In particular, models should be presented in a way that makes them easier for decision-makers and the public to digest. This could be achieved through linkages with geographic information systems and remote sensing software packages. Indeed, models could be developed entirely within a visual framework such as the Virtual Reality Modelling Language (VRML) (Bell et al., 1999). Land-use–transportation models should also be more responsive to public policy, including sub-models addressing issues such as the environment, poverty, criminal justice, and public health and safety.

### **9.2.4 Flexibility**

Future modelling efforts should accommodate an improved degree of flexibility. Here there are two main issues: scaling and modularization. It is important that land-use–transportation models cater to a variety of scales in an integrated and seamless fashion, representing the phenomena impacting

upon urban systems at all levels from global through to local. Linking macro scale dynamics to local processes through mechanisms such as cellular automata and agent-based modelling will be key to this. Additionally, land-use–transportation models could be rendered more flexible were they modularized into a set of sub-models and constituent components that could be independently tested, as well as being integrated on a broader level as a complete package.

### **9.2.5 Behavioural realism**

Advances in land-use–transportation modelling are moving closer towards incorporating a more realistic representation of the behavioural systems that make up an urban system. Techniques such as agent-based modelling and activity-based representations of the transport system will be an important factor in integrating the behavioural dynamics of individuals, governments, developers, and investors in the modelling framework.

### **9.2.6 Zonal geography**

The current geographical characterization of spatial objects within land-use–transportation models (commonly the traffic analysis zone) is useful but lacking in its ability to honestly simulate urban systems. At the heart of this deficiency is the failure of the model to realistically characterize the spatial extent of neighbourhoods and sub-markets within which development and location decisions might be formulated.

The Modifiable Areal Unit Problem (MAUP) is a concept that was popularized by Openshaw in the 1980s, but which has plagued geographic research for quite some time. At the heart of the MAUP is the fact that there are an almost infinite number of spatial objects that can be defined and modified for any given area of inquiry, but few, if any modifiable entities. A practical example that may help to illustrate this point is that of the Bureau of the Census. Census data are collected for essentially non-modifiable entities (e.g., people and households) but are reported across modifiable areal units (e.g., counties, ZIP code boundaries, census tracts, census block groups, etc.). At best the spatial delineation of these areal units is decided based on some operational requirements (administration, data collection, etc.); at worst they are arbitrarily defined “and subject to the whims and fancies of whoever is doing, or did, the aggregating” (Openshaw, 1983). Closely related to the MAUP is the ecological fallacy problem. An ecological fallacy occurs when it is inferred that results based on aggregate data can be applied to the individuals who form the aggregated group.

If the areal units governing geographic research are arbitrarily contrived, then the value of any work based on them must be questioned. Specifically, the MAUP creates twinned problems of scale and aggregation in geographical studies. With respect to scale, quantitative results for zones are dynamic. Correlation coefficients for a zone-based regression calculation, for example, become artificially inflated with increasing scale. In terms of aggregation, zonal calculations are equally sensitive to the specific configuration of zonal geography. Correlation coefficients in a regression analysis increase as the number of zones in a study falls. It should be clear then that there is a strong need for a more functional and geographically relevant description of zones within land-use–transportation models.

Recent research has begun to address this problem (Thurstain-Goodwin and Unwin, 2000), but this has not been incorporated into land-use–transportation models. Models have circumvented the MAUP by simulating at the micro-level and aggregating up, but there is clearly room for improvement, e.g., through the use of patch-based metrics for delineating zones of activity or the identification of local submarkets (Torrens and Alberti, 2000).

## **10 CONCLUSIONS**

Section 10 draws the paper to a close with a discussion of some innovative simulation techniques that are likely to shape the development of land-use–transportation models in the future. The discussion focuses particularly on techniques from complexity theory as well as urban visualization—topics occupying much of the author’s present research in urban simulation (Torrens, 2000).

### **10.1 WEAVING COMPLEXITY INTO THE SIMULATION FRAMEWORK**

In modelling urban systems such as land-use and transportation, we are faced with a dilemma. The intellectual apparatus with which we model urban systems evolved in a time when the city was very different from contemporary manifestations. Single-centre cities built with raw materials, labour, and trade have given way to polycentric cities restructured by automobiles, services, and information technology. It is clear that many of the tools with which we study the city today are deficient in their ability to fully simulate and describe the changing character of urban areas. Consequently, there is a need for models that are as flexible and dynamic in their simulation capabilities as is the city in its ability to evolve. Many land-use–transportation models are on a

weak theoretical footing. In many cases they depart from what we know about the way in which urban systems evolve and the dynamic forces that shape them. In short, there is much room for improvement. One feasible remedy to these problems is to weave ideas from complexity theory—a synthetic approach to simulation—with existing techniques to arrive at a hybrid, modular simulation strategy for modelling urban systems. Such an approach would build upon those areas of traditional land-use–transportation models that work well (particularly at the macro- and the meso-levels), but would delegate the micro-scale dynamic simulation to sub-models derived from complexity theory.

Reductionist science, a method of inquiry that is largely *analytic*, breaking down problems into their constituent components in a bid to understand them, has been widely used in investigating urban issues. A problem with the reductionist approach, however, is that it ignores many features of how things work in the real world. By breaking down problems, the interactions that may give rise to aggregate structures may be lost. Synthetic science, on the other hand, is concerned with studying phenomena from the bottom up, by combining individual components together to create structures, rather than dissecting them. This is closely allied with ideas from complexity theory, particularly the concept of emergence.

With emergent phenomena, a small number of rules or laws, through local-scale interactions, can generate complex global systems. Furthermore, this emergent behaviour occurs without the direction of a centralized executive. This complexity is not just the complexity of random patterns; in fact, recognizable features may emerge. Cities are prime examples of emergent systems. From local-scale interaction such as individual movement patterns and social biases emerge regular patterns such as traffic congestion, economies of agglomeration, and social segregation. There is an argument, therefore, for approaching urban simulation from the local level. However, as suitable to the simulation of urban systems as models based on complexity theory are, there are some things that they cannot model well, most notably constraints such as planning restrictions that are applied to urban systems from the top down. In light of this consideration, perhaps a hybrid approach—taking what is useful from traditional techniques and fusing them with ideas aligned with complexity theory—is where the future of urban modelling lies. Cellular automata and agent-based

models, although in their infancy in application to urban phenomena, show promise in remedying some of the shortcomings of earlier urban models.<sup>4</sup>

At the most rudimentary level, a cellular automata model can be described as a two-dimensional array of regular spaces (cells) which are, at any given time, in a state that is determined by the attributes of neighbouring cells according to some uniform transition rules. Adjacent cells alter their states through the recursive application of these rules. In this way, cellular automata replace the traditional mechanics of urban models with rule-based mechanisms. Cellular automata have been widely employed in fields such as physics, chemistry, computer science, and biology, and there has also been quite an impressive range of application to urban systems, including urban growth, spatial structure, segregation, land-use dynamics, and sprawl. However, the technique is still very much in its early stages as an urban simulation tool.<sup>5</sup>

The agent-based approach to simulation seeks to represent individual actors (or groups) in a given system. Agents may interact with each other and/or with an environment. From these interactions, macro-scale behaviours emerge in the aggregate. Agent-based models have been used to simulate insect behaviour, search the Internet, and to manipulate financial data. Agent-based approaches have also been used to simulate urban systems, including traffic dynamics, pedestrian movement, and lines of sight. Equally, we might envisage agent-based models that represent the agents that compose the land-use–transportation system—migrating households, firms, or individuals; socio-economic groups; commuters; pedestrians; developers; etc.<sup>6</sup>

---

<sup>4</sup> For a more detailed picture of the broad and interdisciplinary field of complexity theory, the reader is referred to these works: Adams, 1994; Arthur, 1990; Batty and Longley, 1994; Cartwright, 1991; Casti, 1997; Holland, 1998; Krugman, 1996; Langton, 1992; Levy, 1992; Resnick, 1994a; 1994b; 1996; 1999; Schelling, 1978; Sipper, 1997; Taylor, 1992; and Wolfram, 1994.

<sup>5</sup> For a more detailed review of the applications and mechanics of cellular automata, the reader is referred to Allen, 1997; Batty, 1991; 1997a; 1997b; 1998; 1999; Batty and Xie, 1994; 1997; Batty et al., 1999; Benati, 1997; Clarke, 1997; Clarke et al., 1997; Couclelis, 1985; 1997; Faith, 1998; Hegelsmann and Flache, 1998; Nagel et al., 1996a; 1999; 1996b; Nagel and Schreckenberg, 1995; O'Sullivan, 2000a; Phipps and Langlois, 1997; Portugali et al., 1997; Sanders et al., 1997; Sembolini, 1997; Torrens, 1998; Wagner, 1997; Webster et al., 1998; White and Engelen, 1993; 1997; White et al., 1997; Wu, 1998; Wu and Webster, 1998; and Xie, 1994.

<sup>6</sup> While the application of agent-based techniques has not been as widespread as cellular automata approaches, examples exist, notably the work of Batty and Jiang, 1999; Batty et al., 1998; Bonabeau et al., 1999; Epstein and Axtell, 1996; Nagel et al., 1999; Resnick, 1999; and Schelhorn et al., 1999.




Cellular automata and agent-based models have the potential to greatly enhance our ability to model urban systems. They directly address five of the six avenues of improvement specified in Section 9.2: dynamics, detail, user concerns, flexibility, and behaviour. They better represent our theoretical and practical knowledge of how complex urban systems emerge from local interactions. In this sense they add an improved behavioural element to the models. Also, their inherent dynamism may help to overcome traditional weaknesses in land-use–transportation models. They are particularly adept at handling urban systems at a detailed level, while retaining the ability to scale up to global levels. Their formulation is perhaps more intuitive than many of the traditional techniques described in this paper. This, alongside with their visual presentation makes them appealing to model users. Moreover, they can be applied flexibly across many scales and are well suited to modularization and linkages with other simulation techniques.

## 10.2 ENGAGING THE USER THROUGH VISUALIZATION AND APPLICATION

A pressing problem facing land-use–transportation models is their general inability to engage the vast majority of their users—and, indeed, the people whose lives they influence—in a meaningful and intuitive fashion. In recent years, significant advances have been made in the development of intelligent 3D models of the built environment. Technology exists today that enables us to render visually stunning and richly detailed simulations of urban environments in a manner that renders an ease of interaction and understanding that is not currently present in many models. These 3D models can be used as a user-friendly interface for querying the urban environment as a geographic information system, for hyper-linking Web-based information, for visualizing model results (Figure 12), and for accessing functional simulation models. Furthermore, the addition of a third dimension to our knowledge base of urban systems greatly enriches the simulation capacity of predictive models.<sup>7</sup>

---

<sup>7</sup> For examples of 3D visualization efforts in urban modelling, the reader may consult Bell et al., 1999 and Centre for Advanced Spatial Analysis, 2000.

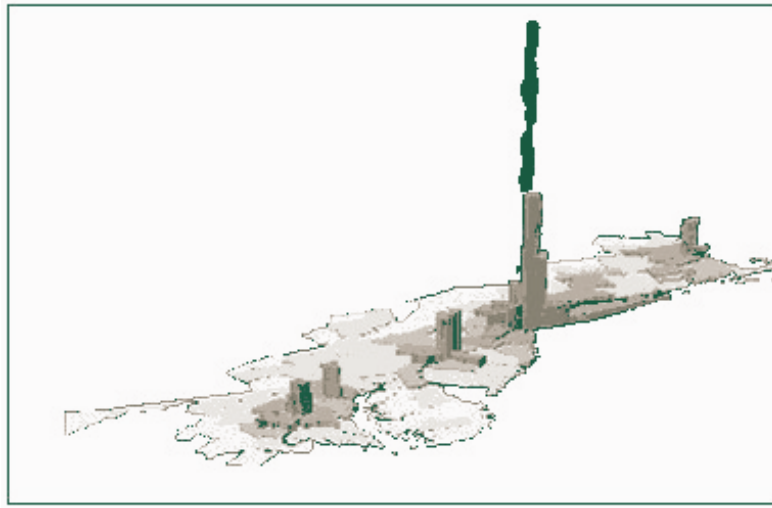

*Figure 12. 3D representation of population density data (1997) for America's Northeastern Megalopolis, from Portland, Maine to Washington D.C. (Source: Torrens, 1998a).*

Another way in which land-use–transportation models can better engage the user is in the questions that they answer. Land-use–transportation models are somewhat deficient in their application to urban systems. While their development in regard to the land-use system and transportation questions is relatively rich, land-use–transportation models have traditionally shied away from addressing many of the critical questions facing cities. Efforts to couple land-use–transportation models with environmental modules have begun, but several urban problems remain largely neglected—notably issues of social justice, segregation, and the geography of growth and decline (Torrens, 2000). There is a pressing need for models that answer what-if questions about the land-use and transport system and that address important policy concerns of relevance to the public.

### 10.3 CONCLUSIONS

Land-use–transportation models emerged in response to a need for educated forecasts of the future pattern of urban systems, as well as a means by which hypotheses relating to cities could be tested. While they are complicated and rely, in some cases, upon rather abstract assumptions, they remain one of the best means by which long-term planning decisions can be made and are invaluable as laboratories for the testing of ideas relating to the city. Nevertheless, they have evolved quite slowly and in recent years the pace of change in urban systems has begun to outstrip them. Moreover, many of the foundations upon which models have been developed (including several of the simulation techniques discussed in this paper) were conceived in a time in which the city was very

different from its present manifestations. Those techniques are ill equipped to describe the dynamics shaping urban evolution and are in many respects ill-suited to supporting the policy decisions that must be made in order to manage large urban systems. Techniques such as spatial interaction modelling focus largely on location as the driving force behind land-use and transportation patterns. There is no doubting the significance of location in influencing these systems, but there are additional factors that are important to consider; interaction is a crucial factor. Also, spatial interaction models are generally static (dynamics enter these models only in an indirect fashion) when the city is quite obviously dynamic in virtually every regard. Moreover, the spatial interaction approach regards the city in the aggregate when it is widely accepted that local level interactions among individuals or groups lie behind much of the behaviour that forms urban systems.

The techniques described in this paper do have many uses in urban simulation, particularly at the levels of geography to which they are commonly applied—the zonal, aggregate, meso-and macro-scales. However, there is an increasing awareness that urban systems are in large part dynamical and that many of the processes responsible for forming the patterns that characterize large cities (traffic congestion, urban sprawl, spatial structure, environmental problems, etc.) organize themselves from the bottom up, from the repeated and myriad local-scale interaction of several thousands of individual agents and small-scale neighbourhoods. There is a need, therefore, for the introduction of techniques that can simulate urban systems in this fashion. Equally, the introduction of tools that can engage a broad spectrum of users in the simulation process is long overdue, as is the development of modules that can investigate the most pressing problems facing urban areas. The development of hybrid models, simulations that combine the techniques discussed in this paper with innovative ideas from complexity theory and advancements in visualization have a great deal to offer in addressing such issues.

## REFERENCES

- Adams, D., 1994. *Urban Planning and the Development Process*. UCL Press, London.
- Allen, P.M., 1997. *Cities and Regions as Self-Organizing Systems: Models of Complexity. Environmental Problems and Social Dynamics*. Gordon and Breach Science Publishers, Australia.
- Arthur, W.B., 1990. Positive feedbacks in the economy. *Scientific American*, February: 80-85.
- Australian Bureau of Transportation Economics, 1998. *Urban Transport Models: A Review (Working Paper 39)*, Department of Transport and Regional Services, Canberra, Australia.
- Bahl, R.W., 1968. A land speculation model: the role of the property tax as a constraint to urban sprawl. *Journal of Regional Science*, 8(2): 199-208.
- Balchin, P. and Kieve, J.L., 1977. *Urban Land Economics*. Macmillan, London.
- Barra, T.d.I., 1989. *Integrated Land Use and Transport Modelling: Decision Chains and Hierarchies*. Cambridge University Press, Cambridge.
- Batty, M., 1976. *Urban Modelling: Algorithms, Calibrations, Predictions*. Cambridge Urban and Architectural Studies. Cambridge University Press, London.
- Batty, M., 1979. Progress, success, and failure in urban modeling. *Environment and Planning A*, 11: 863-878.
- Batty, M., 1991. Generating urban forms from diffusive growth. *Environment and Planning A*, 23: 511-544.
- Batty, M., 1994. A chronicle of scientific planning: the Anglo-American modeling experience. *Journal of the American Planning Association*, 60(1): 7-16.
- Batty, M., 1997a. Cellular automata and urban form: A primer. *Journal of the American Planning Association*, 63(2): 266-274.
- Batty, M., 1997b. Editorial: Urban systems as cellular automata. *Environment and Planning B*, 24: 159-164.
- Batty, M., 1998. Urban evolution on the desktop: simulation with the use of extended cellular automata. *Environment and Planning A*, 30: 1943-1967.

- Batty, M., 1999. Modeling urban dynamics through GIS-based cellular automata. *Computers, Environment and Urban Systems*, 23: 205-233.
- Batty, M. and Jiang, B., 1999. Multi-Agent Simulation: New Approaches to Exploring Space-Time Dynamics Within GIS. CASA Working Paper 10, Centre for Advanced Spatial Analysis (CASA), University College London, London.
- Batty, M., Jiang, B. and Thurstain-Goodwin, M., 1998. Local Movement: Agent-Based Models of Pedestrian Flows. CASA Working Paper 4, Centre for Advanced Spatial Analysis (CASA), University College London, London.
- Batty, M. and Longley, P., 1994. *Fractal Cities*. Academic Press, London.
- Batty, M. and Xie, Y., 1994. From cells to cities. *Environment and Planning B*, 21: s31-s48.
- Batty, M. and Xie, Y., 1997. Possible urban automata. *Environment and Planning B*, 24: 175-192.
- Batty, M., Xie, Y. and Sun, Z., 1999. The dynamics of urban sprawl. CASA Working Paper 15, University College London, Centre for Advanced Spatial Analysis (CASA), London.
- Bell, M., Dean, C. and Blake, M., 1999. A model for forecasting the location of fringe urbanisation, with GIS and 3D visualisation, Sixth International Conference on Computers in Urban Planning and Urban Management (CUPUM), IUAV, Venice.
- Benati, S., 1997. A cellular automaton for the simulation of competitive location. *Environment and Planning B*, 24: 175-192.
- Bonabeau, E., Dorigo, M. and Theraulaz, G., 1999. *Swarm Intelligence: From Natural to Artificial Systems*. Santa Fe Institute Studies in the Sciences of Complexity. Oxford University Press, New York.
- Bramley, G., Bartlett, W. and Lambert, C., 1995. *Planning, the Market and Private Housebuilding*. The Natural and Built Environment Series 4. UCL Press, London.
- Cambridge Systematics, I. and Group, H.C., 1991. *Making the Land Use, Transportation, Air Quality Connection--Modelling Practices*, Volume I.
- Carter, H., 1981. *The Study of Urban Geography*. Edward Arnold, Victoria, Australia.
- Cartwright, T.J., 1991. Planning and chaos theory. *Journal of the American Planning Association*, 57(1): 44-56.

- Casti, J.L., 1997. *Would-be Worlds: How Simulation is Changing the Frontiers of Science*. John Wiley & Sons, New York.
- Centre for Advanced Spatial Analysis, 2000. *Computer Visualisation for the Corporation of London: A Review of Applications and Proposals for Implementation*, Centre for Advanced Spatial Analysis (CASA), University College London, London.
- Cervero, R., 1989. *America's Suburban Centers : The Land-Use Transportation Link*. Unwin-Hyman, Winchester, MA.
- Clarke, K., 1997. Land transition modeling with deltatrons. Department of Geography, University of California, Santa Barbara.
- Clarke, K.C., Hoppen, S. and Gaydos, L., 1997. A self-modifying cellular automaton model of historical urbanization in the San Francisco Bay area. *Environment and Planning B*, 24: 247-261.
- Couclelis, H., 1985. Cellular worlds: A framework for modeling micro-macro dynamics. *Environment and Planning A*, 17: 585-596.
- Couclelis, H., 1997. From cellular automata to urban models: New principles for model development and implementation. *Environment and Planning B*, 24: 165-174.
- Epstein, J.M. and Axtell, R., 1996. *Growing Artificial Societies from the Bottom Up*. Brookings Institution, Washington D.C.
- Faith, J., 1998. Why Gliders Don't Exist: Anti-Reductionism and Emergence. In: C. Adami (Editor), *Artificial Life VI: Proceedings of the Sixth International Conference on Artificial Life. Complex Adaptive Systems*, No. 6. MIT Press, Cambridge, MA.
- Fotheringham, A.S., Brunson, C. and Charlton, M., 2000. *Quantitative Geography: Perspectives on Spatial Data Analysis*. Sage, London.
- Fotheringham, A.S. and O'Kelly, M.E., 1989. *Spatial Interaction Models: Formulations and Applications*. Studies in Operational Regional Science. Kluwer Academic Publishers, Dordrecht.
- Golledge, R. and Stimson, R.J., 1997. *Spatial Behavior: A Geographic Perspective*. The Guilford Press, New York.

- Government of Ireland, 1995. Dublin Transportation Initiative Technical Volume I: Transport Modelling in Phase 2. Stationary Office, Dublin.
- Harris, B., 1994. The real issues concerning Lee's "Requiem". *Journal of the American Planning Association*, 60(1): 31-34.
- Harvey, J., 1996. *Urban Land Economics*. Macmillan, Houndsmills.
- Hegelsmann, R. and Flache, A., 1998. Understanding complex social dynamics: a plea for cellular automata based modelling. *Journal of Artificial Societies and Social Simulation*, 1(3).
- Holland, J.H., 1998. *Emergence: From Chaos to Order*. Perseus Books, Reading, MA.
- Kivell, P., 1993. *Land and the City: Patterns and Processes of Urban Change*. Routledge, London.
- Klosterman, R.E., 1994. Large-scale urban models: retrospect and prospect. *Journal of the American Planning Association*, 60(1): 3-6.
- Krugman, P., 1996. *The Self-Organizing Economy*. Blackwell, Malden, MA.
- Landis, J., 1994. The California Urban Futures Model: a new generation of metropolitan simulation model. *Environment and Planning B*, 21(2).
- Landis, J., 1995. Imagining land use futures: applying the California Urban Futures Model. *Journal of the American Planning Association*, 61(4): 438-457.
- Landis, J. and Zhang, M., 1998. The second generation of the California Urban Futures Model. Part 2: Specification and calibration results of the land-use change submodel. *Environment and Planning B*, 25: 795-824.
- Langton, C.G., 1992. Life at the Edge of Chaos. In: C.G. Langton, C. Taylor, J.D. Farmer and S. Rasmussen (Editors), *Artificial Life II*. Addison-Wesley, Redwood City, CA, pp. 41-93.
- Lee, D.B., 1973. Requiem for large-scale models. *Journal of the American Institute of Planners*, 39: 163-178.
- Lee, D.B., 1994. Retrospective on large-scale urban models. *Journal of the American Planning Association*, 60(1): 35-40.
- Lee, M.-S. and Goulias, K., 1997. Accessibility indicators for transportation planning using GIS, Transportation Research Board.
- Levy, S., 1992. *Artificial Life: The Quest for a New Creation*. Penguin Books, London.

- Miller, E.J., Kriger, D.S. and Hunt, J.D., 1998. Integrated Urban Models for Simulation of Transit and Land-Use Policies. TCRP Project H-12.
- Nagel, K., Barrett, C.L. and Rickert, M., 1996a. Parallel traffic microsimulation by cellular automata and application for large-scale transportation modeling. LA-UR 96-50, Los Alamos National Laboratory, Los Alamos, NM.
- Nagel, K., Beckman, R.J. and Barrett, C.L., 1999. TRANSIMS for urban planning. LA-UR 98-4389, Los Alamos National Laboratory, Los Alamos, NM.
- Nagel, K., Rasmussen, S. and Barrett, C.L., 1996b. Network traffic as self-organized critical phenomena. TSA-DO/SA MS-M997 and CNLS MS-B258, Los Alamos National Laboratory, Los Alamos, NM.
- Nagel, K. and Schreckenberg, M., 1995. Traffic jams in stochastic cellular automata. 95ATS089, Los Alamos National Laboratory, Los Alamos, NM.
- Openshaw, S., 1979. A methodology for using models for planning purposes. *Environment and Planning A*, 11: 879-896.
- Openshaw, S., 1983. The Modifiable Areal Unit Problem. *Catmog* 38. GeoBooks, Norwich.
- Oryani, K. and Harris, B., 1996. Enhancement of DVRPC's Travel Simulation Models Task 12: Review of Land Use Models and Recommended Model for DVRPC. Report Prepared for Delaware Valley Regional Planning Commission, URS Consultants, Inc., Philadelphia.
- O'Sullivan, D., 2000a. Graph-based cellular automata models of urban spatial processes. Ph.D. thesis Thesis, University College London, London.
- O'Sullivan, D., 2000b. Using desktop GIS for the investigation of accessibility by public transport: an isochrone approach. *International Journal of Information Science*, 14(1): 85-104.
- Phipps, M. and Langlois, A., 1997. Spatial dynamics, cellular automata, and parallel processing computers. *Environment and Planning B*, 24(193-204).
- Portugali, J., Benenson, I. and Omer, I., 1997. Spatial cognitive dissonance and sociospatial emergence in a self-organizing city. *Environment and Planning B*, 24: 263-285.
- Putman, S.H., 1979. *Urban Residential Location Models*. Kluwer Academic Publishers.
- Putman, S.H., 1983. *Integrated Urban Models*. Pion.



- Putman, S.H., 1989. *Integrated Urban Models: Policy Analysis of Transportation and Land Use*. Pion.
- Putman, S.H., 1992. *Integrated Urban Models 2: New Research and Applications of Optimization and Dynamics*. Pion.
- Resnick, M., 1994a. Changing the centralized mind. *Technology Review*(July): 32-40.
- Resnick, M., 1994b. Learning about life. *Artificial Life*, 1(1-2).
- Resnick, M., 1996. Beyond the centralized mindset. *Journal of the Learning Sciences*, 5(1): 1-22.
- Resnick, M., 1999. *Turtles, Termites, and Traffic Jams: Explorations in Massively Parallel Microworlds*. *Complex Adaptive Systems*. MIT Press, Cambridge, MA.
- Sanders, L., Pumain, D., Mathian, H., Guérin-Pace, F. and Bura, S., 1997. SIMPOP: A multiagent system for the study of urbanism. *Environment and Planning B*, 24: 287-305.
- Sayer, R.A., 1979. Understanding urban models versus understanding cities. *Environment and Planning A*, 11: 853-862.
- Schelhorn, T., O'Sullivan, D., Haklay, M. and Thurstain-Goodwin, M., 1999. *STREETS: an agent-based pedestrian model*, University College London, Centre for Advanced Spatial Analysis, London.
- Schelling, T.C., 1978. *Micromotives and Macrobehavior*. WW Norton and Company, New York.
- Sembolini, F., 1997. An urban and regional model based on cellular automata. *Environment and Planning B*, 24: 589-612.
- Sipper, M., 1997. *Evolution of Parallel Cellular Machines: The Cellular Programming Approach*. *Lecture Notes in Computer Science 1194*. Springer, Berlin.
- Smith, M., 1998. Painting by numbers--mathematical models of urban systems. *Environment and Planning B*, 25: 483-493.
- Taylor, C.E., 1992. "Fleshing Out" *Artificial Life II*. In: C.G. Langton, C. Taylor, J.D. Farmer and S. Rasmussen (Editors), *Artificial Life II: Proceedings of the Workshop on Artificial Life held February, 1990 in Santa Fe, New Mexico*. Addison-Wesley, Redwood City, CA, pp. 25-38.
- Thomas, R.M. and Huggett, R.J., 1980. *Modelling in Geography: A Mathematical Approach*. Barnes & Noble Books, Totowa, N.J.

- Thurstain-Goodwin, M. and Unwin, D., 2000. Defining and delineating the central areas of towns for statistical monitoring using continuous surface representations, Centre for Advanced Spatial Analysis, University College London.
- Torrens, P.M., 1998a. Everything Must Go! The Geography of Retail Change in America's Northeastern Megalopolis, 1977 to 1992. Master's Thesis, Indiana University, Bloomington.
- Torrens, P.M., 1998b. A Manhattan Made of Lego: Modeling Urban Phenomena Using Cellular Automata, University of Washington, Seattle.
- Torrens, P.M., 2000. SprawlSim: A Simulation Model for Exploring Spatial Complexity and Sprawling Urban Growth, Centre for Advanced Spatial Analysis (CASA), University College London, London.
- Torrens, P.M. and Alberti, M., 2000. Measuring sprawl, Centre for Advanced Spatial Analysis, University College London and Department of Urban Design and Planning, University of Washington.
- Waddell, P., 1998a. UrbanSim Reference Guide: Beta Version, University of Washington, Seattle.
- Waddell, P., 1998b. UrbanSim Specifications. Version 1.01, University of Washington, Seattle.
- Wagner, D.F., 1997. Cellular automata and geographic information systems. *Environment and Planning B*, 24: 219-234.
- Webster, C., Wu, F. and Zhou, S., 1998. An object-based urban simulation model for interactive visualisation, Third International Conference on GeoComputation, University of Bristol.
- Wegener, M., 1983. Description of the Dortmund Region Model. Working Paper 8, Institut für Raumplanung, Dortmund.
- Wegener, M., 1994. Operational urban models: state of the art. *Journal of the American Planning Association*, 60: 17-29.
- Wegener, M., 1996. The potential of microsimulation for urban models. In: G.P. Clarke (Editor), *Microsimulation for Urban and Regional Policy Analysis*. European Research in Regional Science 6. Pion, London.
- White, R. and Engelen, G., 1993. Cellular automata and fractal urban form. *Environment and Planning A*, 25: 1175-1199.

- White, R. and Engelen, G., 1997. Cellular automata as the basis of integrated dynamic regional modelling. *Environment and Planning B*, 24: 235-246.
- White, R., Engelen, G. and Uljee, I., 1997. The use of constrained cellular automata for high-resolution modelling of urban land use dynamics. *Environment and Planning B*, 24: 323-343.
- Wolfram, S., 1994. *Cellular Automata and Complexity*. Addison-Wesley, Reading, MA, 3-71 pp.
- Wu, F., 1998. An experiment on the generic polycentricity of urban growth in a cellular automatic city. *Environment and Planning B*, 25: 731-752.
- Wu, F. and Webster, C.J., 1998. Simulation of land development through the integration of cellular automata and multicriteria evaluation. *Environment and Planning B*, 25: 103-126.
- Xie, Y., 1994. Analytical models and algorithms for cellular urban dynamics. Ph.D. Thesis, University of New York at Buffalo, Buffalo, NY.