

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

Mechanical (and Materials) Engineering --
Dissertations, Theses, and Student Research

Mechanical & Materials Engineering,
Department of

Spring 4-2012

Development and Recommendations for a Non-Proprietary, High-Tension, Cable End Terminal System

Ryan J. Terpsma

University of Nebraska-Lincoln, rterpsma@huskers.unl.edu

Follow this and additional works at: <https://digitalcommons.unl.edu/mechengdiss>



Part of the [Civil Engineering Commons](#), and the [Computer-Aided Engineering and Design Commons](#)

Terpsma, Ryan J., "Development and Recommendations for a Non-Proprietary, High-Tension, Cable End Terminal System" (2012). *Mechanical (and Materials) Engineering -- Dissertations, Theses, and Student Research*. 31.

<https://digitalcommons.unl.edu/mechengdiss/31>

This Article is brought to you for free and open access by the Mechanical & Materials Engineering, Department of at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Mechanical (and Materials) Engineering -- Dissertations, Theses, and Student Research by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

DEVELOPMENT AND RECOMMENDATIONS FOR A
NON-PROPRIETARY, HIGH-TENSION, CABLE END
TERMINAL SYSTEM

by

Ryan John Terpsma

A THESIS

Presented to the Faculty of
The Graduate College at the University of Nebraska
In Partial Fulfillment of Requirements
For the Degree of Master of Science

Major: Mechanical Engineering

Under the Supervision of Professor John D. Reid

Lincoln, Nebraska

April, 2012

DEVELOPMENT AND RECOMMENDATIONS FOR A NON-PROPRIETARY,
HIGH-TENSION, CABLE END TERMINAL SYSTEM

Ryan John Terpsma, M.S.

University of Nebraska, 2012

Advisor: John D. Reid

Cable guardrail systems have been increasing in popularity in recent years due to several perceived benefits over the commonly used W-beam guardrail. A non-proprietary design was desired as an alternative to the many proprietary designs available. A non-proprietary, high-tension cable end terminal was necessary to accompany the non-proprietary, high-tension cable guardrail system under development.

The objective of this research project was to develop design recommendations for a non-proprietary, high-tension cable end terminal. An analysis of several cable guardrail end terminals was undertaken to identify any common features that may prove to be beneficial or detrimental to end terminal designs. Next, a study of the non-proprietary low-tension system was conducted to determine the cause of vehicle instabilities in full-scale testing. Since the high-tension and low-tension cable end terminal designs are similar, it is likely that any issues with the low-tension design will also be evident in testing of the high-tension design.

LS-DYNA modeling of current cable terminal anchor hardware was then accomplished and compared to bogie testing results. The anchor model proved to be sufficiently accurate to preliminarily analyze alternative cable anchor designs.

A final, optimized, high-tension cable anchor design was produced along with alternative terminal post recommendations for continuing development of the non-proprietary, high-tension cable end terminal.

ACKNOWLEDGEMENTS

I would like to first thank my advisor, Dr. John Reid, for his continued patience, advice, and guidance throughout graduate school as well as his counsel as I prepare to take the next step in my career. You have taught me to think more critically and to be more thorough. I appreciate all of the wisdom and direction you have provided.

Special thanks also to the other members of my advisory committee, Dr. Ron Faller and Dr. Zhaoyan Zhang. Dr. Faller, the basketball discussions at lunch always brightened my day and gave me hope for future Nebraska basketball teams. Your help and guidance during the project proved invaluable. Dr. Zhang, your classes challenged me and taught me problem solving skills that will help me long after I have left graduate school.

Thanks is also due to all of the MwRSF staff who helped me along throughout this project. To Bob, Scott, Karla, and Curt for guiding me through the various stages and tasks that a research project requires as well as Jim and Ken for helping me with the component testing. I could not have done it without you guys.

Thank you to all of the undergraduate and graduate students at MwRSF who made college fun. The fun-jams, tailgates, and get-togethers kept graduate school interesting.

A great deal of thanks is due to my friends and family. Without their support graduate school would have been impossible. A special thanks is due to my grandparents, who were some of my biggest influences and reasons for starting graduate school. Finally, thank you to my parents who have always been there for me and have been incredible role models. Your help and support has made this journey much easier.

TABLE OF CONTENTS

ACKNOWLEDGEMENTS	i
TABLE OF CONTENTS.....	ii
LIST OF FIGURES	v
LIST OF TABLES	viii
CHAPTER 1 - INTRODUCTION.....	1
1.1 Problem Statement.....	1
1.2 Background.....	2
1.3 Research Objectives.....	4
1.4 Scope.....	4
1.5 Research Approach	5
CHAPTER 2 - LITERATURE REVIEW.....	7
2.1 Introduction.....	7
2.2 Previously-Tested High-Tension Cable End Terminal Designs.....	7
2.2.1 Texas Transportation Institute	10
2.2.2 Brifen	14
2.2.3 Gibraltar	16
2.2.4 Safence.....	19
2.2.5 Armorflex.....	22
2.3 Discussion.....	25
CHAPTER 3 - EVALUATION OF THE LOW-TENSION, THREE CABLE END TERMINAL TEST SERIES	27
3.1 Background.....	27
3.2 Simulation of the Low-Tension, Three Cable End Terminal	28
3.2.1 Three-Cable, Low-Tension Anchor Bracket Assembly.....	28
3.2.2 Slip Base Post No. 1.....	33
3.2.3 Slip Base Line Posts.....	35
3.2.4 Cables.....	36
3.2.4.1 Pre-Tension.....	36
3.2.5 Vehicle Model.....	36
3.2.6 Model Construction	37
3.2.7 End Terminal Model Validation	37
3.2.8 Discussion.....	44
3.2.8.1 Vehicle Trajectory	44
3.2.8.2 Slip Base Post Performance Analysis.....	46
3.2.8.2.1 Full-Scale Testing Evaluation.....	46
3.2.8.2.2 M4x3.2 Replacement Post Option	46
3.2.8.2.3 Modified S3x5.7 Post Option.....	48
3.2.8.2.4 Terminal Post Replacement Options Summary	51

3.3 Conclusions.....	52
CHAPTER 4 - CURRENT, HIGH-TENSION CABLE ANCHOR BRACKET DESIGN	55
CHAPTER 5 - INITIAL COMPUTER SIMULATION.....	62
5.1 Introduction.....	62
5.2 Abbreviated High-Tension Cable End Terminal System Model.....	63
5.2.1 High-Tension Cable Anchor Bracket Assembly.....	63
5.2.2 Slip Base Post Assembly.....	66
5.2.3 System Cables.....	70
5.2.4 Bogie Model.....	72
5.3 Bogie Test Simulation.....	72
5.4 Discussion.....	75
CHAPTER 6 - HIGH-TENSION, CABLE END TERMINAL BOGIE TESTING.....	78
6.1 Purpose.....	78
6.2 Scope.....	78
6.3 System Details.....	79
6.3.1 Cable Anchor Bracket Assemblies.....	81
6.3.2 Slip Base Post Assemblies.....	82
6.3.3 System Cables.....	83
6.4 Equipment and Instrumentation.....	91
6.4.1 Bogie.....	91
6.4.2 Accelerometer.....	92
6.4.3 Pressure Tape Switches.....	92
6.4.4 Digital Cameras.....	93
6.5 Data Processing.....	93
CHAPTER 7 - BOGIE TESTING – TEST NO. HTCT-1.....	95
7.1 Procedures.....	95
7.2 Test Description, Test No. HTCT-1.....	95
7.3 System Damage.....	96
CHAPTER 8 - SIMULATION MODEL EVALUATION.....	111
8.1 Introduction.....	111
8.2 High-Speed Video Comparison.....	111
8.3 Accelerometer Data Comparison.....	112
8.4 Component Damage Comparison.....	116
8.5 Discussion and Conclusions.....	121
CHAPTER 9 - REDESIGN OF THE HIGH-TENSION CABLE ANCHOR BRACKET Assembly.....	123
9.1 Introduction.....	123
9.2 Design Issues.....	124
9.2.1 Cable Release Lever.....	124
9.2.2 Cable Release Lever Rotation Point.....	125

9.2.3 Cable Anchor Bracket Assembly Geometry	128
9.3 Alternate Design Development.....	132
9.3.1 Redesigned, High-Tension, Cable Anchor Bracket Assembly Model Development.....	133
9.3.1.1 Cable Release Lever Rotation Brackets.....	134
9.3.1.2 Cable Anchor Bracket Assembly Rotation Support Brackets	135
9.3.1.3 Cable Release Lever Rotation Bolts	136
9.3.2 Model Development Simulations	136
9.3.2.1 Simulation No. 1 - Initial Anchor Bracket Assembly Model	137
9.3.2.2 Simulation No. 2 – Redesigned Support Bracket and Cable Release Lever Model	139
9.3.2.3 Simulation No. 3 – Redesign of Rotational Joint Hardware.	143
9.3.2.4 Simulation No. 4 – Analysis of Release Lever Modification	147
9.3.2.5 Simulation No. 5 – Increased Cable Tension.....	153
9.3.2.6 Simulation No. 6 –Anchor Impact at Oblique Angle	156
9.3.2.7 Simulation No. 7- Reverse Direction Impact.....	158
9.4 Final Design and Simulation.....	163
9.4.1 Final Redesigned Cable Anchor Bracket Assembly	163
9.4.2 Simulation	170
9.4.3 Discussion	176
 CHAPTER 10 - SUMMARY, CONCLUSIONS, AND RECOMMENDATIONS	181
10.1 Summary	181
10.2 Conclusions and Recommendations	183
10.2.1 Future Work.....	185
 CHAPTER 11 - REFERENCES.....	188
 CHAPTER 12 - APPENDICES.....	190
Appendix A. Initial Simulation Results - Metric	191
Appendix B. Bogie Test Results - Metric	193
Appendix C. Standard MwRSF Bogie Test Sheet, Test No. HTCT-1	198
Appendix D. Redesigned Cable Anchor Bracket Simulation Results – Metric	201

LIST OF FIGURES

Figure 1. TTI End Terminal.....	10
Figure 2. TTI End Terminal, Technical Drawing.....	11
Figure 3. TTI End Terminal, Technical Drawing.....	12
Figure 4. Brifen End Terminal, Technical Drawing.....	15
Figure 5. Gibraltar End Terminal.....	16
Figure 6. Gibraltar End Terminal, Technical Drawing.....	17
Figure 7. Safence End Terminal.....	19
Figure 8. Safence End Terminal, Technical Drawing.....	20
Figure 9. ArmorflexEnd Terminal.....	22
Figure 10. Armorwire End Terminal, Technical Drawing.....	23
Figure 11. Low-Tension, Cable Anchor Bracket Assembly Details.....	30
Figure 12. Low-Tension, Cable Anchor Bracket Component Details.....	31
Figure 13. Low-Tension, Cable Anchor Bracket Component Details.....	32
Figure 14. Cable Anchor Bracket Assembly.....	33
Figure 15. Slip Base Post No. 1 Model.....	34
Figure 16. Slip Base Line Post Model.....	35
Figure 17. Geo Metro Vehicle Model.....	36
Figure 18. Shear Post Impact with Guide Flag, Test No. CT-4.....	39
Figure 19. Guide Flag/Shear Post Impact Force Diagram.....	40
Figure 20. Comparison of Actual and Simulated Vehicle Yaw – Test No. CT-4.....	40
Figure 21. Sequential Comparison at Post Impact Times, CT-4 and Simulation CT-4_13.....	41
Figure 22. Vehicle Trajectory Comparison – 500 ms After Impact.....	42
Figure 23. Geo Metro Overriding System Debris.....	43
Figure 24. Cable Interaction with Slip Base Post No. 1.....	45
Figure 25. Post Cross Section Dimensions.....	47
Figure 26. S3x5.7 Post with Cut Flanges.....	49
Figure 27. S3x5.7 Post with Weakening Holes.....	51
Figure 28. Cable Anchor Bracket Assembly Drawings.....	57
Figure 29. Cable Anchor Bracket Assembly Details.....	58
Figure 30. Cable Anchor Bracket Component Details.....	59
Figure 31. Cable Release Lever Assembly Details.....	60
Figure 32. Bill of Materials, Cable Anchor Bracket Assembly.....	61
Figure 33. Cable Anchor Bracket Component Mesh.....	64
Figure 34. Cable Anchor Bracket and Finite Element Model.....	65
Figure 35. Slip Base Post Assembly Component Mesh.....	68
Figure 36. Slip Base Post Assembly and Finite Element Model.....	69
Figure 37. Cable and End Fitter Component Model and Mesh.....	71
Figure 38. Bogie Finite Element Model.....	72
Figure 39. Sequential Photographs, Bogie Test Simulation.....	76
Figure 40. Longitudinal Bogie Velocity, Initial Simulation.....	77
Figure 41. Bogie Test System Setup, Test No. HTCT-1.....	80
Figure 42. Bogie Test Layout, Test No. HTCT-1.....	84
Figure 43. Cable Anchor Bracket Assembly Details, Test No. HTCT-1.....	85

Figure 44. Slip Base Post Assembly Details, Test No. HTCT-1	86
Figure 45. Slip Base Post Component Details, Test No. HTCT-1	87
Figure 46. Slip Base Post Component Details, Test No. HTCT-1	88
Figure 47. Cable End Fitters and Turnbuckle Details, Test No. HTCT-1	89
Figure 48. Bill of Materials, Test No. HTCT-1	90
Figure 49. Rigid Frame Bogie on Guidance Track.....	92
Figure 50. Sequential Photographs, Test No. HTCT-1.....	98
Figure 51. Documentary Photographs, Test No. HTCT-1	99
Figure 52. System Damage, Test No. HTCT-1	100
Figure 53. System Damage, Test No. HTCT-1	101
Figure 54. System Damage, Test No. HTCT-1	102
Figure 55. System Damage, Test No. HTCT-1	103
Figure 56. System Damage, Test No. HTCT-1	104
Figure 57. System Damage, Test No. HTCT-1	105
Figure 58. System Damage, Test No. HTCT-1	106
Figure 59. Force vs. Time, Test No. HTCT-1	109
Figure 60. Longitudinal Velocity vs. Time, Test No. HTCT-1	109
Figure 61. Energy vs. Time, Test No. HTCT-1	110
Figure 62. Cable Release Event Comparison, Test No. HTCT-1 vs. Simulation.....	114
Figure 63. Sequential Comparison, Test No. HTCT-1 vs. Simulation	115
Figure 64. Bogie Velocity Comparison, Test No. HTCT-1 vs. Simulation	116
Figure 65. Upstream Cable Anchor Damage Comparison, Test No. HTCT-1 vs. Simulation.....	118
Figure 66. S3x5.7 Post Damage Comparison, Test No. HTCT-1 vs. Simulation	119
Figure 67. Release Lever Interaction with System Cables, Test No. HTCT-1 vs. Simulation.....	120
Figure 68. Simplified Free Body Diagram of Cable Release Lever During Cable Release	126
Figure 69. Rotation Point Comparison	128
Figure 70. Cable End Fitter Interference	129
Figure 71. Cable End Fitter Movement	131
Figure 72. Redesigned Cable Anchor Bracket Assembly Model	133
Figure 73. Cable Release Lever Rotation Bracket Model	135
Figure 74. Cable Anchor Bracket Assembly Rotation Support Bracket Model.....	136
Figure 75. Release Lever Disengaging from Assembly, Simulation No. 1	138
Figure 76. Redesigned Cable Anchor Bracket Support Bracket Geometry.....	140
Figure 77. Redesigned Cable Release Lever, Angled Base Plate.....	140
Figure 78. Distorted Joint on Cable Anchor Bracket Assembly, Simulation No. 2	141
Figure 79. Anchor Bracket Assembly Damage, Simulation No. 2.....	142
Figure 80. Anchor Bracket Assembly von Mises' Stress, Simulation No. 2	142
Figure 81. Bolt Rotation with Washer	144
Figure 82. Anchor Bracket Assembly with Rod.....	145
Figure 83. Cable Anchor Bracket Assembly Deformation, Simulation No. 3	146
Figure 84. Anchor Bracket Assembly Plastic Strain, Simulation No. 3	147
Figure 85. Nodal Penetration in Rotation Bracket Contact	149
Figure 86. Typical Shell Element and Simulated Contact Surface.....	150

Figure 87. Rotation Bracket Contact Using Solid Elements.....	150
Figure 88. Deformation of Release Lever Assembly Components, von Mises' Stress..	151
Figure 89. Cable Anchor Bracket Assembly von Mises' Stress, Simulation No. 4	153
Figure 90. Cable Plate Plastic Strain, Simulation No. 5	154
Figure 91. Impact Force Comparison, Increased Cable Tension vs. Design Tension	155
Figure 92. 15 Degree Impact Scenario Sequentials, Simulation No. 6.....	157
Figure 93. Cable Release Lever Plastic Strain, Simulation No. 6	158
Figure 94. Bogie Impact Orientation, Simulation No. 7.....	159
Figure 95. Reverse Direction Impact Sequentials, Simulation No. 7	161
Figure 96. Component Plastic Strain, Simulation No. 7.....	162
Figure 97. Redesigned, High-Tension, Cable Anchor Bracket Assembly Model	164
Figure 98. Redesigned, High-Tension, Cable Anchor Bracket Assembly	165
Figure 99. Cable Anchor Bracket and Cable Release Lever Assembly Details	166
Figure 100. Cable Anchor Bracket Component Details	167
Figure 101. Cable Release Lever Component Details	168
Figure 102. Redesigned, High-Tension, Cable Anchor Bracket Bill of Materials	169
Figure 103. Sequential Photographs, Final Redesign	173
Figure 104. Cable Anchor Bracket Assembly Damage, Final Redesign	174
Figure 105. Plastic Strain in Rotational Bolt, Final Redesign	175
Figure 106. Cable Anchor Components After Cable Release, Final Redesign	175
Figure 107. Bogie Velocity, Final Redesign.....	176
Figure 108. Comparison of Anchor Assembly von Mises' Stress Distribution	178
Figure 109. Anchor Bracket Assembly Simulations Velocity Comparison	179
Figure A-1. Bogie Velocity, Initial Simulation	192
Figure B-1. Force vs. Time, Test No. HTCT-1	194
Figure B-2. Velocity vs. Time, Test No. HTCT-1	195
Figure B-3. Energy vs. Time, Test No. HTCT-1	196
Figure B-4. Bogie Velocity Comparison	197
Figure C-1. Results of Test No. HTCT-1 – English	199
Figure C-2. Results of Test No. HTCT-1 - Metric	200
Figure D-1. Impact Force Comparison, Increased Cable Tension vs. Design Tension..	202
Figure D-2. Bogie Velocity, Final Redesign	203
Figure D-3. Anchor Bracket Simulations Velocity Comparison	204

LIST OF TABLES

Table 1. Comparison of MASH and NCHRP 350 Testing Criteria for Test Level 3	3
Table 2. NCHRP 350 Crash Testing Results on Proprietary, High-Tension Cable Barriers	9
Table 3. Vertical Impact Forces, Cut Cable Post Bogie Testing	50
Table 4. Post Strength Properties.....	52
Table 5. Summary of Cable Anchor Bracket Model Properties	64
Table 6. Summary of Slip Base Post Model Properties.....	67
Table 7. Sequential Description of Impact Events, Initial Simulation	74
Table 8. Camera Locations, Speeds, and Lens Settings	93
Table 9. Sequential Description of Impact Events, Test No. HTCT-1	96
Table 10. Summary of Redesigned Cable Anchor Bracket Assembly Model Properties	134
Table 11. Sequential Description of Impact Events, Final Redesign	171
Table 12. Recommended MASH Testing.....	187

CHAPTER 1 - INTRODUCTION

1.1 Problem Statement

Cable guardrail has been in use along roadsides since the 1930's [1]. More recently, cable guardrails have become increasingly popular due to several benefits over the more common W-Beam guardrail [2] including:

- lower initial costs;
- easier repair after vehicle impacts;
- increased visibility behind the barriers (aesthetics and safety); and
- reduction or elimination of snow drifting against barrier.

In the 1980's and 1990's, all cable guardrail systems in use were low-tension systems. Recently, high-tension cable guardrail systems have been developed and are gaining in popularity. High-tension systems have several advantages over low-tension systems [3]:

- lower system deflections;
- reduced maintenance costs; and
- ability to remain effective after vehicle impact.

There are numerous high-tension cable guardrail designs available for installations along roadsides, all of which utilize one of the five currently approved, high-tension cable end terminal designs. However, all of the end terminal designs are proprietary. In 2006, a research program was begun at the Midwest Roadside Safety Facility (MwRSF) to develop a non-proprietary, high-tension, cable guardrail that would meet FHWA's crashworthiness requirements for a guardrail system. As part of that

program, a new end terminal design is necessary that safely anchors and terminates the guardrail cables.

1.2 Background

In the early 2000's, a series of tests were conducted at MwRSF on a non-proprietary, low-tension end terminal design [4]. Although the end result of the testing program produced an accepted design [5], high vehicle roll angles were observed during the 820C testing program which were caused by the interaction between the vehicle and the end terminal.

There are many similarities between high-tension and low-tension cable guardrail end terminals. Therefore, it is reasonable to expect that some of the same issues experienced in low-tension end terminal testing will also occur in high-tension tests and should be taken into consideration with a high-tension cable end terminal design.

Aside from the change from low cable tension to high cable tension, a change in testing criteria has also been implemented for end terminals after the testing of the low-tension cable guardrail was conducted. The low-tension end terminal tests were accomplished under National Cooperative Highway Research Program (NCHRP) Report 350 testing criteria [6]. The current testing criterion is specified in the *Manual for Assessing Safety Hardware* (MASH) [7]. Many of the test conditions and evaluation criterion are similar; however, one notable change is that the vehicles utilized under MASH criteria are significantly more massive than those used under NCHRP 350 criteria. The standard car mass increased from 820 kg to 1,100 kg, and the standard pickup truck mass increased from 2,000 kg to 2,270 kg. A comparison of the testing criteria specified by the two standards is shown in Table 1.

Table 1. Comparison of MASH and NCHRP 350 Testing Criteria for Test Level 3

NCHRP 350						MASH					
Test No.	Terminal Type	Vehicle	Impact Speed (mph)	Impact Angle (deg)	Impact Location	Test No.	Terminal Type	Vehicle	Impact Speed (mph)	Impact Angle (deg)	Impact Location
3-30	G/NG	820C	62.1	0	Start of Terminal	3-30	G/NG	1100C	62.1	0	Start of Terminal
3-31	G/NG	2000P	62.1	0	Start of Terminal	3-31	G/NG	2270P	62.1	0	Start of Terminal
3-32	G/NG	820C	62.1	15	Start of Terminal	3-32	G/NG	1100C	62.1	15	Start of Terminal
3-33	G/NG	2000P	62.1	15	Start of Terminal	3-33	G/NG	2270P	62.1	15	Start of Terminal
3-34	G	820C	62.1	15	Critical Impact Point	3-34	G/NG	1100C	62.1	15	Critical Impact Point
3-35	G	2000P	62.1	20	Start of Length of Need	3-35	G/NG	2270P	62.1	25	Start of Length of Need
3-36	NG	820C	62.1	15	Start of Length of Need	3-36	G/NG	2270P	62.1	25	Critical Impact Point
3-37	NG	2000P	62.1	20	Start of Length of Need	3-37	G/NG	2270P	62.1	25	Reverse Direction
3-38	NG	2000P	62.1	20	Critical Impact Point	3-38	G/NG	1500A	62.1	0	Start of Terminal
3-39	G/NG	2000P	62.1	20	Reverse Direction						

G = Gating Terminal
 NG= Non-Gating Terminal

Although some of the test designation numbers were altered, the only new test added with the MASH testing criteria was test no. 3-38 which designates an end terminal impact with a 1,500-kg sedan. Many of the test conditions remained unchanged. Aside from the increased vehicle masses, the impact angles for several of the truck tests (2000P vs. 2270P) were increased by 5 degrees which increases the impact severity of those tests.

1.3 Research Objectives

The main research objective for this study was to evaluate cable guardrail end terminal designs and to produce recommendations for a high-tension, cable guardrail end terminal design that would safely perform under the Test Level 3 (TL-3) MASH crash testing criteria. A particular emphasis of the research efforts were placed on developing a design for the cable anchor hardware, as that component has a substantial influence on the overall safety performance of the end terminal system.

1.4 Scope

The research effort began with a literature review of previous crash testing of high-tension cable guardrail end terminals. An analysis of approved, proprietary designs was also conducted to identify any features that may improve or weaken system performance. Following the literature review, modeling and simulation efforts were undertaken to analyze the low-tension, cable end terminal design that was crash tested at MwRSF in the 2000's. This model was validated and studied to determine the causes of the degraded vehicle stability that was exhibited during full-scale crash testing.

Next, bogie testing and simulation was conducted on a high-tension cable anchor design. Data from the testing and simulation was used to develop recommendations and a design for a new high-tension cable anchor. Along with the anchor design, conclusions

from the literature review and study of the low-tension cable end terminal tests were combined to produce a final set of recommendations for a high-tension cable end terminal design.

1.5 Research Approach

A non-proprietary, high-tension, cable end terminal design was needed to safely terminate the non-proprietary, high-tension cable guardrail system. As an initial effort in the design process, a literature review was conducted to collect data on other high-tension designs, including testing on cable barrier designs that had failed or not yet been approved. The results of the literature review are detailed in Chapter 2.

After the literature review was concluded, the non-proprietary, low-tension cable end terminal that was previously tested at MwRSF was further evaluated. The evaluation consisted of a simulation study and analysis of the low-tension end terminal's performance during full-scale crash testing. The end terminal system was deemed satisfactory and was approved for use on roadsides; however, the vehicle/barrier interaction produced high vehicle roll and yaw angles and left room for future design improvements. The simulation study is presented in Chapter 3.

The history and development of the current high-tension cable anchor design was detailed and presented in Chapter 4. Technical drawings of the assembly are also provided in the chapter.

Next, an initial computer simulation study was conducted utilizing the current high-tension, cable anchor bracket assembly. The simulation was utilized to evaluate the capability of the finite element code as a predictive evaluation tool. The development of the model and results of the simulation are presented in Chapter 5.

After the initial simulation of the current high-tension cable anchor bracket assembly, a bogie test was conducted to evaluate both the current design and the simulation results. The bogie test was designed to mimic the simulation model. The setup and methods used to conduct the bogie test are provided in Chapter 6. Results and discussion of the bogie test are detailed in Chapter 7.

Next, the results of the physical bogie test and the initial simulation of the current high-tension cable anchor bracket were compared and discussed. The results and findings are provided in Chapter 8.

Finally, the results of the literature review, low-tension end terminal analysis, initial simulation, and bogie testing were used to redesign the high-tension cable anchor bracket. Simulation, 3-D modeling, and hand calculations were the primary tools utilized to evaluate modifications made to the cable anchor bracket assembly. The development of the cable anchor bracket design, results of the conducted simulations, and technical drawings for a redesigned, high-tension cable anchor bracket are presented in Chapter 9.

Data and findings from the literature review, analysis of test results, and simulations results were then compiled and used to develop a final set of design recommendations for the high-tension cable end terminal. Conclusions and recommendations are presented in Chapter 10.

CHAPTER 2 - LITERATURE REVIEW

2.1 Introduction

A preliminary review of high-tension cable guardrail end terminals was conducted. Information pertaining to high-tension cable end terminal designs, full-scale crash testing results, as well as high-tension cable system characteristics were reviewed, and the relevant material is summarized in the ensuing section.

In order for roadside barrier hardware, cable or otherwise, to be utilized along federal-aid highways, that component and/or system must be crash tested using guidelines and requirements specified by the Federal Highway Administration (FHWA). Thus, all currently-approved high-tension cable guardrail end terminal designs were tested, evaluated, and granted acceptance using testing criteria published in the National Cooperative Highway Research Program (NCHRP) Report 350. The actual impact conditions under which the proprietary, high-tension end terminal designs were tested are listed and detailed in the current chapter.

A total of 7 crash tests were required to evaluate a gating end terminal design, while 8 crash tests were required for a non-gating end terminal design within the NCHRP Report No. 350 impact safety standards. Currently, all approved designs are gating end terminals. An NCHRP Report No. 350 test matrix for end terminal systems was previously shown in Table 1.

2.2 Previously-Tested High-Tension Cable End Terminal Designs

Currently, there are six approved, high-tension cable end terminal designs, all of which are proprietary. The results of the full-scale testing required for system acceptance was tabulated for the sake of comparison and is shown in Table 2. Certain tests may be

deemed unnecessary for a given design if another test is determined to be more critical.

Note that due to the fact that these designs are proprietary, the availability of results from full-scale crash testing is dependent on what is provided by the proprietors.

Table 2. NCHRP 350 Crash Testing Results on Proprietary, High-Tension Cable Barriers [8-12]

Manufacturer	Testing Results									
	Test Designation	Test Vehicle	Impact Speed (mph)	Impact Angle (deg)	Impact Location	Exit Speed	% Speed Reduction	Max Roll	Max Pitch	Max Yaw
TTI	3-30	820c	62.9	0.3	At post no. 1	53.5	14.94	-9.7	4.8	6.2
	3-34	820c	62.3	15.2	42.9" upstream of post no. 3	N/A	N/A	-27.9	4.9	21.9
	3-35	2000p	63.2	20.4	23.6" downstream of post no. 4	N/A	N/A	14.4	-10.4	21.1
	3-39	820c	63.4	20.5	At post no. 4, reverse direction	46.3	26.97	6.9	-10.2	-1.7
Brifen	3-30	820c	62.7	0.0	At post no. 1	N/A	N/A	38.9	N/A	20.7
	3-34	820c	61.5	14.0	Midspan between post nos. 1 and 2	N/A	N/A	-13.0	N/A	32.4
	3-35	2000p	61.8	23.0	63" upstream from post no. 6	N/A	N/A	-6.2	N/A	20.0
	3-39	820c	63.1	21.5	Midspan between post nos. 4 and 5, reverse direction	N/A	N/A	12.4	N/A	41.9
Gibraltar	3-30	820c	62.3	0.0	At post no. 1	49.2	21.03	21.9	-12.8	8.9
	3-32	820c	64.1	15.0	At post no. 1	55.2	13.88	-27.1	-7.4	-19.2
	3-35	2000p	62.1	20	At post no. 5	23.7	61.84	44.2	7.7	51.0
	3-39	820c	61.5	20	At post no. 3, reverse direction	0	100.00	-53.9	-60.5	-15.5
Safence	3-30	820c	63.4	0.0	At post no. 1	60.3	4.89	47.6	15.8	9.0
	3-34	820c	63.1	15.0	Unknown	58.4	7.45	31.3	6.9	21.2
	3-35	2000p	63.3	20	Unknown	54.1	14.53	15.2	3.9	27.1
	3-39	820c	61.5	20	At post no. 11, reverse direction	39.1	36.42	14.4	11.6	81.1
Armorflex	3-30	820c	60.7	0	At post no. 1	N/A	N/A	-14.2	11.3	135.8
	3-32	820c	61.5	14.4	At post no. 1	57.5	6.50	14.2	-13.5	160.4
	3-35	2000p	63.2	20.3	Between post nos. 4 and 5	45.4	28.16	-7.1	-3.2	42.3
	3-39	820c	62.9	20	157.5" upstream of terminal trigger post	N/A	N/A	7.5	-14.8	-45.4

N/A – Not Available

2.2.1 Texas Transportation Institute

The Texas Transportation Institute (TTI) designed and successfully tested a high-tension cable barrier end terminal in 2002 [8]. TTI's end terminal incorporated proprietary breakaway posts in the end terminal section, followed by Rib-Bak, U-Channel posts for the line posts. The breakaway terminal posts are designated as Cable Release Posts (CRP). Each CRP is used to anchor one of the cable guiderails used in the system. The crash tested barrier system utilized three cables. The end terminal, as tested, is shown in Figure 1. Technical drawings of the system layout are shown in Figures 2 and 3.



Figure 1. TTI End Terminal

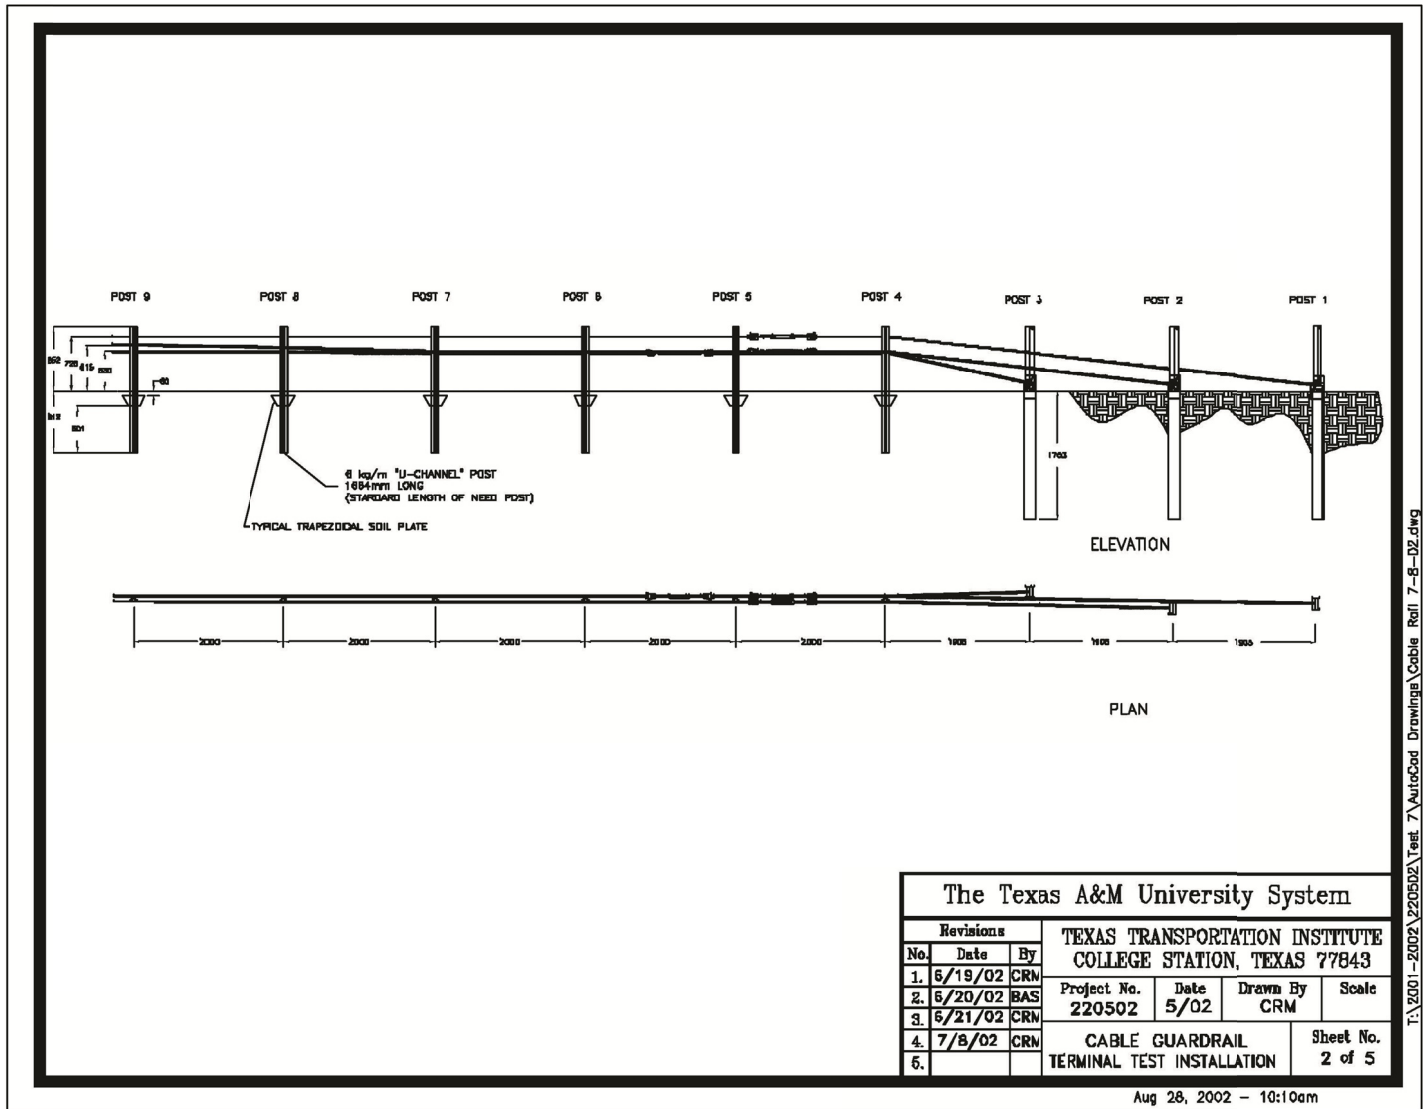


Figure 2. TTI End Terminal, Technical Drawing

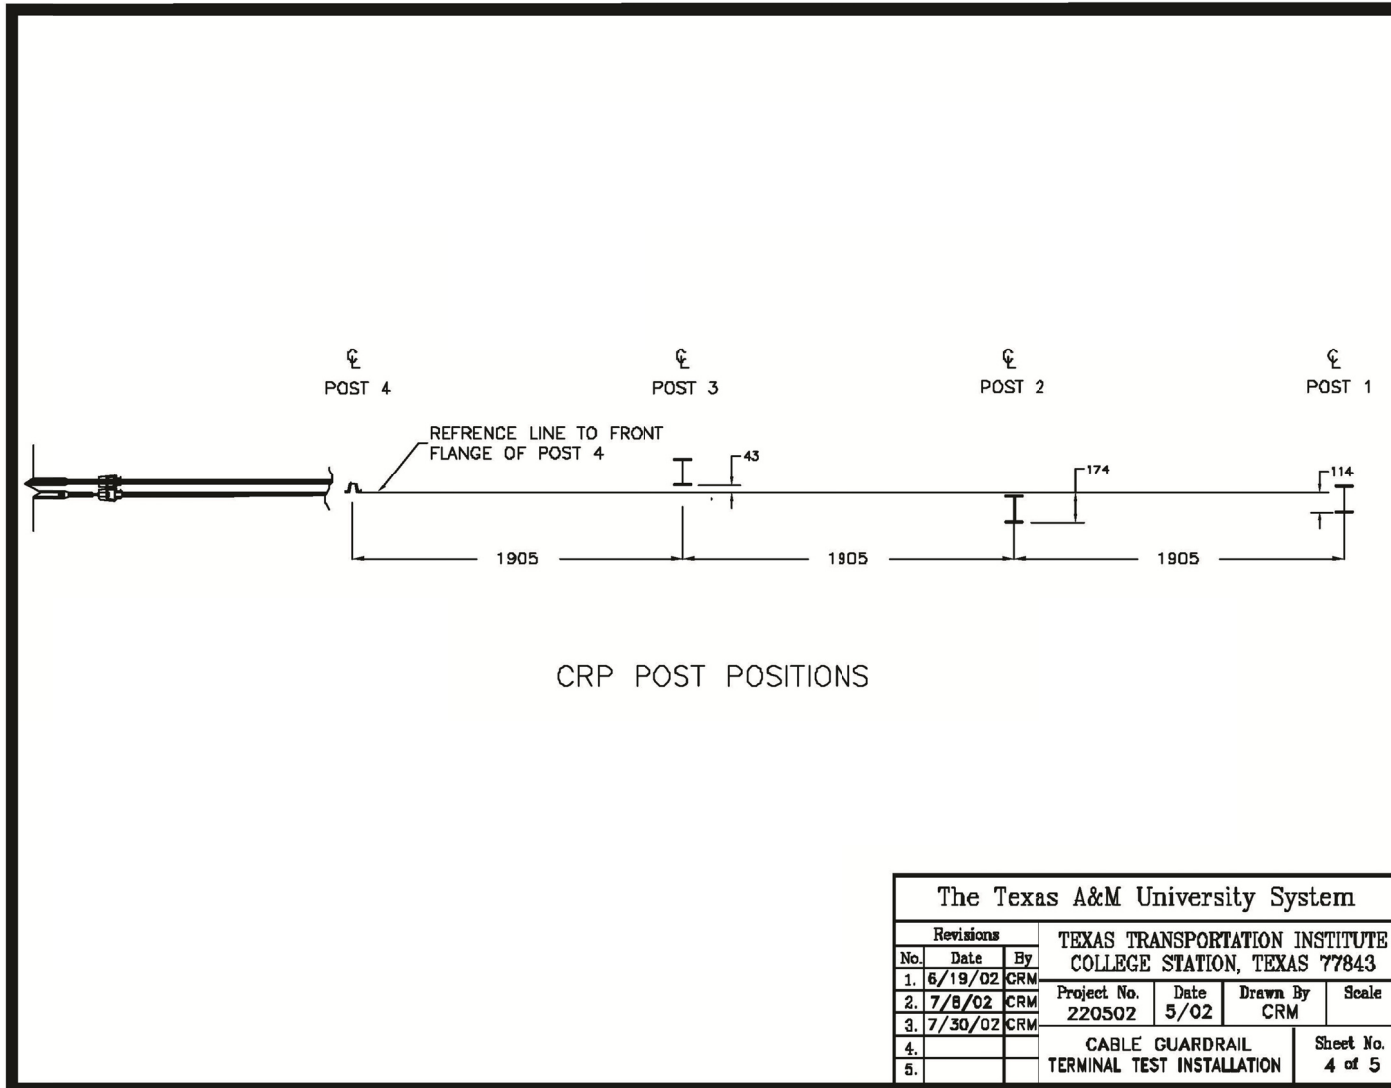


Figure 3. TTI End Terminal, Technical Drawing

Although the system performed well in full-scale testing, some concerns, arose during a review of the test data.

The primary concern was associated with the alignment of the vehicle in Test 3-30. That test calls for the vehicle to be aligned with the centerline of the system at 0 degrees using a ¼-point lateral offset of the vehicle's total width. From TTI's sequential photographs it appears that the vehicle was aligned with respect to CRP post no. 3 in the end terminal. CRP post no. 3 was offset from the tangent of the system and resulted in the vehicle's centerline being closely aligned with the centerline of the U-Channel line posts. This alignment resulted in a favorable vehicle trajectory after the vehicle had passed through the three breakaway terminal posts. The centerline vehicle impact with the line posts eliminated much of the yawing and instability concerns observed in other systems.

While this alignment is perfectly acceptable, it poses concern for increased vehicle instability should a vehicle strike the end terminal at a different lateral offset. One of the risks associated with an off-center impact is the inevitable yawing of the vehicle. With increased yaw motion, vehicle behavior will be much more similar to that seen in crash tests with other end terminal designs. As such, the trajectory of the vehicle will be more erratic and unpredictable after impact with the terminal. Beyond vehicle yawing and trajectory, it is unclear how the system's performance might be effected.

2.2.2 Brifen

Brifen USA, Inc. successfully tested a high-tension end terminal design in the fall of 2003 [9]. Brifen's design incorporated an angled post no. 2 with proprietary "S" or "Z" posts for the remainder of the system. The cables were terminated using an anchor bracket that was secured to a buried, concrete block. The Brifen design utilized four system cables. A technical drawing of the system layout is shown in Figure 4.

The Brifen end terminal system performed satisfactorily under full-scale crash testing according to the NCHRP 350 requirements. In all tests, the vehicle was brought to a controlled stop without rollover, excessive decelerations, or excessive damage to the occupant compartment. However, there may be some issues that potentially degrade impact performance. In test 3-30, the vehicle impacted the end terminal at a 0-degree angle and a ¼-point lateral offset. During the test, the vehicle ramped up the cables and rolled nearly 40 degrees. After ramping up and over angled post no. 2, the vehicle came back into contact with the ground off to the side of the system.

At the present, there is no mechanism to release the cables during end-on impacts with the terminal. In the case of a centerline vehicular impact on the end terminal system, it is possible that the vehicle could ramp up the cables and land on top of one or more line posts, possibly puncturing the undercarriage of the occupant compartment. Such an occurrence would be hazardous to occupants for several reasons. First, a penetrating post could directly cause harm to an occupant. Second, the airborne vehicle could become entangled within or snagged on system components, thus resulting in rapid decelerations and/or vehicle instabilities, such as rollover.

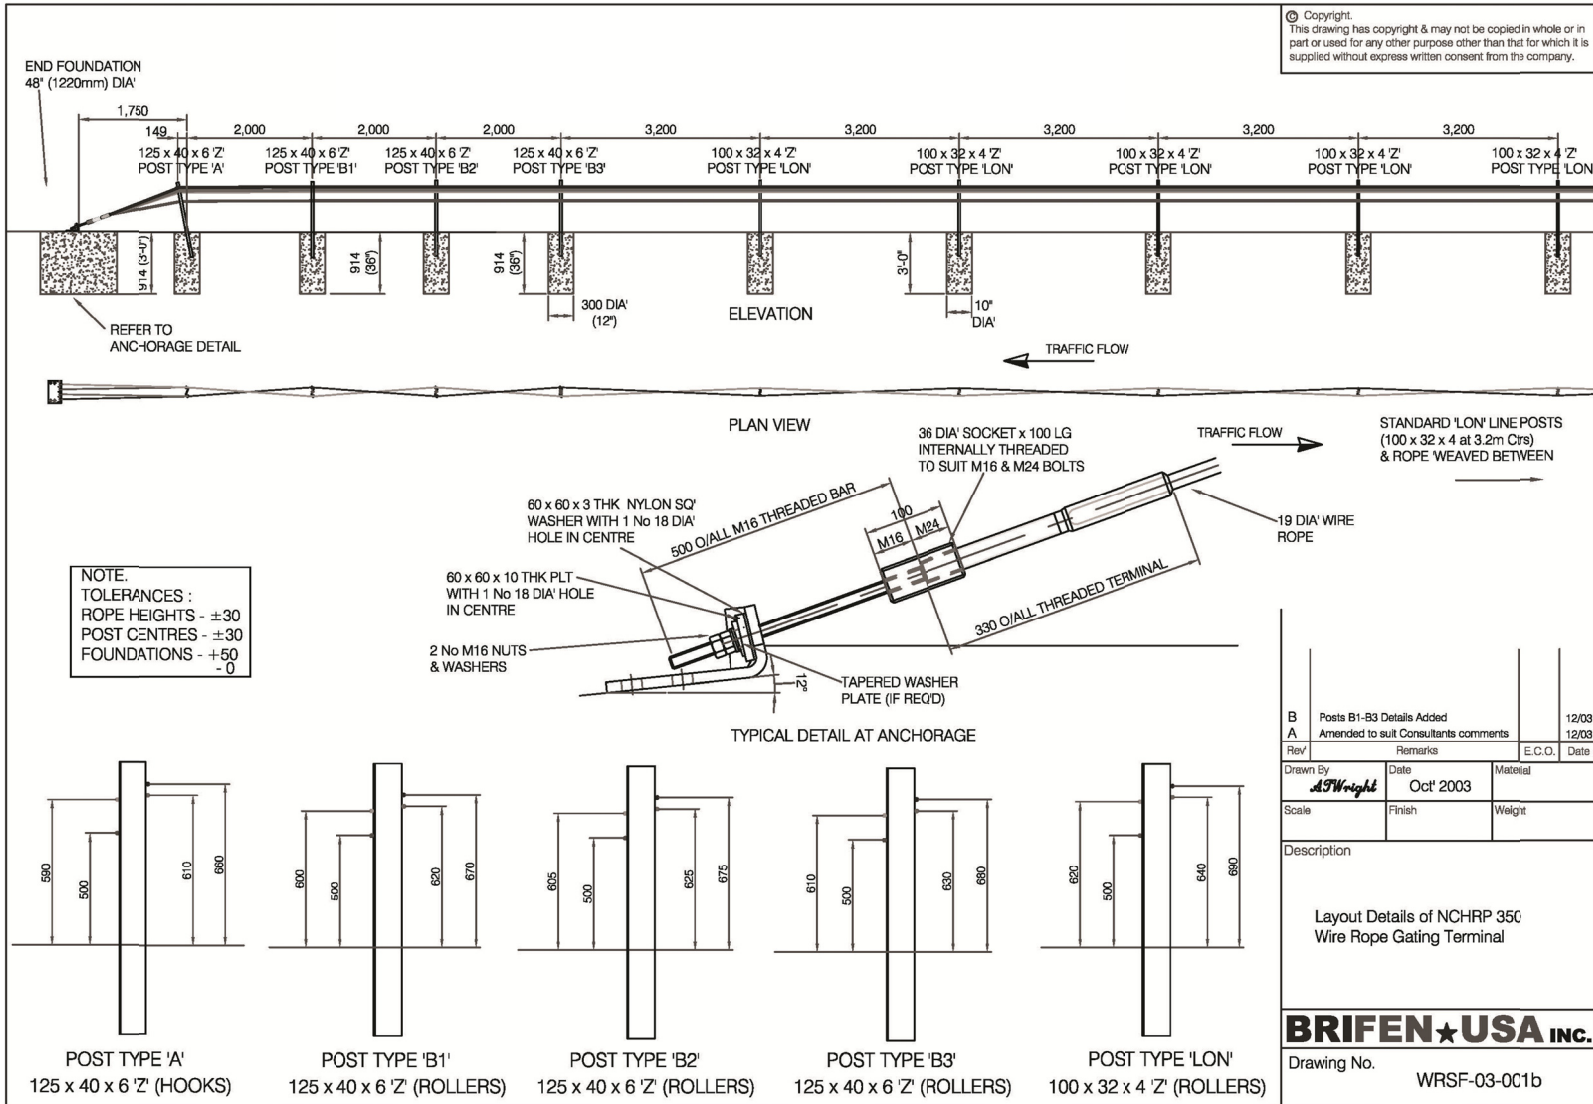


Figure 4. Brifen End Terminal, Technical Drawing

2.2.3 Gibraltar

Gibraltar Cable Barrier Systems, L.P. designed and successfully tested a three-cable, high-tension end terminal in 2005 [10]. Gibraltar's design incorporated a cable release anchor post which was designed to release the cables in the case of an end-on impact with the terminal. The barrier system consisted of "C" section posts throughout the terminal region as well as for line posts. Post no. 2 was angled at 6 degrees with respect to vertical, and post nos. 2 and 3 utilized holes at ground level to weaken the terminal posts.

A Gibraltar cable barrier end terminal installed in a median application is shown in Figure 5. Technical drawings of the system layout and photographs of the constructed end terminal are shown in Figure 6.



Figure 5. Gibraltar End Terminal

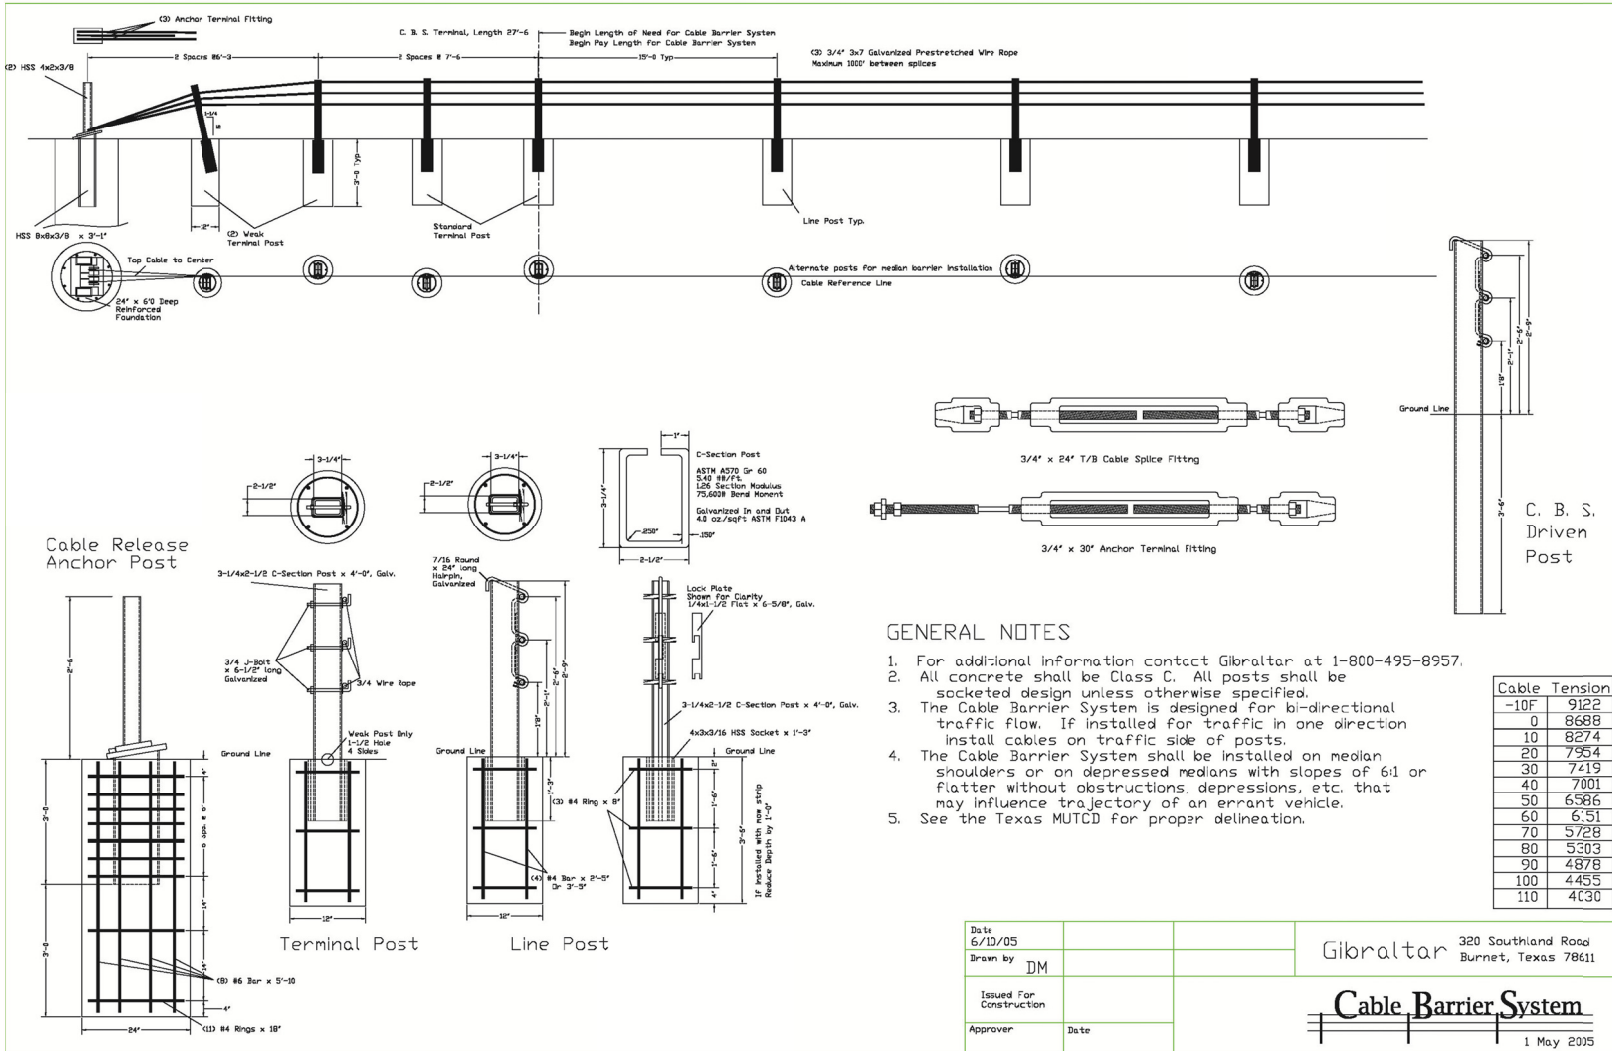


Figure 6. Gibraltar End Terminal, Technical Drawing

Gibraltar's end terminal system exhibited good control of the vehicle and performed well in all end terminal testing. In Test 3-30, the cable release anchor post functioned as designed and allowed the vehicle to travel through the system without ramping up the cables. However, the vehicle did rollover during this test, which was subsequently attributed to the vehicle's tires tripping on loose soil. Following a review of the test details, it was observed that the end terminal used in Test 3-30 was a shortened version of the system. As such, there is concern that small car testing on a longer, more realistic system length may result in increased roll motion and vehicle instabilities. However, it is unknown as to how these changes would affect the stability of the vehicle and the overall success of the crash test.

2.2.4 Safence

Safence, Inc. designed and successfully tested a four-cable, high-tension end terminal in 2005 [11]. The Safence end terminal design used 11 posts ranging in heights from 11.8 in. to 30.7 in. to transition the cables from the block anchor to the tangent system height. The system utilized a proprietary C-shaped section for both terminal and line posts. Like the Brifen design, Safence's design did not incorporate a method to release the system cables in the case of an end-on impact. As such, similar concerns to those noted for Brifen would exist for centered vehicle impacts on the end of the terminal.

A Safence end terminal installed in a roadside application is shown in Figure 7. A technical drawing of the system layout is shown in Figure 8.



Figure 7. Safence End Terminal

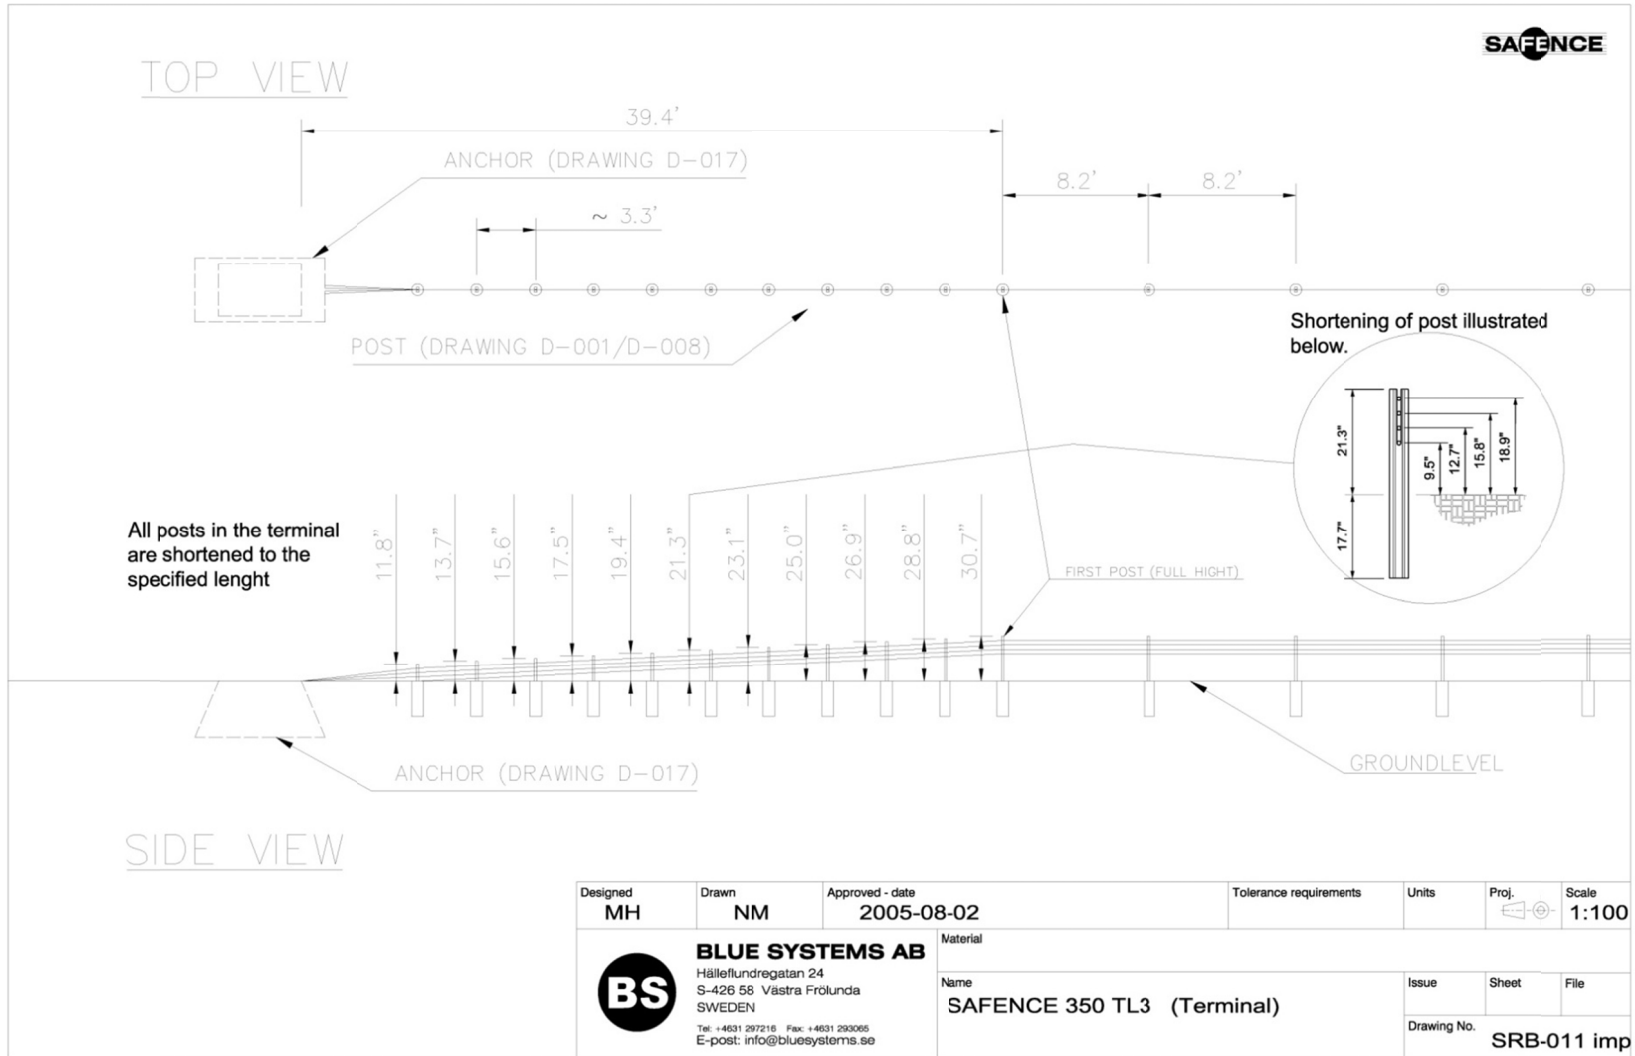


Figure 8. Safence End Terminal, Technical Drawing

Test 3-39, a reverse direction terminal impact, exhibited a controlled, safe vehicle interaction. There was no observable snag, and the vehicle passed through the anchor before coming to a controlled stop. In Test 3-30, the vehicle rode up the cables before being deflected off to one side.

Safence's end terminal testing resulted in higher values of vehicle roll and pitch than were typically seen in other testing. However, considering the gradual slope of the cables, the vehicle exhibited more roll prior to losing contact with the system. Like Brifen's system, the vehicle was safely redirected, or allowed to pass through the system in all tests. The same potential for vehicle damage was evident. While Test 3-30 successfully directed the vehicle out of the end terminal, it was determined that the successful redirection was in large part due to the ¼-point offset impact with the end terminal. A centerline vehicular impact with the terminal end could pose significant risk for the vehicle to land on top of posts, thus increasing the potential for penetration of the undercarriage and putting the occupants in considerable danger.

2.2.5 Armorflex

Armorflex designed and successfully tested a four-cable, high-tension end terminal in 2008 [12]. The Armorflex end terminal consisted of a trigger post and line posts with oval shaped cross sections. The unique trigger post design consisted of an angled post assembly that was used to connect anchor cables to the line cables. The trigger post was designed to release the line cables when impacted by a vehicle. The trigger post assembly is shown in Figure 9. Technical drawings of the system layout and photographs of the constructed end terminal are shown in Figure 10.



Figure 9. ArmorflexEnd Terminal

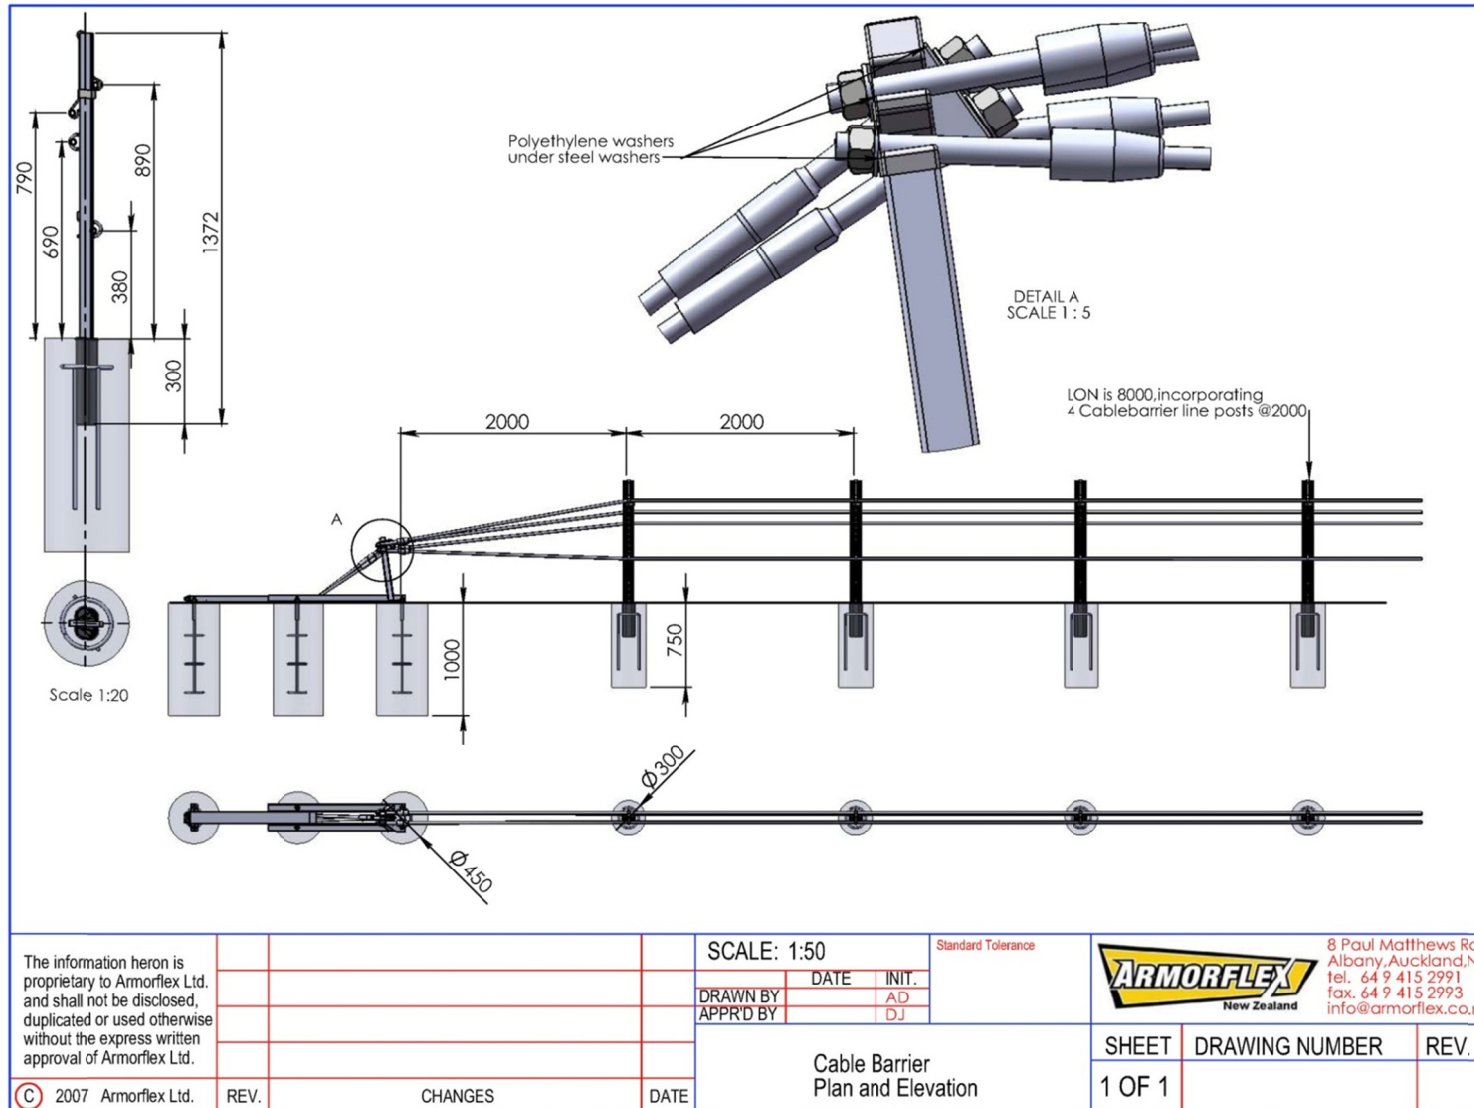


Figure 10. Armorwire End Terminal, Technical Drawing

The full-scale testing exhibited acceptable performance. The trigger post performed as designed in tests 3-30, 3-32, and 3-39. For test 3-35, the 2000P truck was smoothly redirected with no snag.

The Armorflex end terminal design prevented significant vehicle rolling or other instabilities that could have resulted in test failure. However, tests 3-30 and 3-32 did result in considerable yawing. Due to the lack of available test data, the exact causes for the increased yaw are unknown. However, upon examination of the system characteristics and comparing with other systems, the yawing is possibly due to the relatively high strength of the terminal and line posts. Off-center impacts with these posts would likely result in high forces imparted on the vehicle and induce substantial yawing in the vehicle.

2.3 Discussion

From the survey of various approved, high-tension end terminal designs, it is apparent that certain end terminal design features are beneficial for improving performance and some features have significant detrimental effects. Weak or weakened terminal posts performed well in TTI (with NUCOR posts) and Gibraltar's end terminal testing programs. In TTI's testing, the vehicle traveled down the centerline of the system without any induced roll or pitch that could potentially arise from the vehicle ramping up a post with stronger cross sectional properties. In systems with relatively close terminal post spacing, weak posts are especially important as any pitching or rolling effects from vehicle to post impacts will be compounded due to the shorter recovery time in between posts.

Terminal post spacing was found to range between 90 in. (Gibraltar) and 39.6 in. (Safence). Note that the one exception is the Armorflex system which transitioned directly from the anchor to the system posts and did not utilize any special terminal posts. The systems that utilized the shorter terminal post spacing exhibited higher roll and yaw angles than the systems with greater post spacing. The shorter post spacing undoubtedly directly contributed to degraded stability as frequent, off-centered impacts with terminal posts induced higher roll and yaw angles on the vehicle. The end terminal systems with increased terminal post spacing showed a more controlled vehicle trajectory, which may lead to even better vehicle stability. However, it is unclear as to whether an increased post spacing will negatively affect the redirective capabilities of the end terminal system.

The most noteworthy feature that was found during the literature review was the ability for the cables to release away from the end anchorage in the event of an inline,

terminal impact. Three of the five approved high-tension end terminal designs have this ability. During testing, the two designs that did not incorporate a mechanism to release the cables exhibited increased vehicle motions and more dangerous vehicle trajectories than observed for the other systems. Vehicle trajectories in those tests exhibited roll angles upwards of 40 degrees as well as excessive yawing. As noted earlier, different vehicle impact conditions (vehicle inline, for instance) could result in even more erratic vehicle behavior and potential harm to occupants.

CHAPTER 3 - EVALUATION OF THE LOW-TENSION, THREE CABLE END TERMINAL TEST SERIES

3.1 Background

In the early 2000s, MwRSF conducted four full-scale crash tests on a three cable, low-tension, end terminal design [4]. The first test conducted, test no. CT-1, was conducted according to test designation 3-35. The final three tests were conducted according to test designation 3-30. Test nos. CT-2 and CT-3 failed due to vehicle rollover. The final test (test no. CT-4) was successful, although high roll and yaw angles were observed during vehicle trajectory. Other NCHRP 350 tests for the low-tension, three cable end terminal were deemed unnecessary for the evaluation of the system design because previous full-scale testing of similar end terminals exhibited good crash performance.

Based on the safety performance exhibited by the three cable, low-tension, end terminal design as well as the desire to utilize similar technology in a four-cable, high-tension, barrier system, further analysis of the end terminal was conducted. Although there are differences between the three cable, low-tension and the four cable, high-tension, end terminal systems, the design intent and expectation for performance are identical. Both systems must:

- 1) allow for the release of the cables when impacted by vehicles at the anchor end;
- 2) allow the impacting vehicle to safely traverse through the barrier system without an unstable vehicle trajectory; and

- 3) not pose undue risk to the vehicle occupants by means of excessive vehicle decelerations, penetration of the occupant compartment, or severe interior occupant compartment damage.

An increased understanding of the mechanisms that caused the poor performance observed in test nos. CT-2 and CT-3 as well as the high roll and yaw angles in test no. CT-4 was deemed necessary to improve the design for use in the high-tension, four cable end terminal.

3.2 Simulation of the Low-Tension, Three Cable End Terminal

In order to analyze the effect that the different system components had on the performance of the three cable, low-tension, end terminal design, a validated end terminal finite element model was necessary. An end terminal model was constructed consisting of the low-tension three cable anchor bracket assembly, slip base post no. 1, five slip base terminal posts, and three wire rope cables. The terminal model was impacted by a Geo Metro vehicle model. Prior to assembling the end terminal, each component was individually constructed and simulated to simplify the eventual integration of the components. Each component model is described in detail herein. The modeling and analysis was accomplished using the explicit, non-linear finite element code LS-DYNA, developed by the Livermore Software Technology Corporation [13].

3.2.1 Three-Cable, Low-Tension Anchor Bracket Assembly

Technical drawings of the three-cable, low-tension anchor bracket assembly are shown in Figures 11 through 13. Shell elements were used to create all parts of the anchor bracket assembly. A Belytschko-Leviathan shell formulation was selected based on previous parameter testing [14]. The nodes on the base plate of the cable anchor

bracket assembly were fully constrained to prevent any movement by the baseplate during the simulation. The model of the anchor assembly is shown in Figure 14.

An elastic piecewise-linear, plastic material model was specified for all anchor bracket components. The yield strength, Young's Modulus, and Poisson's Ratio for the material model were specified as 54 ksi, 29,008 ksi, and 0.293, respectively, to reflect ASTM A36 steel material properties. Material properties for the anchor bracket model were taken from a previous study [15].

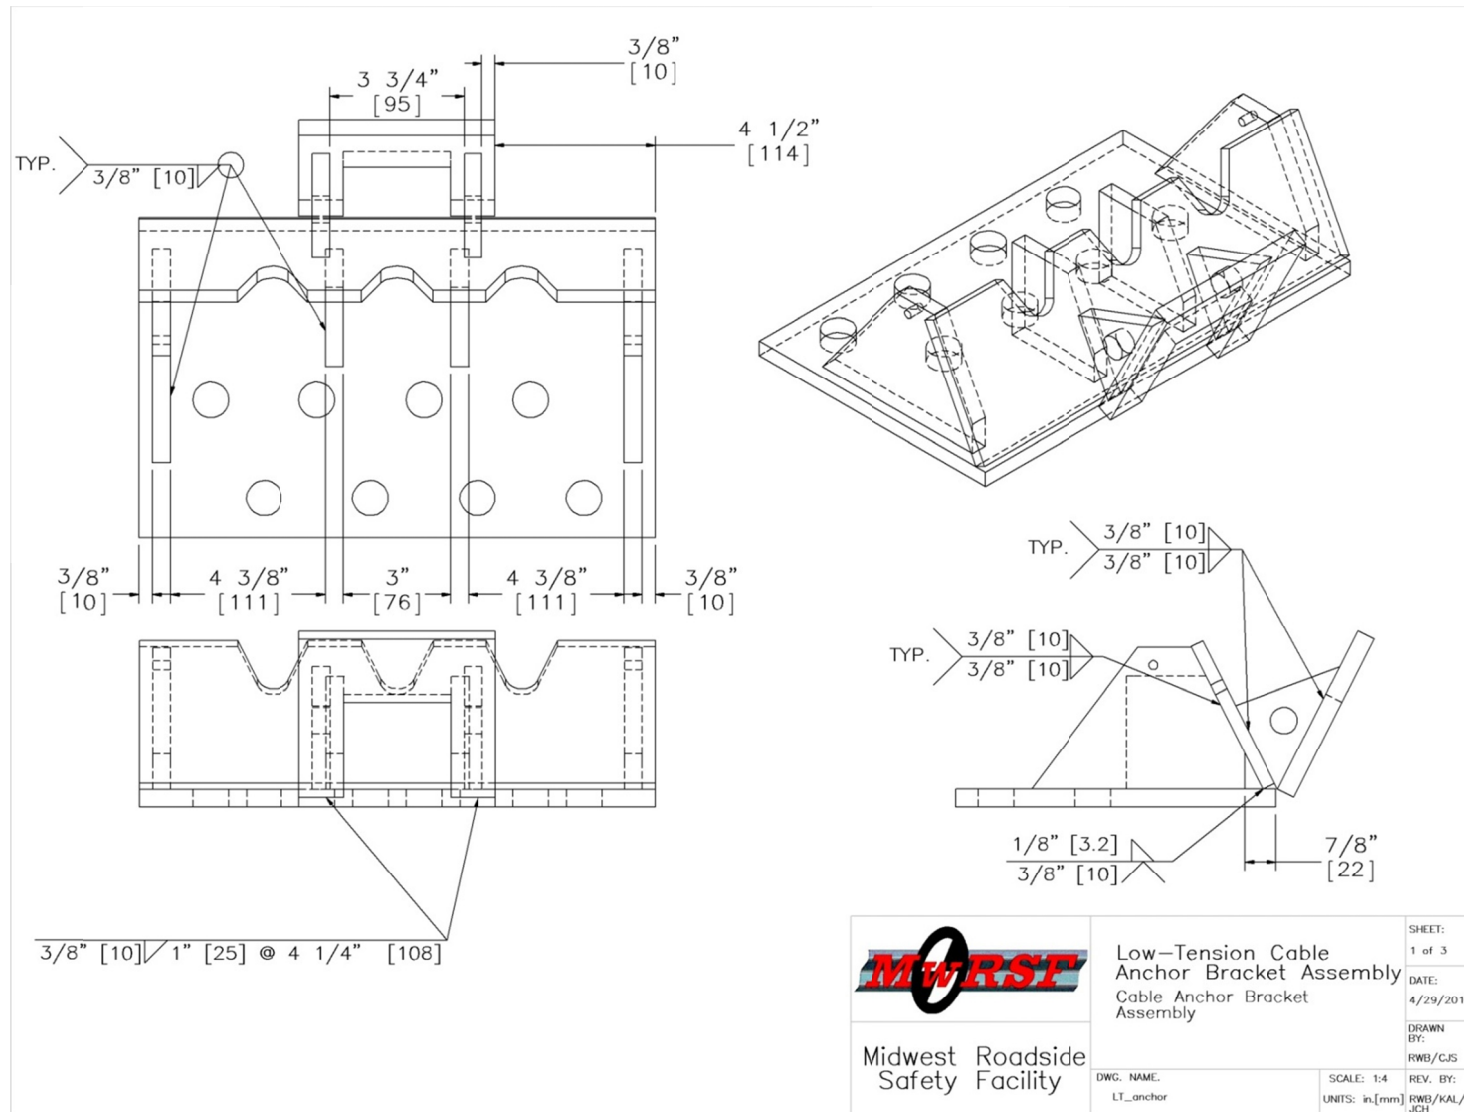


Figure 11. Low-Tension, Cable Anchor Bracket Assembly Details

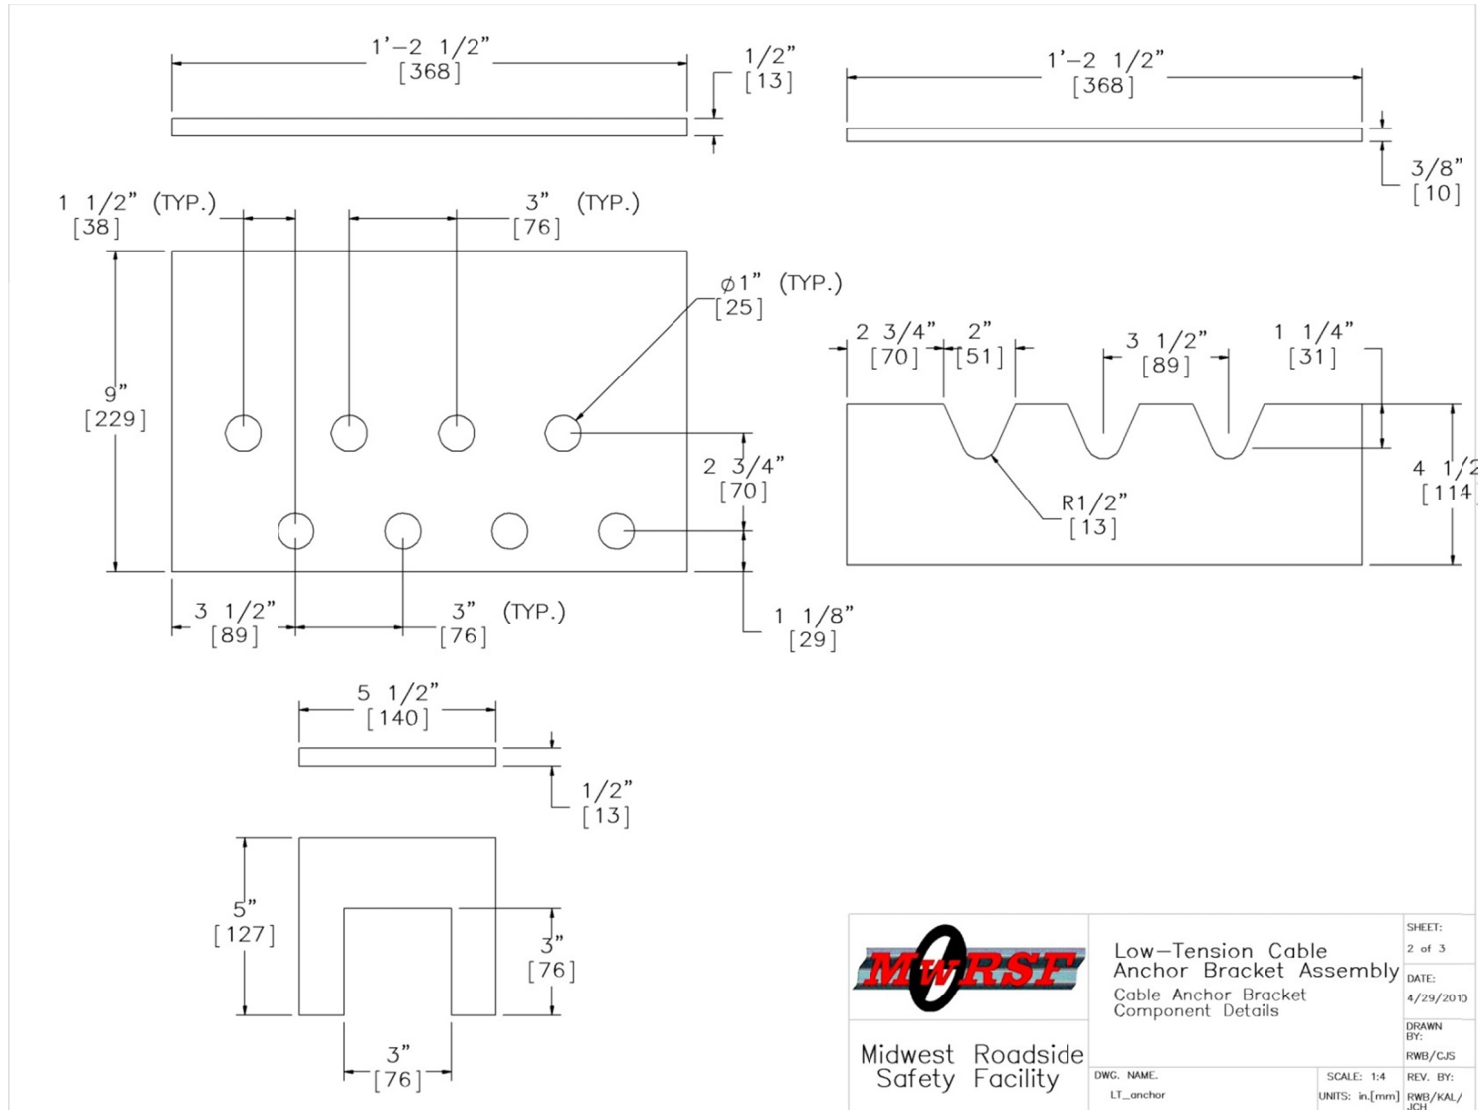


Figure 12. Low-Tension, Cable Anchor Bracket Component Details

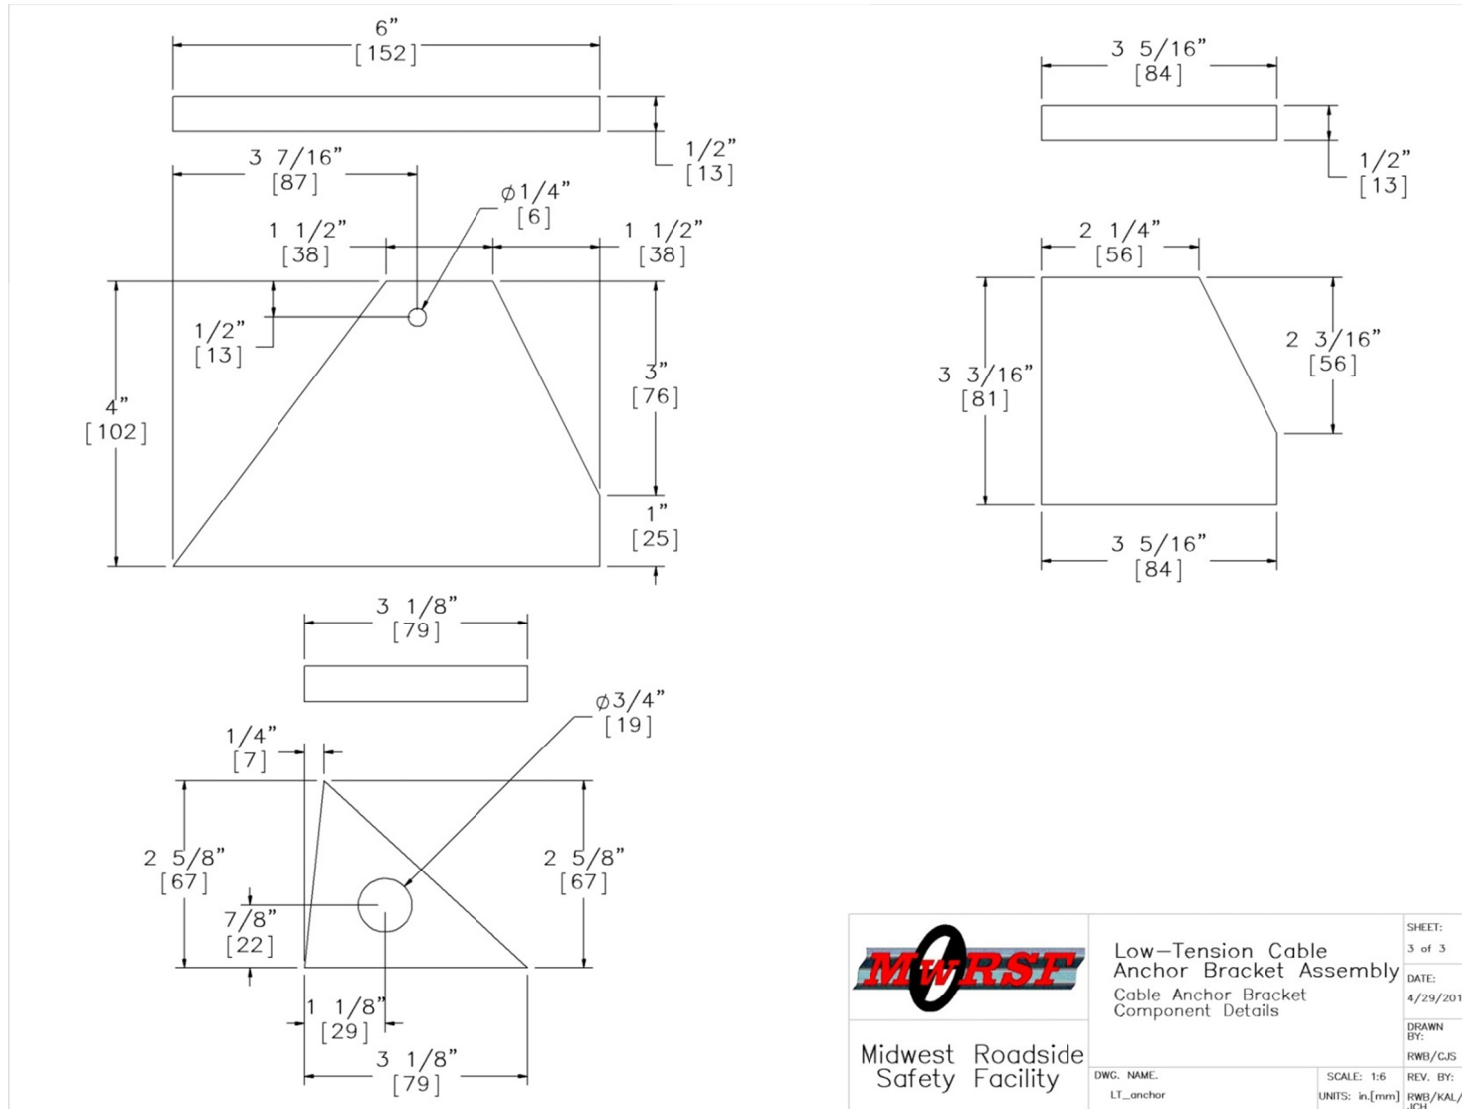


Figure 13. Low-Tension, Cable Anchor Bracket Component Details

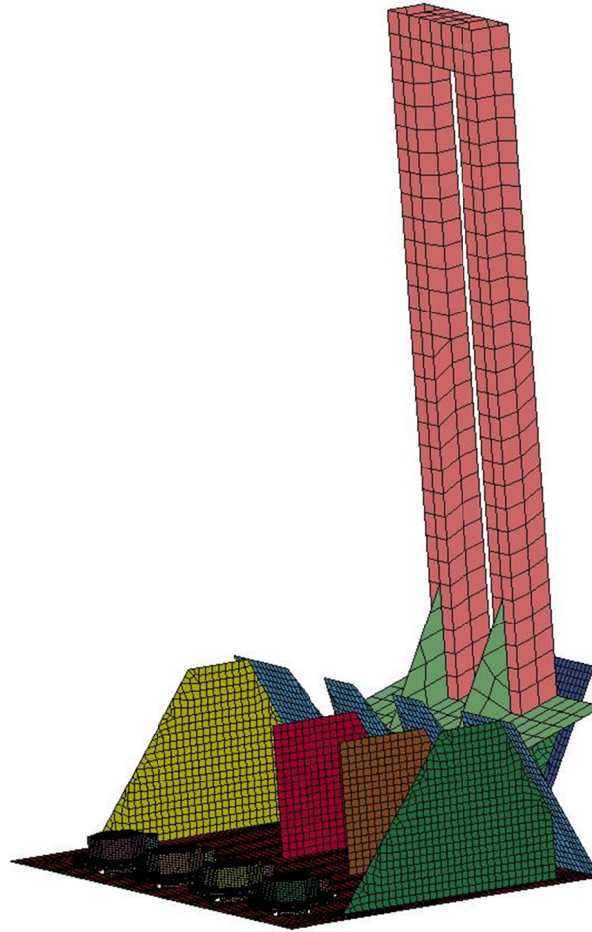


Figure 14. Cable Anchor Bracket Assembly

3.2.2 Slip Base Post No. 1

The slip base post was the result of previously validated work. The primary purpose of the post was to support the cables as they transitioned from the horizontal, guardrail section, down to the anchor bracket. The difference between slip base post no.1 and the standard, slip base terminal posts is the cable hangar that is welded to one of the flanges of the upper slip base post section. The cable hangar is necessary to withstand the vertical forces resulting from the redirection of the system cables. Post component details

and a description of the development of the model can be found in Nick Hiser's Master's Thesis [15]. The post model is shown in Figure 15.

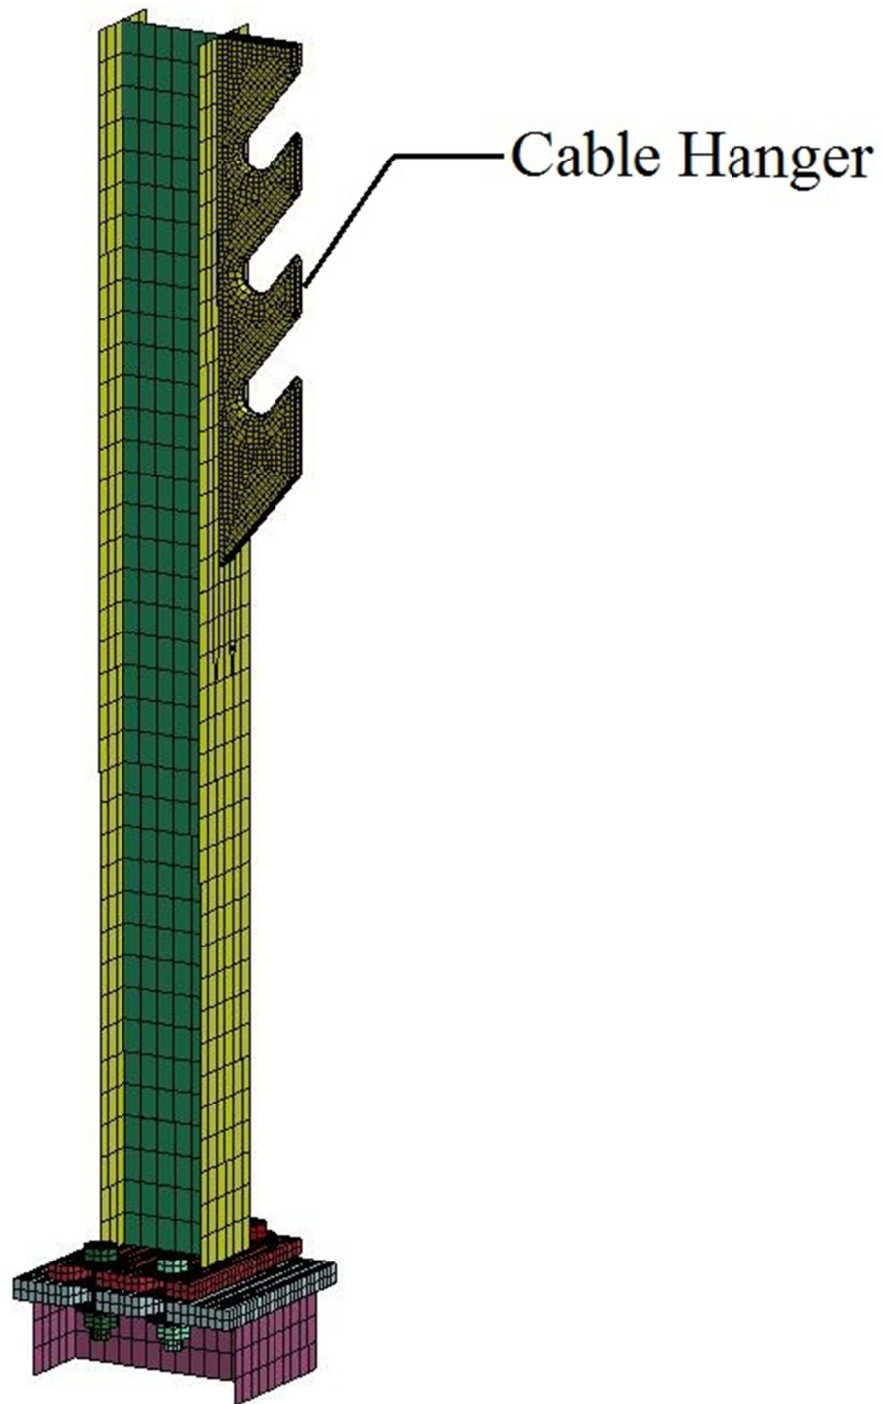


Figure 15. Slip Base Post No. 1 Model

3.2.3 Slip Base Line Posts

The slip base line post model was similar to the slip base post no. 1 model. However, the line posts utilized three cable hook bolts to secure the system cables to the post, in lieu of the cable hanger bracket. The hook bolt model had 9 solid elements in its cross section and was developed by Reid and Coon [16]. The slip base line post model is shown in Figure 16.

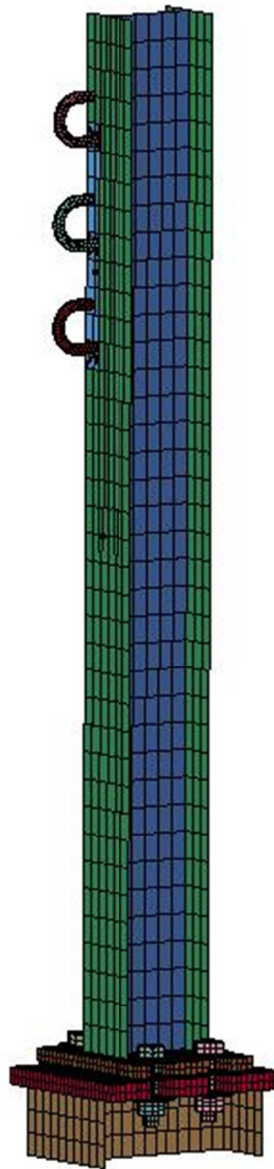


Figure 16. Slip Base Line Post Model

3.2.4 Cables

The cable model used in simulations was the same model used in the initial development of the three cable end terminal model by Reid, Hiser, and Paulsen. The cable model consisted of beam elements surrounded by eight tetrahedron elements to serve as the contact surface. Specific details of the cable model and its development can be found in the technical paper *Simulation and Bogie Testing of a New Cable Barrier Terminal* [17].

3.2.4.1 Pre-Tension

Cable pre-tension was defined as 900 lbf per cable. This pre-tension value reflected what was specified in full-scale crash test no. CT-4. The cables were pre-tensioned by attaching discrete spring elements to the downstream ends of the cables.

3.2.5 Vehicle Model

A Geo Metro vehicle model was utilized as the impacting vehicle for the validation simulations. The Geo Metro model was obtained from Politecnico di Milano, Italy and subsequently modified by for use in MwRSF's roadside safety applications. The original Metro model that was improved by Politecnico di Milano was developed by the National Crash Analysis Center (NCAC). The Geo model is shown in Figure 17.

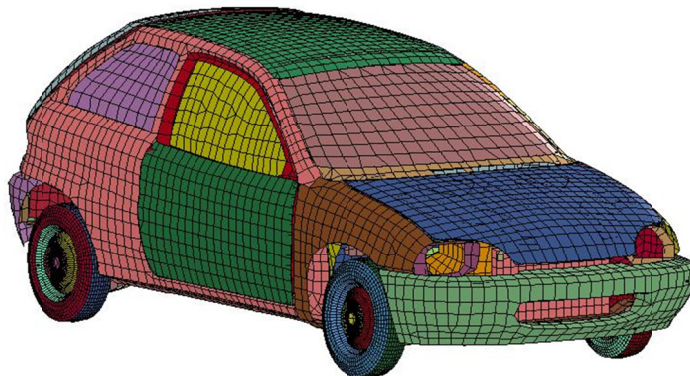


Figure 17. Geo Metro Vehicle Model

3.2.6 Model Construction

Once each component model had been statically simulated to guarantee its individual efficacy, they were combined to create an abbreviated end terminal model identical to that used in full-scale crash test no. CT-4. The model included the cable anchor assembly, 3 system cables, slip base post no. 1, five slip base line posts, and the Geo Metro vehicle model. An automatic single surface contact was utilized as a global contact for system self-interaction as well as vehicle-system interaction. The Metro was given an initial velocity of 61.4 mph and a ¼-point lateral offset toward the passenger side to reflect the impact conditions of test no. CT-4.

3.2.7 End Terminal Model Validation

The main criteria used to evaluate and validate the end terminal model were:

- vehicle yaw data;
- vehicle trajectory; and
- visual comparison of component and vehicle damage.

During the initial simulations, the initial yaw of the Geo Metro did not match the test results obtained from CT-4. Upon further examination of the high-speed video from CT-4, it was determined that an initial yaw motion was imparted to the vehicle as a result of the tow and guidance process. As the vehicle neared the impact point, the guide flag, which maintains the vehicle's heading angle during towing, was detached from the vehicle. The guide flag release was accomplished through an impact with a shear post on the right side of the vehicle. Ideally the guide flag/shear post impact will be trivial. However, during test no. CT-4, the impact may have been significant enough that the vehicle began to yaw prior to impacting the cable anchor's release lever.

To further investigate the guide flag/shear post impact, the accelerometer data from the test was reanalyzed to examine events prior to the vehicle entering the guardrail system. At approximately the same time as the guide flag/shear post impact, there was a 1.8 g deceleration applied to the vehicle. At the point of the application of that deceleration, the applied force was approximately 2.5 kips. Due to the off-center point of application, it is possible that the resultant force imparted an initial yawing motion to the vehicle. Overhead photographs of the guide flag impact are shown in Figures 18 and 19.



Impact



4 ms After Impact

Figure 18. Shear Post Impact with Guide Flag, Test No. CT-4

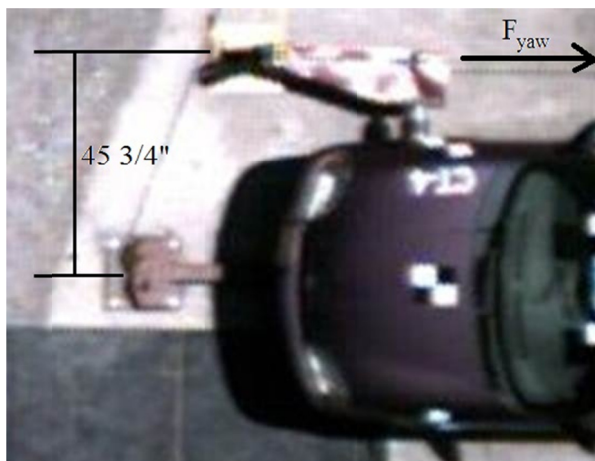


Figure 19. Guide Flag/Shear Post Impact Force Diagram

In order to match the initial yaw motion of the vehicle as it impacted the cable release lever, an initial yaw rate of 15 deg/s was applied to the Geo Metro model. After the initial yaw was applied to the vehicle, the simulated trajectory of the Geo Metro more closely matched that observed in test no. CT-4. Vehicle yaw data from the simulation and test no. CT-4 are shown in Figure 20. Sequential images for the simulated and actual vehicle trajectories are shown in Figure 21.

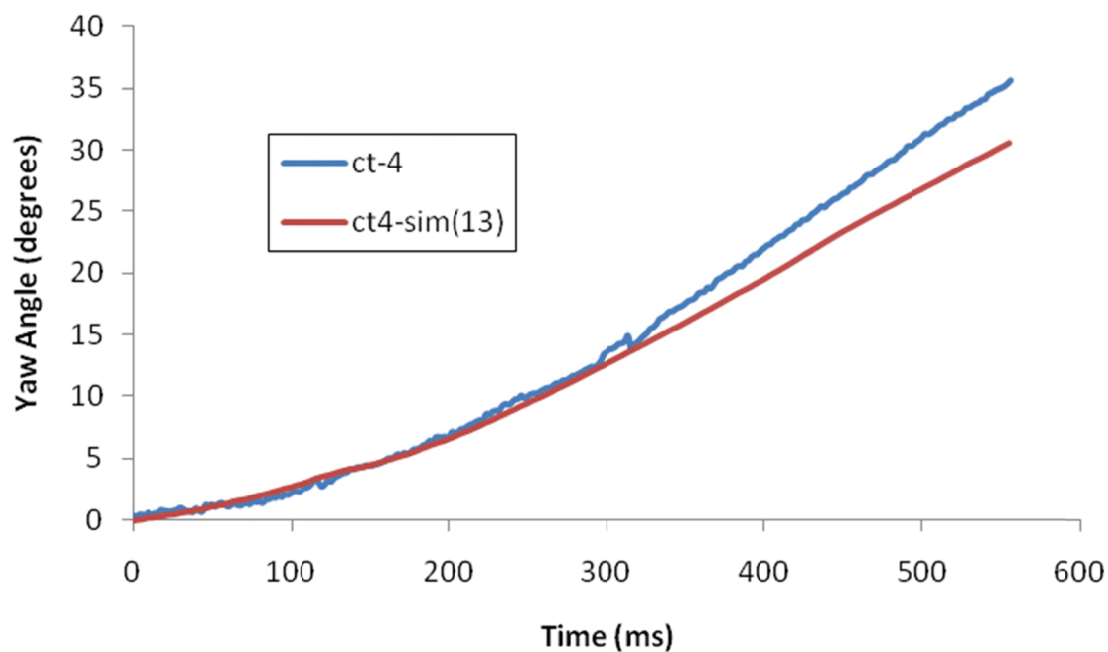


Figure 20. Comparison of Actual and Simulated Vehicle Yaw – Test No. CT-4




54 ms




172 ms




384 ms

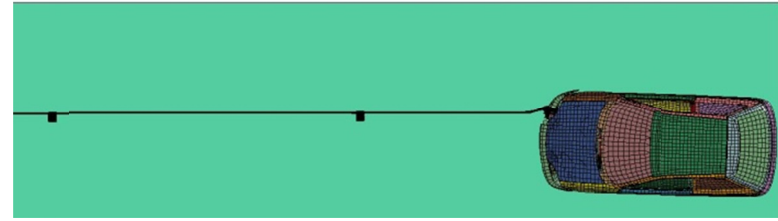

60 ms

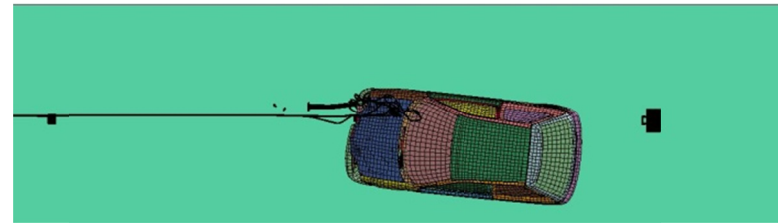


180 ms

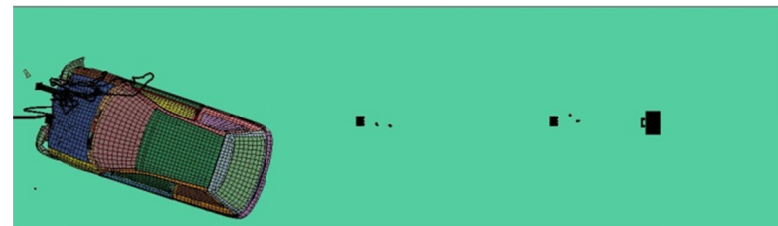


384 ms

Figure 21. Sequential Comparison at Post Impact Times, CT-4 and Simulation CT-4_13

Geo Metro vehicle positions at 500 ms after impact are compared between the actual test and simulation results and are shown in Figure 22.

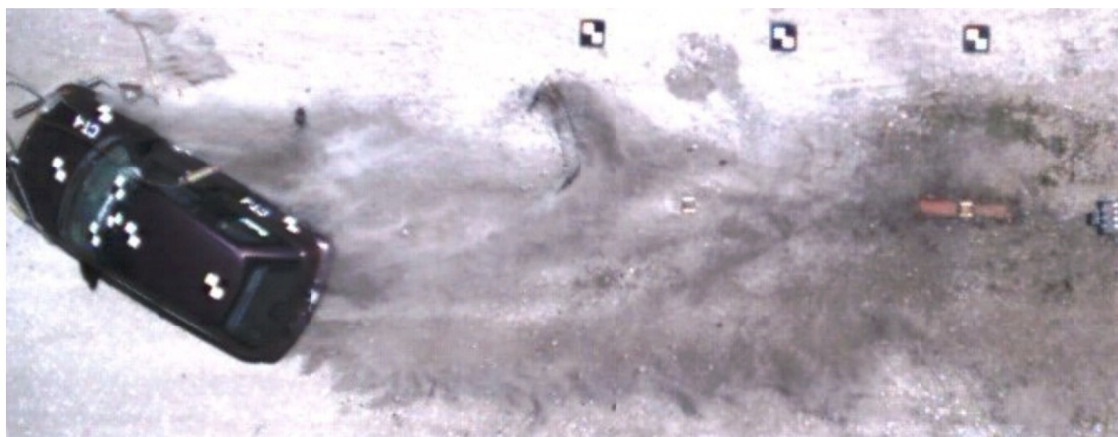

500 ms

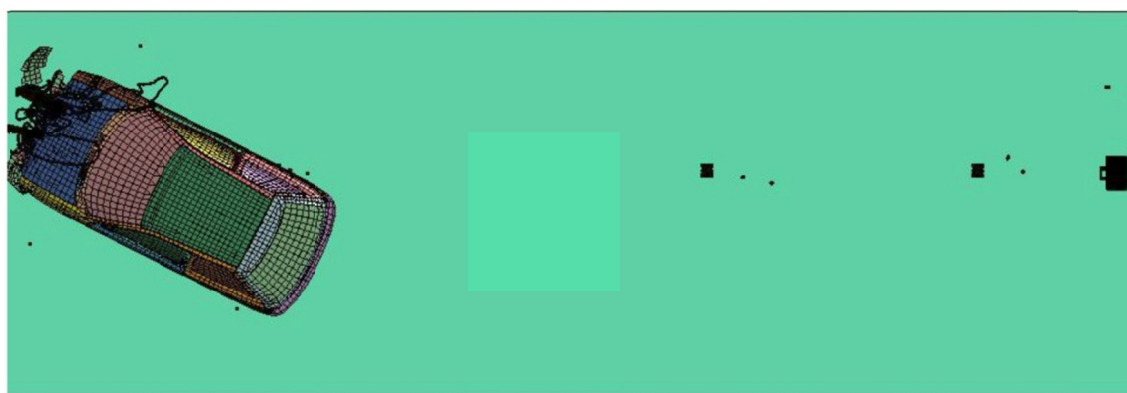

500 ms

Figure 22. Vehicle Trajectory Comparison – 500 ms After Impact

Although the first portion of the simulation matched well with test no. CT-4, the vehicle trajectories began to diverge after 300 ms. A review of the high-speed video of test CT-4 revealed that this divergence in vehicle trajectories was partially due to vehicle contact with system debris. The debris included top sections of slip base posts, cable compensators, and the cable release lever from the end anchor. During test CT-4, this debris was overridden by the Geo Metro, thus resulting in increased vehicle yawing and

also vehicle roll toward the driver's side that nearly led to rollover. As shown in Figure 23, the yawed vehicle has contacted and begun to override the system debris in test CT-4.



Figure 23. Geo Metro Overriding System Debris

3.2.8 Discussion

3.2.8.1 Vehicle Trajectory

Through 300 ms, the simulated vehicle trajectory and yaw motion observed in the three cable, low-tension end terminal model matched well with the actual results obtained in test CT-4. Although the trajectories began to diverge as the vehicles exited the terminals, valuable information was obtained from the simulation. The main cause of the divergent exit trajectories and near rollover in test no. CT-4 was likely due to the actual Geo Metro contacting and overriding the debris from detached end terminal components. The movement of the system debris and location of the vehicle-to-debris contact is highly dependent on ground conditions as well as bumper characteristics. As such, these vehicle-to-barrier interactions are very difficult to accurately simulate. Improvements to the simulation model could be made with further development of the ground and bumper models. For the current application, however, the utilized models proved sufficient.

Another sensitive part of the end terminal system was the interaction between the cable compensators and slip base post no. 1. In the “best” simulation model, it was discovered that the cables immediately downstream from slip base post no. 1 coiled on the downstream face of the web. This action forced the detached slip base post section up onto the hood of the vehicle, which prevented the simulated vehicle from overriding the post section. In test CT-4, the cable compensators located between slip base post nos. 1 and 2 similarly impacted the downstream face of the web on slip base post no. 1 and forced the post section onto the hood of the vehicle. The vehicle-to-post interactions for both the simulation and test CT-4 are shown in Figure 24.

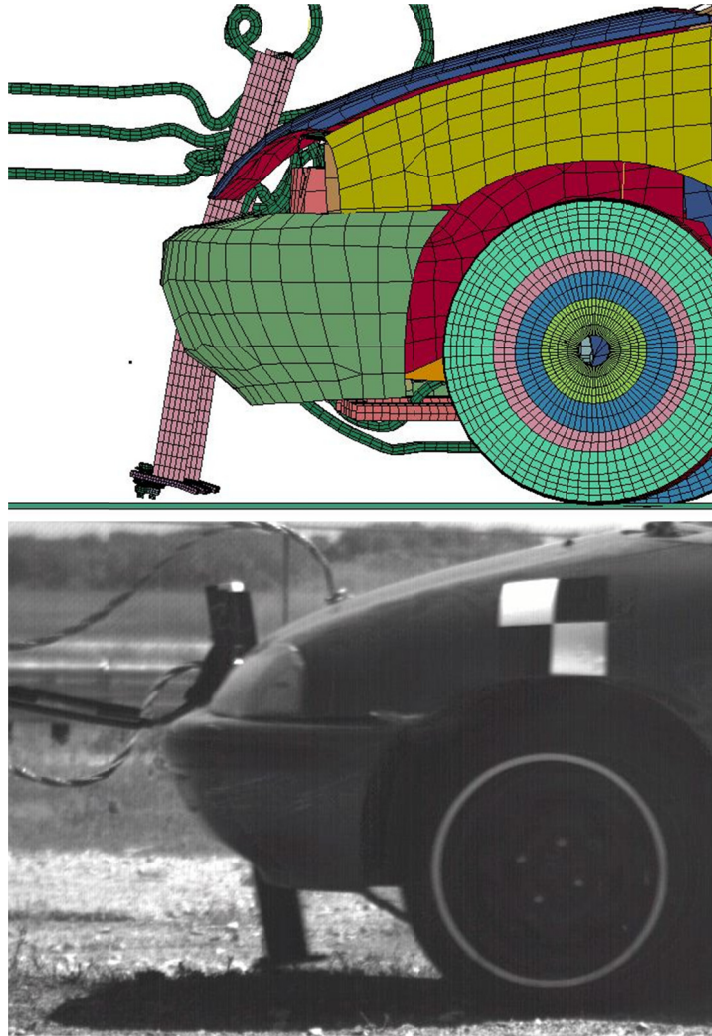


Figure 24. Cable Interaction with Slip Base Post No. 1

Throughout the study, many variations of the system were simulated including parameter studies on contact algorithms as well as cable pretension. In many of the simulations, the cables did not coil on the web of slip base post no. 1. For these scenarios, the detached section of slip base post no. 1 was overridden earlier in the simulation. The simulated trajectory of the vehicle as it overrode post sections was unpredictable. In some cases, the interaction significantly increased vehicle yawing and in other instances it hardly effected the vehicle trajectory at all.

3.2.8.2 Slip Base Post Performance Analysis

3.2.8.2.1 Full-Scale Testing Evaluation

The slip base posts served their intended purpose by releasing upon impact in the weak-axis direction. This quick release prevented the vehicle from overriding and ramping up the post, as was seen in previous testing with other post options [4]. However, after the slip base post released, the detached top sections proved to be potentially hazardous debris. This behavior was exhibited in both simulations as well as physical testing. The detached post section trajectory was erratic and unpredictable. These detached posts have the potential to cluster together and cause vehicle instabilities, as seen in test no. CT-4. This hazard may be reduced if the post sections were retained or if a standard post with a decreased section modulus in the weak-axis direction were utilized in place of the slip base post assembly.

3.2.8.2.2 M4x3.2 Replacement Post Option

The S3x5.7 post has been used in previous, non-proprietary, cable end terminal designs. Full-scale testing showed that the S3x5.7 post has the propensity to cause vehicle rollover due to repeated impacts between terminal posts and the test vehicle. Therefore, a post with reduced weak-axis bending and/or shear strength is desired.

One terminal post replacement option is the M4x3.2 post section. The M4x3.2 section was selected to analyze due to its similar strong-axis bending strength as compared with the S3x5.7 section. The M4x3.2 section also has the greatest weak-axis bending strength reduction (compared to S3x5.7) relative to other standard M section post options. The M4x3.2 section post has a 47 percent reduction in weak-axis bending strength, and an 18 percent reduction in bending strength in the strong-axis direction, as compared to the S3x5.7 post section.

The strength reduction in the weak-axis direction would reduce the likelihood of vehicle rollover as a result of repeated vehicle-to-post impacts. The section's strong-axis characteristics allow the post sufficient strength to provide resistance and support for the system cables in a redirection impact.

Although the M4x3.2 section has comparable strong-axis strength in pure bending as compared with the S3x5.7 post, the M4x3.2 section has an 86 percent reduction in torsional stiffness. The torsional stiffness of the terminal post section will have a significant effect on angled terminal impacts downstream of the cable anchor. With the reduced torsional stiffness, it is possible that posts downstream of the impact will twist due to cable deflection, thus reducing its strength. The reduction in post bending strength will reduce the likelihood of vehicle rollover, but it will also reduce the post's capacity to support the cables during redirection. Therefore, if an M4x3.2 section is selected for terminal posts, a relatively short post spacing may be necessary to adequately support the cables during redirection terminal impacts. A comparison of the S3x5.7 and M4x3.2 post cross sections is shown in Figure 25.

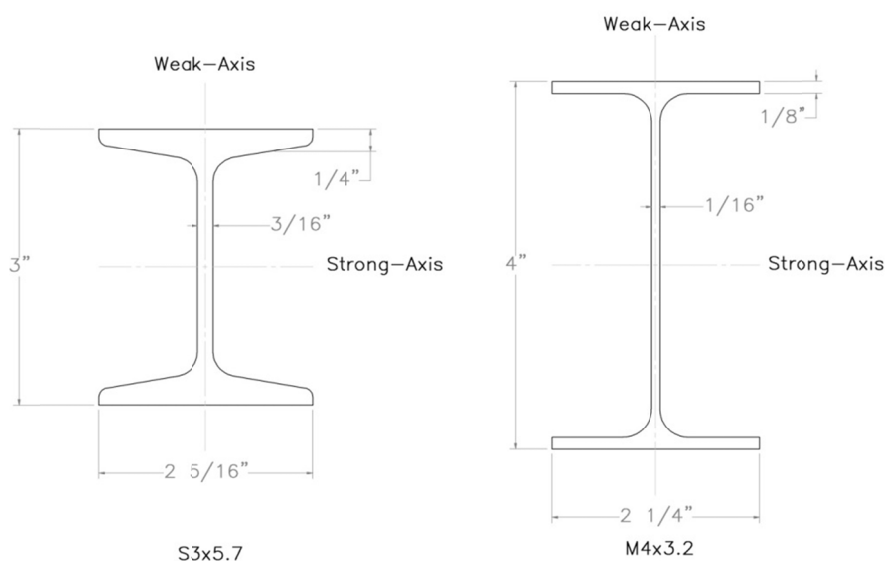


Figure 25. Post Cross Section Dimensions

3.2.8.2.3 Modified S3x5.7 Post Option

Another possible option to reduce weak-axis bending capacity would be to alter the strength characteristics of the S3x5.7 post. This strength reduction could be accomplished by incorporating horizontal cuts or holes into the post's cross section at the intended failure location. In this scenario, a failure in bending at the groundline would be ideal. This option would simplify system installation by using a uniform post type for the entirety of the system, as compared with a terminal that used a slip base post that would require assembly. The bending strength characteristics, however, are not as desirable as that of the M4x3.2 option due to the M4x3.2 section's reduced weak-axis bending strength and a strong-axis bending strength more comparable to standard S3x5.7 system line posts. Similarly, as noted previously for the M4x3.2 post, a modified S3x5.7 post would have reduced torsional stiffness as compared with an S3x5.7 section. Therefore, similar issues during redirection terminal impacts may be evident.

In 2004, a testing program was accomplished at MwRSF to evaluate the directional strength properties of modified S3x5.7 posts [18]. Posts with varying length cuts into the ends of the flanges were impacted in both strong-axis and weak-axis orientations. These results were compared with impact data obtained from unmodified S3x5.7 posts [19]. A technical drawing of a sample post modification is shown in Figure 26.

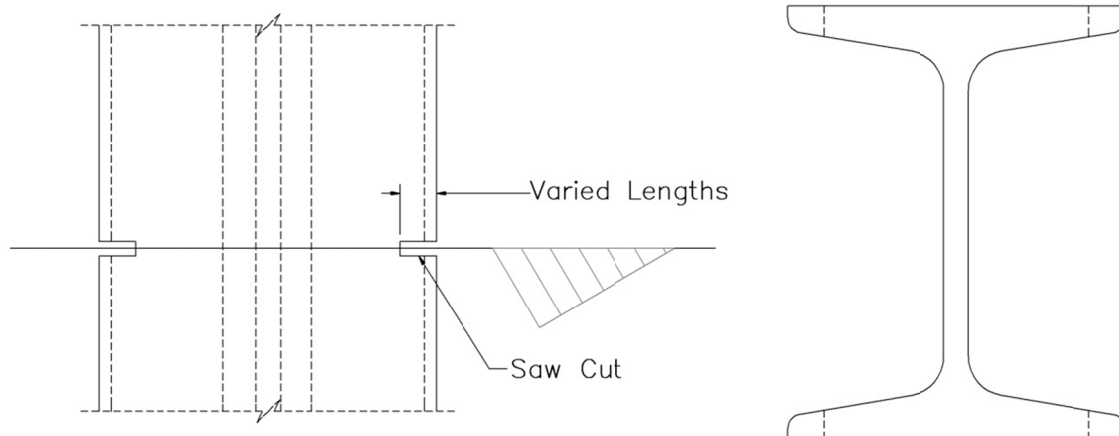


Figure 26. S3x5.7 Post with Cut Flanges

An S3x5.7 post with 1/8-in. cuts in each flange exhibited desirable strength characteristics for a terminal post. The modified post had similar maximum impact force values in both the strong-axis and the weak-axis orientations as compared with an unmodified S3x5.7 post. The vertical impact force, however showed a 54 percent decrease in weak-axis strength. The vertical impact forces are important in this case since these are indicative of the posts ability to impart uplift forces on a vehicle and subsequently, which could result in pitching and rolling if the force is high enough. Since the vertical impact forces were reduced by 54 percent in the weak-axis direction, the modified posts will be less likely to cause rollover in the event of a terminal impact. The vertical force data from bogie testing of the cut post section as compared to a non-cut section is shown in Table 3.

Table 3. Vertical Impact Forces, Cut Cable Post Bogie Testing

Post Section	Plastic Section Modulus, Z (in. ³)		Vertical Impact Force (kips)	
	Strong-Axis	Weak-Axis	Strong Axis	Weak Axis
S3x5.7	1.94	0.66	1.9	3.8
S3x5.7 with 1/8-in. Saw Cuts in Flanges	1.69	0.46	1.9	1.8

Although the S3x5.7 post with cut flanges showed favorable strength characteristics in the bogie testing program, the modified post was not selected for full-scale crash testing. There was some question as to whether the cuts in the flanges could be manufactured in a consistent manner and allow for predictable crack propagation. Another issue that surrounded the modified posts was whether driving modified posts into soil would cause premature crack propagation at the cut flanges, thus excessively weakening the terminal posts.

These manufacturing and installation concerns eliminated the modified cut post from consideration for the non-proprietary low-tension end terminal. However, these issues were speculative, and the cut cable post was never investigated further.

An alternate means of reducing the bending strength of the S3x5.7 post could be accomplished by drilling weakening holes into the flanges of the post. Although the cut flanges option would yield a greater reduction in weak-axis bending strength, the weakening holes would alleviate concerns of crack propagation during post installation. It would also improve the manufacturability of the terminal posts.

Weakening holes measuring $\phi 3/8$ -in. diameter would result in a weak-axis bending strength reduction of 40 percent, and a 25 percent reduction in the strong-axis bending strength. The decreased weak-axis bending strength would aid in the reduction of vehicle roll motion. Unlike the cut flanges option, no bogie tests have been performed on S3x5.7 posts with weakening holes. Thus, physical testing and evaluation will be required prior to moving forward with this option. The weakening hole option is shown in Figure 27.

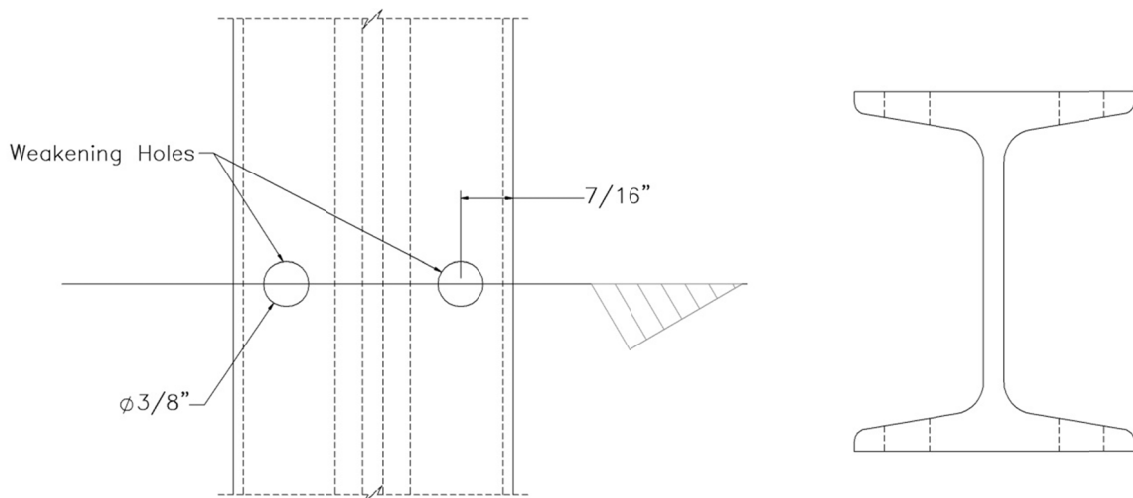


Figure 27. S3x5.7 Post with Weakening Holes

3.2.8.2.4 Terminal Post Replacement Options Summary

The slip base post assembly utilized in the non-proprietary, low-tension cable end terminal led to significant vehicular roll and yaw motions during the full-scale crash testing. Potential replacement options include an M4x3.2 post or a weakened S3x5.7 post. The M4x3.2 post is similar to the S3x5.7 in strong-axis bending strength. However, its weak-axis bending strength is significantly reduced, which diminishes its propensity to cause vehicle rollover. The weakened S3x5.7 post may be preferable because it simplifies the construction of the non-proprietary cable guardrail system. However, its strength

characteristics are not as desirable as that of the M4x3.2 post section. Both the M4x3.2 section post and modified S3x5.7 post options have reduced torsional stiffness as compared with the S3x5.7 section. The reduction in torsional stiffness may require a relatively close terminal post spacing in order to adequately support cables during a terminal redirection impact, however this issue requires further investigation. A comparison of the post strength properties is shown in Table 4.

Table 4. Post Strength Properties

Post Section	Plastic Section Modulus, Z (in. ³)		Plastic Bending Moment (kip-in.)		Impact Force (kips)		Torsional Strength (kip-in.)
	Strong-Axis	Weak-Axis	Strong-Axis	Weak-Axis	Strong-Axis	Weak-Axis	
S3x5.7	1.94	0.66	104.8	35.6	6.9	2.3	1.0*
S3x5.7 with 1/8-in. Saw Cuts in Flanges	1.69	0.46	91.3	24.8	6.5	2.7	0.8*
S3x5.7 with ø3/8-in. Weakening Holes	1.45	0.39	78.3	21.1	5.2*	1.4*	-
M4x3.2	1.68	0.35	90.7	18.9	5.7*	1.2*	0.1*
Slip Base Post	-	-	-	-	-	4.3	-

*Theoretically Derived Values

The use of one of the replacement post options could potentially increase the robustness of the end terminal design by eliminating the unpredictable interactions between detached post sections and the impacting vehicle. As a result, the overall safety performance and ease of assembly of the end terminal design would be improved.

3.3 Conclusions

An investigation of the vehicle trajectory and stability exhibited in the low-tension, cable end terminal test series (CT series) was undertaken. To analyze the system, a model of the low-tension, cable end terminal system was developed using finite element

software. The model was then validated using test data from the physical crash test no. CT-4.

Analysis of the simulation results revealed that the vehicle had an initial yaw prior to impact with the system. The initial yaw was due to the impact between the vehicle's guide flag and the shear post on the tow line. This initial yaw intensified the yawing that was generated by off-centered anchor and post impacts once the vehicle entered the system. The vehicle yaw, while not solely responsible for the near vehicle rollover, contributed to the erratic vehicle trajectory.

The vehicle impacted the system and began to yaw. As mentioned previously, the yaw alone was not cause for concern as the vehicle will still remain stable and balanced. The vehicle then overrode a cluster of system debris. System debris included cable compensators, detached, top sections of slip base post assemblies, and the cable release lever. The interaction between the right-front vehicle tire and undercarriage with the system debris caused abrupt vehicle decelerations, sharp increases in yaw rate, and induced a roll toward the driver side of the vehicle. This resulted in the near vehicle rollover that occurred in test no. CT-4.

Since cable end terminal components and features are similar regardless of the designed cable tension, it is possible that the non-proprietary, high-tension cable end terminal will exhibit similar vehicle trajectory, yaw, and roll angles if no modifications are made to the end terminal design. While the cable anchor served its intended purpose, the crashworthiness of the design would be improved if the cable anchor was redesigned. The cable release lever was allowed to detach from the assembly post-cable release. The detached release lever's trajectory was unpredictable, and in the case of test no. CT-4, the

interaction between the release lever and the vehicle contributed to high vehicle roll and yaw angles. These angular motions nearly resulted in vehicle rollover.

The slip base posts also activated as intended. However, much like the cable release lever, interaction between the vehicle and the detached top post sections resulted in unintended vehicle decelerations, yaw, and roll. Although the slip base post assembly has several features that are beneficial to satisfactory terminal performance, the unpredictability of the detached post sections makes it less than ideal to use slip base posts in future systems.

Alternate options for the slip base post assemblies include an M4x3.2 post and modified S3x5.7 post options. The alternate post options have lower weak-axis bending strength as compared to the S3x5.7 post. Thus, it would be less likely to induce vehicle rollover. The replacement options also would not introduce system debris into the vehicle path that could cause vehicle instabilities. A detailed investigation including bogie testing, full-scale crash testing, and further simulation would be necessary to verify that either the M4x3.2 post section or one of the modified S3x5.7 post sections are indeed viable replacement options.

CHAPTER 4 - CURRENT, HIGH-TENSION CABLE ANCHOR BRACKET

DESIGN

With the ongoing development of high-tension cable median barriers for use in ditch applications, it was deemed necessary to also continue to develop a crashworthy cable end terminal system for anchoring the cables. As noted previously, MwRSF developed, crash tested, and obtained FHWA's acceptance of a low-tension, cable guardrail end terminal. Subsequently, the anchor bracket assembly was adapted for use with a four cable, high-tension end terminal system. In the low-tension, end terminal testing, the anchor bracket and cable release mechanism performed well. During testing, there was no indication that the end terminal would not perform well in high-tension applications as well as with more cables.

Therefore, the anchor bracket assembly was modified for a four cable, high-tension system. Modifications included:

- widening the entire anchor bracket assembly to accommodate an extra system cable;
- adding a 4th slot on the cable plate to accommodate 4th system cable;
- adding extra internal gussets to strengthen the assembly against increased cable loading;
- increasing the height of outer gussets to provide extra support for the cable plate; and
- altering the release lever and release lever support geometry to accommodate the revised slope of the end cables that are terminated at the cable bracket assembly.

Detailed drawings of the high-tension, cable anchor bracket assembly are shown in Figures 28 through 32.

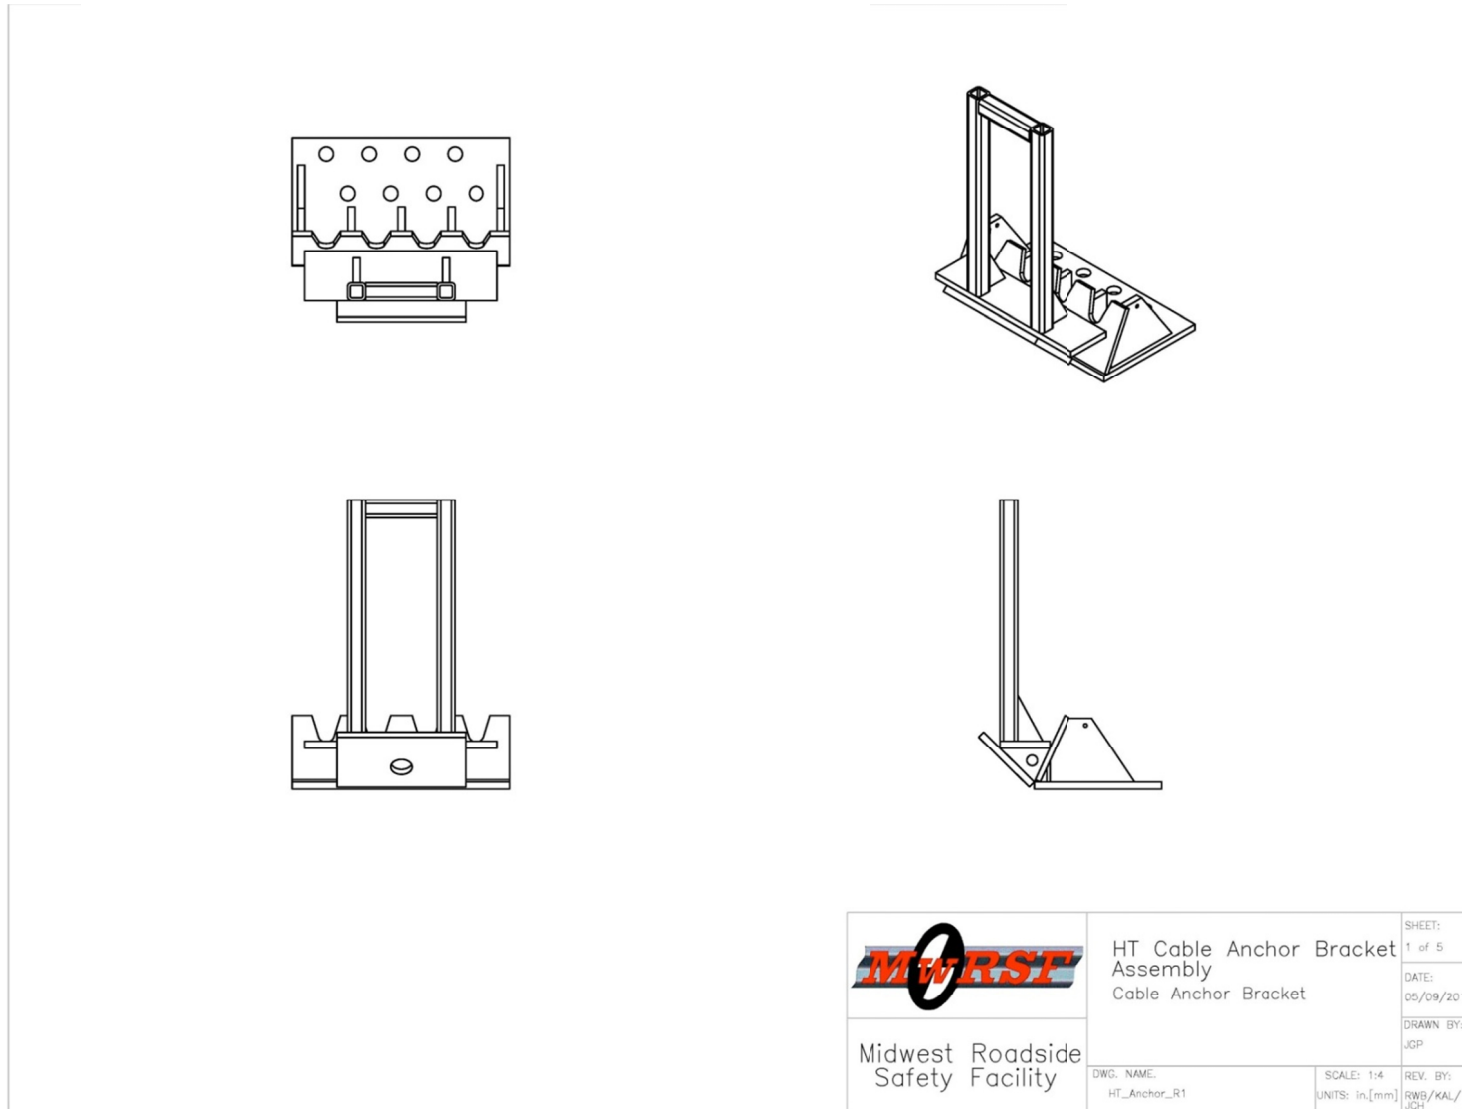


Figure 28. Cable Anchor Bracket Assembly Drawings

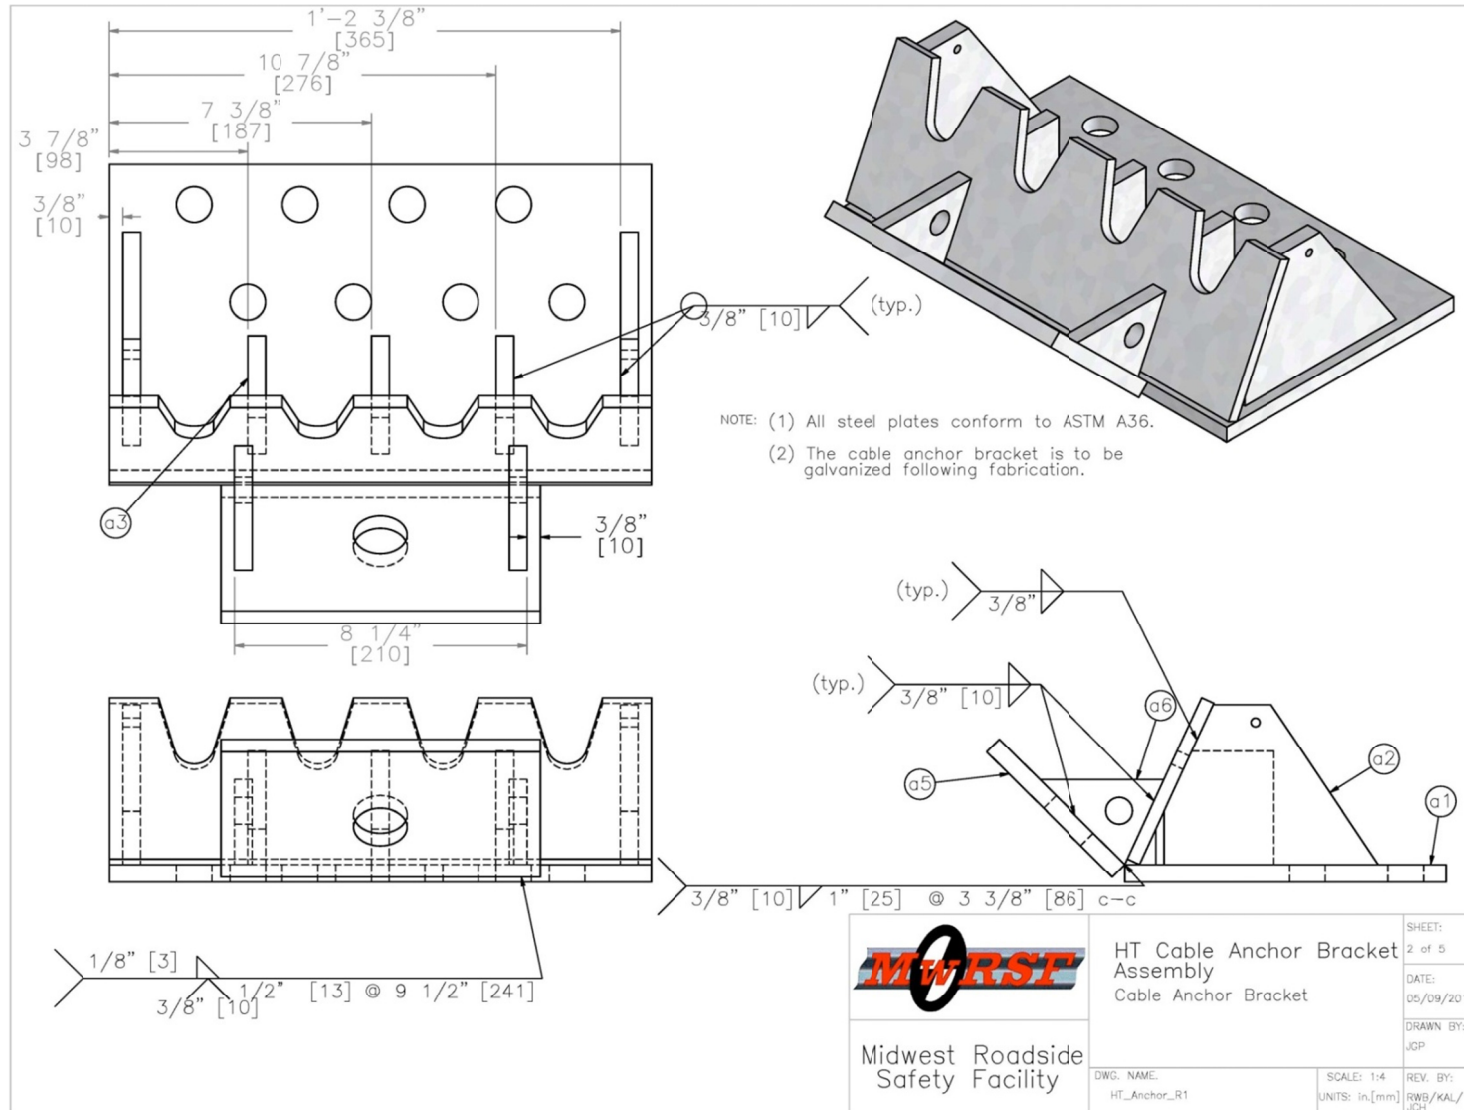


Figure 29. Cable Anchor Bracket Assembly Details

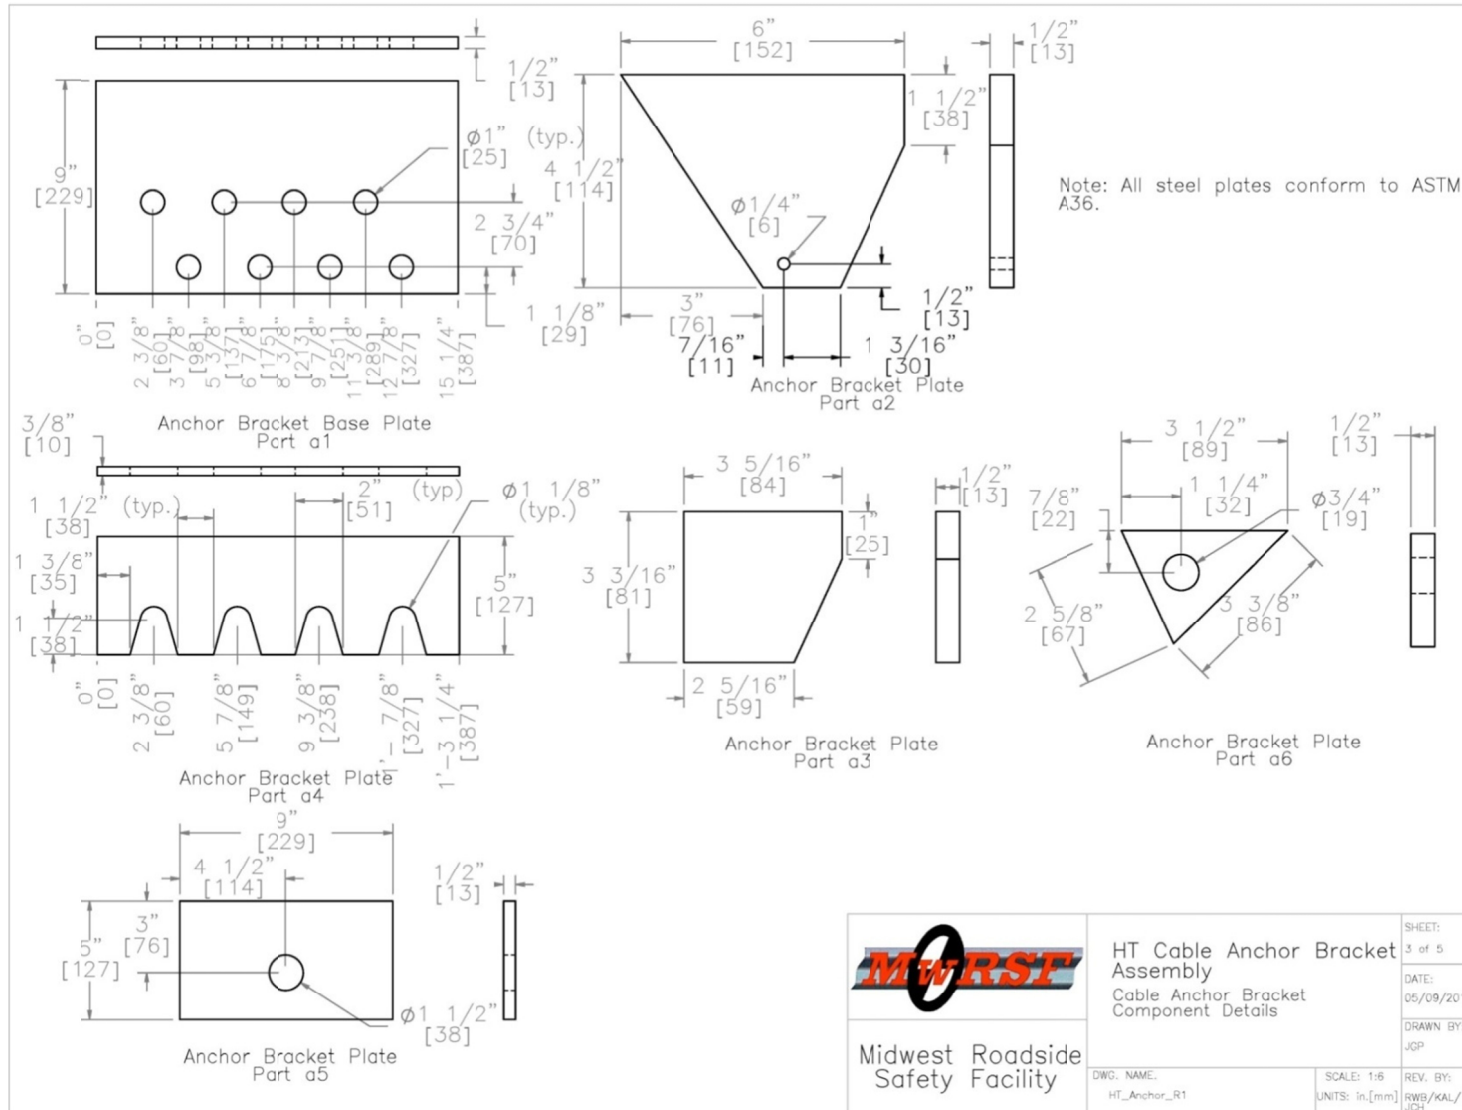


Figure 30. Cable Anchor Bracket Component Details

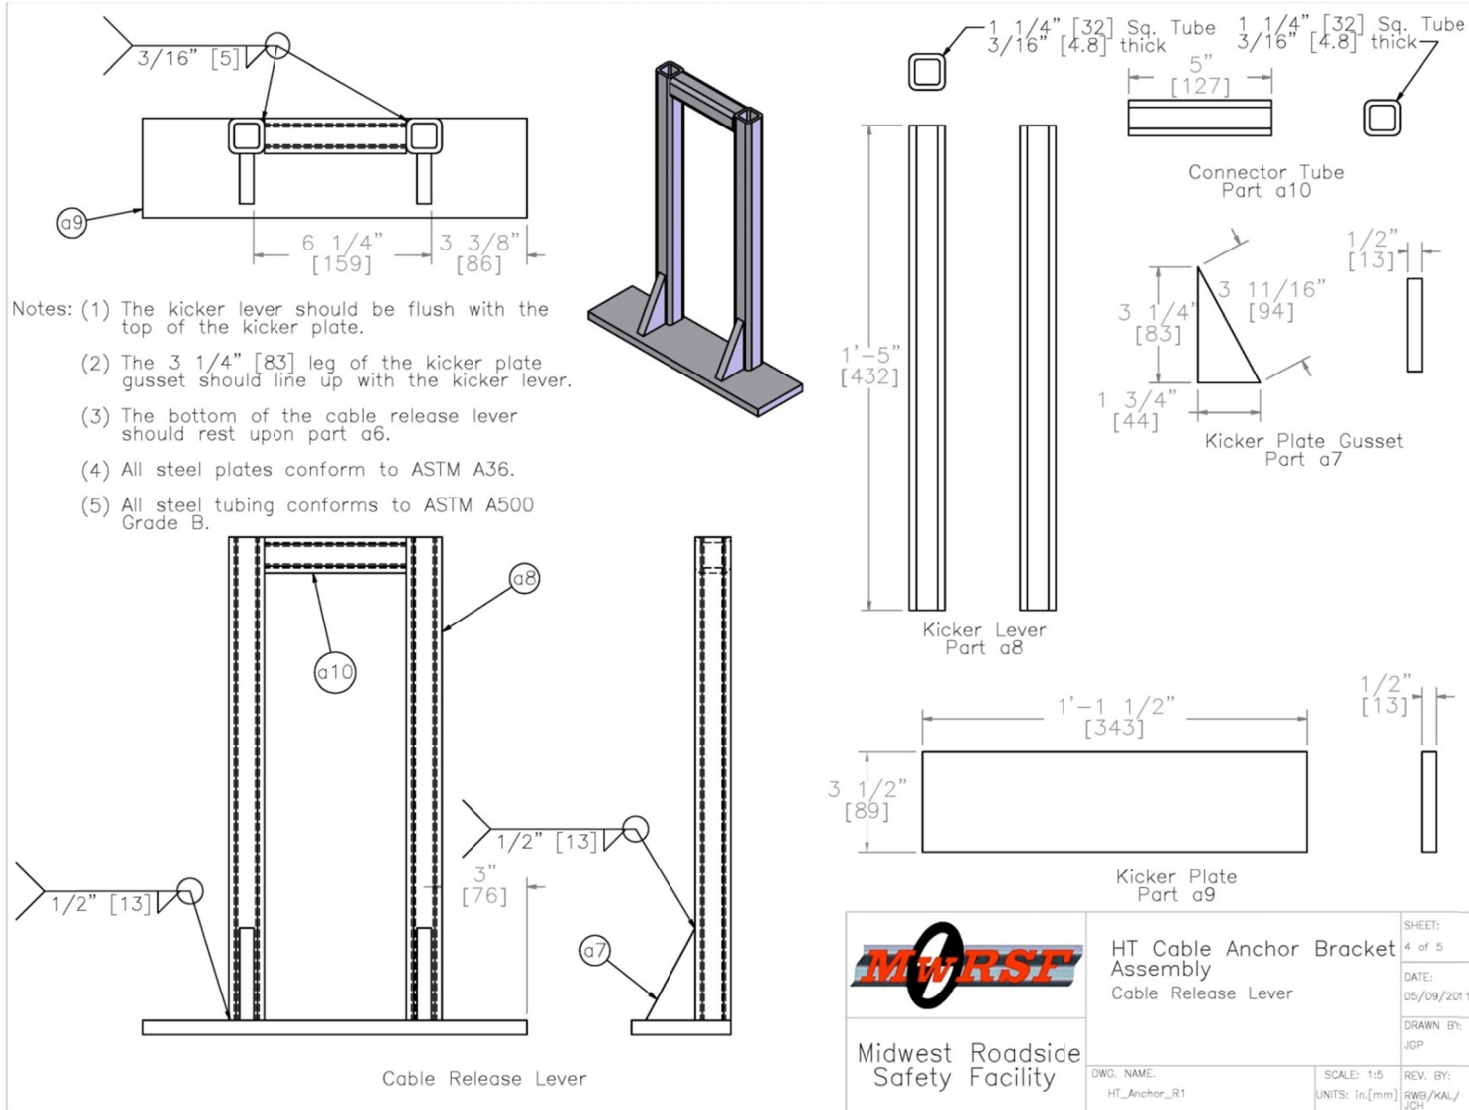


Figure 31. Cable Release Lever Assembly Details

Item No.	QTY.	Description	Material Specification
a1	2	Cable Anchor Base Plate	ASTM A36 Steel
a2	4	Exterior Cable Plate Gusset	ASTM A36 Steel
a3	6	Interior Cable Plate Gusset	ASTM A36 Steel
a4	2	Anchor Bracket Plate	ASTM A36 Steel
a5	2	Release Lever Plate	ASTM A36 Steel
a6	4	Release Gusset	ASTM A36 Steel
a7	4	CT kicker – gusset	ASTM A36 Steel
a8	4	1.25x1.25x0.1875" TS CT Kicker Lever Tube	ASTM A500 Grade B
a9	2	3x10x0.5" Kicker Plate	ASTM A36 Steel
a10	2	1.25x1.25x0.1875" TS CT Kicker Lever Connecting Tube	ASTM A 500 Grade B

 Midwest Roadside Safety Facility	HT Cable Anchor Bracket Assembly Bill of Materials	SHEET: 5 of 5
	DWC. NAME: HT_Anchor_R1	SCALE: 1:5 UNITS: in,[mm]
		DATE: 05/09/2011
		DRAWN BY: JGP
		REV. BY: RWB/KAL/ JCH

Figure 32. Bill of Materials, Cable Anchor Bracket Assembly

CHAPTER 5 - INITIAL COMPUTER SIMULATION

5.1 Introduction

Finite element modeling can be a useful tool in the design process. If an accurate model is obtained, it can be used in place of costly physical testing to evaluate potential designs. A finite element model of the high-tension, cable anchor bracket assembly was created in order to assess the capability of finite element modeling as a predictive design tool. Simulations were conducted with an abbreviated finite element model of the high-tension, cable end terminal. Subsequent physical bogie testing of the anchor was used to evaluate the current high-tension, cable anchor design as well as the predictive capabilities of the finite element model.

During the low-tension end terminal validation, the model closely replicated the mechanics of the cable anchor bracket assembly during the release of the cables. After the successful modeling of the low-tension cable anchor bracket and end terminal, it was hoped that the high-tension cable anchor bracket model would be replicated as well.

Many of the system components in the high-tension cable end terminal are similar to components in the low-tension cable end terminal. One difference, however, is that the cable compensators utilized in low tension systems are not necessary in high-tension systems. The elimination of the cable compensators reduces the amount of debris that could possibly cause vehicle instabilities observed during end-on terminal impacts. The only other significant difference between the two systems is small variations in component geometry. Materials used for fabricating many of the components were unchanged from the low-tension system to the high-tension system. As such, the material

models and element formulations were reused from the low-tension end terminal model and applied to the high-tension model.

5.2 Abbreviated High-Tension Cable End Terminal System Model

To evaluate the high-tension cable anchor bracket model, an abbreviated high-tension cable end terminal model was created. This system was then impacted with a bogie vehicle model to simulate a dynamic component test. The abbreviated high-tension cable end terminal model consisted of four main components:

- the high-tension cable anchor bracket assembly;
- one slip base post assembly;
- four system cables; and
- bogie model.

Detailed descriptions of the individual components and the techniques used to model them are discussed in the ensuing sections.

5.2.1 High-Tension Cable Anchor Bracket Assembly

The cable anchor bracket was modeled using a combination of three-noded and four-noded shell elements. The cable release lever was also modeled using shell elements. Eight-noded hexagonal elements were used to model the anchor bolts and their associated washers. ASTM A36 steel material properties were specified for all components of the cable anchor bracket model, and ASTM A307 steel material properties were used for the bolts. A Belytschko-Leviathan element formulation was specified for all shell elements and a Fully Integrated S/R solid element formulation was used for all solid elements. A summary of the anchor bracket assembly components and their associated element and material types is shown in Table 5. A comparison of the physical

cable anchor bracket and its finite element model as well as a close up of the component meshing is shown in Figures 33 and 34.

Table 5. Summary of Cable Anchor Bracket Model Properties

Part Name	Element Type	Element Formulation	Material Type	Material Formulation
Interior Cable Plate Gusset	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Exterior Cable Plate Gusset	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Base Plate	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Cable Plate	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Release Lever Support Plate	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Release Lever Support Gusset	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Release Lever Vertical Tube	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Release Lever Connecting Tube	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Release Lever Base Plate	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Release Lever Gusset	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Anchor Bolts	Solid	Fully Integrated, S/R	ASTM A307	Piecewise, Linear Plastic
Washers	Solid	Fully Integrated, S/R	ASTM A36	Rigid

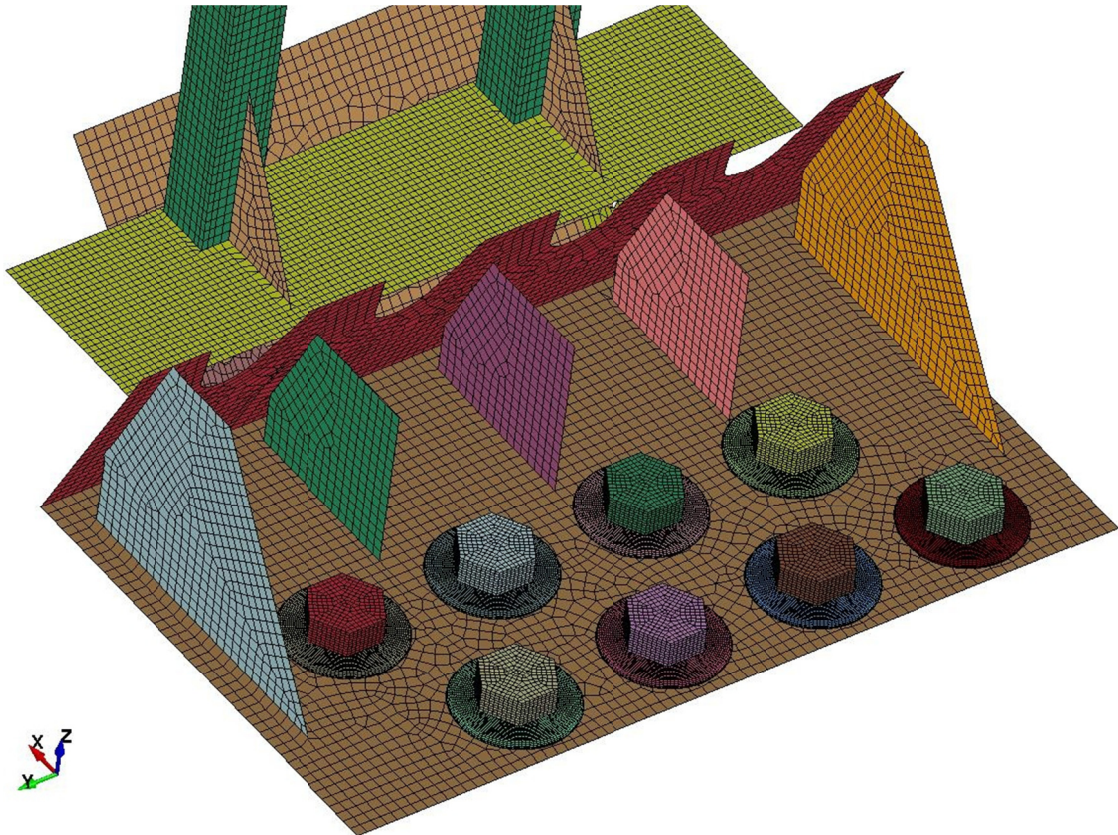


Figure 33. Cable Anchor Bracket Component Mesh

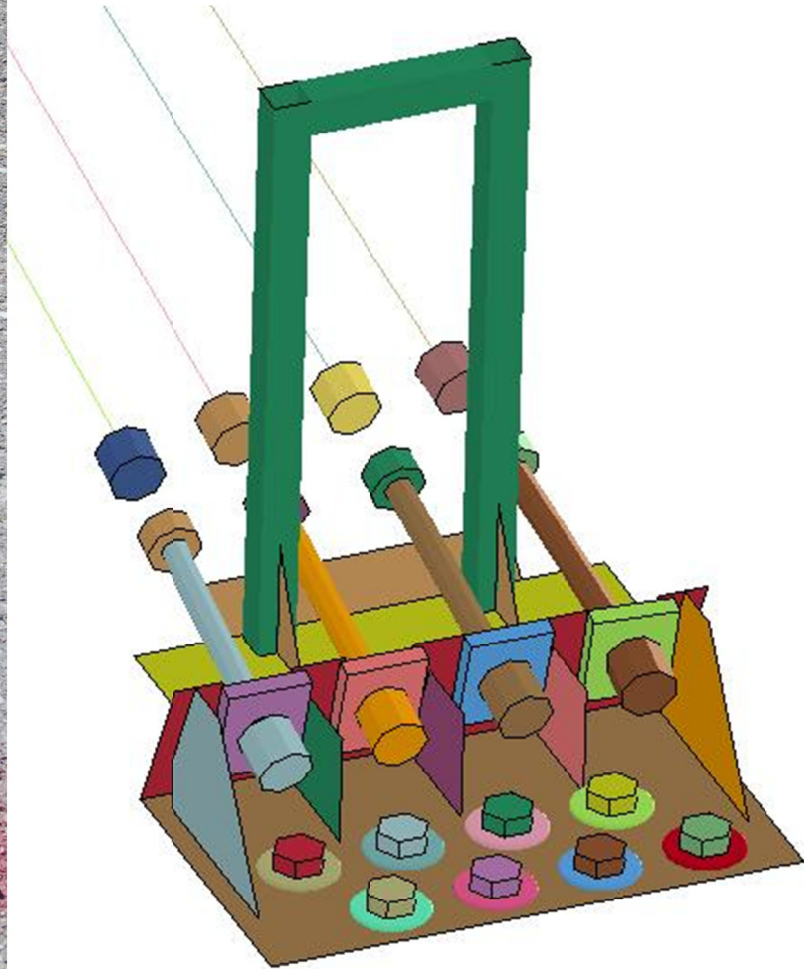


Figure 34. Cable Anchor Bracket and Finite Element Model

5.2.2 Slip Base Post Assembly

The slip base post assembly utilized in the end terminal simulation was modeled to reflect the geometry and slip characteristics of the physical post assembly. The S3x5.7 portion of the post was meshed with three-noded and four-noded shell elements. A Belytshcko-Leviathan element formulation was specified for the post elements. The cable hangar attached to the post was meshed with three-noded shell elements. Various physical tests have shown this component to be very robust; therefore, a rigid material type was applied to reduce computational time.

The base plate components that comprised the slip interface were modeled with solid elements. A Fully Integrated S/R solid element formulation was used. Solid elements were used to model the slip connection to better define the contact surfaces. The bolts and washers utilized in the slip connection were also meshed with solid elements and a Fully Integrated S/R element formulation. The washers utilized between the slip plates and under the bolt heads and nuts were specified as rigid. Note that although the component modeling was accomplished for this simulation effort, the slip connection model was taken from a previous study [15].

The slip connection support plates as well as the assembly base plate were meshed with three-noded and four-noded shell elements. A Fully Integrated shell element formulation was specified for both the supports and the base plate. The wedge bolts and washers used to anchor the assembly were meshed with solid elements. Fully Integrated S/R element formulations were used for both the bolts and the washers. The washers were again specified as rigid.

ASTM A36 steel material properties were specified for all steel plate components and ASTM A307 steel material properties were used for the slip base bolts and the wedge bolts. Component modeling information is tabulated in Table 6. A comparison of the physical cable anchor bracket and its finite element model as well as a close up of the component meshing is shown in Figures 35 and 36.

Table 6. Summary of Slip Base Post Model Properties

Part Name	Element Type	Element Formulation	Material Type	Material Formulation
S3x5.7 Post	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Cable Hangar	Shell	Belytschko-Leviathan	ASTM A36	Rigid
Top Slip Base Plate	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Bottom Slip Base Plate	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Slip Base Bolts	Solid	Fully Integrated, S/R	ASTM A307	Piecewise, Linear Plastic
Slip Base Washers	Solid	Fully Integrated, S/R	ASTM A36	Rigid
Slip Base Support Plates	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Post Assembly Base Plate	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Wedge Bolt Anchors	Solid	Fully Integrated, S/R	ASTM A307	Piecewise, Linear Plastic
Anchor Washers	Solid	Fully Integrated, S/R	ASTM A36	Rigid

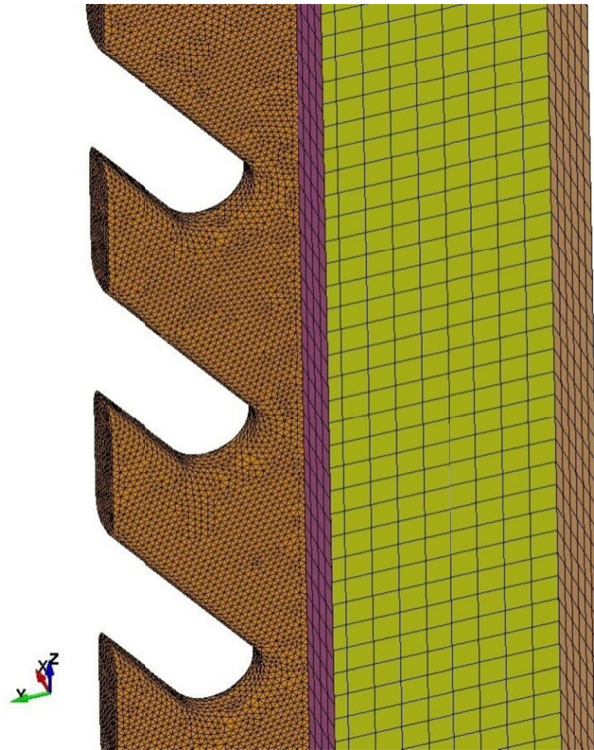
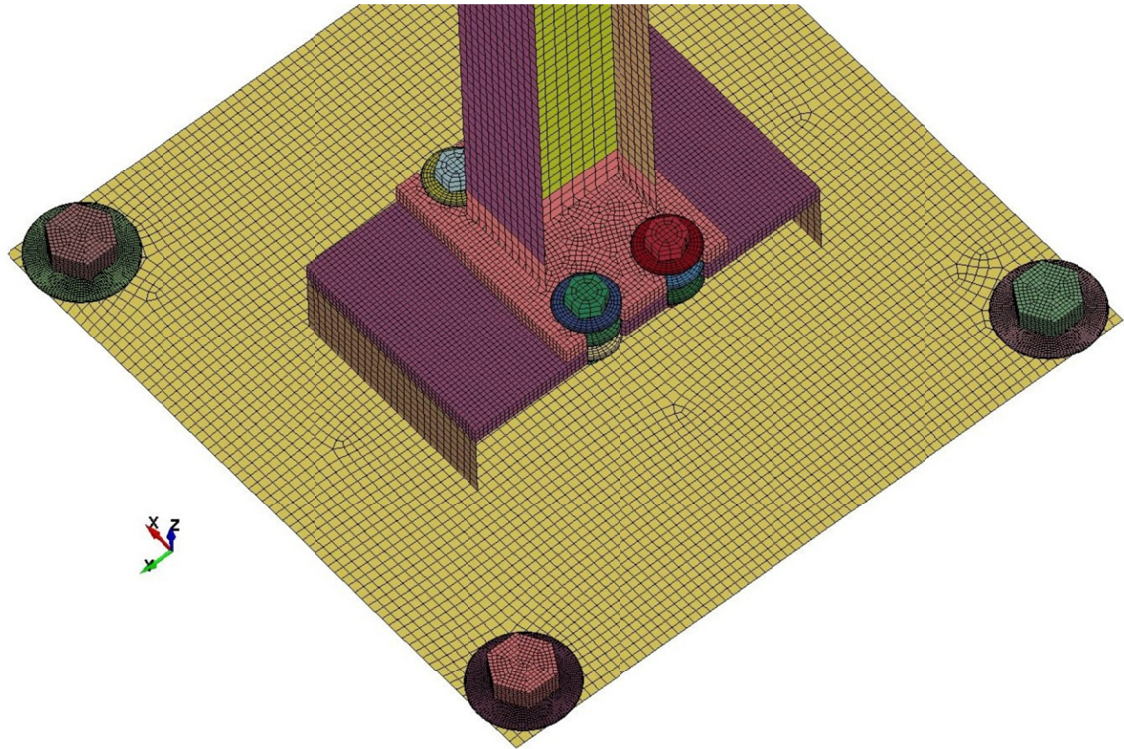


Figure 35. Slip Base Post Assembly Component Mesh

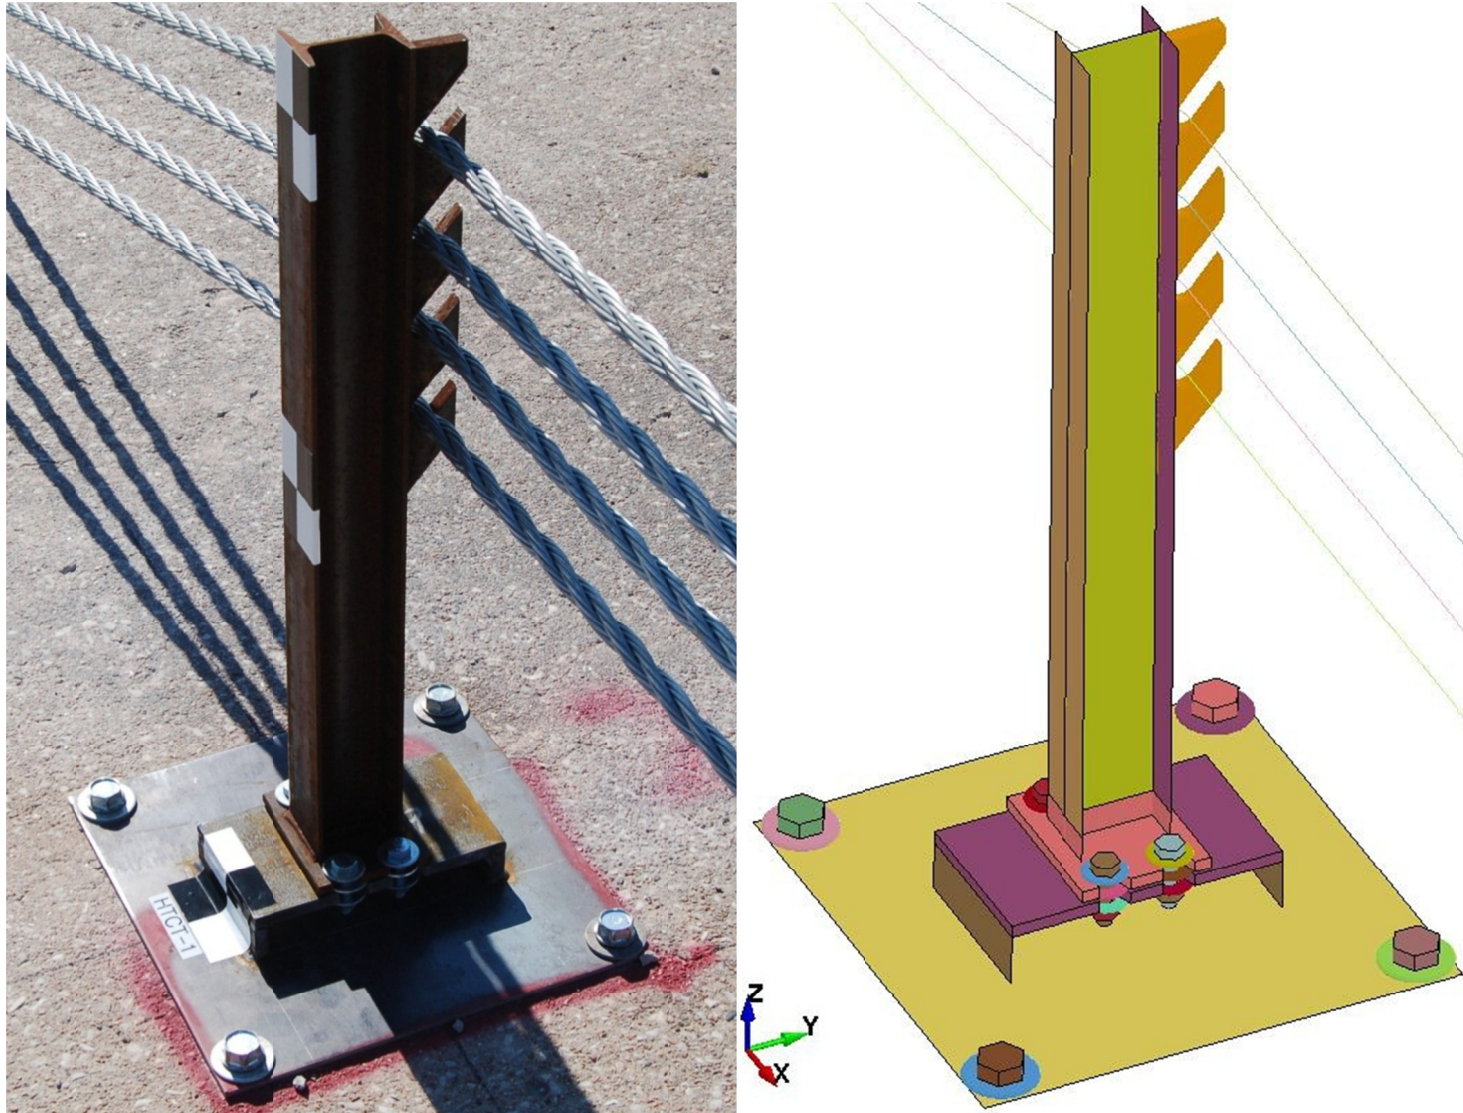


Figure 36. Slip Base Post Assembly and Finite Element Model

5.2.3 System Cables

The cable model used in the high-tension simulation differed from the model used for the low-tension end terminal validation. The cable model used in the current component test simulation model was the result of a previous study [20]. However, at the time of the low-tension end terminal validation there were some issues with the cable model that prevented its use. Since then, the issues were corrected and the model was available for use. The new cable model has several advantages over the older model, including accuracy and usability. The cables main purpose in the simulation is to provide a load on the cable anchor bracket. Thus, it is reasonable to assume that changing cable models would have a negligible effect on the performance of the anchor or the simulation in general.

Discrete spring elements were used to tension the cables. One end of each spring element was attached to the downstream end of a cable and the other end was fixed. The springs were given an initial offset so that when the system had reached equilibrium, the tension in each cable was 4,200 lbs.

One significant change from the low-tension cable anchor bracket to the high-tension cable anchor bracket was in the type of washer used on the cable end fitters. The low-tension anchor bracket utilized a typical round washer, while the high-tension anchor bracket required a stronger plate washer to resist deformations from the higher static cable loads. The plate washers also provided increased surface area, which required greater displacement in order to release away from the slots on the anchor bracket.

The plate washers were modeled using 8-noded solid elements. It was expected that the plate washers would not sustain any plastic deformation; therefore a rigid

material type was specified to reduce computational time. Subsequent physical testing was later used to verify this assumption. A comparison of the physical system components and their finite element models is shown in Figure 37.

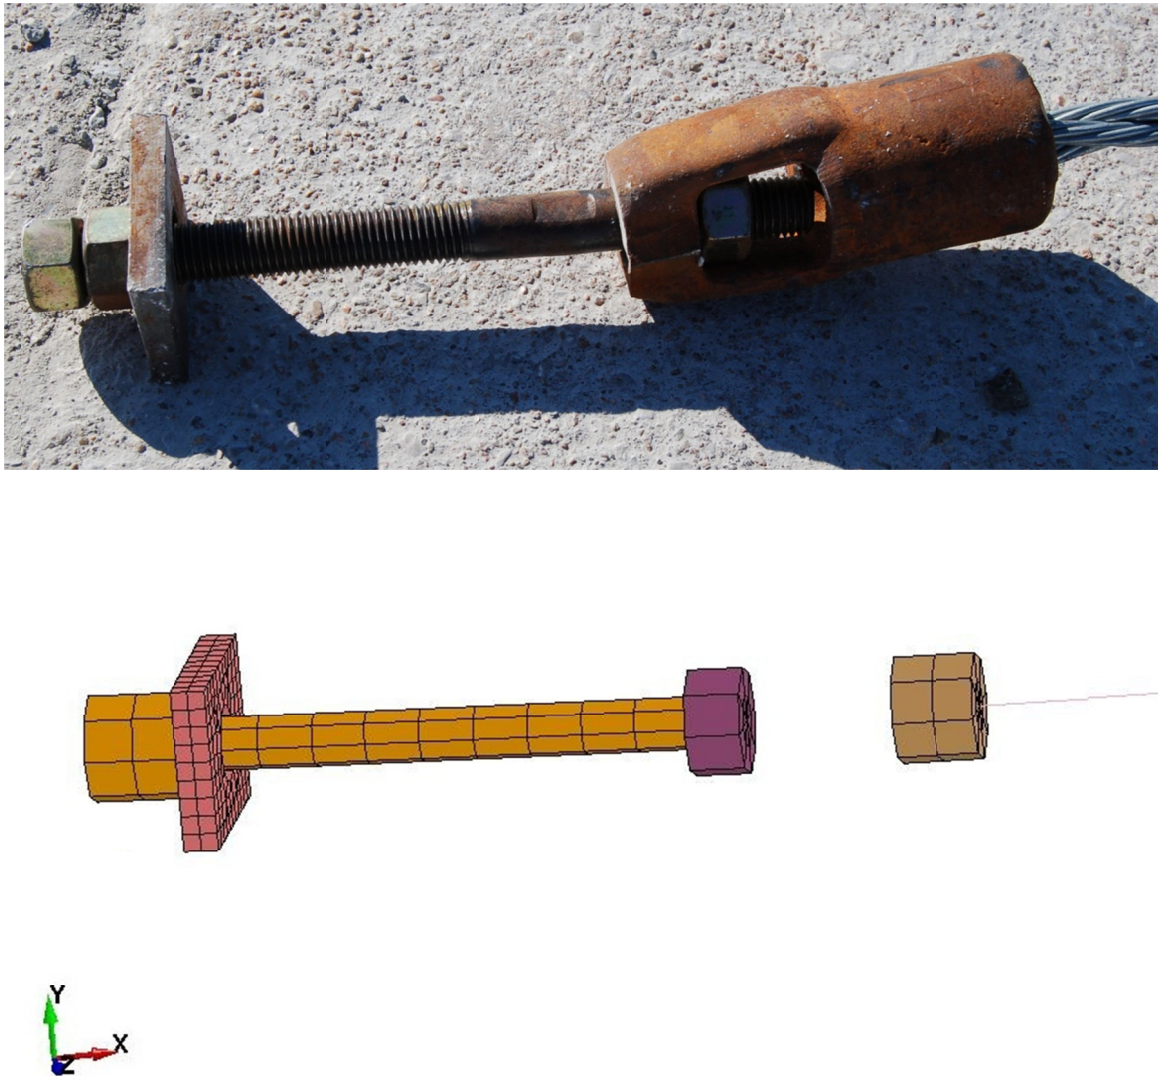


Figure 37. Cable and End Fitter Component Model and Mesh

5.2.4 Bogie Model

The bogie model used for the simulation was previously developed by the MwRSF. Only slight modifications were made to the bogie model (i.e. impact head mounting height and bogie mass) in order to more closely represent the physical bogie. The final mounting height of the impact head was 19 in. and the bogie weight was 1794.2 lbs. The bogie model is shown in Figure 38.

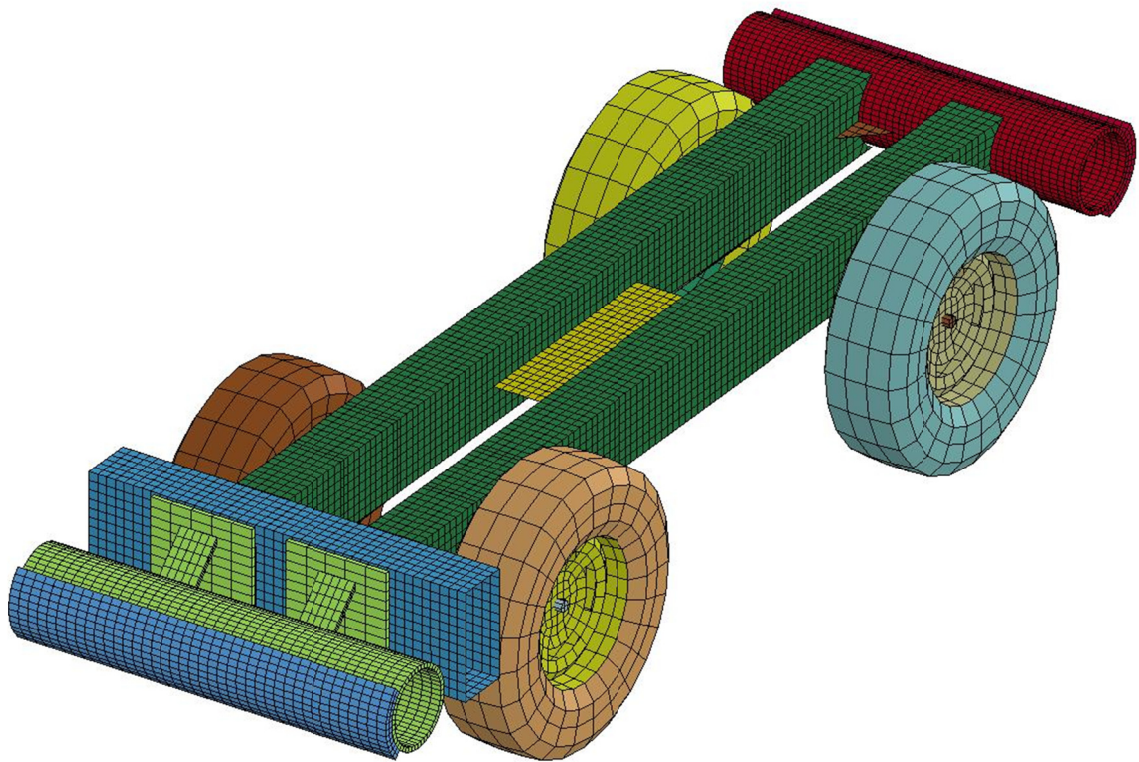


Figure 38. Bogie Finite Element Model

5.3 Bogie Test Simulation

The bogie model was given an initial velocity of 45.0 mph. The centerline of the bogie impact head was aligned with the vertical centerline of the cable release lever. An automatic single surface contact was used to specify contact between the slip base post assembly, cable anchor bracket assembly, and the bogie's impact head. An automatic

nodes to surface contact was used with the cable model to better capture the cable interaction with the cable hangar, bogie impact head, and any other system components that may contact the cables.

Initial impact was between the center of the bogie head and the center of the cable release lever. A sequential description of the simulated impact events is contained in Table 7. Sequential images of the simulation are shown in Figure 39.

Table 7. Sequential Description of Impact Events, Initial Simulation

TIME (sec)	EVENT
0.000	The cable release lever began to rotate backwards as the bogie impacted and entered the system. The cable end fitters began to translate upwards and out of their respective slots as the cable release lever rotated backwards.
0.019	The cable end fitters fully released from the cable anchor bracket.
0.024	The cross bar on the cable release lever assembly impacted the middle two system cables, causing the cables to begin to wrap around the cross bar.
0.026	The cable release lever assembly lost contact with the cable anchor bracket.
0.052	The top of the cable release lever impacted the ground. The middle two system cables are still wrapped around the cross bar of the cable release lever assembly and continued to pull the assembly downstream.
0.053	The bogie head impacted the top system cable
0.063	The bogie head simultaneously impacted the middle two system cables.
0.066	The bottom cable impacted the bogie head. All four cables began to coil on the front of the bogie head.
0.110	The bogie head impacted the upstream edge of the slip base post.
0.129	The bottom slip base plate separated from the slip base supports due to element failure along the component boundary. The element failure occurred due to the slip base mechanism failing to activate. The failure of the plate-support boundary marked the end of the simulation.

The bogie velocity in the simulation was captured to analyze the impact events between the bogie, cable anchor assembly, and slip base post. To capture the bogie velocity, a node located at the bogie's center of mass was tracked throughout the simulation.

After the bogie impact with the anchor bracket, the bogie's longitudinal velocity remained constant for a short time before contacting the system cables and other detached

anchor bracket components. The simulated bogie velocity after impact with the cable anchor bracket stabilized to 44.4 mph. The associated change in velocity due to the anchor impact was 0.6 mph. The bogie head impact with the system cables resulted in a linear decrease in velocity beginning at roughly 61 ms. The total loss in velocity from the cable impact was 0.5 mph. The bogie then impacted the slip base post, thus resulting in an additional bogie velocity reduction of 0.9 mph. The velocity data from the simulation is shown in Figure 40.

5.4 Discussion

A finite element model of the current, high-tension cable anchor bracket was created and analyzed using a simulated dynamic bogie test. The simulation was conducted in order to obtain a numerical model to compare to subsequent physical bogie testing. The initial simulation of the current, high-tension cable anchor bracket exhibited good cable release mechanics as the cable release lever was impacted and rotated backwards, releasing the system cables as designed.

A physical bogie test using a test setup identical to the simulation model was next conducted. If results from the physical bogie test are deemed to be in relatively good agreement with initial simulation results, the model can be used with confidence to evaluate alternative high-tension cable anchor bracket designs and modifications.

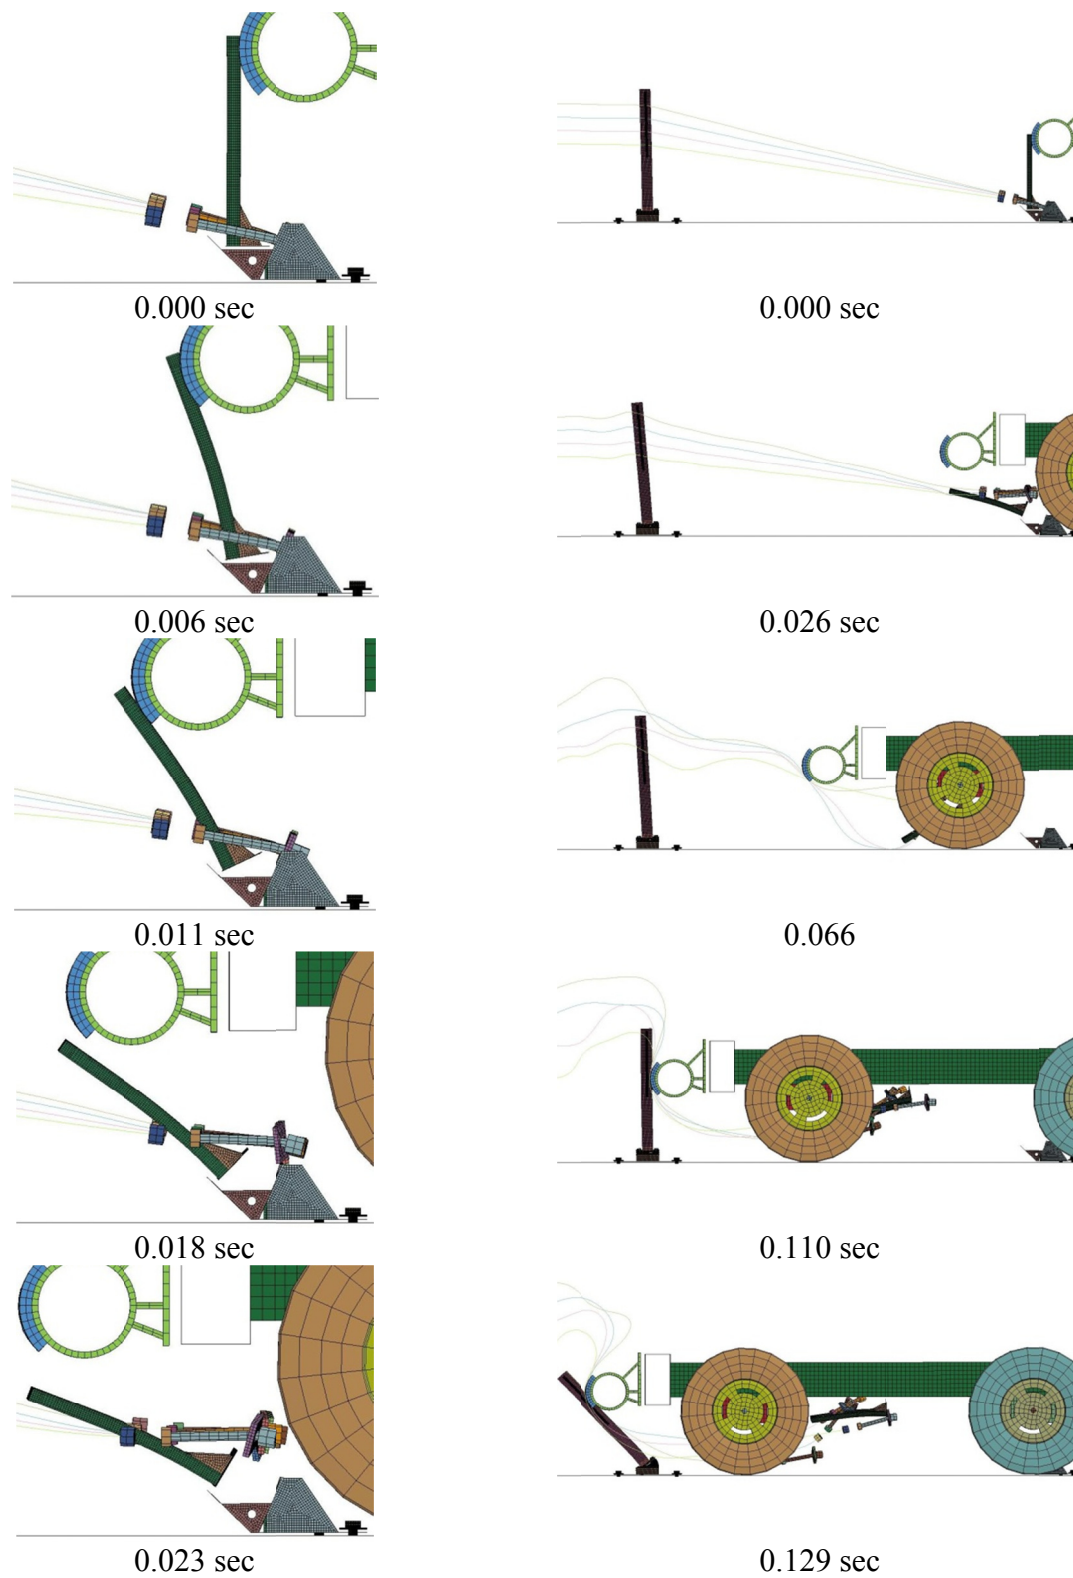


Figure 39. Sequential Photographs, Bogie Test Simulation

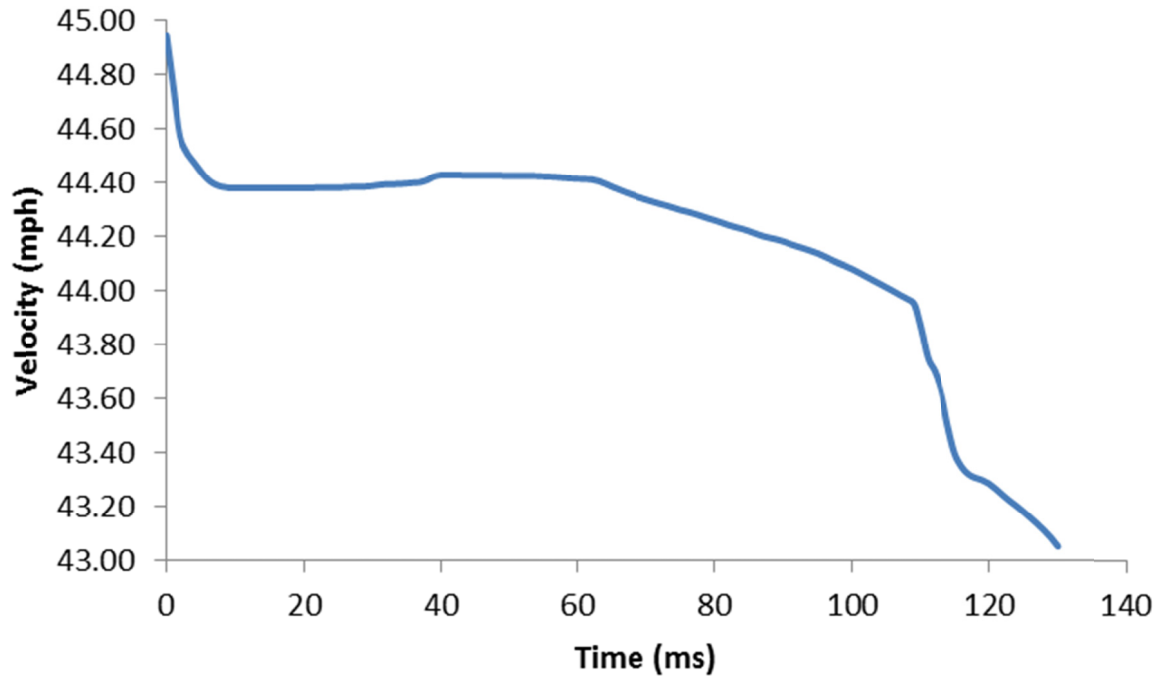


Figure 40. Longitudinal Bogie Velocity, Initial Simulation

CHAPTER 6 - HIGH-TENSION, CABLE END TERMINAL BOGIE TESTING

6.1 Purpose

In order to evaluate the current design and to validate the simulation, bogie testing was performed on an identical terminal system. The test results were needed to evaluate anchor design performance, structural adequacy, and potential for damage or failure. If the design worked well and the model proved accurate, then other simulations with alternate high-tension anchor designs could be analyzed with confidence.

An evaluation of the structural capacity of the current, high-tension, cable anchor bracket was previously incorporated into numerous barrier systems that were subjected to full-scale crash testing. However, the impact performance of the anchor bracket assembly has never been investigated during vehicle impacts on the end terminal. Based on investigation of the low-tension end terminal system, there are concerns with some design aspects of the low-tension cable anchor bracket that were utilized in the current, high-tension cable anchor bracket. These features could increase the propensity for vehicle instabilities in small car impacts with the high-tension end terminal system.

With this in mind, component testing was used to verify assumptions, investigate concerns, and determine if design modifications were necessary. The dynamic testing was conducted at the MwRSF Proving Grounds in Lincoln, Nebraska.

6.2 Scope

A bogie test was conducted on an abbreviated version of a high-tension, cable end terminal. The abbreviated system consisted of two high-tension, cable anchor brackets, two slip base post assemblies, and four system cables. The system was installed on a concrete tarmac at MwRSF's outdoor testing facility. The target test conditions consisted

of an impact speed of 45 mph with the bogie's impact head centered and aligned with the center of the cable release lever on the cable anchor bracket. The targeted impact height for the test was 19 in., as measured from the ground to the horizontal centerline of the bogie impact head. This height was selected to simulate the bumper height of a Kia Rio. The test matrix is shown in Figure 42.

6.3 System Details

The cable barrier test system used for the bogie test consisted of three main components: (1) cable anchor bracket assemblies; (2) slip base post assemblies; and (3) system cables. Descriptions of each of these assemblies and the components that comprise the assembly can be found in the following sections. Photographs of the system prior to testing are shown in Figure 41. Design drawings for the test articles are shown in Figures 42 through 48.

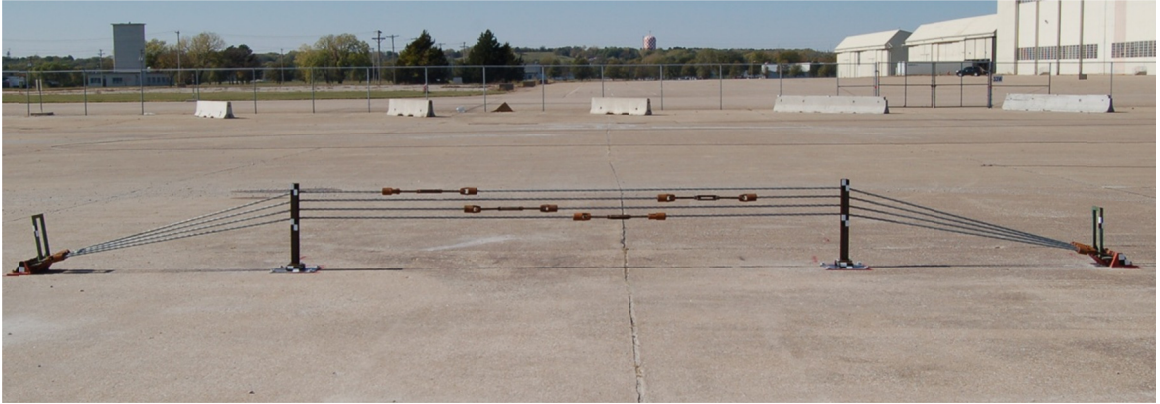


Figure 41. Bogie Test System Setup, Test No. HTCT-1

6.3.1 Cable Anchor Bracket Assemblies

The cable anchor bracket assemblies consisted of five components: (1) cable release lever; (2) anchor baseplate; (3) anchor cable plate; (4) anchor support gussets; and (5) release lever support gussets. The cable release lever consisted of two 17-in. long, 1 ¼-in. x 1 ¼-in. x 3/16-in. thick steel tubes welded to a 3 ½-in. x 13 ½-in. x ½-in. thick steel baseplate. Two 3 ¼-in. x 1 ¾-in., triangular steel gussets were welded between the baseplate and the steel tubes to increase the bending capacity of the connection. A 5-in. long, 1 ¼-in. x 1 ¼-in. x 3/16-in. steel tube was welded between the two vertical tubes to aid in the distribution of forces throughout the assembly.

The cable anchor bracket consisted of a 9-in. x 15 ¼-in. x ½-in. thick steel baseplate with a 5-in. x 15 ¼-in. x 3/8-in. thick steel cable plate welded at a 65-degree angle. Eight 1-in. diameter holes were drilled into the baseplate in order to anchor the assembly. Four 1 1/8-in. diameter notches were cut into the cable plate in order to secure the cables to the assembly. Two 4 ½-in. x 6-in. x 1 ½-in. thick gussets were welded to the baseplate and the cable plate at the edges of the assembly. Three smaller gussets, measuring 3 3/16-in. x 3 5/16-in. x ½-in., were welded to the cable plate and base plate at interior locations. On the front of the assembly, two rectangular gussets, measuring 3 ½-in. x 2 3/8-in. x ½-in., were welded to the cable plate. A 9-in. x 5-in. x ½-in. thick support plate was also welded to the front gussets. A ¾-in. diameter hole was cut into each gusset as well as a 1 ½-in. diameter hole in the support plate to aid in the galvanization process. The gussets and the support plate provided the surface for rotation of the cable release lever.

The cable anchor brackets were secured to the testing surface using eight $\frac{3}{4}$ -in. diameter x 12-in. long ASTM A193 Grade B7 threaded rods with hex nuts and washers. The threaded rods were epoxied 10 $\frac{1}{2}$ -in. into the concrete.

All steel plate used in the cable anchor bracket assembly conformed to ASTM A36 specifications. All steel tubing used in the assembly conformed to ASTM A500 Grade B specifications.

6.3.2 Slip Base Post Assemblies

The slip base post assemblies consisted of two sub-assemblies: (1) top post section and (2) base assembly. The top post section was comprised of a 28 $\frac{1}{8}$ -in. long, S3x5.7 steel post that was welded to a 4 $\frac{15}{16}$ -in. x 4-in. x $\frac{3}{8}$ -in. thick steel base plate. A cable hanger was welded to the outer surface of a flange of the S3x5.7 post to support the cables. The cable hanger was machined out of a 2-in. x 15-in. x $\frac{1}{2}$ -in. thick steel plate.

The base of the slip base post assembly was comprised of a 15-in. x 15-in. x $\frac{1}{4}$ -in. steel base plate with two 4 $\frac{15}{16}$ -in. x 1 $\frac{1}{4}$ -in. x $\frac{1}{2}$ -in. thick steel plates welded to the top surface. A 4 $\frac{15}{16}$ -in. x 9-in. x $\frac{1}{2}$ -in. thick steel slip base plate was welded to the top of the two plates to provide a support surface for the top post section. The base assembly was secured to the concrete tarmac using four $\frac{3}{4}$ -in. diameter wedge bolt anchors and washers.

The top post section and base section were then assembled using four $\frac{1}{2}$ -in. diameter x 2-in. long ASTM A307 bolts with washers and nuts used to form the slip base connection. All steel used to fabricate the slip base post assembly conformed to ASTM A36 specifications.

6.3.3 System Cables

Four $\frac{3}{4}$ -in. diameter, 3x7 wire rope cables were used in the barrier system. The cables were tightened through the use of cable turnbuckles. The ends of the cable contained threaded rod fittings that terminated in the cable anchor bracket. Each threaded rod was secured in a cable anchor slot with a 3-in. x $2\frac{3}{8}$ -in. x $\frac{1}{2}$ -in. thick plate washer and two $\frac{3}{4}$ -in. diameter heavy hex nuts.

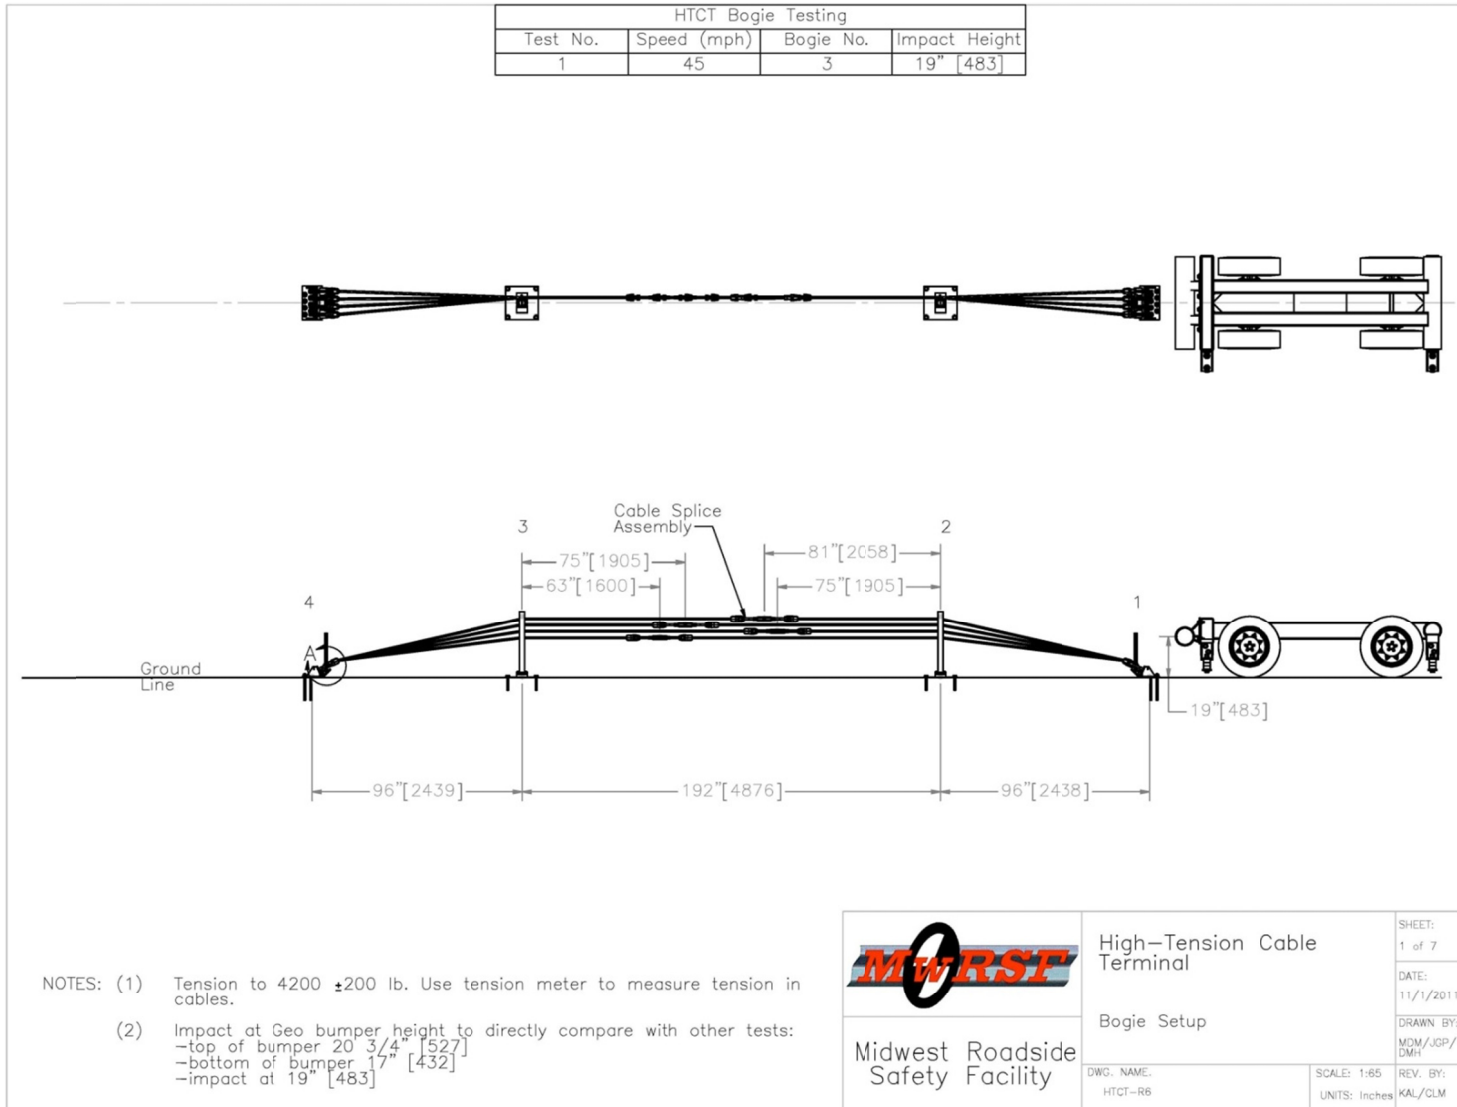


Figure 42. Bogie Test Layout, Test No. HTCT-1

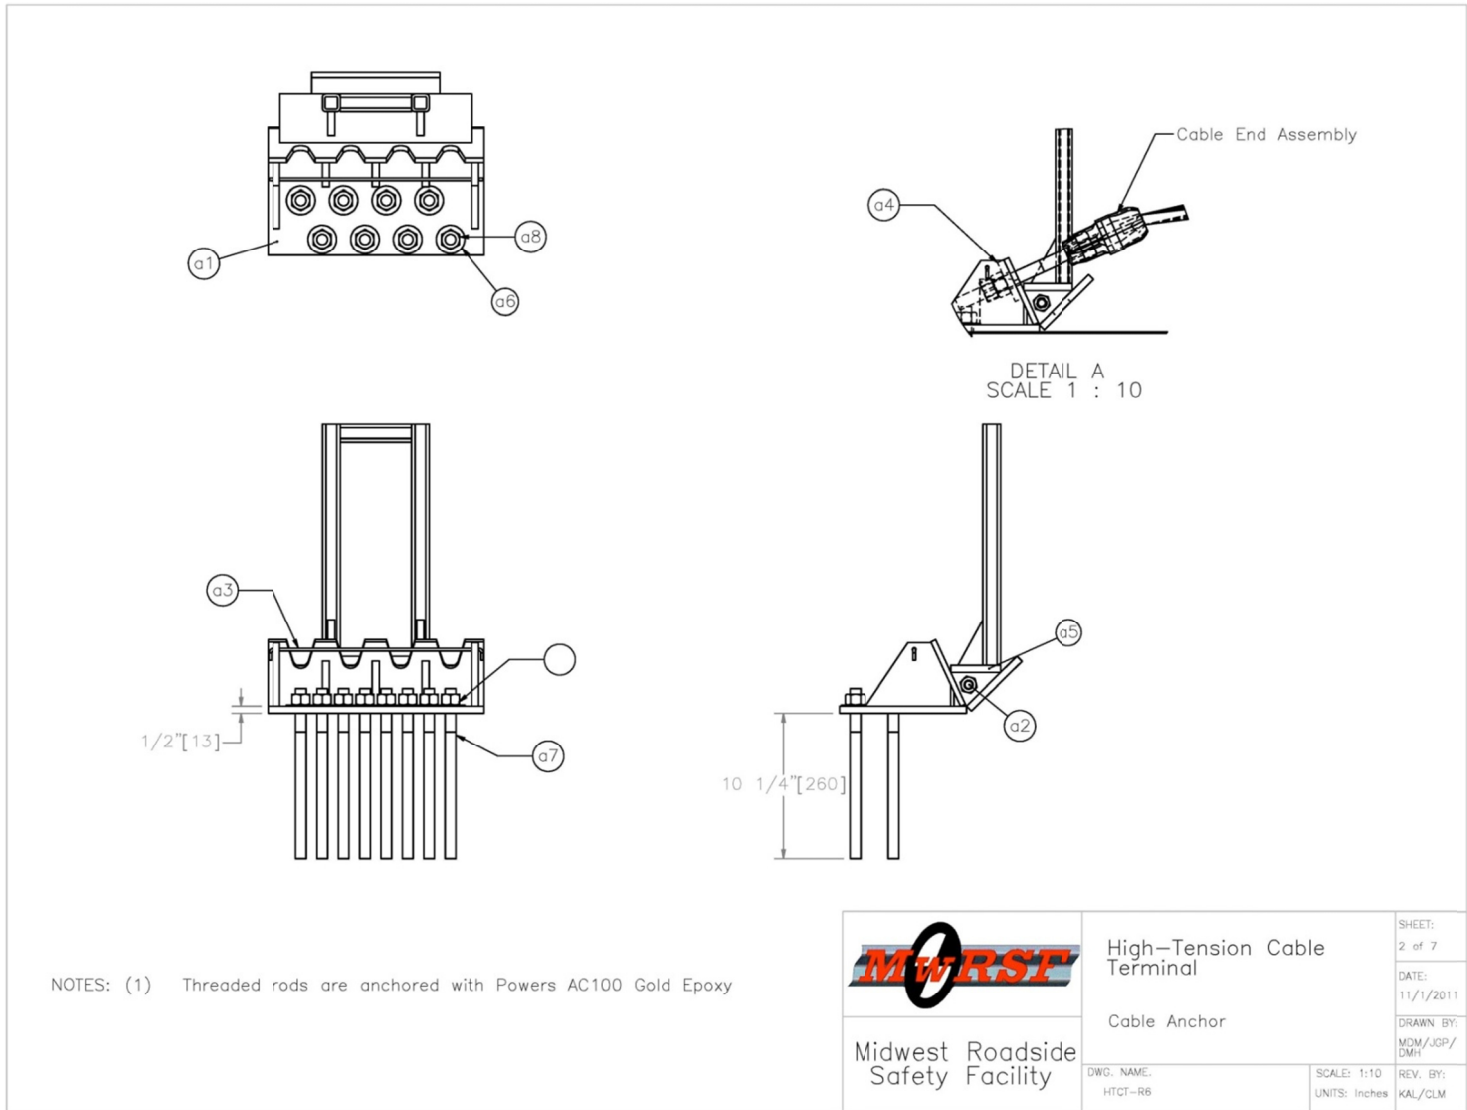


Figure 43. Cable Anchor Bracket Assembly Details, Test No. HTCT-1

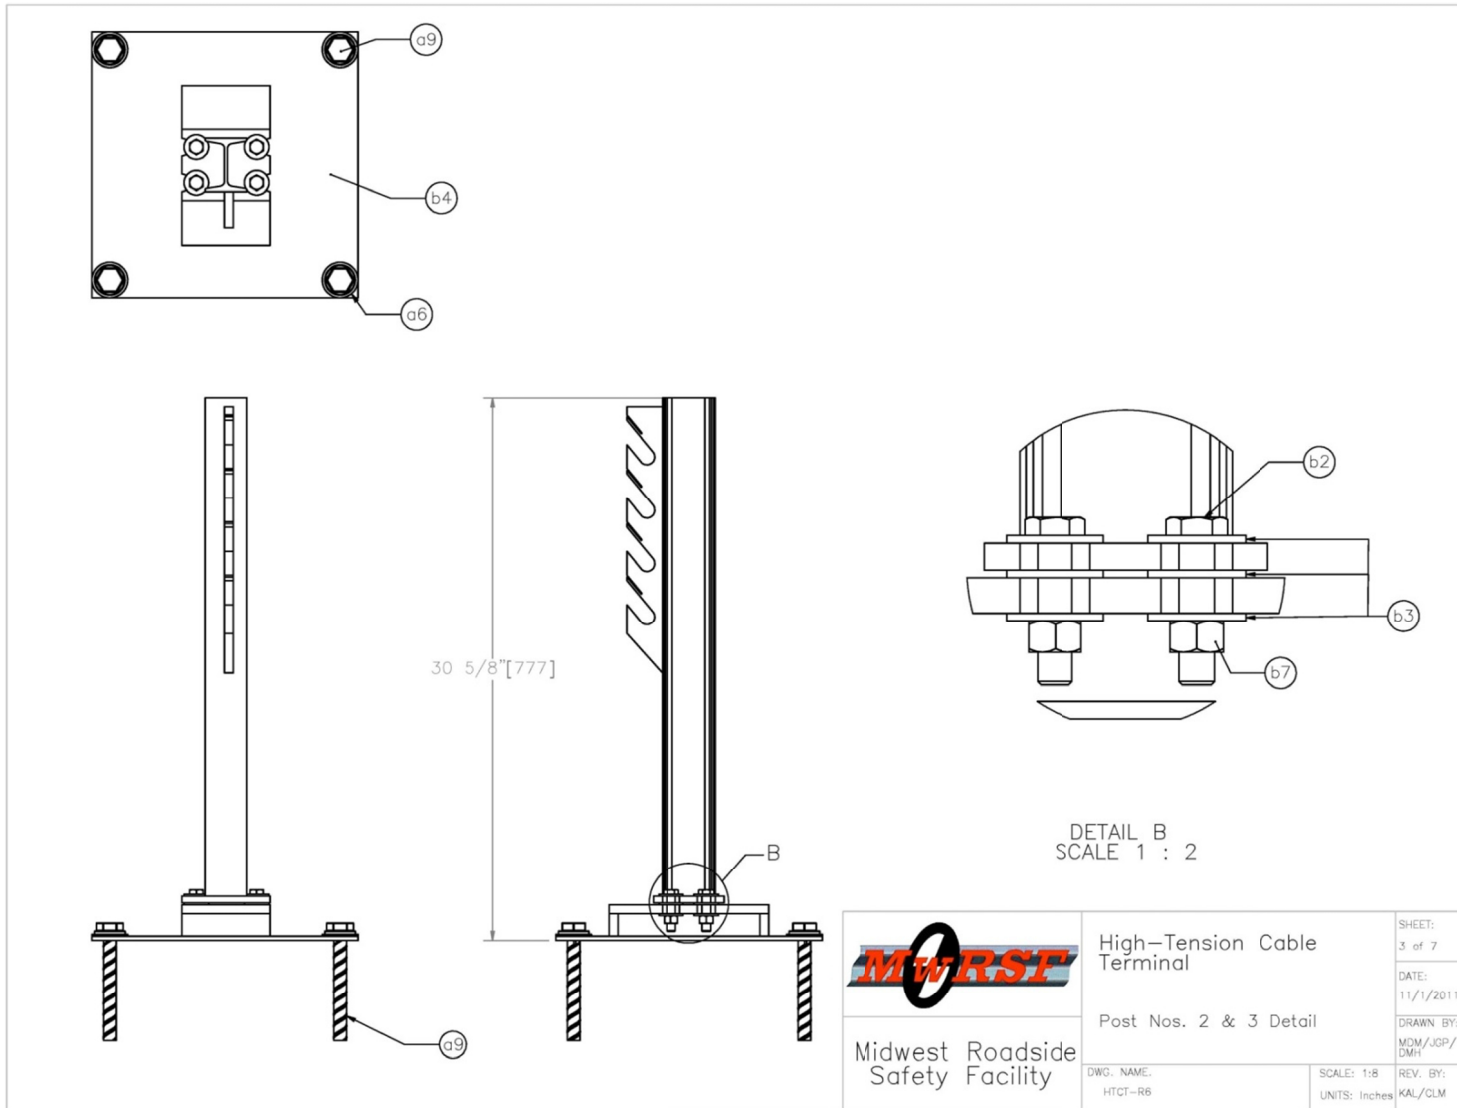


Figure 44. Slip Base Post Assembly Details, Test No. HTCT-1

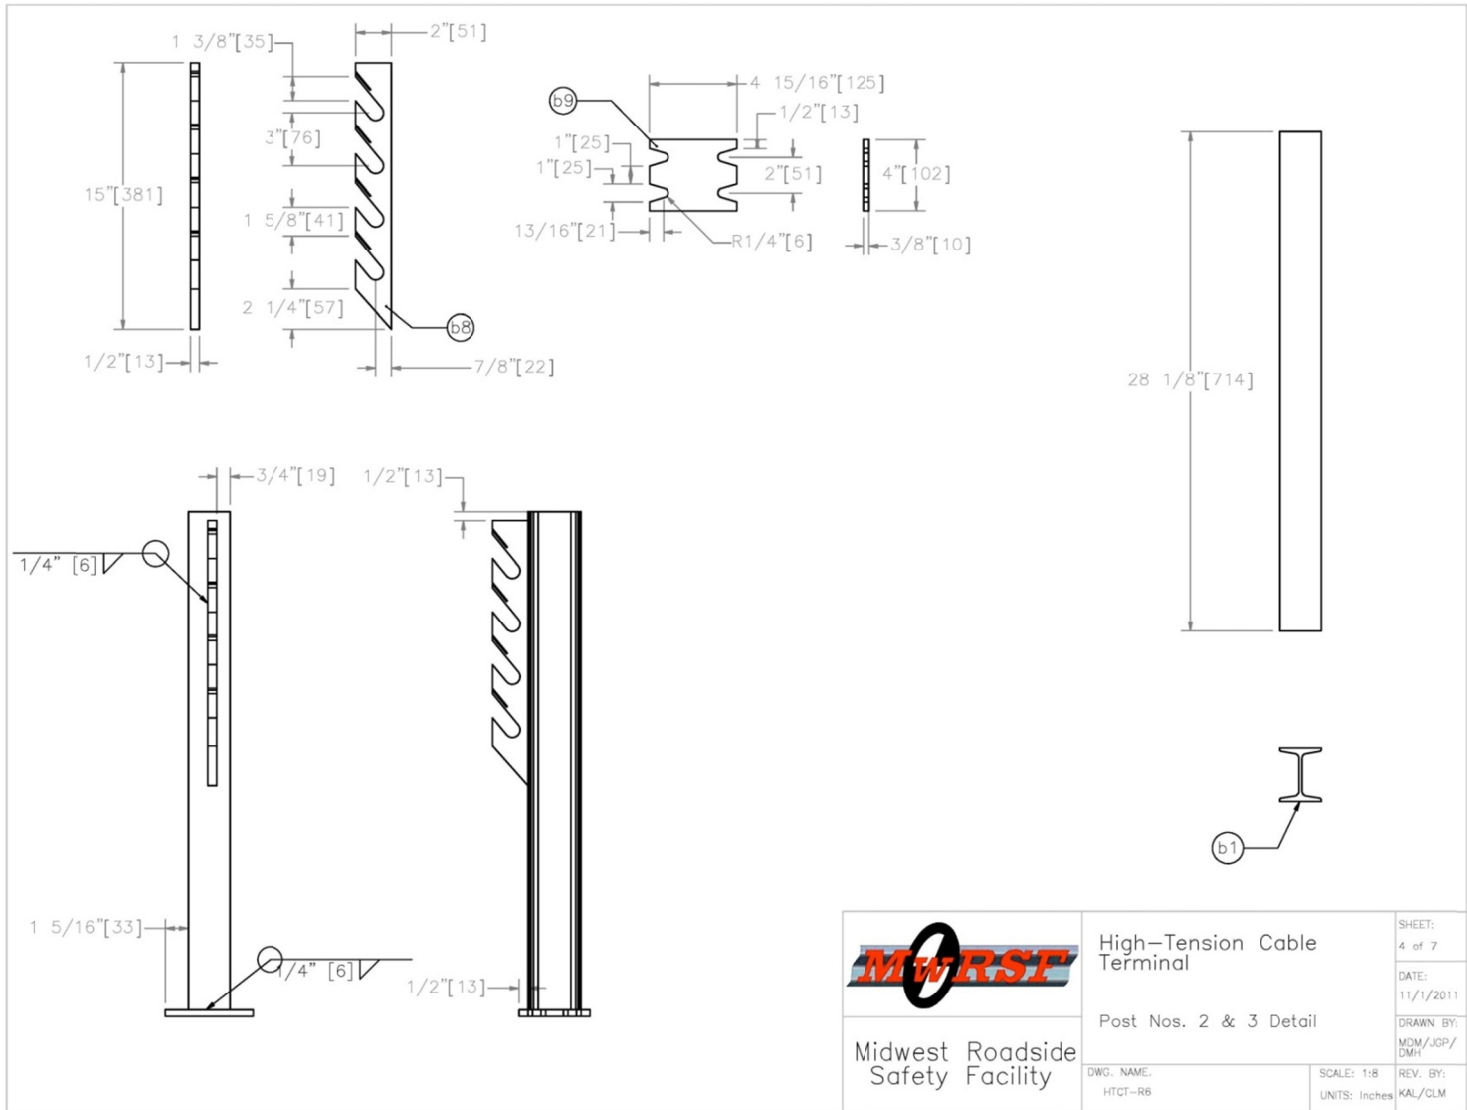


Figure 45. Slip Base Post Component Details, Test No. HTCT-1

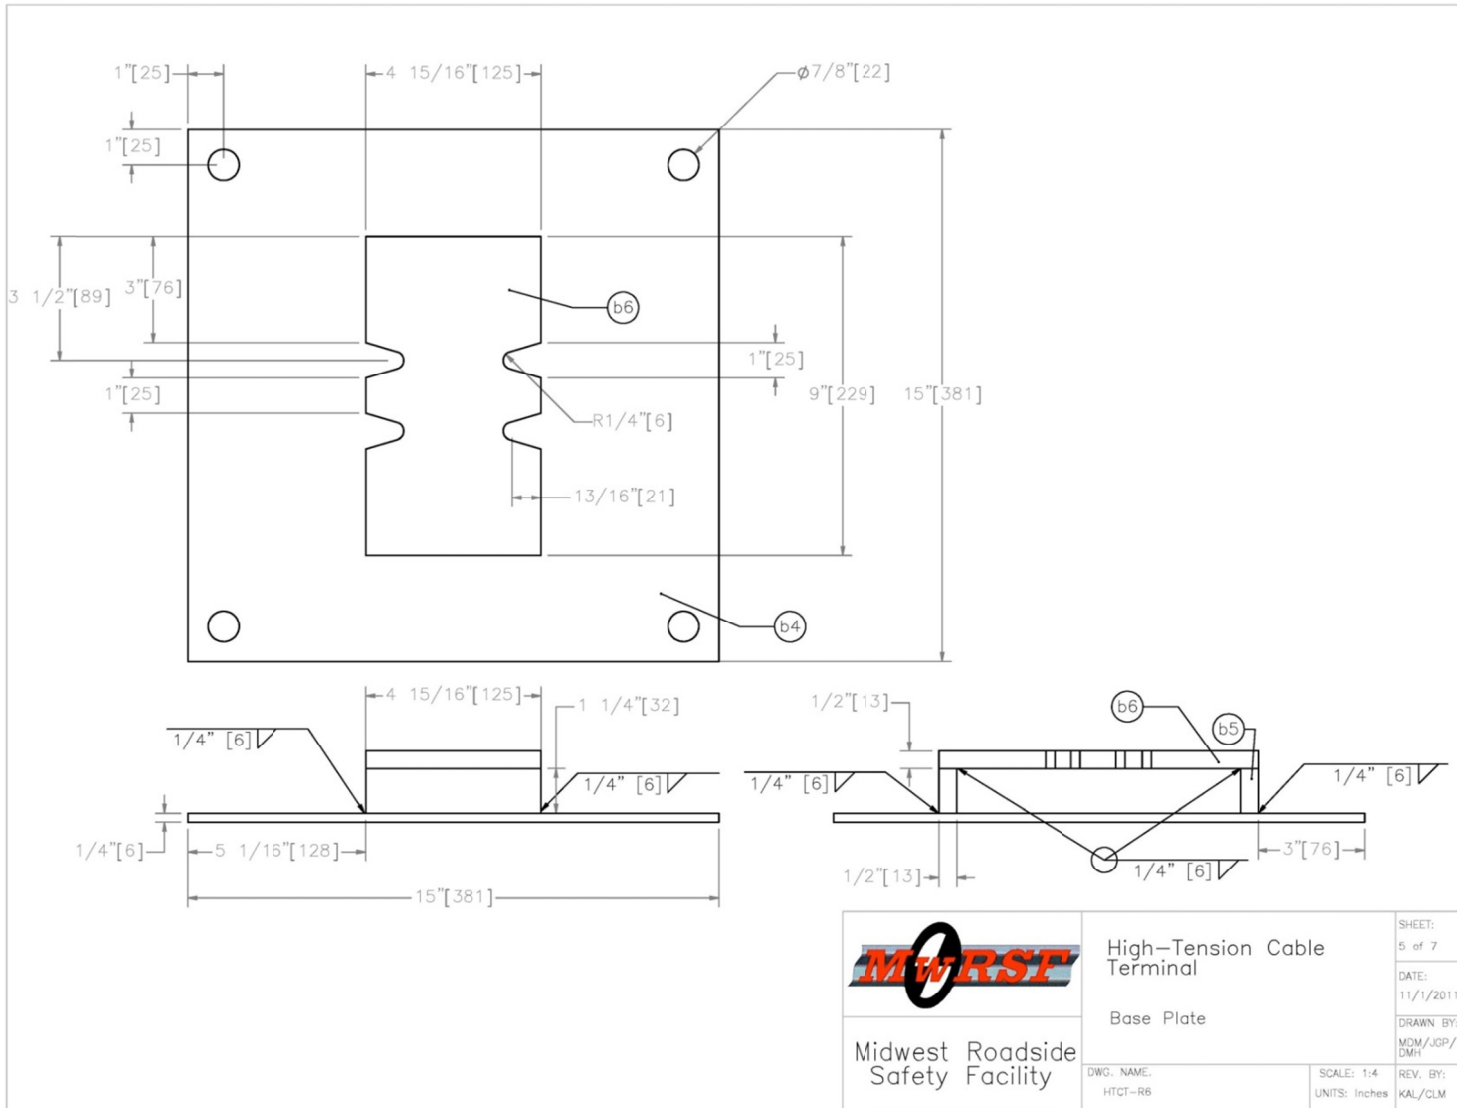


Figure 46. Slip Base Post Component Details, Test No. HTCT-1

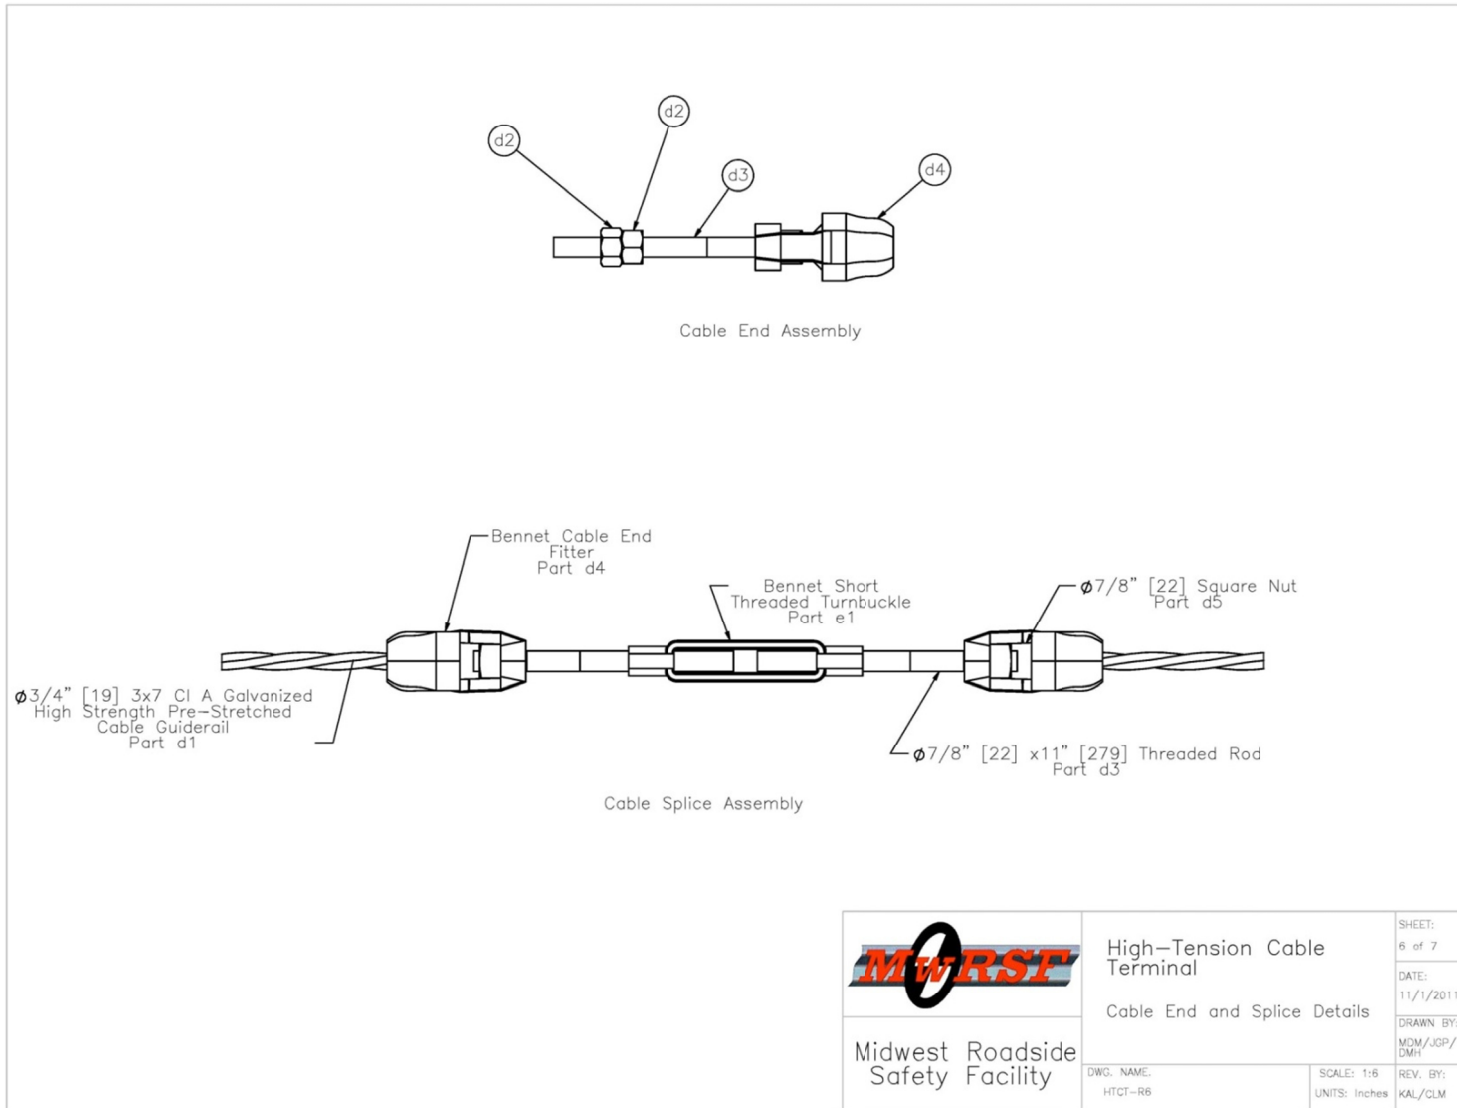


Figure 47. Cable End Fitters and Turnbuckle Details, Test No. HTCT-1

Item No.	QTY.	Description	Material Specifications	Hardware Guide
a1	2	Cable Anchor	ASTM A36	-
a2	2	Ø5/8" x 9 1/2" Long Hex Bolt and Nut	A307 & A563M	FBX16a
a3	2	Ø3/16" Brass Keeper Rod, 14" long	Brass Alloy 260	-
a4	8	CMB High Tension Anchor Plate Washer	ASTM A36	-
a5	2	Kicker Plate	ASTM A36	-
a6	24	Ø3/4" Flat Washer	Grade 2	FWC20a
a7	16	Ø3/4" dia. by 12" Long Threaded Rod	ASTM A193 Grade B7	-
a8	16	Ø3/4" Hex Nut	Grade 8	-
a9	8	3/4" Dia. by 6" Long Wedge-Bolt Anchor	Galvanized, Carbon Steel	-
b1	2	S3x5.7 Post - 28 1/8" Long	ASTM A572 GR50-07	-
b2	8	Ø1/2" x 2" long Hex Bolt	ASTM A307	FBX14a
b3	24	Ø1/2" Washer	ASTM A307	FWC14a
b4	2	15"x15"x0.25" Base Plate	ASTM A36	-
b5	4	1 1/4"x4 15/16"x1/2" Post Base Side	ASTM A36	-
b6	2	9"x4 15/16"x1/2" Top Base Plate	ASTM A36	-
b7	8	Ø1/2" Hex Nut	ASTM A563M	FBX14a
b8	2	2nd Post Cable Hanger	ASTM A36	-
b9	2	2nd Post Base Plate	ASTM A36	-
d1	4	Ø3/4" Cable	AASHTO M30 Type 1 Class A	-
d2	16	Ø7/8" Hex Nut	ASTM A563M	RCE03
d3	16	Cable End Threaded Rod	ASTM-A449	RCE03
d4	16	Bennet Cable End Fitter	ASTM-A47	RCE03
d5	16	Ø7/8" Square Nut	Grade 5	FNS20
e1	4	Bennet Short Threaded Turnbuckle	Not Specified	-
-	-	Powers AC100 Gold Epoxy	-	-


 Midwest Roadside Safety Facility	High-Tension Cable Terminal	SHEET: 7 of 7
	Bill of Materials	DATE: 11/1/2011
DWG. NAME: HTCT-R6	SCALE: None UNITS: Inches	DRAWN BY: MDM/JGP/ DMH
		REV. BY: KAL/CLM

Figure 48. Bill of Materials, Test No. HTCT-1

6.4 Equipment and Instrumentation

A variety of equipment and instrumentation was used to record and collect data.

Equipment and instruments utilized in this testing included:

- Bogie
- Accelerometer
- Pressure Tape Switches
- Digital Photographic Cameras

6.4.1 Bogie

A rigid frame bogie was used to impact the system. The bogie impact head was constructed of 8-in. diameter, ½-in. thick, standard steel pipe, with ¾-in. thick neoprene belting wrapped around the pipe to prevent local damage to the post from the impact. The bogie with the impact head is shown on the guidance track in Figure 49. The weight of the bogie with the addition of the mountable impact head was 1794.2 lbs. The impact head contacted the release lever at 19-in. above the ground. The target speed for the test was 45 mph.

A pickup truck with a reverse cable tow and guide rail system was used to propel and direct the bogie. The bogie was accelerated toward the system along the guidance system, which consisted of a steel pipe anchored above the tarmac. The bogie wheels were aligned for caster and toe-in values of zero so that the bogie would track properly. When the bogie reached the end of the guidance system, it was released from the tow cable, allowing it to be free rolling when it struck the cable release lever. A remote braking system was installed on the bogie to provide for safe deceleration of the bogie after the test.



Figure 49. Rigid Frame Bogie on Guidance Track

6.4.2 Accelerometer

One tri-axial, piezo-resistive, accelerometer system Model EDR-3 with a range of ± 200 g's was developed by Instrumented Sensor Technology (IST) of Okemos, Michigan and was mounted on the frame on the bogie near its center of gravity. Data sampling was at 3,200 Hz with a 1,120 Hz Butterworth low-pass filter with a -3 dB cut-off. Computer software, "DynaMax 1 3/4" and a customized "Microsoft Excel" worksheet were used to analyze and plot the accelerometer data [21].

6.4.3 Pressure Tape Switches

Four pressure tape switches, spaced at 3-ft intervals and placed near the end of the bogie track, were used to determine the speed of the bogie before the impact. As the right-front tire of the bogie passed over each tape switch, a strobe light was fired sending an electronic timing signal to the data acquisition system. Test speeds were determined by dividing the measured distance between the switches by the time between the electronic signals.

6.4.4 Digital Cameras

Three high-speed AOS XPRI digital video cameras, each with operating speeds of 500 frames/sec, were used to film the bogie test. Three JVC digital video cameras, each with an operating speed of 29.97 frames/sec, were also used to film the bogie test. Camera locations and camera lens information is shown in Table 8.

Table 8. Camera Locations, Speeds, and Lens Settings

	Camera No.	Type	Operating Speed (frames/sec)	Lens/Setting	Location/Distance
High-Speed Video	5	Vitcam X-PRI	500	Fujinon 50 mm Fixed	70 in. Away, Perpendicular to Upstream Anchor, and 35 in. Downstream
	6	Vitcam X-PRI	500	Canon 17-102 / 102	237 in. Away, Perpendicular to Upstream Anchor
	7	Vitcam X-PRI	500	Nikon 50 mm Fixed	344 in. Away, Perpendicular to First Slip Base Post
Digital Video	2	JVC - GZ - MG27u (Everio)	29.97	-	567 in. Away, Perpendicular with the Center of the System
	3	JVC - GZ - MG27u (Everio)	29.97	-	344 in. Away, Perpendicular to First Slip Base Post
	4	JVC - GZ - MG27u (Everio)	29.97	-	344 in. Away, Perpendicular to First Slip Base Post

6.5 Data Processing

The electronic accelerometer data obtained in dynamic testing was filtered using the SAE Class 60 Butterworth filter conforming to the SAE J211/1 specifications [22]. The pertinent acceleration signal was extracted from the bulk of the data signals. The processed acceleration data was then multiplied by the mass of the bogie to get the impact force using Newton's Second Law. Next, the acceleration trace was integrated to find the change in velocity versus time. Initial velocity of the bogie, calculated from the pressure tape switch data, was then used to determine the bogie velocity, and the calculated velocity trace was integrated to find the bogie's displacement. Combining the

previous results, a force vs. deflection curve was plotted for each test. Finally, integration of the force vs. deflection curve provided the energy vs. deflection curve for each test.

CHAPTER 7 - BOGIE TESTING – TEST NO. HTCT-1

7.1 Procedures

From the bogie test, information was desired to analyze the mechanics and structural adequacy of the cable anchor bracket assembly. Characterization of the bogie deceleration and force loading on the cable anchor bracket and lever arm was also of utmost importance in the test.

Although the acceleration data was applied from the bogie impact location, the data came from the center of gravity of the bogie. Error was added to the data since the bogie was not perfectly rigid and sustained vibrations. The bogie may have also rotated during impact, causing differences in accelerations between the bogie center of mass and the bogie impact head. While these issues may affect the data, the data was deemed sufficiently valid. Filtering procedures were applied to the data to smooth out vibrations, and the rotations of the bogie during test were minor.

The accelerometer data for the bogie test was processed in order to obtain acceleration, velocity, and deflection curves. The values described herein were calculated from the EDR-3 data curves.

7.2 Test Description, Test No. HTCT-1

Test no. HTCT-1 was performed at 0 degrees and 44.9 mph with the bogie impact head centered on the cable release lever. A sequential description of the impact events is contained in Table 9. During the test, the guide bracket and roller bearing on the bogie snagged on a concrete edge after exiting the test setup, and the bogie came to a rest roughly 43 ft downstream from the downstream anchor bracket. Time-sequential documentary photographs of the test are shown in Figures 50 and 51.

Table 9. Sequential Description of Impact Events, Test No. HTCT-1

TIME (sec)	EVENT
0.000	The cable release lever began to rotate backwards, forcing the cable end fitters up and out of their respective slots on the cable anchor bracket.
0.006	Slip base post no. 1 began to deflect upstream due to the stretching of the cables from the prying action of the release lever.
0.018	Cables have been fully released from their respective slots.
0.040	The system cables began to coil on the front of the bogie's impact head.
0.116	The bogie impacted slip base post no. 1.
0.118	Baseplate of slip base post no. 1 began to buckle as the slip connection did not immediately activate.
0.124	The welds between the top S3x5.7 post section and the slip plate broke causing the post to fail prior to activation of the slip base mechanism.
0.200	The bogie head impacted the cable turnbuckle from the second highest mounted cable.
0.370	The bogie impacted the second slip base post.
0.380	The welds between the top S3x5.7 post section and the slip plate on the second slip base post assembly broke prior to activation of the slip base mechanism, at roughly this time.
0.510	Bogie impacted the downstream cable release lever.
0.530	The left-front tire of the bogie impacted the downstream cable anchor bracket, causing the bogie to roll.
0.770	The bogie exited the field of view.

7.3 System Damage

The damage to system components in test no. HTCT-1 was moderate. Both of the slip base post assembly bases buckled under impact loading, and the top S3x5.7 post sections fractured off of the lower assembly due to weld failure in both cases. The detached S3x5.7 post sections exhibited some plastic bending in the impact region.

The upper edges of the cable slots on the upstream cable anchor bracket assembly showed some plastic bending as the cables were forced out of the slots. Other


components of the cable anchor bracket assembly were undamaged. There was some contact and/or gouging on the base plate of the upstream cable release lever due to highly concentrated contact forces with the cable end fitters. However, there was no plastic bending in the base plate or the vertical impact tubes. Damage photos are shown in Figures 52 through 58.



0.000 sec




0.006 sec

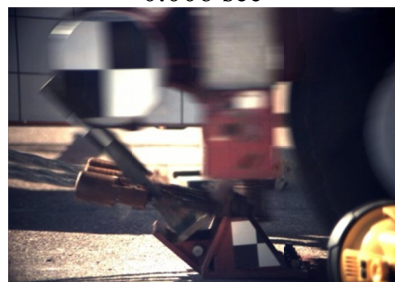


0.014 sec



0.018 sec

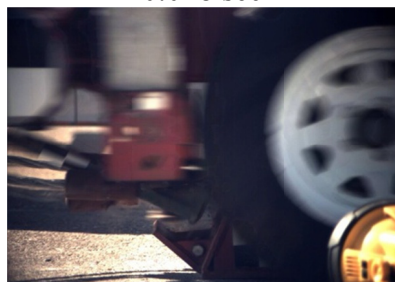

0.024 sec

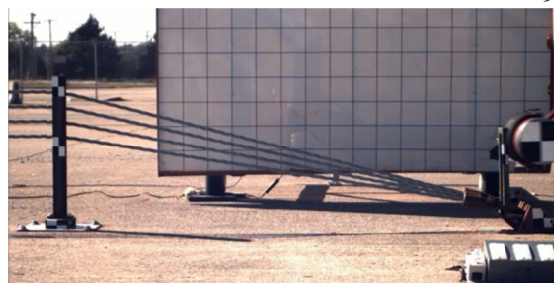

0.000 sec



0.018 sec



0.046 sec



0.116 sec



0.130 sec

Figure 50. Sequential Photographs, Test No. HTCT-1

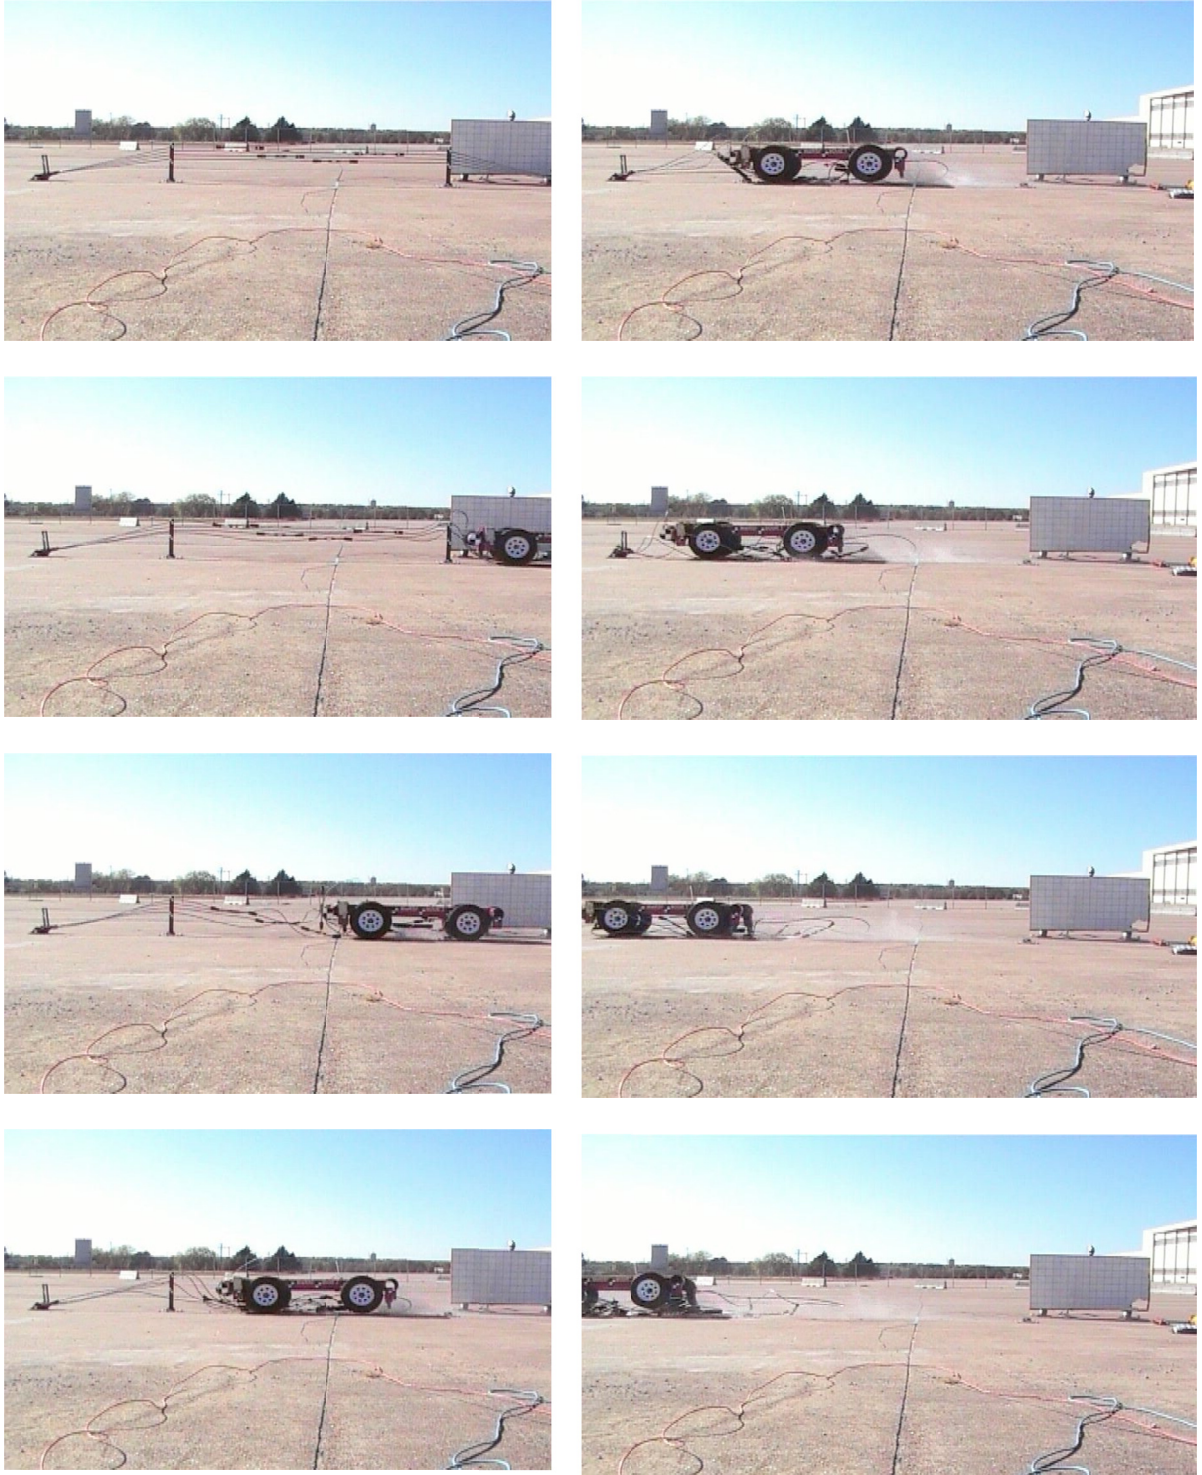


Figure 51. Documentary Photographs, Test No. HTCT-1

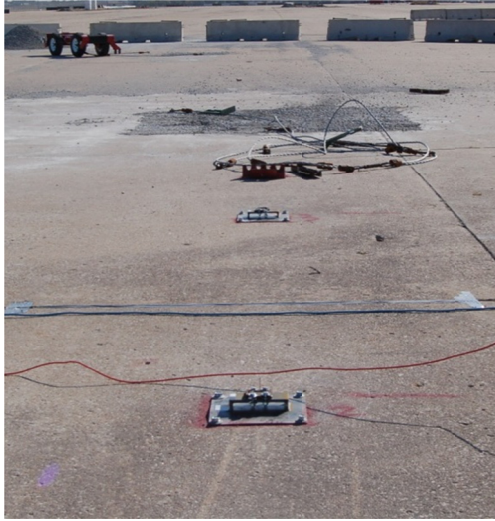


Figure 52. System Damage, Test No. HTCT-1



Upstream Cable Anchor Bracket Assembly – Pre-Test



Upstream Cable Anchor Bracket Assembly – Post-Test

Figure 53. System Damage, Test No. HTCT-1



Upstream Slip Base Post Assembly



Upstream Slip Base Post Assembly



Upstream Slip Base Post Assembly

Figure 54. System Damage, Test No. HTCT-1



Upstream Slip Base Post Assembly



Upstream Slip Base Post Assembly

Figure 55. System Damage, Test No. HTCT-1



Downstream Slip Base Post Assembly



Downstream Slip Base Post Assembly

Figure 56. System Damage, Test No. HTCT-1



Downstream Slip Base Post Assembly



Downstream Slip Base Post Assembly

Figure 57. System Damage, Test No. HTCT-1



Downstream Cable Anchor Bracket Assembly – Pre-Test



Downstream Cable Anchor Bracket Assembly – Post-Test

Figure 58. System Damage, Test No. HTCT-1

Force, velocity, and energy dissipation curves for the bogie test were created from accelerometer data and are shown Figures 59, 60, and 61, respectively. Also note that standard MwRSF bogie test documentation sheets can be found in Appendix C.

The maximum force during the test was due to the bogie impacting the two slip base posts. Peak force levels of 14.6 kips at 120 ms and 15.3 kips at 387 ms were experienced for the first and second slip base posts, respectively. Recall that in both cases, the slip base mechanism did not activate but rather the assembly failed due to weld fracture at the base of the upper post section and the support plate buckling. Had the slip base post functioned as designed it could be expected that the force levels would be lower.

The peak force for the bogie impact with the upstream cable anchor assembly was 5.0 kips which occurred at approximately 5 ms. Although the peak force was significant, the duration of the impact event was relatively short, which resulted in only 21.8 kip-in. of energy being dissipated. The energy loss equates to a 0.3 mph decrease in bogie velocity. The bogie impacts with the slip base posts absorbed an average of 43 kip-in. per impact. The impacts resulted in an average speed loss of 0.7 mph per impact.

At approximately 270 ms after impact, the bogie head impacted one of the cable turnbuckles. This impact resulted in a 6.5-kip force on the bogie. At approximately 520 ms, the bogie head impacted the downstream cable release lever. The peak force from impact was 3.2 kips or 32 percent less than that of the impact with the upstream anchor.

One reason for the significantly reduced peak impact force on the downstream cable anchor assembly was that the cable tension had been reduced to 0 after the release of the cables from the upstream anchor. The majority of the resistive force from impact

with the cable anchor bracket assemblies comes from the prying action of the cables from the slots. In order to release the cables from the slots, the release lever must overcome the force of friction caused by the cable tension on the cable plate. Since the cables had been released, there was no friction force to overcome, thus resulting in a lower resistive force.

The bogie's left-front wheel impacted the downstream cable anchor bracket at approximately 573 ms. The impact resulted in a peak force of 9.2 kip. After the bogie impact with the downstream cable anchor bracket, the bogie continued out of the system before coming to a stop downstream of the test setup.

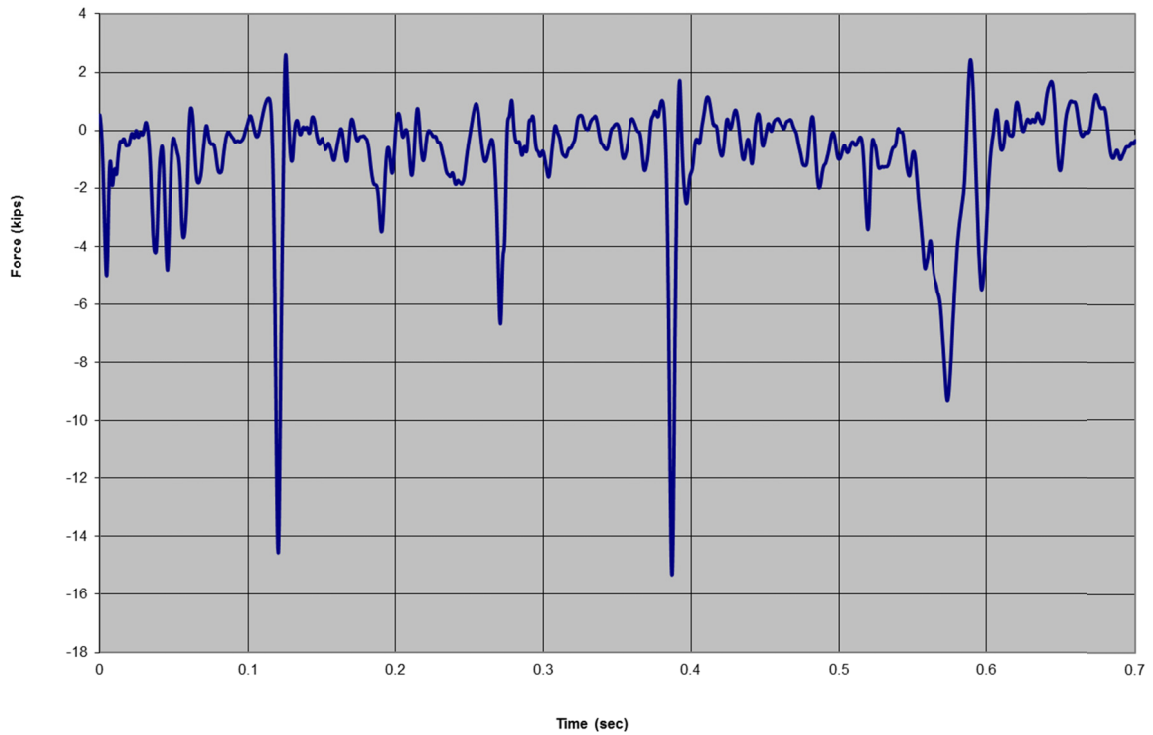


Figure 59. Force vs. Time, Test No. HTCT-1

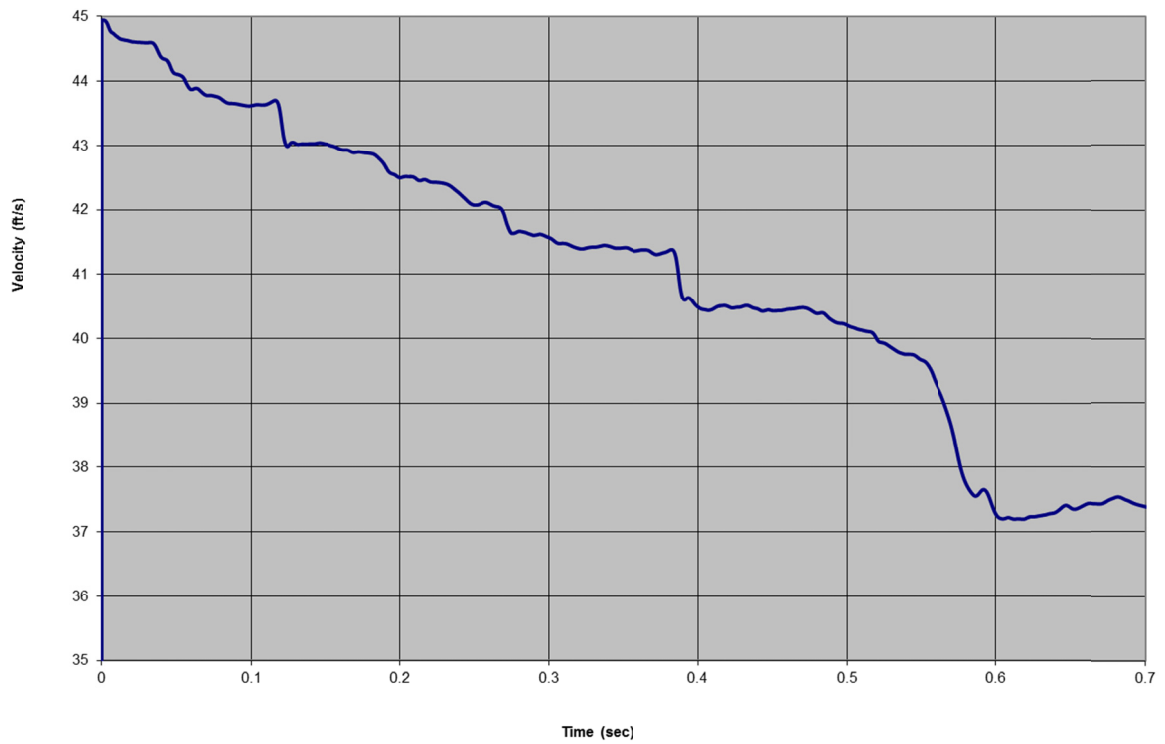


Figure 60. Longitudinal Velocity vs. Time, Test No. HTCT-1

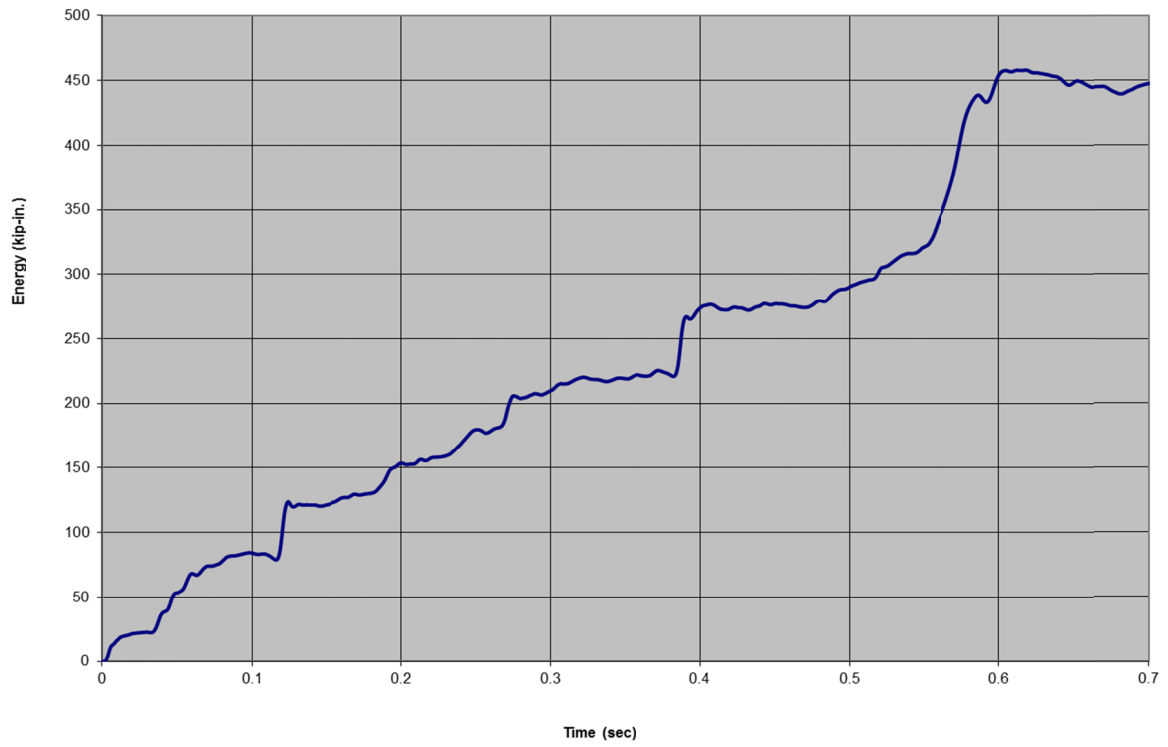


Figure 61. Energy vs. Time, Test No. HTCT-1

CHAPTER 8 - SIMULATION MODEL EVALUATION

8.1 Introduction

The results from the cable end terminal simulation and the associated physical bogie testing were compared to determine the effectiveness and accuracy of the simulation model. If the model showed good initial agreement with the physical testing, alternate high-tension, cable anchor bracket designs could be modeled and evaluated with confidence.

The main criteria used to evaluate the end terminal model were:

- mechanics of the cable release process;
- impact times of major system components;
- accelerometer data; and
- component damage.

8.2 High-Speed Video Comparison

High-speed video from test no. HTCT-1 was used to incrementally compare the release mechanics of the cables from the cable anchor bracket to the mechanics observed in the simulation model. A sequential comparison of the cable release event is shown in Figure 62. The cables showed smooth release without snag in both the simulation as well as the physical test. The cables fully released from the cable anchor bracket at roughly 18 ms as compared to 20 ms in the physical test. The error in release times could partially be attributed to frame rate limitations in physical testing. The frame rate on the actual high-speed cameras was 500 frames/sec. While this limitation is likely not the sole cause of the error, it could have contributed to the difference in release time.




The timing of the bogie impact with the slip base post correlated well between the simulation and the physical test. The bogie in the simulation impacted the slip base post at 111 ms. The bogie in test no. HTCT-1 impacted the slip base post at 116 ms. The error could again be partially attributed to frame rate limitations with the high-speed cameras or simplifications and assumptions made in the simulation model that led to a divergence from actual component behavior. Differences in cable material properties and interactions with the bogie impact head could have resulted in higher longitudinal changes in bogie velocity (Δv 's) and also contributed to the error. The higher Δv 's would increase the time between the initial impact with the cable lever arm and the impact with the slip base post. A sequential comparison of test no. HTCT-1 and the associated simulation is shown in Figure 63.

8.3 Accelerometer Data Comparison

Bogie velocity was also used to evaluate the accuracy of the simulation model. Accelerometer data captured during the actual and simulated bogie tests was processed in order to calculate and compare bogie velocities. The bogie velocities for the simulation and physical test are shown in Figure 64. The velocity trace is plotted through the impact with the upstream cable anchor assembly. However, it is cut off prior to the bogie's impact with the slip base post. Although similar failure modes were exhibited in both the simulation and the physical testing, the main focus of the comparison is the modeling of the cable anchor bracket and its release mechanics.

The velocity data agreed well between the physical bogie test and the simulation. The average error in velocity between the physical test and numerical simulation was 0.79 percent. After the anchor bracket impact, the bogie velocity in both the simulation

and physical test stabilized for a short time before small impacts with the system cables and other detached anchor bracket components. These secondary impacts caused small velocity reductions at roughly 35 ms after initial impact. The stabilized velocity in test no. HTCT-1 after impact with the cable anchor bracket was 44.6 mph, compared with 44.3 mph observed in the simulation. The resulting error in the Δv from the impact was 0.7 percent.

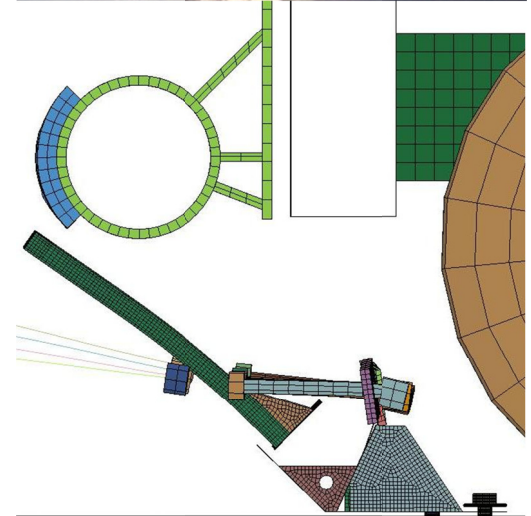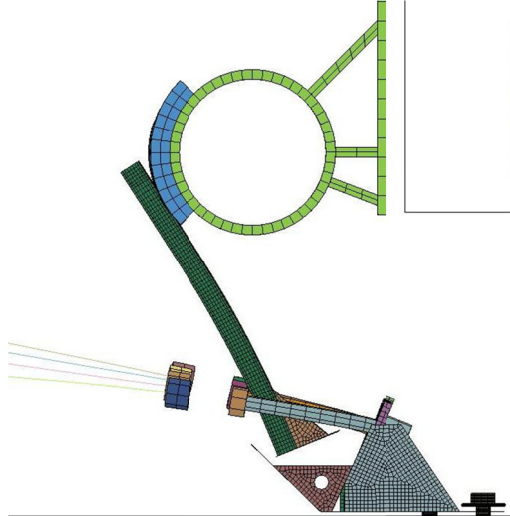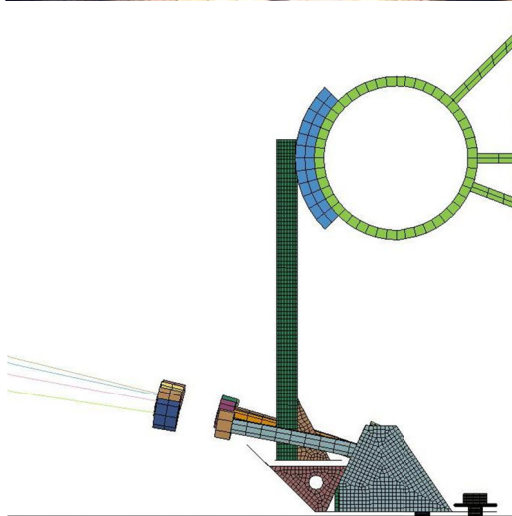

0 ms

10 ms

18 ms

Figure 62. Cable Release Event Comparison, Test No. HTCT-1 vs. Simulation



0.000 sec



0.000 sec




0.020 sec



0.020 sec




0.058 sec

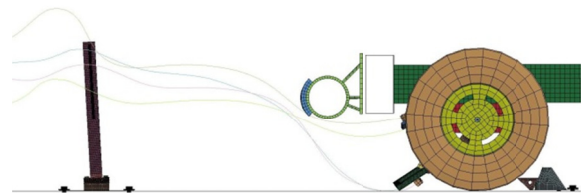

0.058




0.116 sec

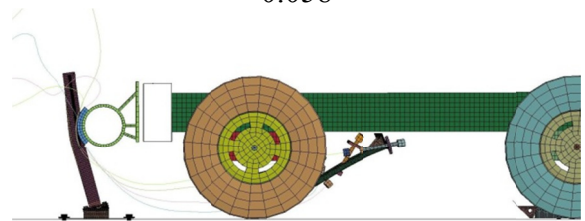

0.116 sec



0.124 sec

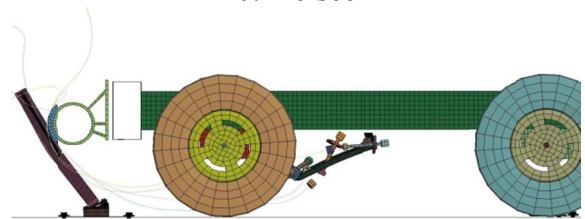

0.124 sec

Figure 63. Sequential Comparison, Test No. HTCT-1 vs. Simulation

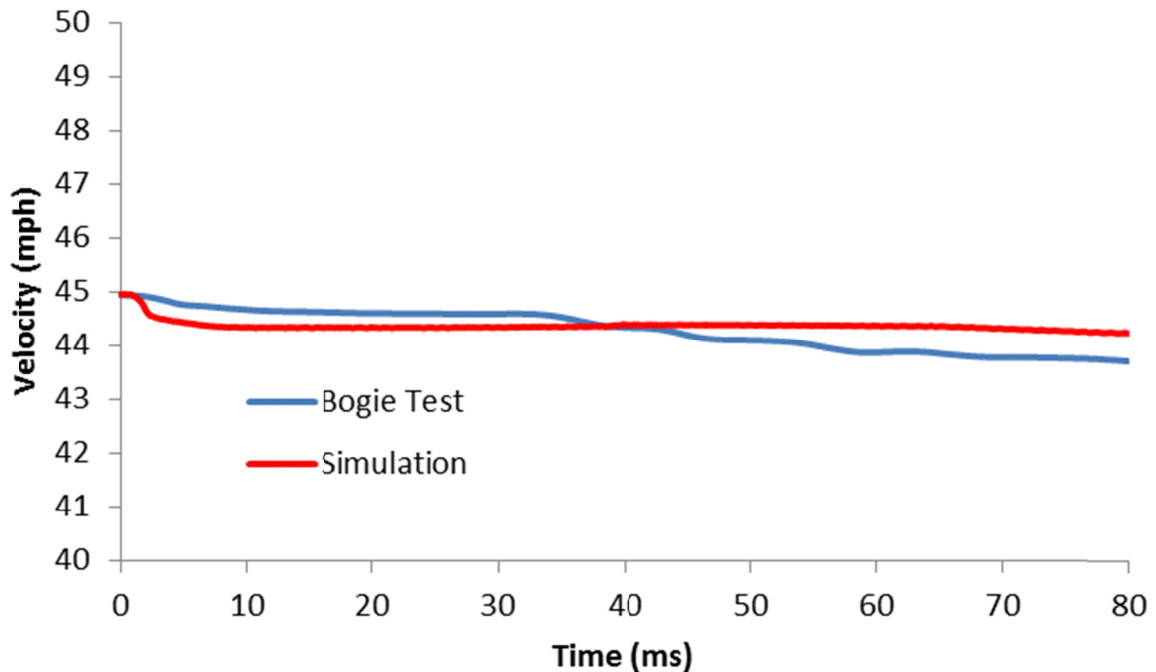


Figure 64. Bogie Velocity Comparison, Test No. HTCT-1 vs. Simulation

8.4 Component Damage Comparison

There was relatively little component damage to the cable anchor bracket assembly in both the physical testing and the simulation. The only permanent deformation to the assembly was plastic bending in the cable plate. The S3x5.7 post section on the first slip base post assembly sustained some plastic deformation in the impact region during the physical test and the simulation. A comparison of the damage is shown in Figures 65 and 66. Although the cable release lever did not sustain any damage, it was pulled downstream with the bogie after several of the system cables wrapped around the assembly's crossbar. This behavior occurred in both the simulation and the physical test. The cable release lever was pulled downstream in both the physical test and the simulation, as shown in Figure 67. Although the dynamics and trajectory of the lever do not match exactly between the simulation and physical test, the fact that the cables

wrapped around the crossbar in both events further support that the cable release event is being simulated accurately.

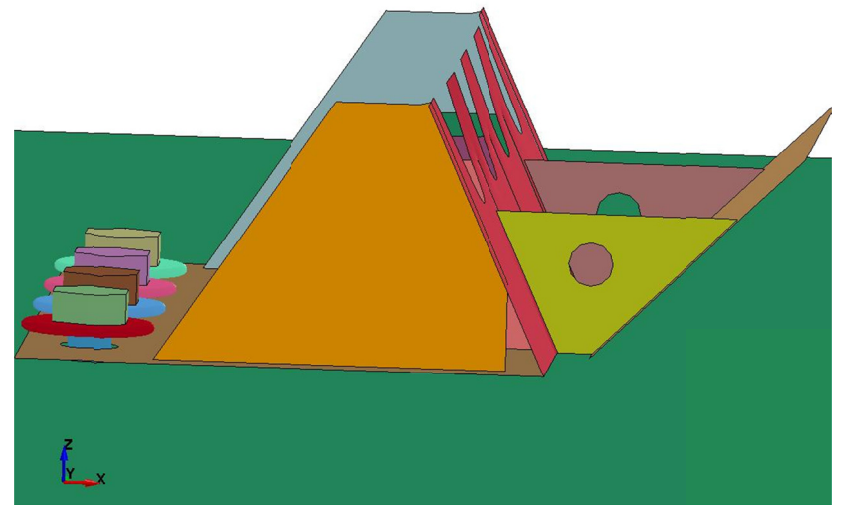
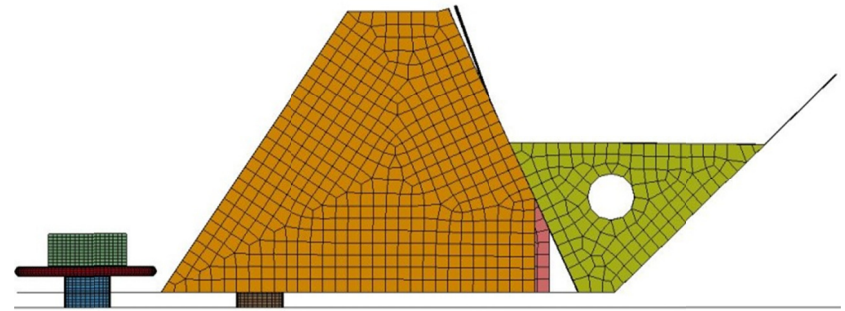


Figure 65. Upstream Cable Anchor Damage Comparison, Test No. HTCT-1 vs. Simulation

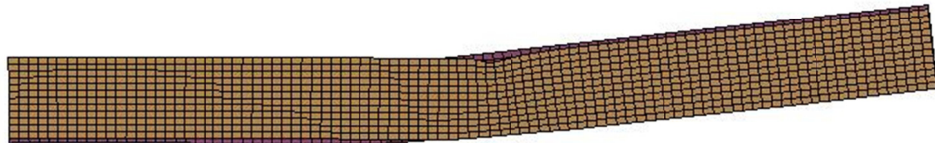


Figure 66. S3x5.7 Post Damage Comparison, Test No. HTCT-1 vs. Simulation

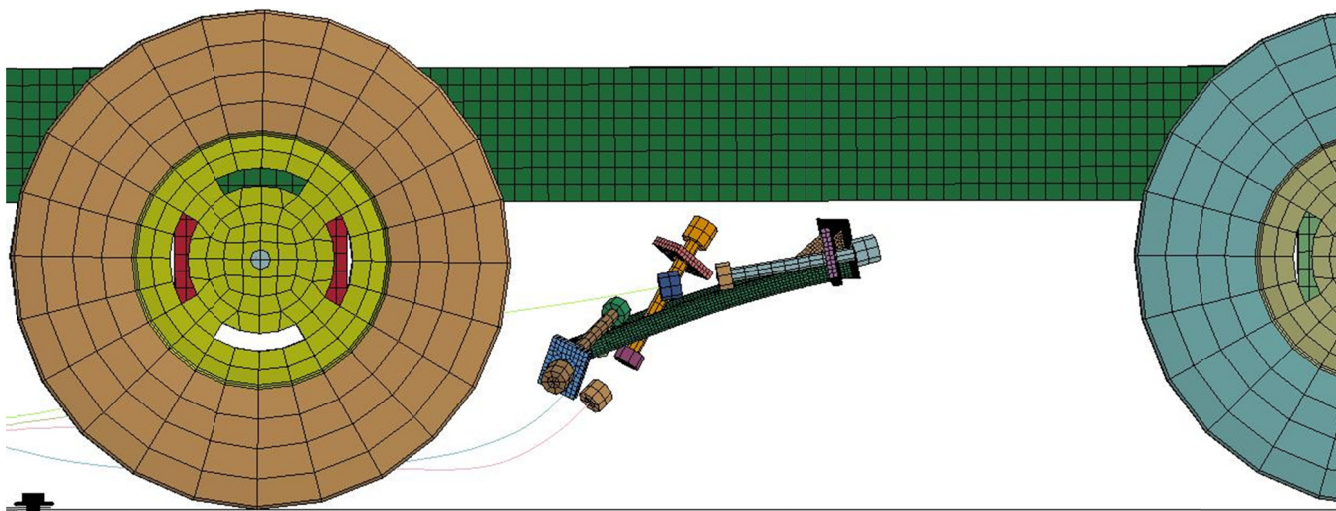


Figure 67. Release Lever Interaction with System Cables, Test No. HTCT-1 vs. Simulation

8.5 Discussion and Conclusions

Data from the simulation of the high-tension, cable anchor bracket and abbreviated end terminal model was compared with physical data from component testing. The timing of the cable release mechanism correlated well between the physical test and simulation. The cable release times and the bogie impact times with the slip base post in the physical test and the simulation were within 2 ms and 6 ms of each other, respectively. The velocity data obtained from the physical test and the simulation also compared well with less than 1 percent error in the bogie's Δv after impact with the cable anchor bracket assembly.

The discrepancy between the impact times can partially be attributed to differences in system cable dynamics and trajectory as they impacted the bogie head. The cables appeared to coil more on the bogie head during the physical test, which would have resulted in a greater Δv . Frame rate limitations with the high-speed cameras used in the bogie test could have also introduced some uncertainty with exact event times.

There was very little component damage to the cable anchor bracket during test no. HTCT-1. Damage that did occur to the anchor bracket was concentrated in the cable plate. The deformation to the cable plate on the anchor bracket was replicated well during the simulation. No other permanent deformation to the anchor bracket or its components occurred during the bogie test.

In both the simulation and the physical test, the system cables wrapped around the cable release lever and pulled it downstream. The trajectory and dynamics of the release lever were not replicated very accurately. The trajectory, however, is highly dependent on the lever's interaction with the system cables, among other things. The cable model is

sufficiently accurate for its intended use in simulations. However, there are differences and simplifications used to model the cables that would unrealistically effect its interaction with other system components. Small differences in mass distribution over the cable lever could also have large effects on the dynamics and trajectory of the assembly.

With the agreement between the results of the simulation and the subsequent test no. HTCT-1, the simulation model can be used with confidence. Moving forward, alternate anchor bracket designs and modifications can be first evaluated using the model.

Although simulation is a powerful tool, it cannot be used to definitively evaluate designs. Physical testing is still the most important aspect of the design process. The model is, however, sufficiently accurate to identify potential problems with prospective high-tension, cable anchor bracket designs. Once the most promising design candidates have been identified, they can then be further evaluated with component and full-scale testing to definitively assess their effectiveness.

CHAPTER 9 - REDESIGN OF THE HIGH-TENSION CABLE ANCHOR

BRACKET ASSEMBLY

9.1 Introduction

The current high-tension cable anchor bracket assembly design was modeled to function much like the previously-tested, low-tension cable anchor bracket assembly. Unlike the low-tension cable anchor bracket assembly, the high-tension design has not been fully evaluated in full-scale crash testing. Since the designs are similar, however, it can be expected that the high-tension cable anchor bracket assembly will perform comparably to the low-tension design in many aspects. As such, any issues that were exposed during full-scale testing of the low-tension cable anchor bracket assembly will also likely be evident with the high-tension design.

With this in mind, a redesign of the high-tension cable anchor bracket assembly was necessary to ensure that future testing would not be subject to the same issues as its low-tension counterpart. Alternative designs for the high-tension cable anchor bracket assembly were modeled and evaluated. The finite element code LS-DYNA was the primary evaluation tool utilized in the design process.

Simulation results with the current design showed good initial agreement. Therefore, it is reasonable to assume that modeling alternative designs can be used as a good initial evaluation of potential designs. Data obtained from test no. HTCT-1 was also used to support alternative design components and features. Design methodology, criteria, and results are summarized in the ensuing chapter.

9.2 Design Issues

The first step in the redesign of the high-tension cable anchor bracket assembly was to identify areas for improvement from the previous design as well as the current design. The new design should not pose any additional concerns. Data from previous testing as well as simulation results were used to detect issues and concerns with the low-tension cable anchor bracket assembly and the current high-tension cable anchor bracket assembly design.

It is important to remember that there are several desirable features of the low-tension cable anchor bracket assembly. Primarily, it performed well in full-scale crash testing as it smoothly released the system cables upon vehicle impact with the cable release lever. The anchor bracket assembly also successfully anchored the system cables during system strength tests. The high-tension design has been used with tangent system tests and has proved to be structurally adequate [23]. The current cable anchor bracket assembly demonstrated positive structural performance during full-scale crash testing beyond the length-of-need as part of several research and development program. Thus, the structural features of the cable anchor bracket assembly were kept intact with only minimal changes to component geometry.

9.2.1 Cable Release Lever

Based on crash testing performance, the low-tension cable end terminal was approved for roadside implementation. The vehicle trajectory and interaction with the system resulted in high roll and yaw angles and caused some concern over vehicle stability. The cable anchor assembly contributed to the exhibited trajectory as the cable release lever impacted the underside of the vehicle and wedged into the ground. The

impact resulted in increased vehicle decelerations and a yaw and roll force being applied to the right side of the vehicle. To eliminate any secondary impacts, the cable release lever must not be pulled downstream by the system cables. This change would eliminate any unintended, secondary impacts between the cable release lever and the vehicle, thereby reducing the magnitude of yaw and roll exhibited by the impacting vehicle.

To protect against the cable release lever being pulled downstream, it could be secured to the cable anchor bracket assembly with a rotational joint. There would still be potential for the cable release lever to be pulled downstream, however, since previous testing showed that the cables consistently wrapped around the lever's cross arm. This behavior resulted in the cable release lever being pulled downstream as the cables retracted from the downstream tension. Therefore, the cross arm of the cable release lever was eliminated.

The cross arm was a precautionary component in the original design to ensure a distributed load was applied to the release lever base plate in order to allow for a smooth, even rotation and release of the cables. In previous testing, however, there was never any indication that the cross arm was necessary for the successful release of the cables. Based on these observations, it is assumed that the elimination of the cross arm will have little to no effect on the release mechanics or overall performance of the cable anchor bracket assembly.

9.2.2 Cable Release Lever Rotation Point

Another issue that was identified in the simulation of the current high-tension cable anchor design was that the release of the cables occurred over a period of 18 ms, while the release of the cables in the low-tension design took only 8 ms. Both designs

successfully released the cables; however, a longer release time may result in greater decelerations and increased yaw imparted to the vehicle. While vehicle yaw alone is not a concern, minimizing it is preferred to obtain a stable vehicle trajectory.

The increased release time is partially due to a higher friction force that must be overcome during the rotation of the cable release lever assembly. The higher friction force results from the increased cable tension and the additional system cable. A free body diagram of the forces involved in the release of the cables is shown in Figure 68.

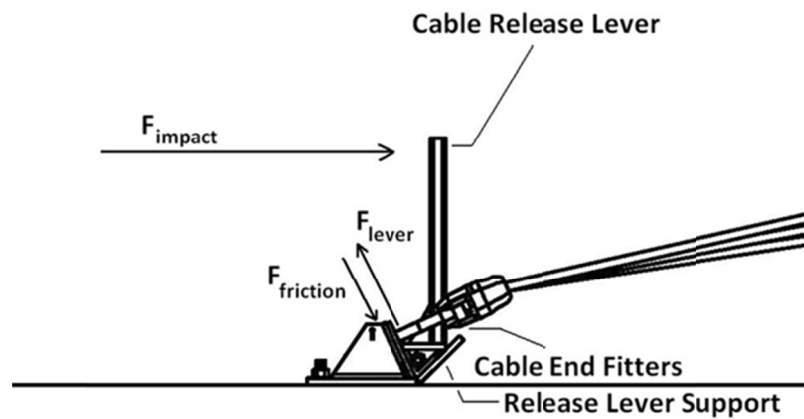


Figure 68. Simplified Free Body Diagram of Cable Release Lever During Cable Release

In order for the cable release lever to begin to rotate, the lever force, F_{lever} , must be greater than the friction force due to the contact between the plate washers on the cable end fitters and the cable plate. The lever force is generated as a result of a moment force applied by the impacting vehicle, F_{impact} , and the corresponding upward prying action. The friction force between one of the washers and the cable plate can be calculated using equation 1.

$$F_{friction} = F_{normal} \cdot \mu_{static-dynamic} \text{ (eq. 1)}$$

where

$$F_{friction} = \text{Friction Force}$$

$$F_{normal} = \text{Normal Force}$$

$$\mu_{static-dynamic} = \text{Coefficient of Static or Dynamic Friction}$$

The normal force in equation 1 can be approximated as the cable tension. The static/dynamic coefficient will remain constant between the low-tension and high-tension tests. Therefore, the total normal force will increase from 2.7 kips to 16.8 kips with the addition of one cable and an increase in cable tension from roughly 900 lbs/cable to 4,200 lbs/cable.

Another reason for the increased release time pertains to the geometry of the cable anchor bracket assemblies. The two cable anchor bracket assemblies are shown in Figure 69. The rotation point for the cable release lever on the low-tension, cable anchor bracket assembly was located 5/8-in. above the bottom of the cable slots on the cable plate. The rotation point for the cable release lever on the high-tension cable anchor bracket assembly was located 1/2-in. below the bottom of the cable slots on the cable plate. The low-tension, cable anchor bracket assembly's geometry allowed for more upward movement of the cables with less rotation of the release lever due to the higher rotation point.

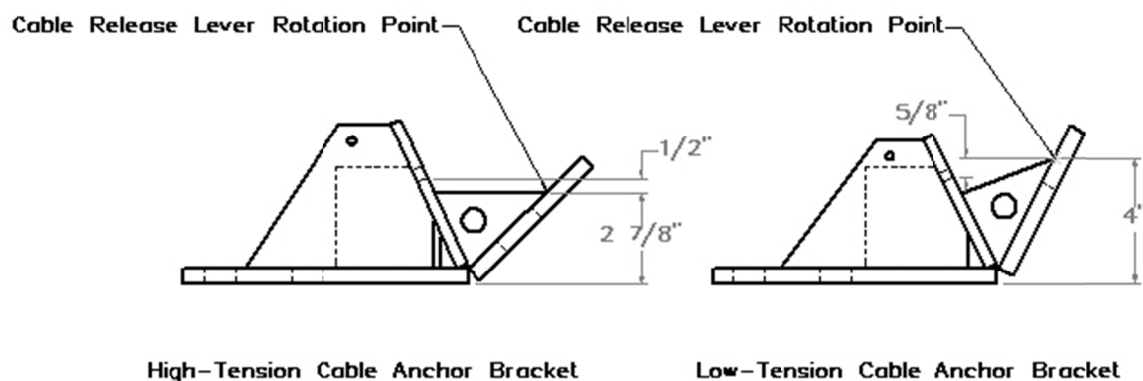


Figure 69. Rotation Point Comparison

Both anchor bracket assemblies exhibited smooth release of the cables in physical testing. However, a quicker release is more desirable as it would reduce the contact time between the vehicle and the anchor assembly. The reduced contact time could reduce yaw and potentially lead to a more controlled vehicle trajectory. Thus, minimizing the contact time between the cable anchor bracket assembly and an impacting vehicle was a goal of the redesign effort.

9.2.3 Cable Anchor Bracket Assembly Geometry

The overall dimensions (i.e. height and width) of the current high-tension cable anchor bracket assembly design also raised some concerns. MASH specifies that a breakaway device shall have a stub height of no higher than 4-in. [7]. While the cable anchor bracket assembly is not technically a breakaway device, the fixed anchor portion of the assembly could pose some risk of undercarriage damage to the impacting vehicle if it is too high. The current height of the assembly is 5-in. In order to mitigate risks of undercarriage damage and occupant risk, the gusset and cable plate height should be decreased by 1-in. so that the assembly would meet the MASH specification.

Another concern regarding the geometry of the current high-tension cable anchor bracket assembly pertains to its overall width. The current assembly is shown in Figure 70. During the assembly of the four cables and end fitting hardware and placement into the cable anchor bracket assembly, space may be somewhat limited. This could potentially result in difficult system construction.



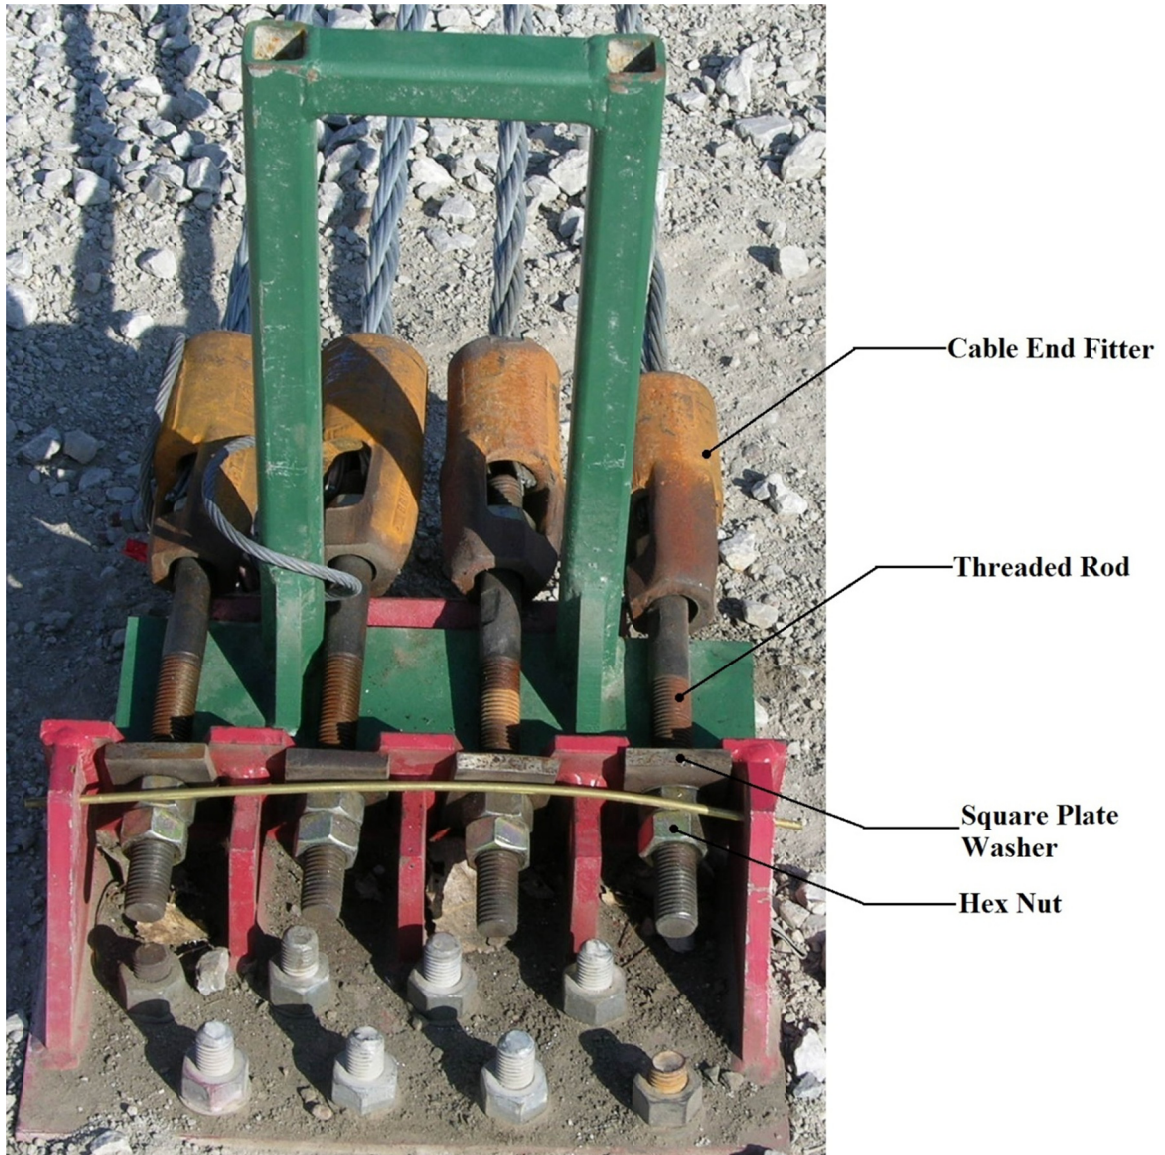


Figure 70. Cable End Fitter Interference

In the current design, four cable end fitters are placed side by side in their respective slots, thus leaving very little room for adjustments within the assembly. Cable tension is achieved by tightening the inline cable turnbuckles and cable end fitters. As cable tension is increased, the cable end fitters move closer together horizontally, thus reducing the spacing between them. This movement is exhibited in Figure 71.

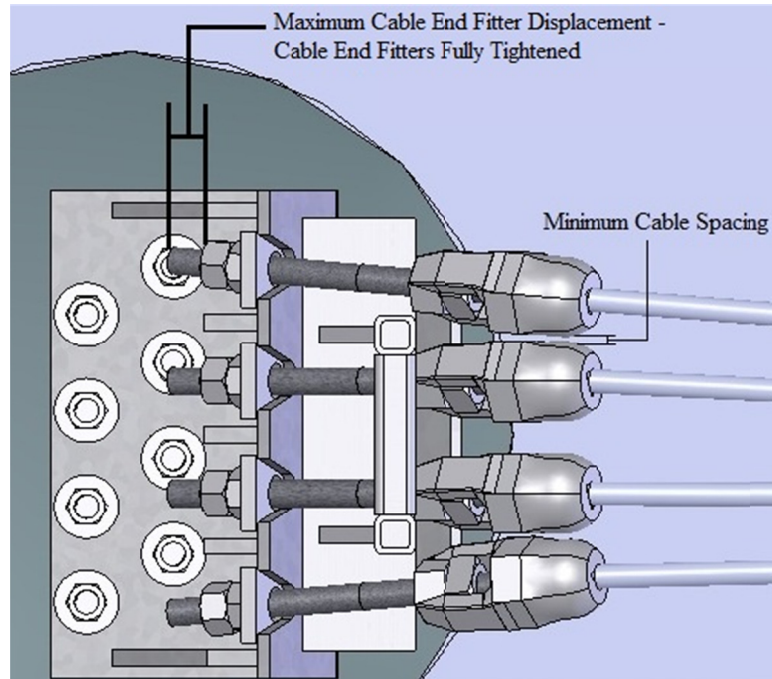

Cable End Fitters at Minimum Cable Spacing

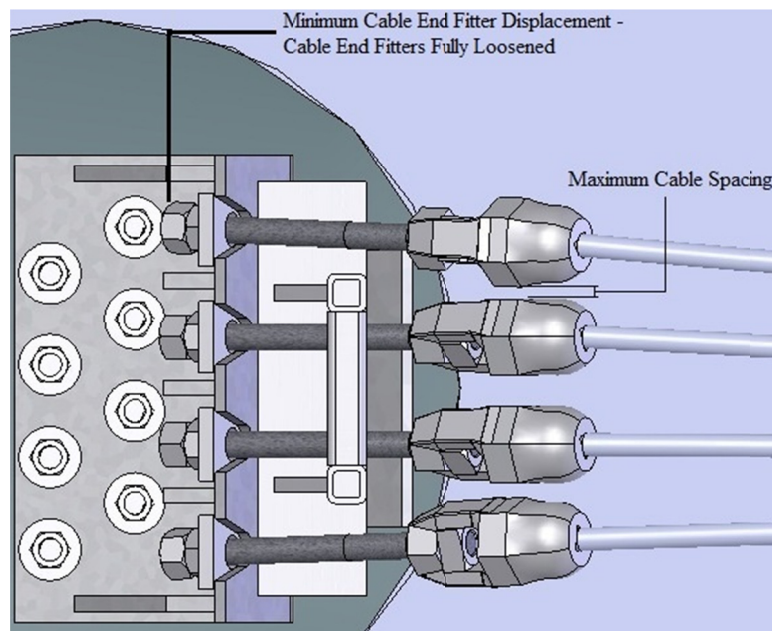

Cable End Fitters at Maximum Spacing

Figure 71. Cable End Fitter Movement

The smaller the spacing between the end fitters, the more difficult it is to assemble the anchor bracket. There is also a limit to how much slack can be taken up in the end fitters since the end fitters will eventually contact each other and cause flexural deformations in the threaded rods.

Aside from issues with tensioning the cables, the cable end fitters could also inhibit the rotation of the cable release lever if they are spaced too closely together. Although it is possible that the cables could still release, bogie testing of this scenario would be required to verify that this configuration would not significantly alter the cable release mechanics.

To eliminate any uncertainty with the performance of the cable anchor bracket assembly, the new design for the cable anchor bracket assembly should be widened. Widening the anchor bracket assembly would also improve the ease of assembly of the anchor bracket and cable end fitters as well as allow for sufficient play in the cable end fitter assemblies.

9.3 Alternate Design Development

Based on the investigation of the low-tension cable end terminal tests as well as in field cable anchor bracket assembly observations, the following design aspects were incorporated into a redesign of the high-tension cable anchor bracket assembly:

- rotating cable release lever with means of retention during impact;
- increased height of rotation point for cable release lever relative to cable slots;
- reduced overall height of cable anchor bracket assembly to 4-in.; and
- widened cable anchor bracket assembly from 15 $\frac{1}{4}$ -in. to 19 $\frac{3}{4}$ -in.

9.3.1 Redesigned, High-Tension, Cable Anchor Bracket Assembly Model

Development

In order to evaluate potential designs and modifications, a finite element model was developed for use with the LS-DYNA FE code. An initial, finite element model of the redesigned cable anchor bracket assembly is shown in Figure 72.

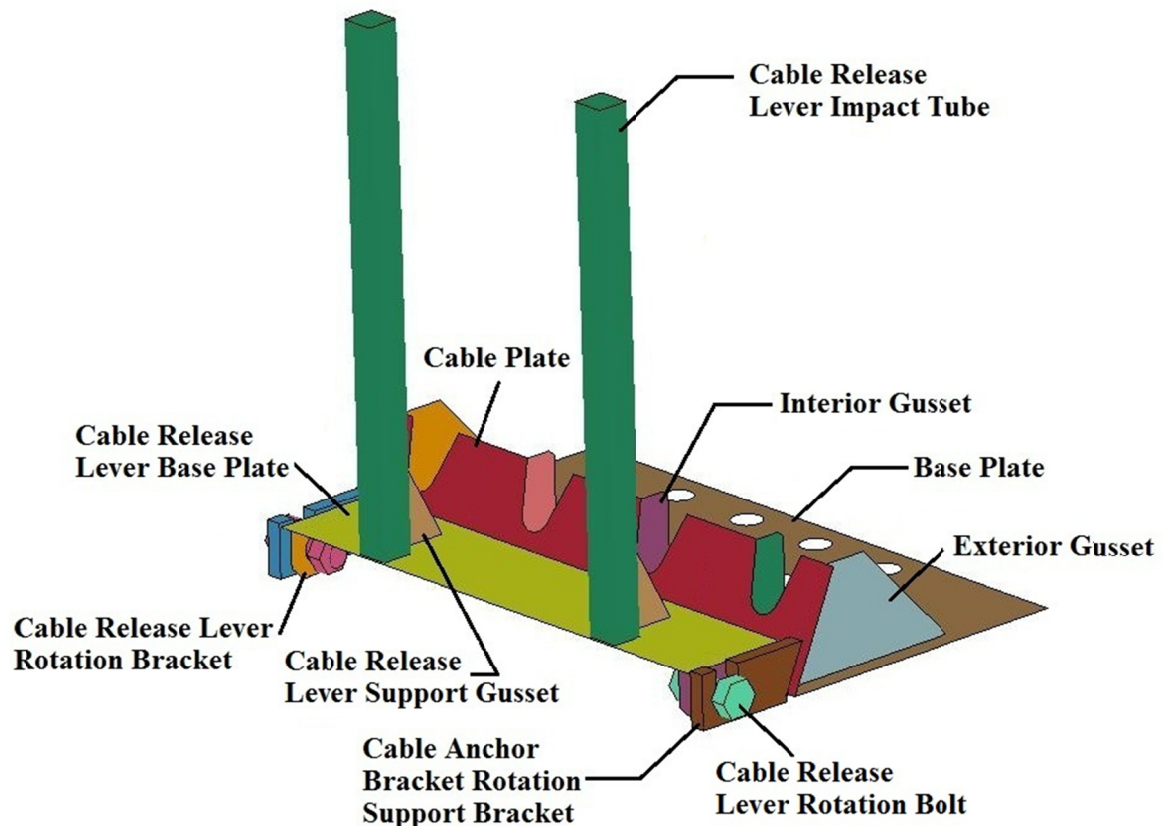


Figure 72. Redesigned Cable Anchor Bracket Assembly Model

The primary purpose of the redesigned, high-tension, cable anchor bracket assembly was to release the system cables when the cable release lever was impacted by a vehicle. Since the mechanics enabling the release of the cables was similar to those in the previous design, many of the element and material formulations were reused.

Geometric modifications had to be made to many components to incorporate the previously-outlined design changes.

It was necessary to model several new components used in the assembly. Those components are described in the ensuing subsections. A summary of the redesigned, anchor bracket assembly components and their associated element and material types is shown in Table 10.

Table 10. Summary of Redesigned Cable Anchor Bracket Assembly Model Properties

Part Name	Element Type	Element Formulation	Material Type	Material Formulation
Interior Gusset	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Exterior Gusset	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Base Plate	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Cable Plate	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Cable Anchor Bracket Rotation Support	Solid	Fully Integrated S/R	ASTM A36	Piecewise, Linear Plastic
Release Lever Support Gusset	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Cable Release Lever Impact Tube	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Cable Release Lever Rotation Bracket	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Release Lever Base Plate	Shell	Belytschko-Leviathan	ASTM A36	Piecewise, Linear Plastic
Cable Release Lever Rotation Bolt	Solid	Fully Integrated, S/R	ASTM A307	Piecewise, Linear Plastic

9.3.1.1 Cable Release Lever Rotation Brackets

Brackets needed to be attached to the cable release lever assembly in order to retain the release lever after the release of the cables. To accomplish this, two brackets

were modeled and attached to the underside of the release lever base plate. An initial bracket model was discretized using three-noded and four-noded shell elements. A piecewise-linear, plastic material model with ASTM A36 steel material properties was specified for the bracket. A Belytschko-Leviathan element formulation was specified for the shell elements. The bracket model is shown in Figure 73.

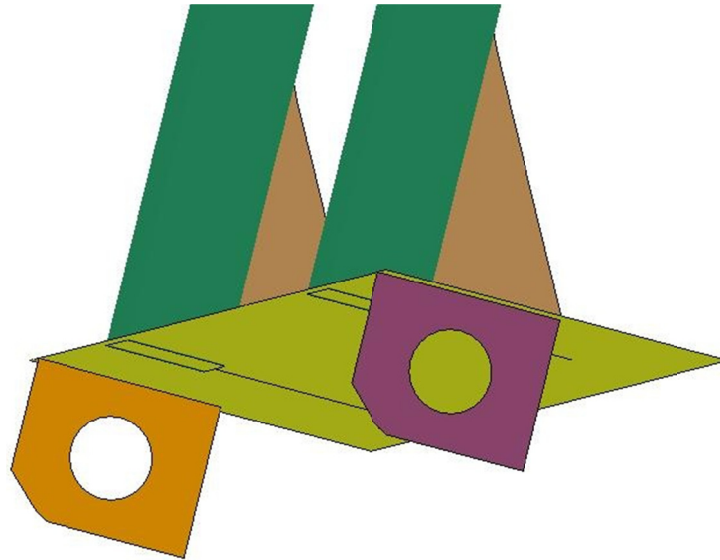


Figure 73. Cable Release Lever Rotation Bracket Model

9.3.1.2 Cable Anchor Bracket Assembly Rotation Support Brackets

A new bracket was necessary to support and accommodate the rotation of the cable release lever assembly during the cable release. Two brackets were attached to the front of the cable plate to create a rotational joint on the front of the cable anchor bracket assembly. A preliminary design was modeled using eight-noded hexagonal elements. A piecewise-linear, plastic material model with ASTM A36 steel material properties was specified for the bracket model. A Fully Integrated S/R solid element formulation was used for the solid elements. The bracket model is shown in Figure 74.

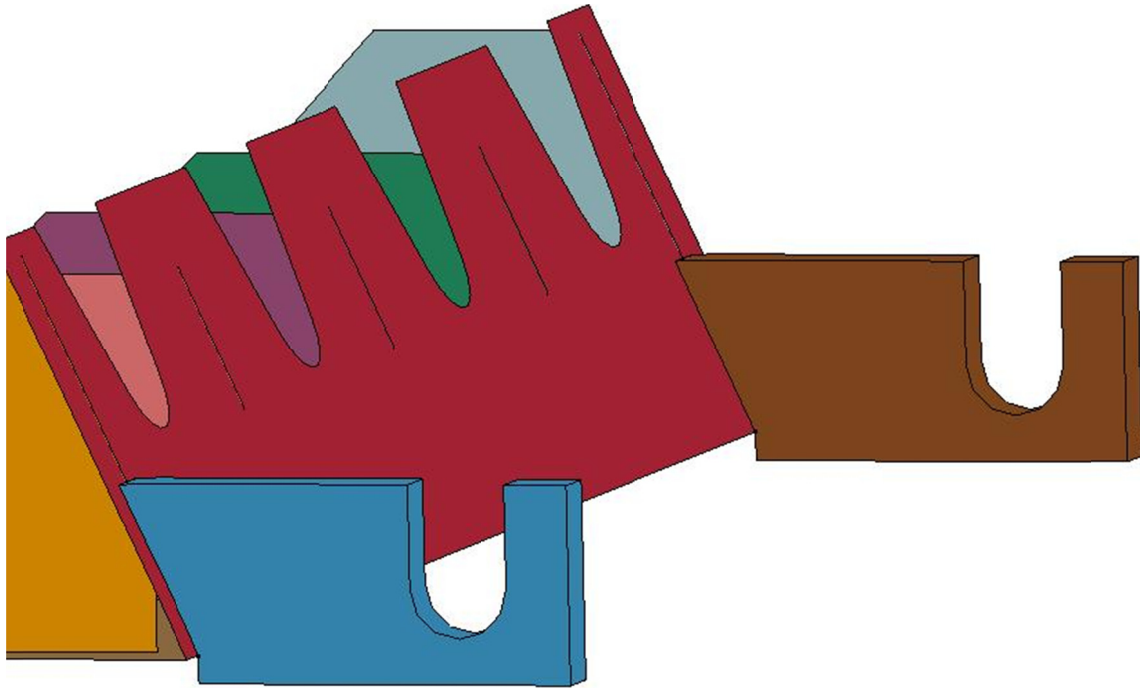


Figure 74. Cable Anchor Bracket Assembly Rotation Support Bracket Model

9.3.1.3 Cable Release Lever Rotation Bolts

Two $\frac{3}{4}$ -in. diameter x 2-in. long ASTM A307 hex bolts were specified to attach the release lever brackets to the support brackets. The bolts were modeled using eight-noded hexagonal elements. A piecewise-linear, plastic material model with ASTM A307 steel material properties was specified for the bolt model. A Fully Integrated S/R solid element formulation was used for the solid elements.

9.3.2 Model Development Simulations

Once a finite element model of the redesigned, high-tension cable anchor bracket assembly had been completed, the model was inserted into the previously-constructed bogie test simulation model. The current design of the high-tension cable anchor bracket assembly model used in the validated simulation was replaced with the redesigned anchor

model to evaluate its performance and identify any potential design issues. Similar bogie impact conditions were used.

9.3.2.1 Simulation No. 1 - Initial Anchor Bracket Assembly Model

Initial simulations with the redesigned, cable anchor bracket assembly resulted in questionable performance. Although the assembly did release the cables, the cable release lever was not retained. The retention of the cable release lever was one of the primary goals of the redesign. The cable release lever as it is detaching from the anchor bracket assembly during the simulation is shown in Figure 75.

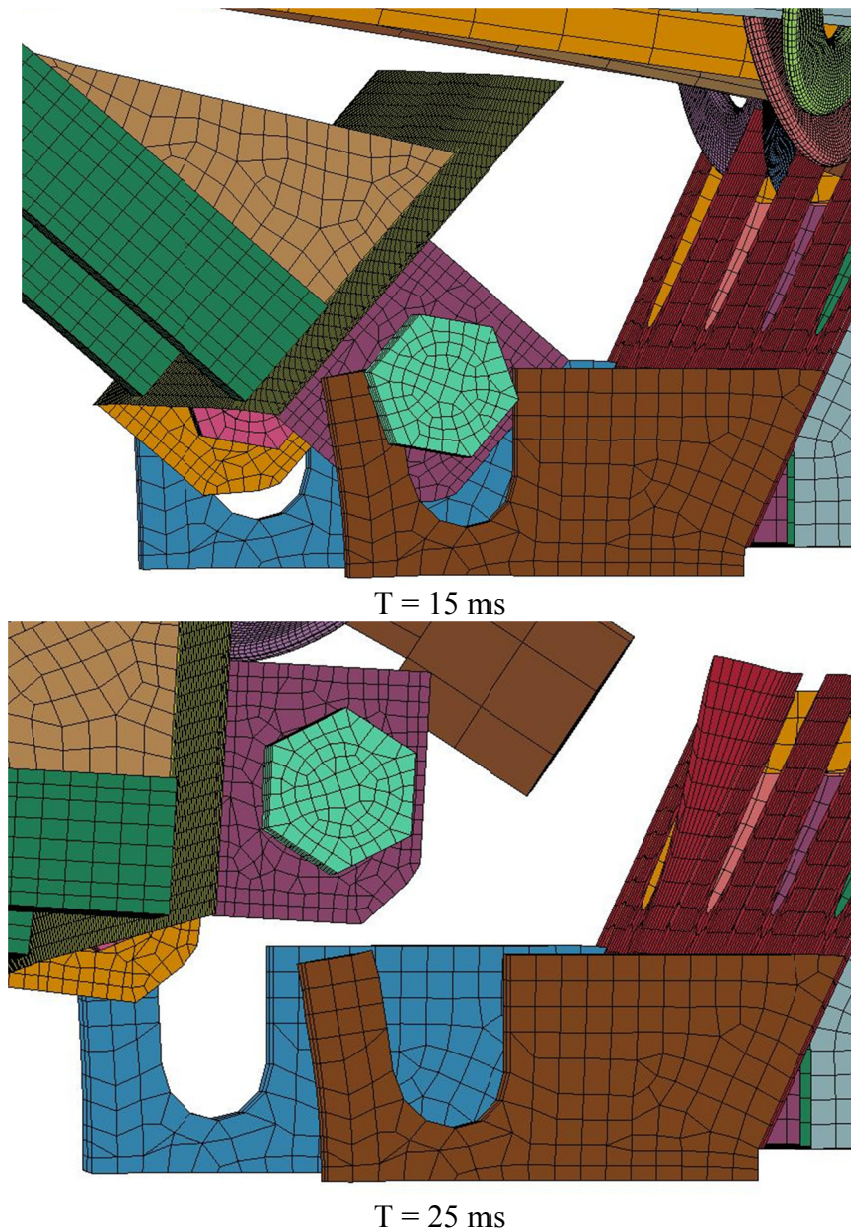


Figure 75. Release Lever Disengaging from Assembly, Simulation No. 1

It was determined that the cable anchor bracket rotation support bracket's geometry and performance was the primary cause for the cable release lever not being retained. Deformation in the bracket slot as well as the bracket height allowed for the cable release lever rotation bolts to slide upwards out of the slot. It was concluded that

the bracket's geometry was the primary reason the cable release lever was able to disengage from the rest of the assembly.

9.3.2.2 Simulation No. 2 – Redesigned Support Bracket and Cable

Release Lever Model

Following the poor performance observed in the initial simulation attempt, the cable anchor bracket rotation support bracket's geometry was redesigned in an attempt to retain the cable release lever. The results and behavior of the previous simulation were studied and numerous component simulations with varying bracket geometries were conducted. Alternate cable release lever concepts were also analyzed in order to determine the design which resulted in optimum cable release mechanics. Release lever concepts investigated included rotation brackets with slots instead of holes, varying the location of the impact tubes and support gussets, and changing the angle of the cable release lever base plate.

It was determined that a taller support bracket would perform better. The slot in the support bracket was also angled back towards the anchor bracket to inhibit the bolt from riding up in the slot. A cable release lever base plate with a mounting angle of 11.5 degrees was selected to use with the updated model. Initial analysis of the new configuration showed that the angled baseplate would reduce the cable release time and result in better cable release mechanics. The redesigned bracket and cable release lever are shown in Figures 76 and 77, respectively. The new design was then inserted into the bogie model and simulated.

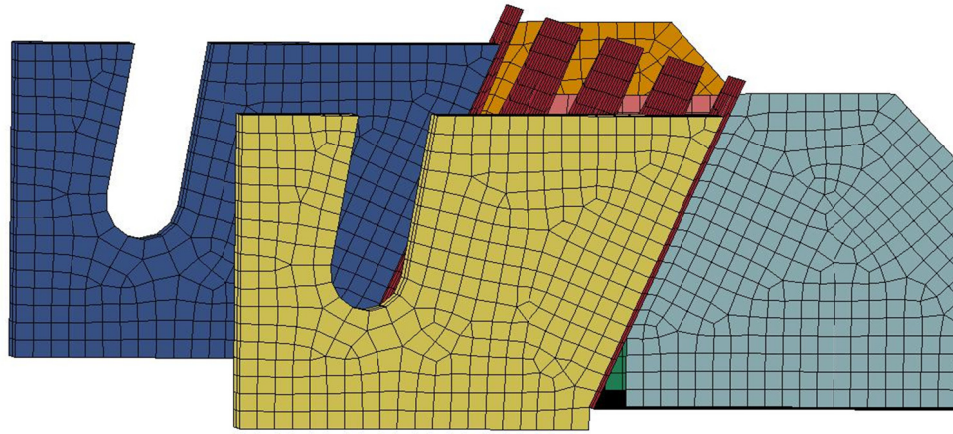


Figure 76. Redesigned Cable Anchor Bracket Support Bracket Geometry

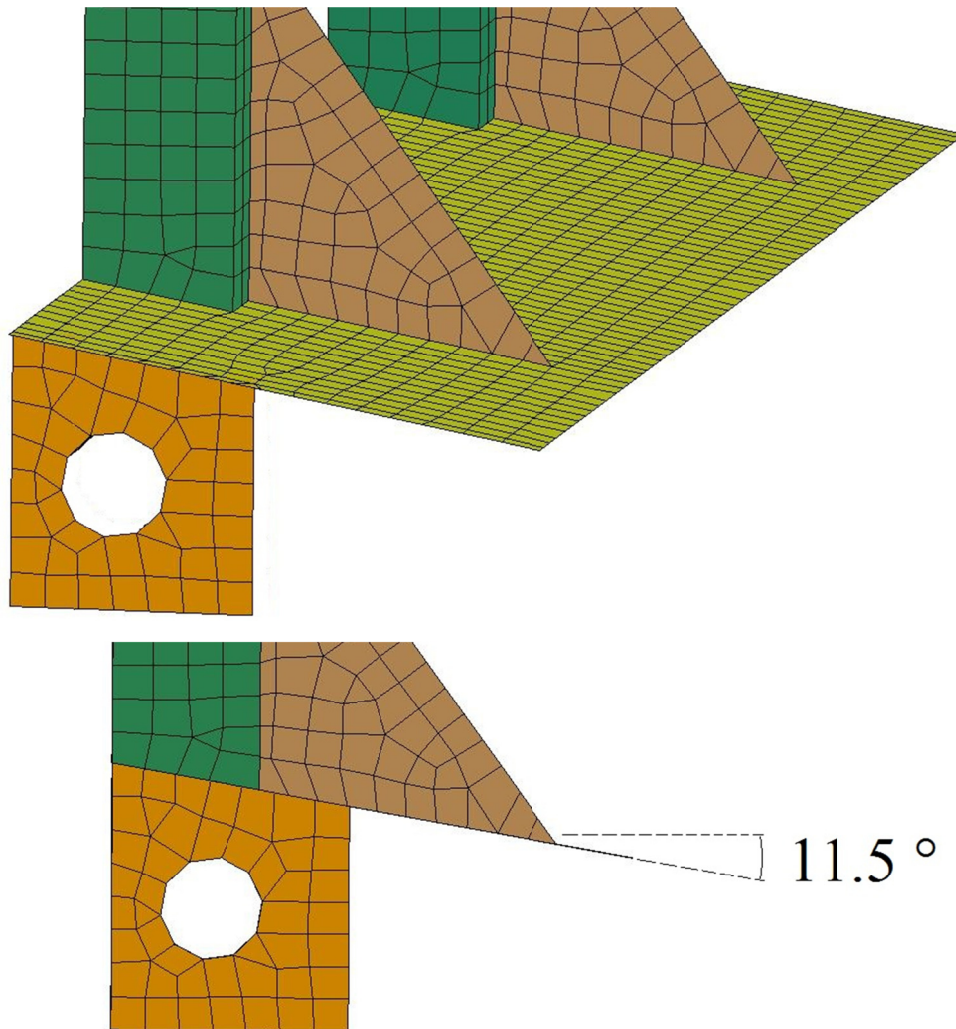


Figure 77. Redesigned Cable Release Lever, Angled Base Plate

The redesigned cable anchor bracket assembly encountered several issues during the second round of simulation. During simulation no. 2, the cables were released successfully. However, there was severe damage to the anchor bracket assembly. The release of the cables took much longer than in previous simulations as well.

The poor release mechanics were primarily due to the release lever assembly binding up upon impact. The binding was caused when the bolts which connect the release lever rotation brackets to the cable anchor rotation support brackets rotated downwards. This created a distorted rotational joint on the front of the cable anchor bracket. The distorted joint resulted in deformation in the release lever base plate. The base plate deformation delayed the cable release and led to high impact forces being imparted to the rest of the assembly. This behavior resulted in the damage to the cable release lever assembly as well as the support brackets. Hardware damage and rotation behavior are shown in Figures 78 through 80.

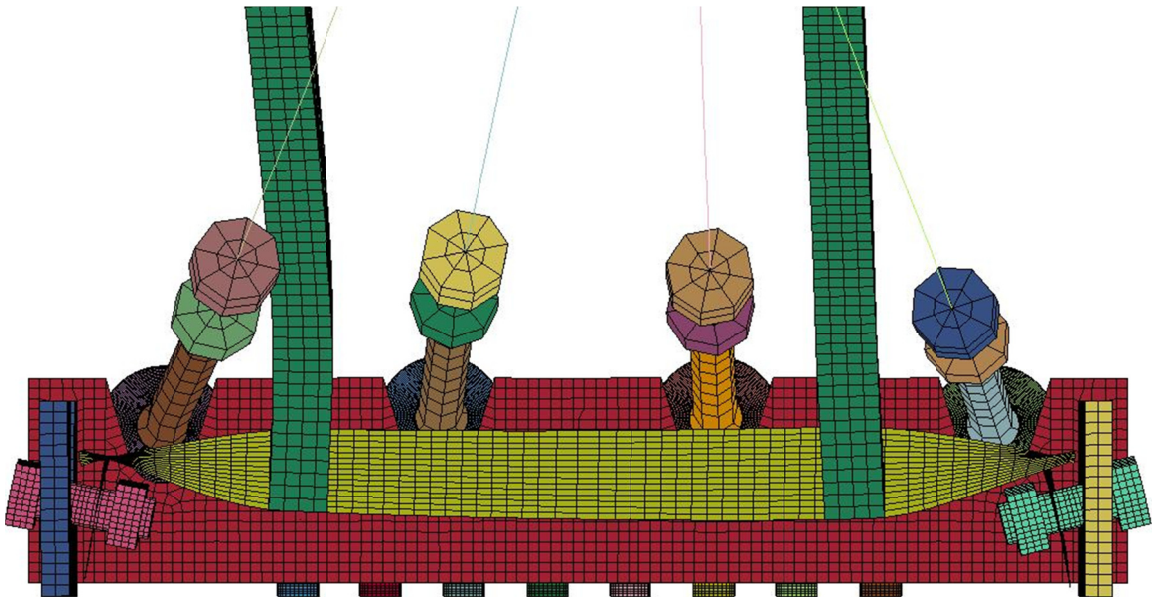


Figure 78. Distorted Joint on Cable Anchor Bracket Assembly, Simulation No. 2

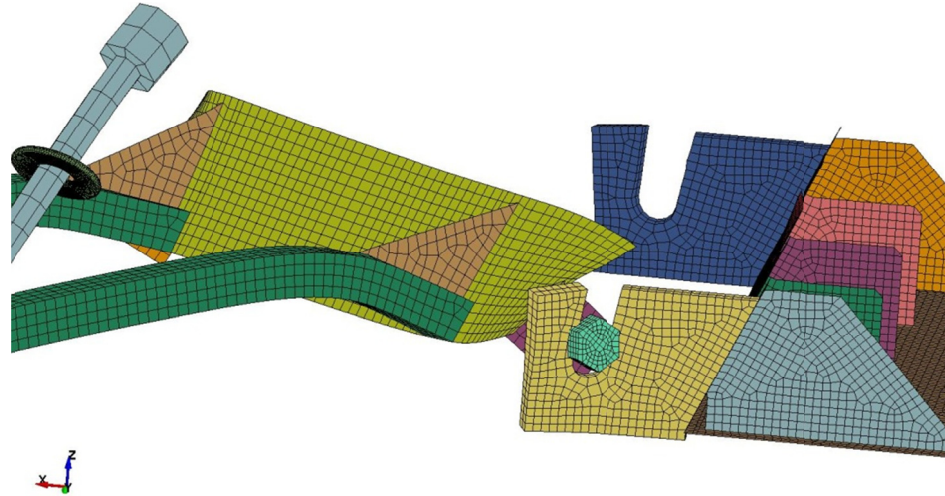


Figure 79. Anchor Bracket Assembly Damage, Simulation No. 2

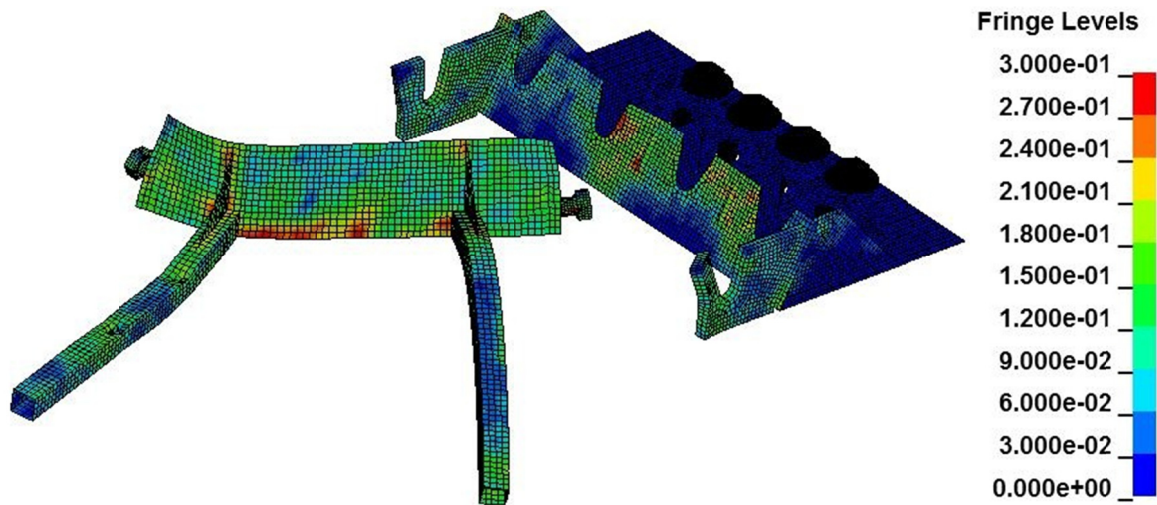


Figure 80. Anchor Bracket Assembly von Mises' Stress, Simulation No. 2

While the results of simulation no. 2 were ultimately unacceptable, the support brackets exhibited much better performance. The taller brackets held the release lever in place, although this is partially what contributed to the severe damage. Since the release lever assembly could not slide upwards in the support bracket slot, the bolts rotated downwards, which initiated the rotation issues. As the cable anchor rotation support brackets served their intended purpose, no modifications were made to their design.

9.3.2.3 Simulation No. 3 – Redesign of Rotational Joint Hardware

To address the rotation issues, several possible solutions were investigated. Washers were placed in between the bolt head and the outer face of the support bracket. While this improved the stability of the rotational joint, there was still some bolt rotation. This led to similar damage to the anchor bracket and release lever assembly, although not to the same extent as seen in simulation no. 2. The bolt rotation with inserted washers is shown in Figure 81.

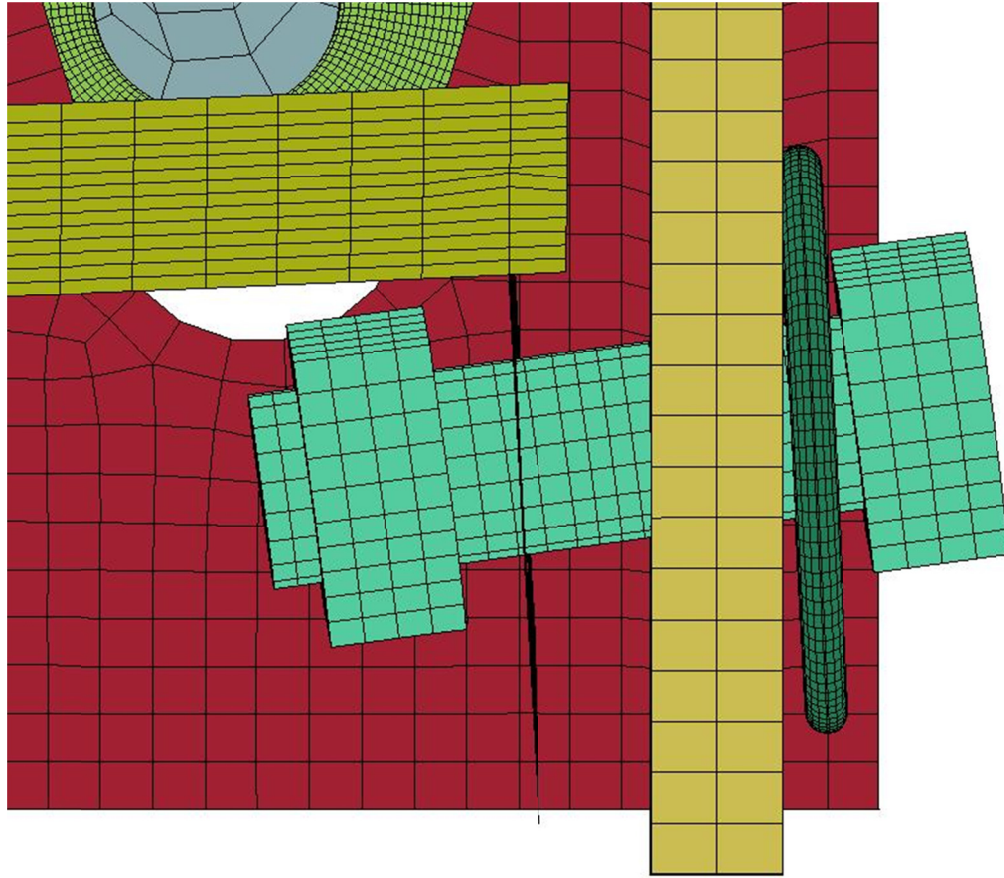


Figure 81. Bolt Rotation with Washer

After the washers did not correct the issue, the two bolts were exchanged for one long, steel rod with threaded ends. As long as the rod does not fail, the rotational joint should remain intact. The washers were used again between the nuts at each end of the rod and the outer surface of the support brackets. The washers were reused to ensure that there was no pullout of the rod in the support bracket slots. The anchor bracket assembly with the rod and washers is shown in Figure 82.

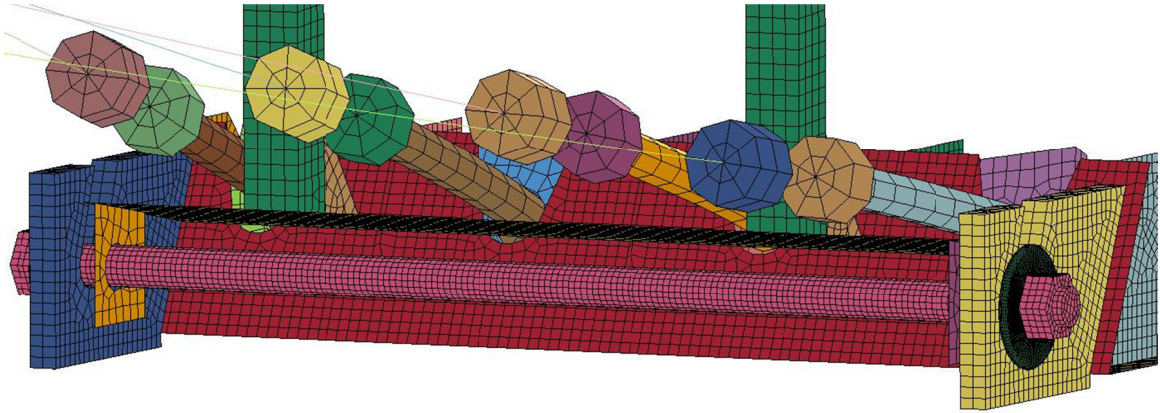


Figure 82. Anchor Bracket Assembly with Rod

During simulation no. 3, the cable release lever rotated smoothly during impact. The cables were released evenly and without incident. At the conclusion of the simulation, the cable release lever was successfully retained. There was some slight deformation to the vertical release lever tubes, and extensive deformation to the angled cable plate. The support brackets and remainder of the anchor bracket assembly were undamaged during the simulation. The cable anchor bracket assembly at the conclusion of simulation no. 3 is shown in Figure 83.

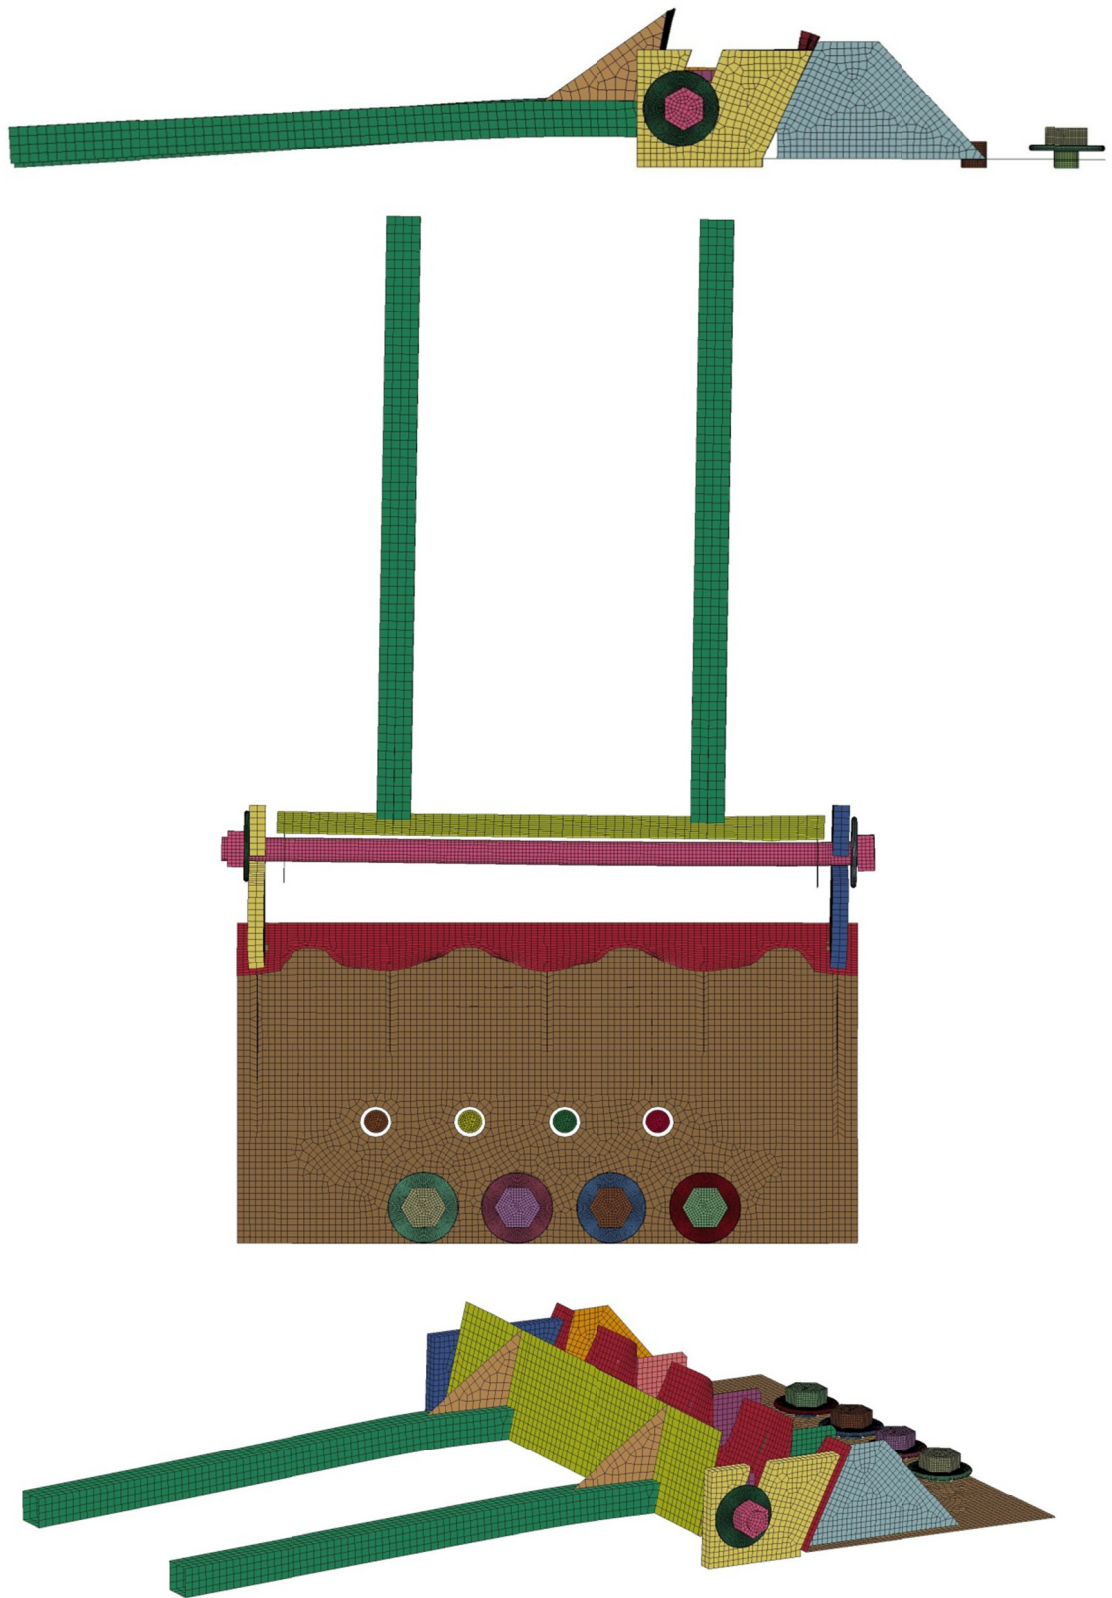


Figure 83. Cable Anchor Bracket Assembly Deformation, Simulation No. 3

The cable plate sustained severe plastic deformation in such a manner that the entire anchor bracket assembly would require replacement before the terminal could safely function. The robustness of the high-tension, cable end terminal design as a whole would be greatly aided by an anchor that was reusable or required minimal repair following an impact event. The plastic strain distribution in the anchor assembly after the release of the cables is shown in Figure 84.

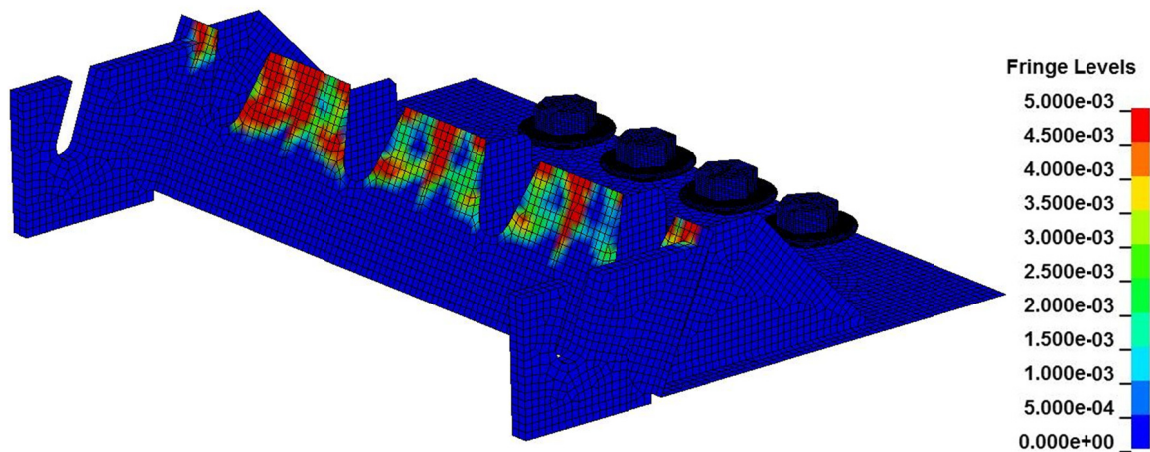


Figure 84. Anchor Bracket Assembly Plastic Strain, Simulation No. 3

9.3.2.4 Simulation No. 4 – Analysis of Release Lever Modification

The elimination of the cross bar on the cable release lever assembly was necessary to prevent the assembly from being pulled downstream after release of the cables in an anchor impact. There was some concern how the modified release lever would perform in the instance that a vehicle impacts only one of the vertical tubes either end-on or at an oblique angle. Without the crossbar to distribute the impact force, all of the load will be concentrated in a single tube. That tube needed to be strong enough to withstand the impact forces and still be able to release the system cables from the slots on the cable plate. If only one tube was unable to successfully release the cables, the vehicle

could potentially ramp up the unreleased cable or cables and produce a hazardous vehicle trajectory, including rollover.

To evaluate the redesigned anchor in this scenario, a simulation was conducted with one of the vertical tubes removed from the contact definition. Modifications were made to several cable anchor bracket assembly components to correct issues that were identified after the completion of simulation no. 3.

The primary concern that arose from analysis of the results from simulation no. 3 was deformation to the cable plate. To eliminate the plastic deformation in the cable plate flanges, the interior cable anchor gussets were extended upwards to the top of the cable plate. The extended gussets provide more support for the flanges and increased the available weld area for the connection between the cable plate and the interior gussets. The cable plate thickness was also increased from 3/8-in. to 5/8-in. to further guard against deformation.

Initial simulations with the updated anchor bracket assembly model revealed several problems with the design and the modeling techniques. Significant nodal penetrations were evident in the contact between the cable release lever rotation brackets and the steel rod. The node penetrations resulted in non-physical deflection of the cable release lever, poor rotation mechanics, and ultimately the cables were not released during the simulated interaction between the cable anchor bracket assembly and the bogie. The node penetration between one of the rotation brackets and the steel rod is shown in Figure 85.

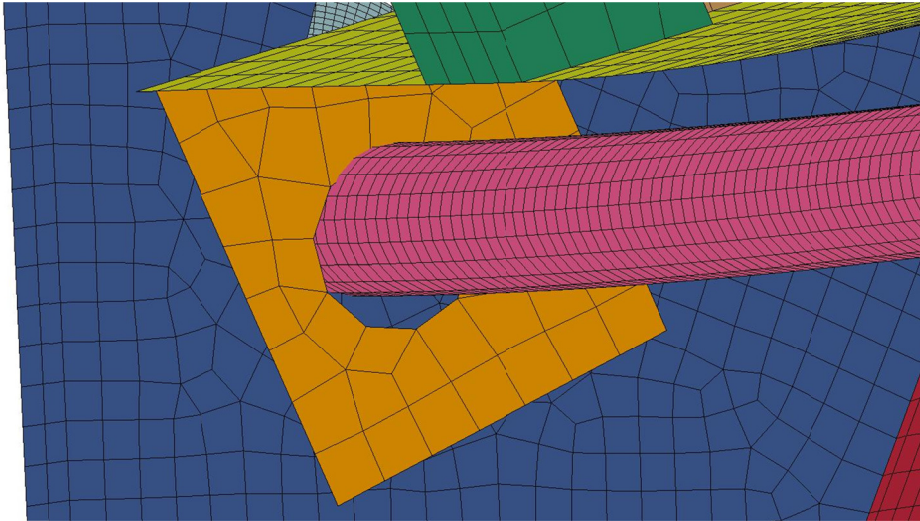


Figure 85. Nodal Penetration in Rotation Bracket Contact

To correct the contact issue, the rotation brackets were remodeled using solid elements. While shell elements are more computationally efficient and easy to use, solid element contact is much more robust and omnidirectional.

The primary issue with shell contacts arises in the instance when a shell edge contacts another element of any type. While solid elements have well defined surfaces for contacts, shell elements utilize artificially created “thicknesses” as contact surfaces on edges. In order to simulate a smooth contact surface, the contact thickness is radially projected around the edge of a shell element boundary. These artificial surfaces can create edge and node penetration issues, which in some cases can yield unrealistic contact behavior and misleading simulation results. For this reason, solid elements are the more reliable option, although more computationally expensive. An example of a typical shell element and its simulated element thickness is shown in Figure 86.

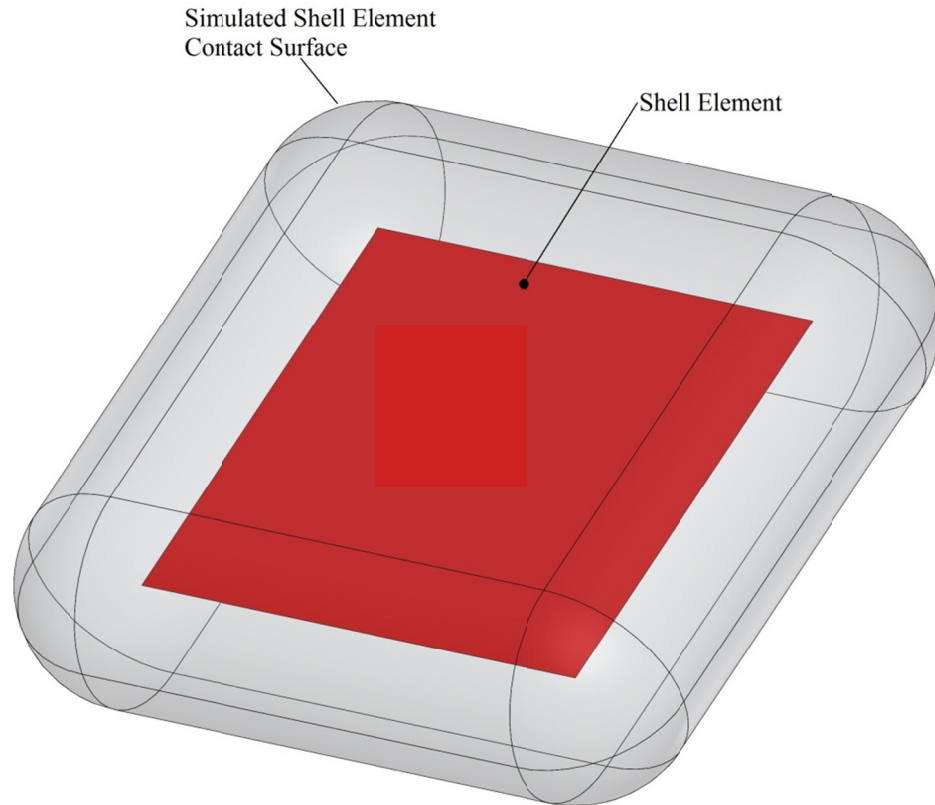


Figure 86. Typical Shell Element and Simulated Contact Surface

Another simulation was conducted with the updated cable anchor bracket assembly model. The solid element rotation brackets improved the contact between the brackets and the steel rod. The updated contact is shown in Figure 87.

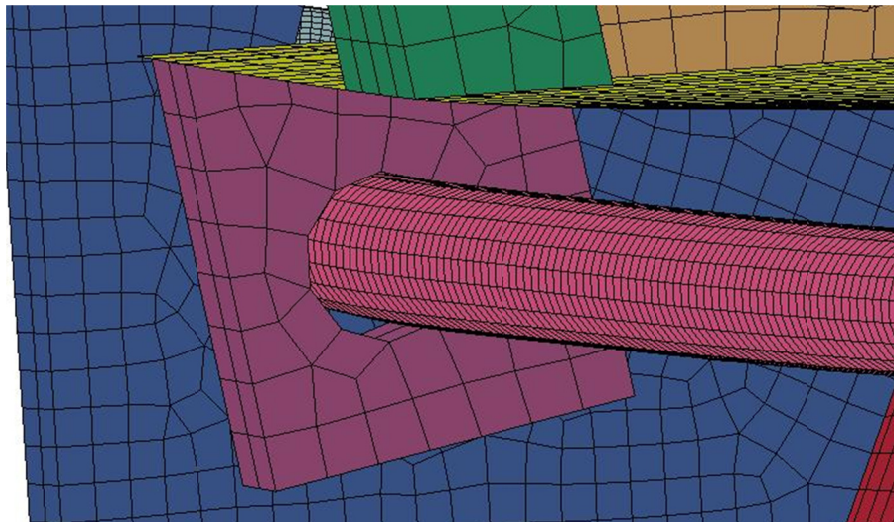


Figure 87. Rotation Bracket Contact Using Solid Elements

The anchor bracket assembly again failed to release the cables. However, deformation to the vertical tube as well as torsion in the release lever assembly base plate prevented the cables from releasing during the bogie impact. The tube bending prevented the release lever from fully rotating and the torsion in the base plate caused one side of the plate to deflect downward. The deflection in turn prevented the cable end fitters from fully translating up and out of their respective slots on the cable plate. Fringe plots of the damaged components are shown in Figure 88.

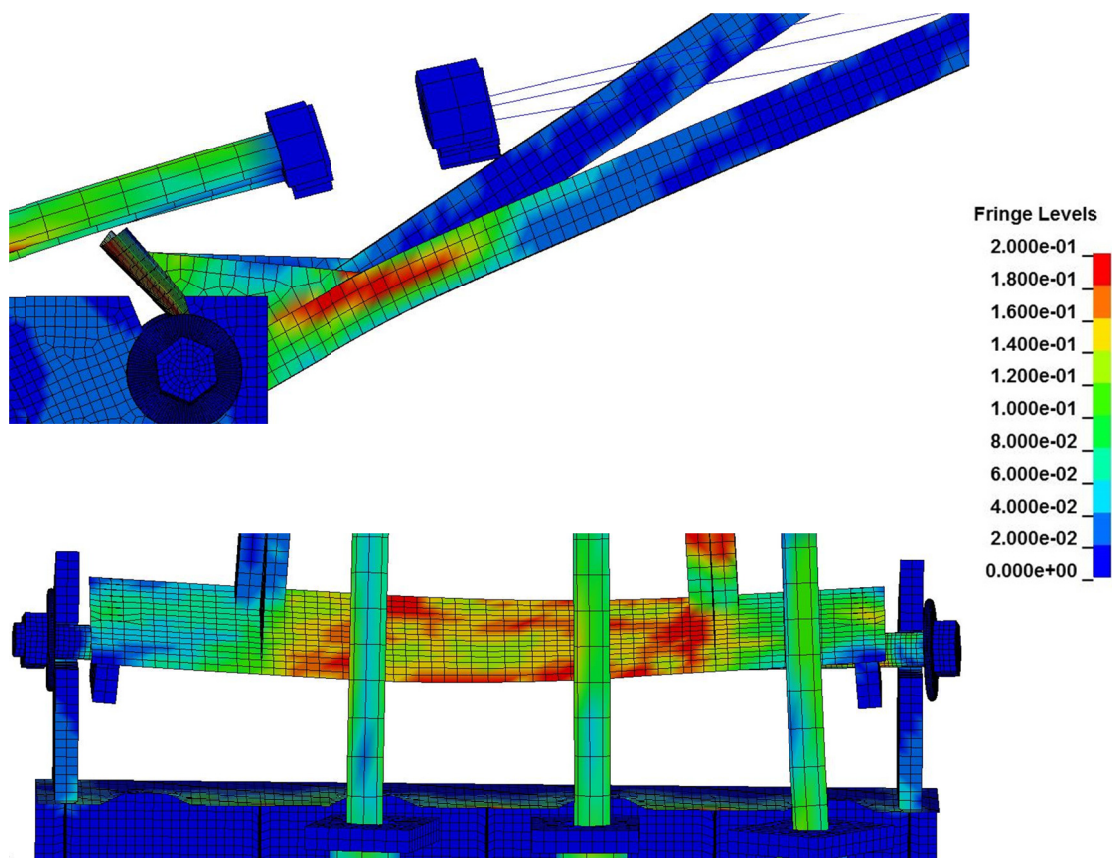


Figure 88. Deformation of Release Lever Assembly Components, von Mises' Stress

In order to successfully release the cables, the torsion and deformation to the release lever assembly needed to be alleviated. Therefore, the vertical tubes were strengthened by replacing the 1 ¼-in. x 1 ¼-in. x 3/16-in. section tubes with 1 ½-in. x 1

½-in. x ¼-in. section tubes. The steel base plate size was also increased from ½-in. to 5/8-in. thick.

After the previously described modifications had been made to the model of the cable anchor bracket assembly, the simulation was conducted again to evaluate the changes. The updated cable anchor bracket assembly model exhibited better rotation mechanics and resulted in the smooth release of the cables during the simulation.

There was still some bending in the vertical tube as well as torsion in the base plate of the cable release lever assembly. The deformation, however, was mitigated by the strengthened components. The deformed components did not exhibit any potential to effect the release mechanics of the redesigned, cable anchor bracket assembly. Therefore, this deformation is considered acceptable. Note also that the cable release lever assembly was the only component of the anchor bracket that would require replacement post impact. The damage in the cable anchor bracket assembly at the instant the cables fully released is shown in Figure 89.

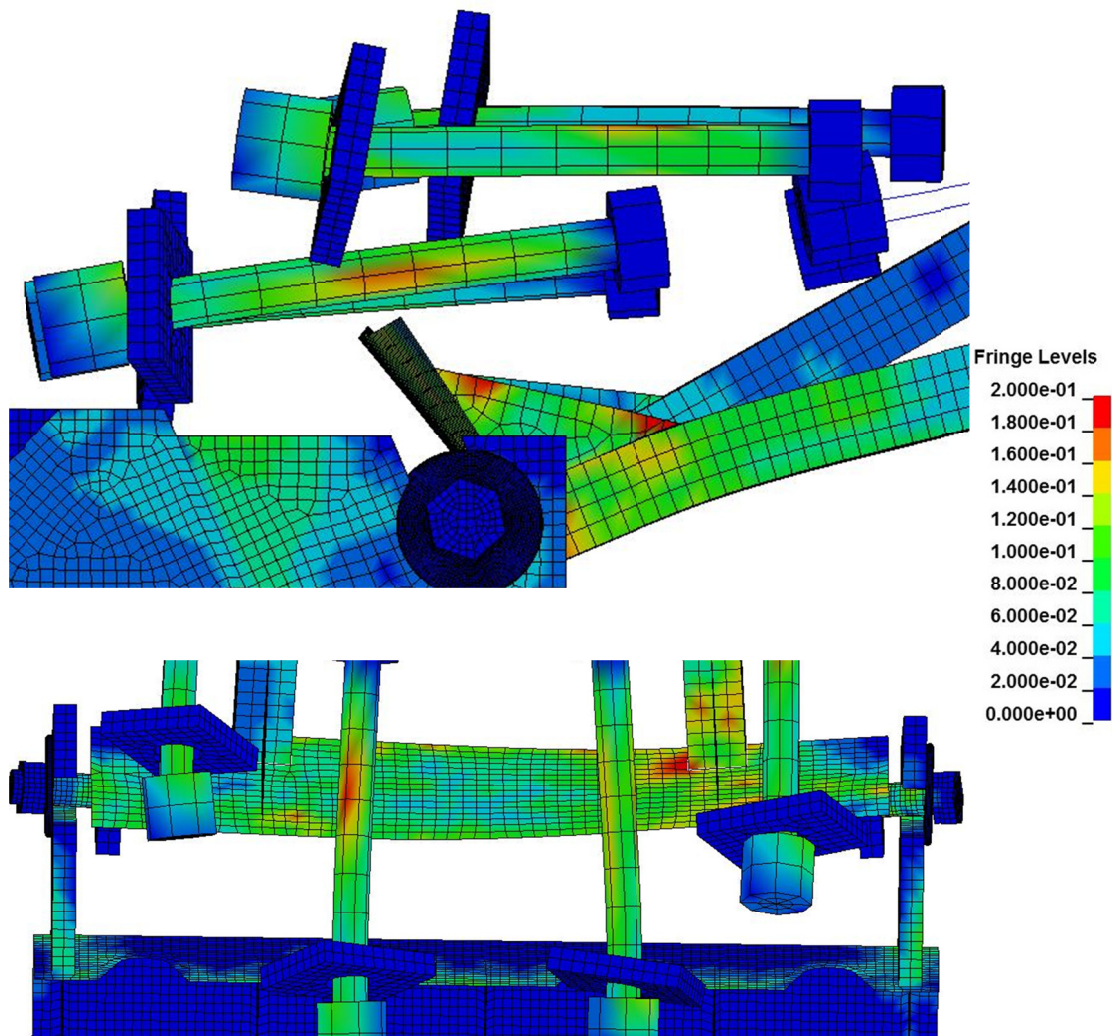


Figure 89. Cable Anchor Bracket Assembly von Mises' Stress, Simulation No. 4

9.3.2.5 Simulation No. 5 – Increased Cable Tension

Although the design tension for the system cables is 4,200 lbs, temperature fluctuations could result in increased cable tension. A simulation was conducted in which the cable tension was doubled to 8,400 lbs/cable. The goal of the simulation was to analyze the effects that increased cable tension would have on the cable release mechanics. The bogie head was centered on the cable anchor and an impact speed of 45.0 mph was used in the simulation.

The bogie head impacted the cable release lever and rotated the cables out of their respective slots on the cable plate. The duration of the cable release process was roughly 6 ms longer as compared to simulation no. 3. Significant plastic deformation in the cable plate flanges occurred due to the prying action of the cables during impact. The maximum plastic strain in the cable plate was 0.65. Since the simulation represents a worst case scenario, however, this deformation was deemed acceptable. The plastic strain in the cable plate at the conclusion of the simulation is shown in Figure 90.

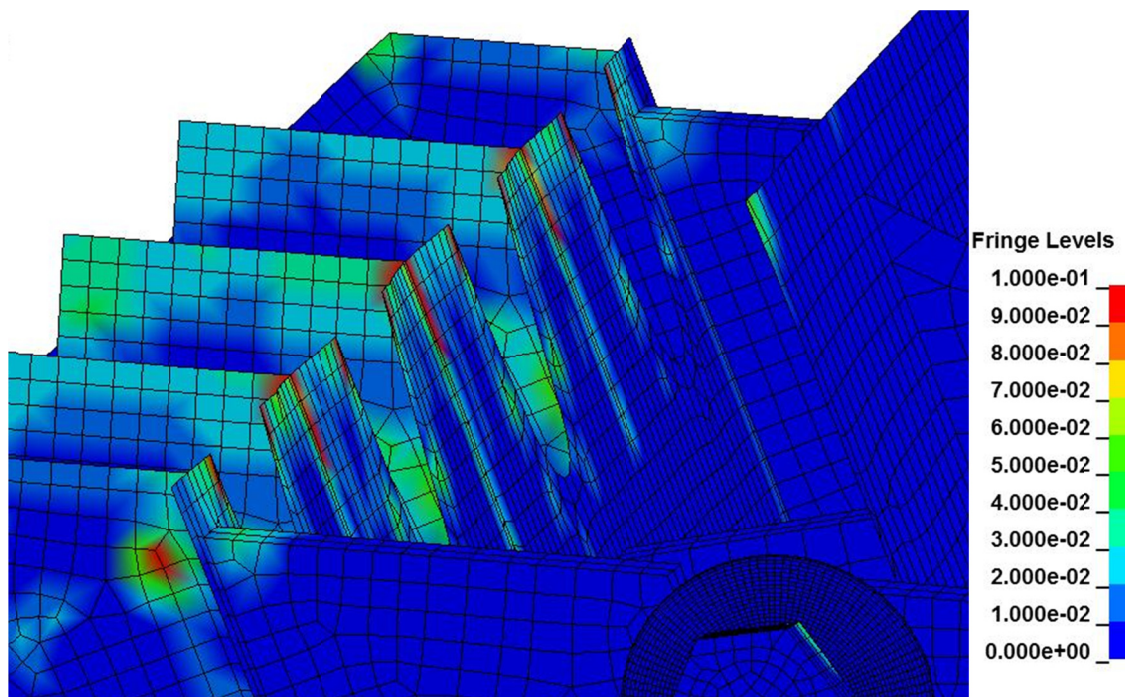


Figure 90. Cable Plate Plastic Strain, Simulation No. 5

The impact forces experienced by the bogie were examined to quantify how increased tension might effect the trajectory of an impacting vehicle. A similar simulation was conducted with the specified design tension in order to compare the two scenarios.

Although the cable tension was doubled, the maximum impact force imparted to the bogie was only 1 percent higher as compared with the simulation with the design

tension. This is in part due to anchor component deformation that occurred in the simulation with increased cable tension. Although the normal force was increased significantly, plastic deformation in the cable release lever and cable plate absorbed energy reducing the peak impact forces. No plastic deformation to the cable anchor bracket assembly was seen in the simulation with the design tension. The average force after the maximum in the simulation with double tension was 1.5 kips as compared to 1.2 kips in the simulation with design tension. The increased average force and elongated cable release time also resulted in more energy dissipation by the bogie due to the larger sliding friction force. The simulation resultant forces on the bogie head from initial impact are shown in Figure 91.

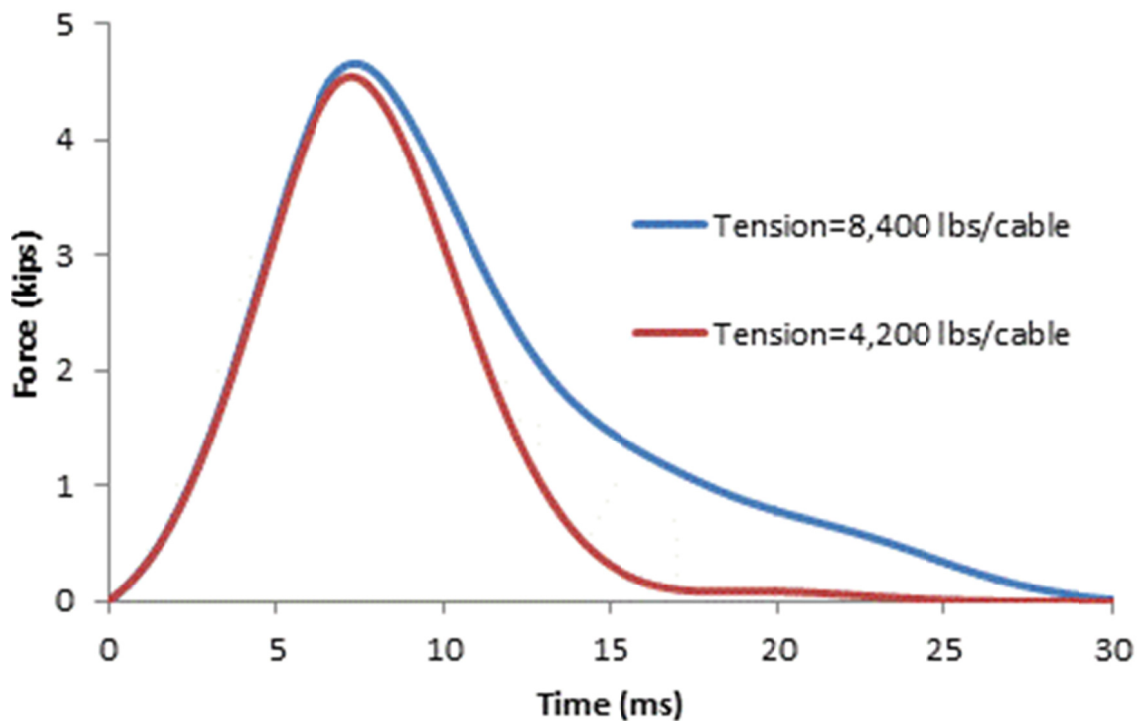


Figure 91. Impact Force Comparison, Increased Cable Tension vs. Design Tension

9.3.2.6 Simulation No. 6 –Anchor Impact at Oblique Angle

The redesigned, high-tension cable anchor bracket has exhibited good performance and release mechanics with inline impacts, however the likelihood of a perfectly aligned vehicle orientation in a roadside impact is minimal. Roadside vehicle interactions with anchors will more commonly be oblique impacts. Because of this, the cable release mechanics must function in the event that the cable anchor bracket assembly is impacted at an oblique angle.

To evaluate the robustness of the redesigned cable anchor bracket assembly's cable release mechanics, a simulation was conducted with the bogie impacting the anchor assembly at an angle of 15 degrees. The bogie head was aligned with the center of the redesigned anchor assembly. The impact angle was selected to reflect impact orientation requirements for MASH Test No. 3-33. An impact speed of 45.0 mph was used.

The bogie impacted one of the vertical release lever tubes and smoothly rotated the cables out of their respective slots on the cable plate. The cable release lever base plate exhibited noticeable bending during the cable release process, primarily due to the forces exerted on the impact tubes out of plane with the rotational joint. There was some permanent deformation in the vertical impact tubes at the conclusion of the simulation, however since the cables were released smoothly and the oblique impact scenario is a worst case scenario, the deformation was deemed acceptable. Sequential images of the oblique impact simulation are shown in Figure 92. The plastic deformation in the cable release lever assembly is shown in Figure 93.

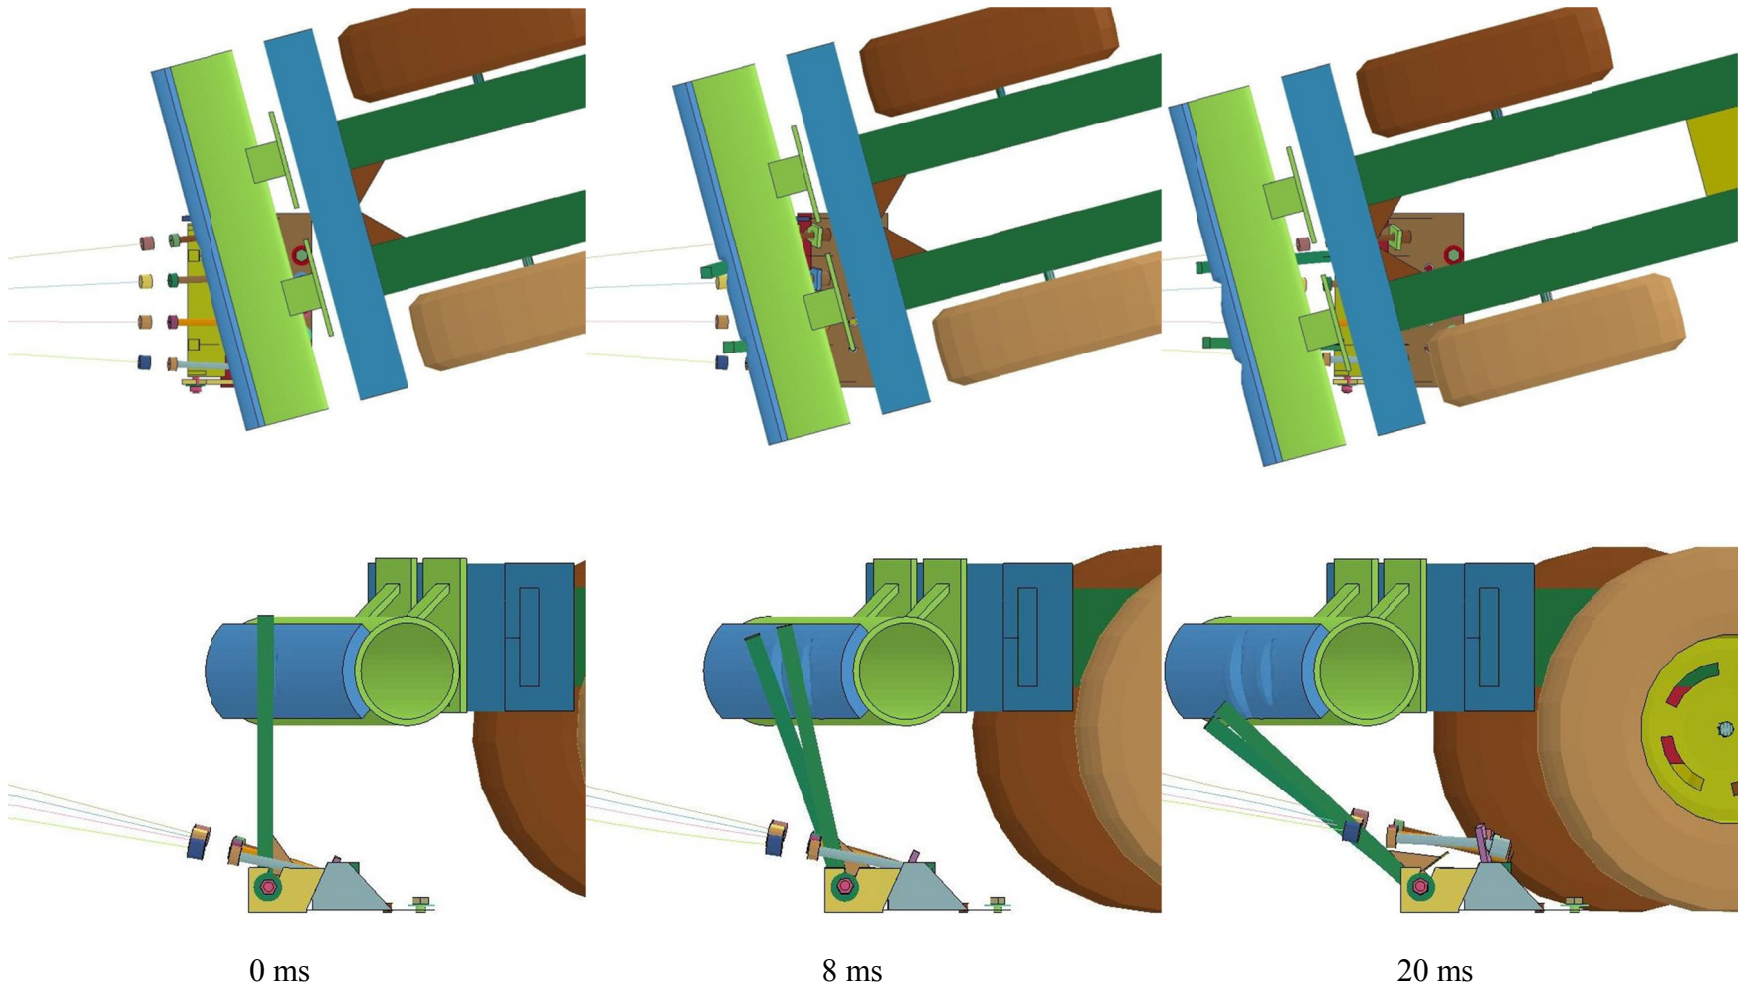


Figure 92. 15 Degree Impact Scenario Sequentials, Simulation No. 6

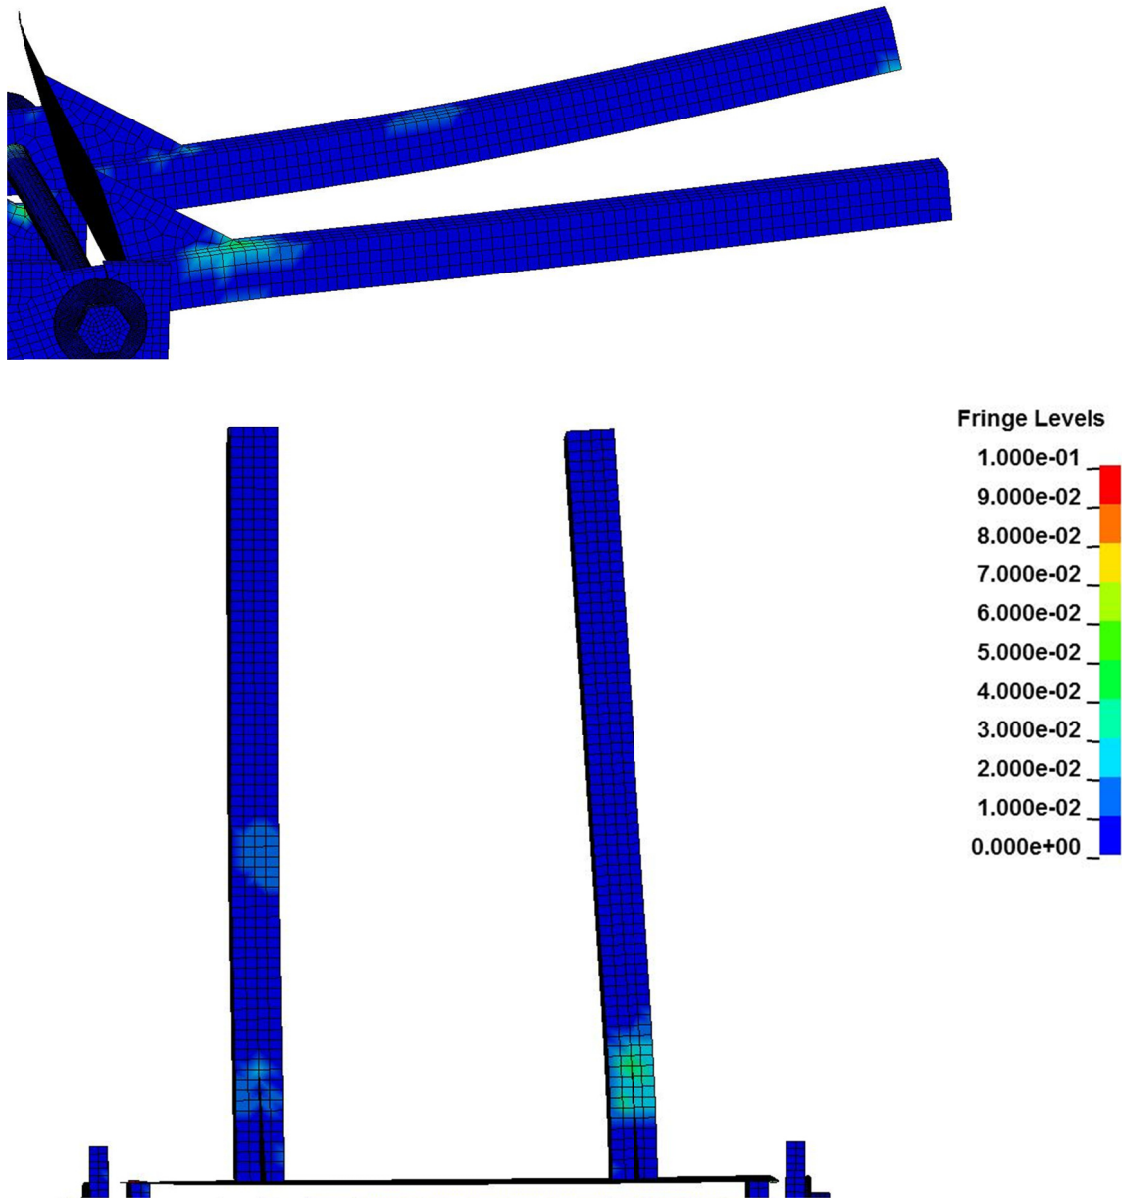


Figure 93. Cable Release Lever Plastic Strain, Simulation No. 6

9.3.2.7 Simulation No. 7- Reverse Direction Impact

Since the redesigned cable anchor bracket assembly is intended to be used in median applications, the possibility exists that the anchor will be subjected to a reverse direction impact. To analyze this scenario, the bogie model was oriented behind the cable

anchor bracket assembly at an angle of 25 degrees. The bogie head was aligned with the center of the redesigned anchor bracket assembly. The 25 degree impact angle was selected to reflect impact orientation requirements for MASH Test No. 3-37. The initial model setup is shown in Figure 94.

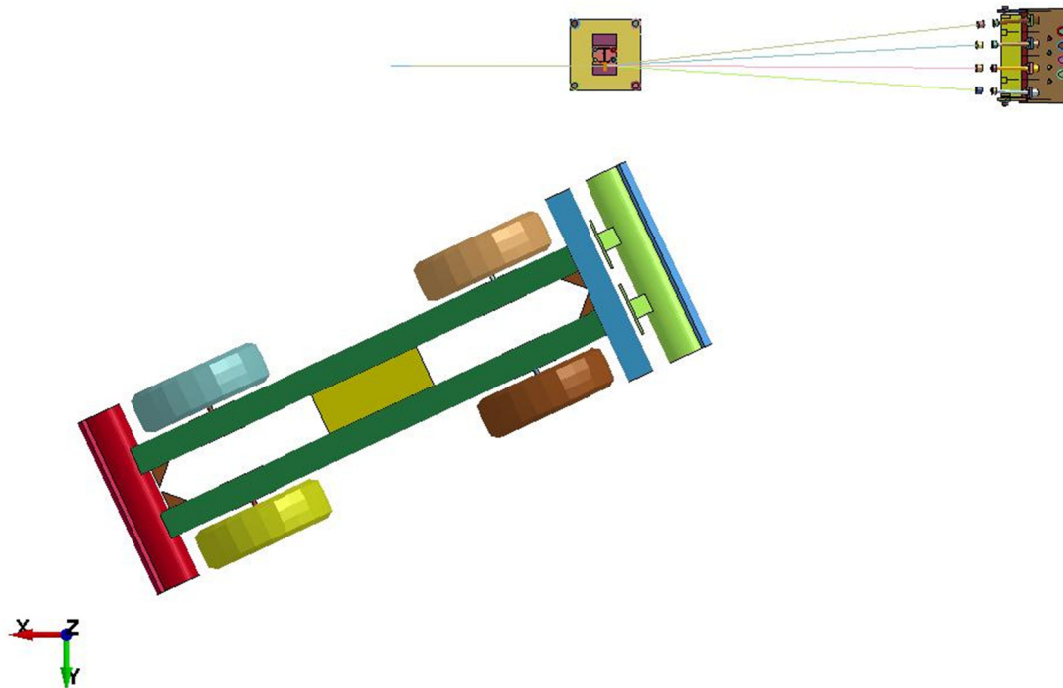



Figure 94. Bogie Impact Orientation, Simulation No. 7

Due to the orientation of the bogie and the nature of the simulation, the left-front bogie wheel made initial contact with the system, impacting the system cables in between the anchor and the slip base post. This impact rotated the cable end fitters in the cable slots on the anchor and resulted in slightly increased cable tension at impact, however it had no other significant effect on the simulation. The bogie head impacted one vertical impact tube and began to bend it backwards. The rotational bolt began to slide upwards in the support bracket immediately after impact. The cable release lever rotated backwards

as it translated up in the slot. Due to geometric constraints, the upwards motion of the cable release lever was facilitated by deformation in both the support bracket slots and deformation in the rotational bolt. The bolt was fully removed from the slots in both brackets roughly 18 ms after initial bogie impact with the vertical impact tube.

As the cable release lever was displaced upwards, it also began to force the cables end fitters out of their respective slots on the cable plate. The cables were fully released from the cable plate at roughly 21 ms after initial bogie impact with the vertical impact tube. Sequential images of the simulation are shown in Figure 95. Note that in the side view of the simulation, the right-front wheel of the bogie has been hidden to clarify the behavior of the release lever assembly.

There was significant plastic bending in the vertical impact tube that was initially impacted as well as the cable release lever cable plate. Both support brackets and the rotation bolt also sustained significant plastic deformation. The permanent damage to the cable release lever assembly, support brackets and rotation bolt is shown in Figure 96.

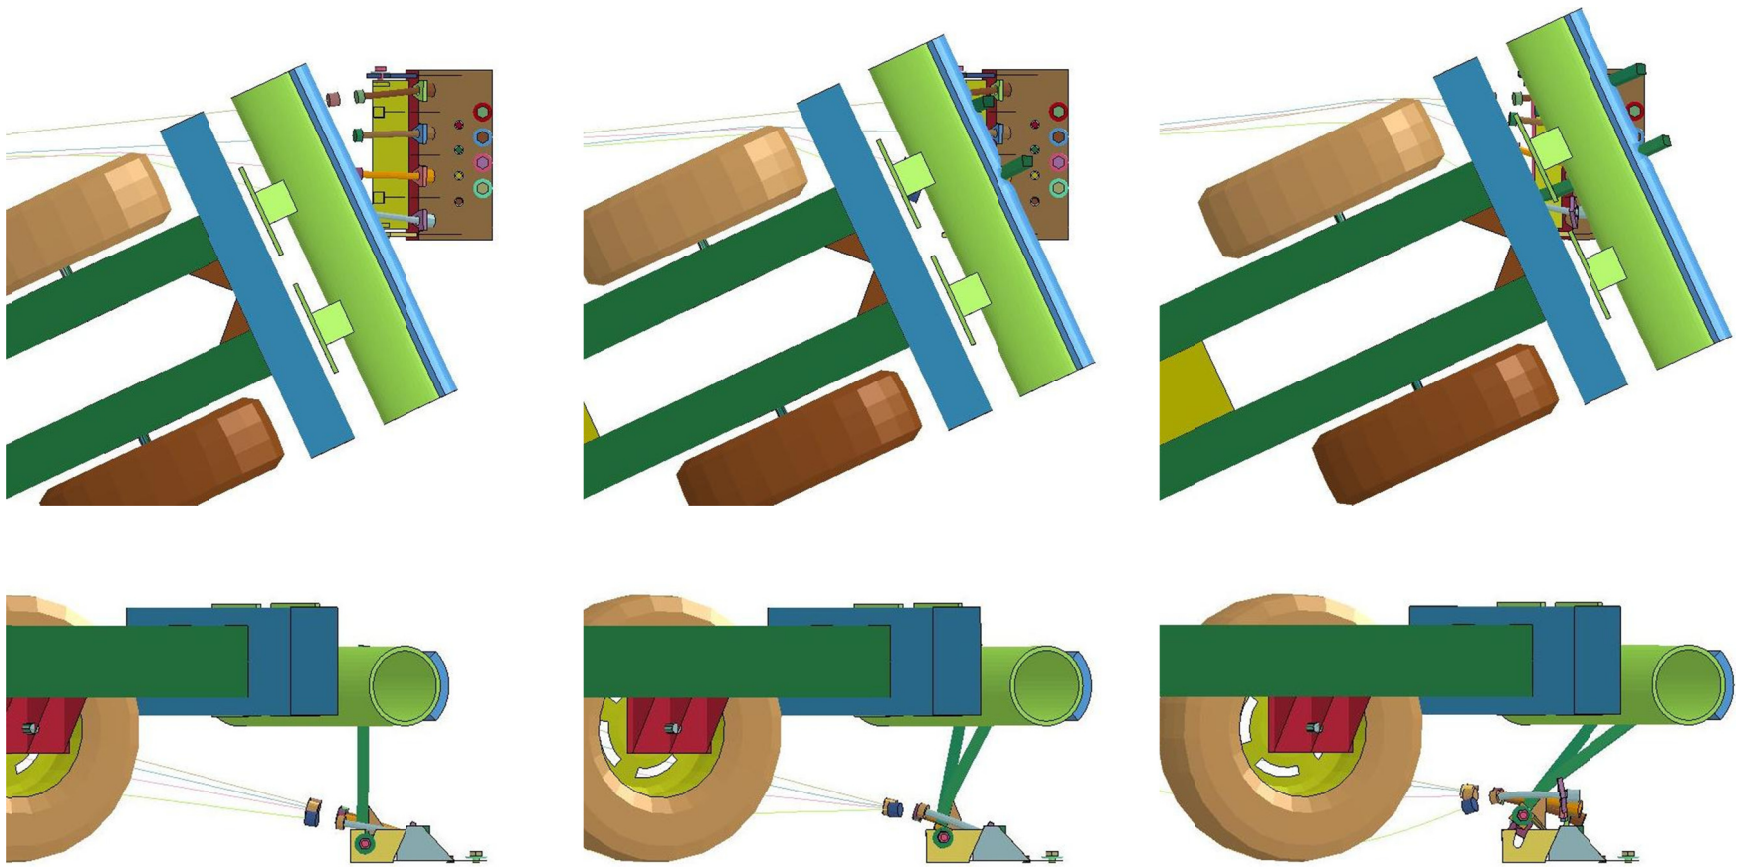

0 ms

10 ms

20 ms

Figure 95. Reverse Direction Impact Sequentials, Simulation No. 7

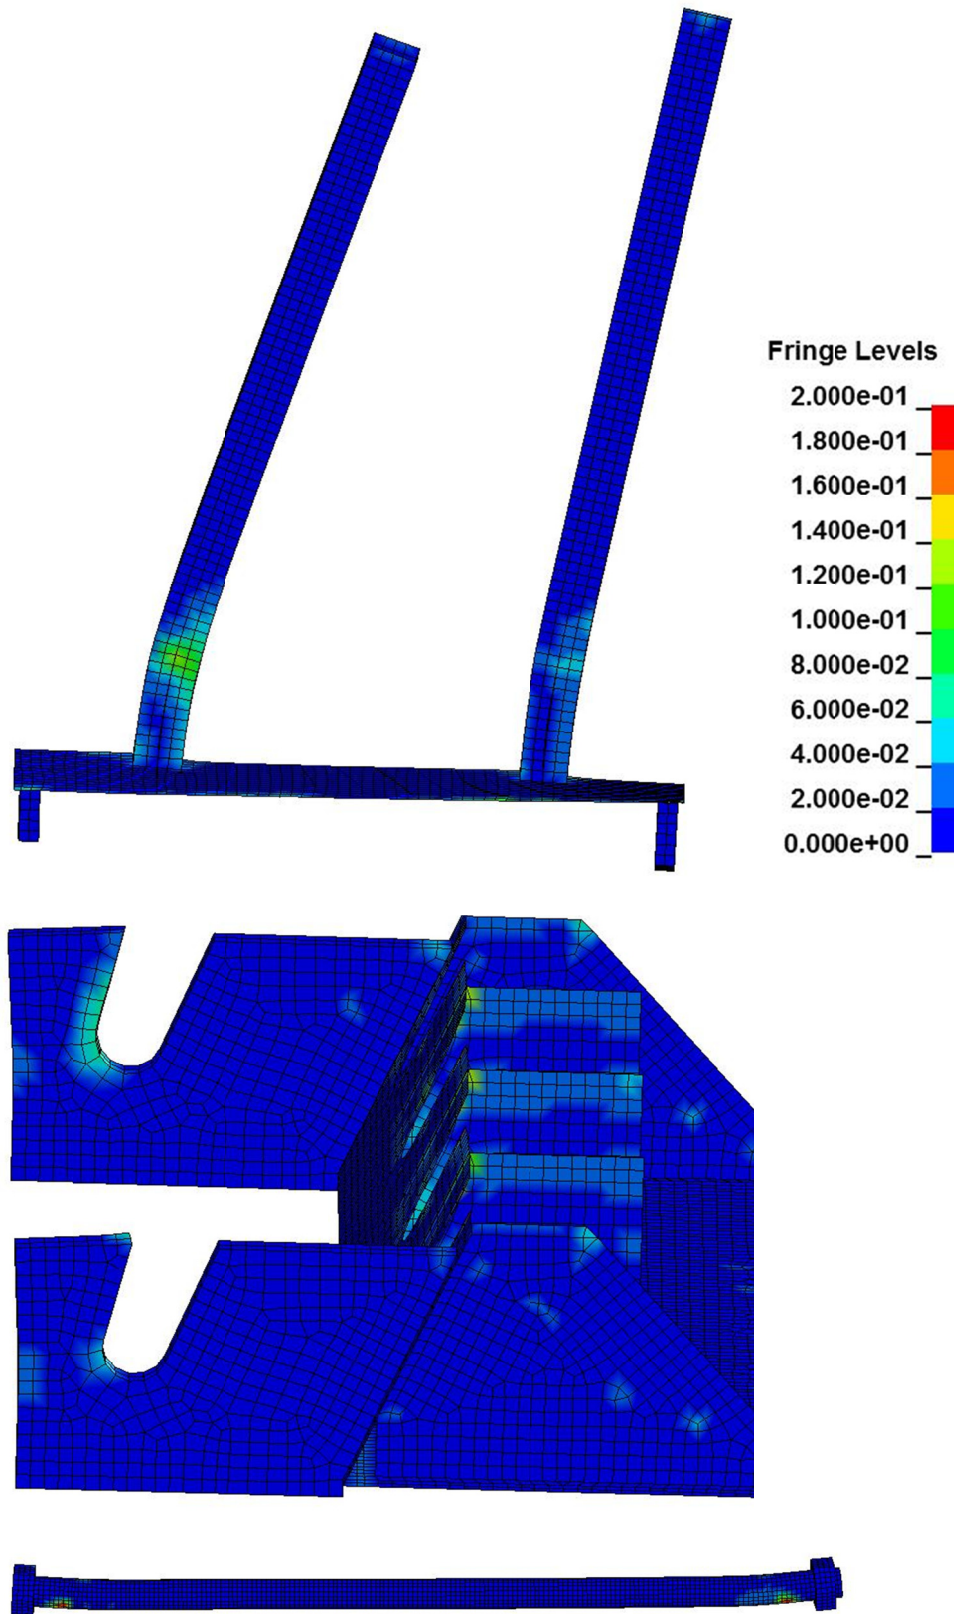


Figure 96. Component Plastic Strain, Simulation No. 7

Although the anchor bracket assembly would require significant repair after impact, the release lever was allowed to disengage from the anchor bracket assembly during the reverse direction impact. This ability greatly reduces any concerns that a vehicle will snag on the cables or impact lever in a reverse direction impact. Although the redesigned anchor bracket assembly model exhibited potential in the reverse direction impact simulation, physical testing is still necessary to definitively evaluate the reverse direction release mechanics.

9.4 Final Design and Simulation

9.4.1 Final Redesigned Cable Anchor Bracket Assembly

The simulation of the redesigned cable anchor bracket assembly exhibited good mechanics and behavior in simulation nos. 4, 5, 6, and 7. To fully evaluate the final design, the scenario when both vertical tubes were impacted was simulated. Results from the final simulation could also be used to compare the final design to initial concepts as well as the current high-tension cable anchor bracket assembly. The final finite element model of the cable anchor bracket assembly is shown in Figure 97. Technical drawings of the cable anchor bracket assembly are shown in Figures 98 through 102.

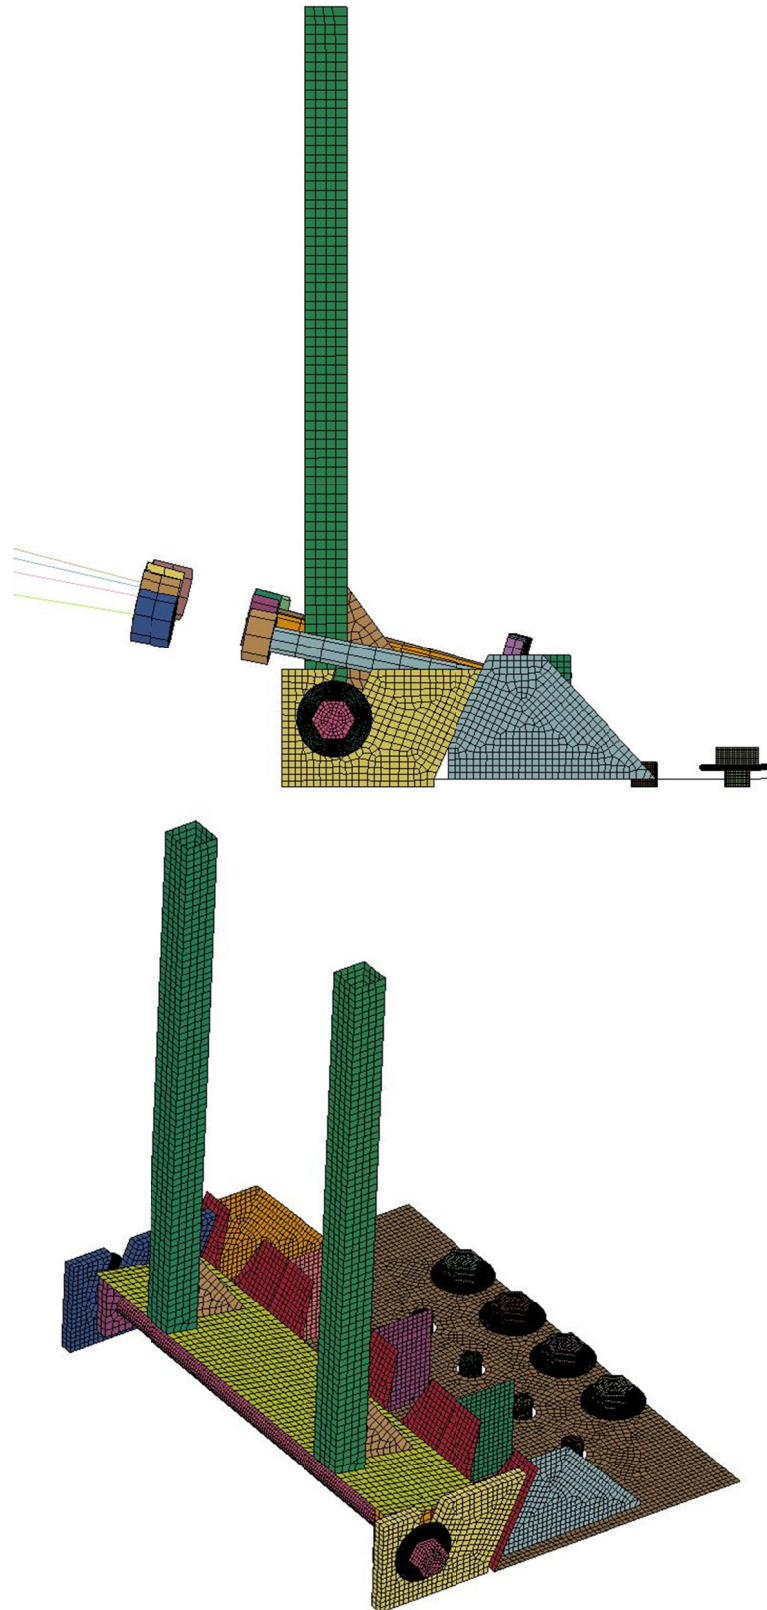


Figure 97. Redesigned, High-Tension, Cable Anchor Bracket Assembly Model

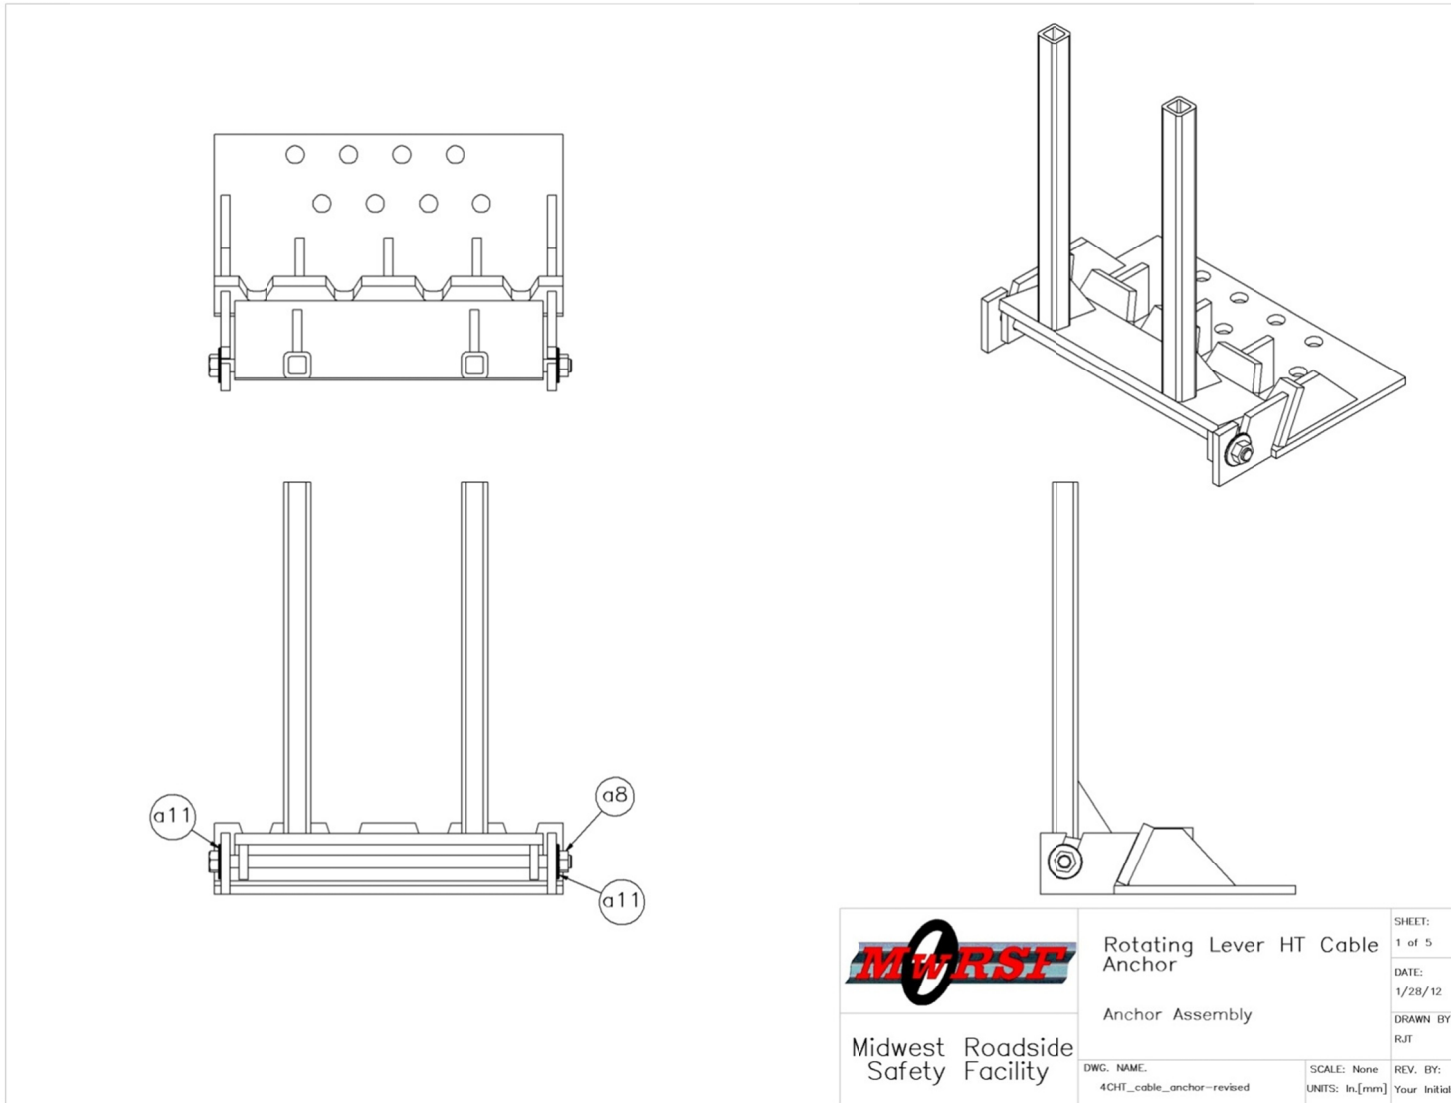


Figure 98. Redesigned, High-Tension, Cable Anchor Bracket Assembly

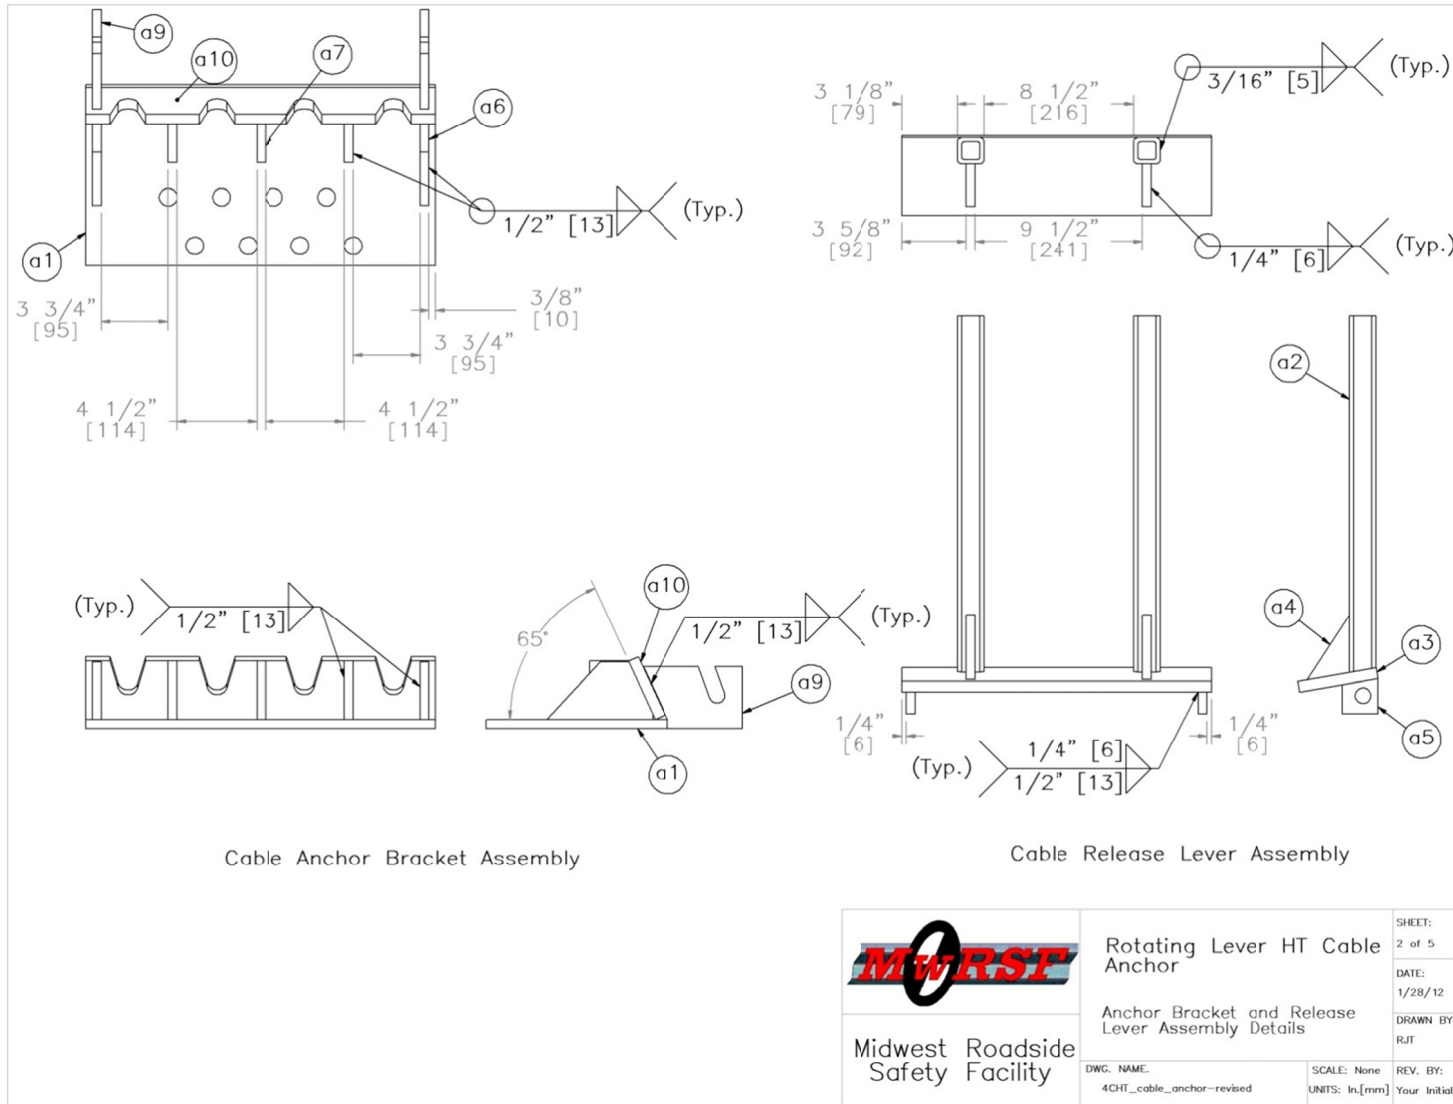


Figure 99. Cable Anchor Bracket and Cable Release Lever Assembly Details

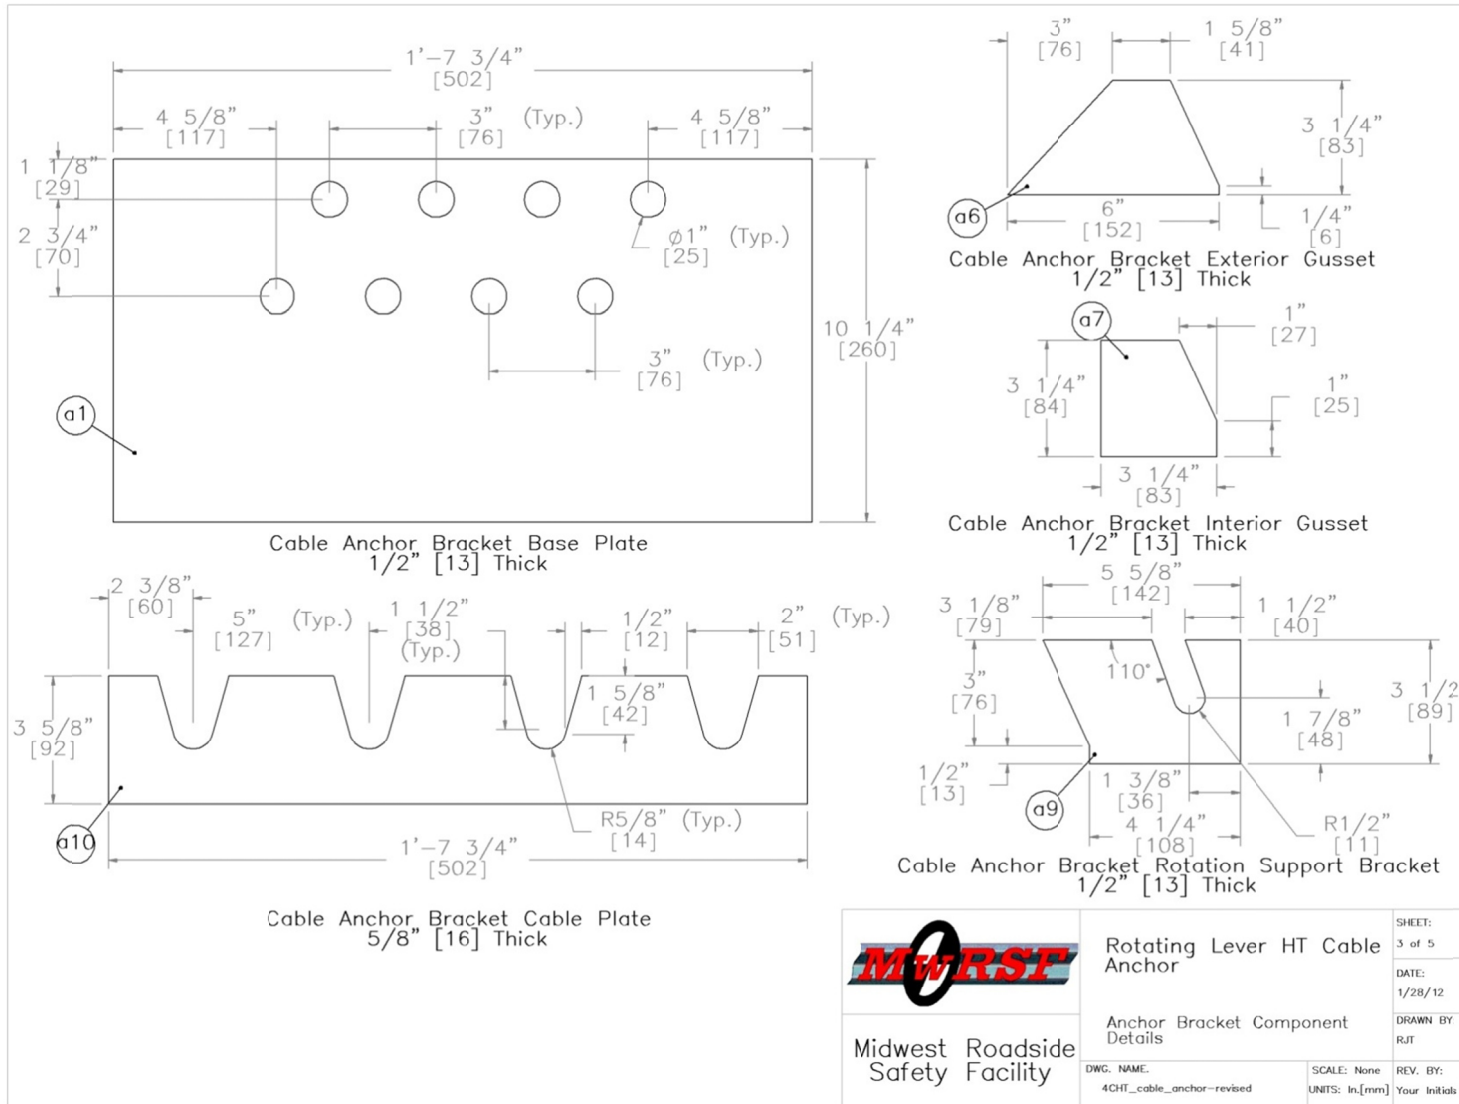


Figure 100. Cable Anchor Bracket Component Details

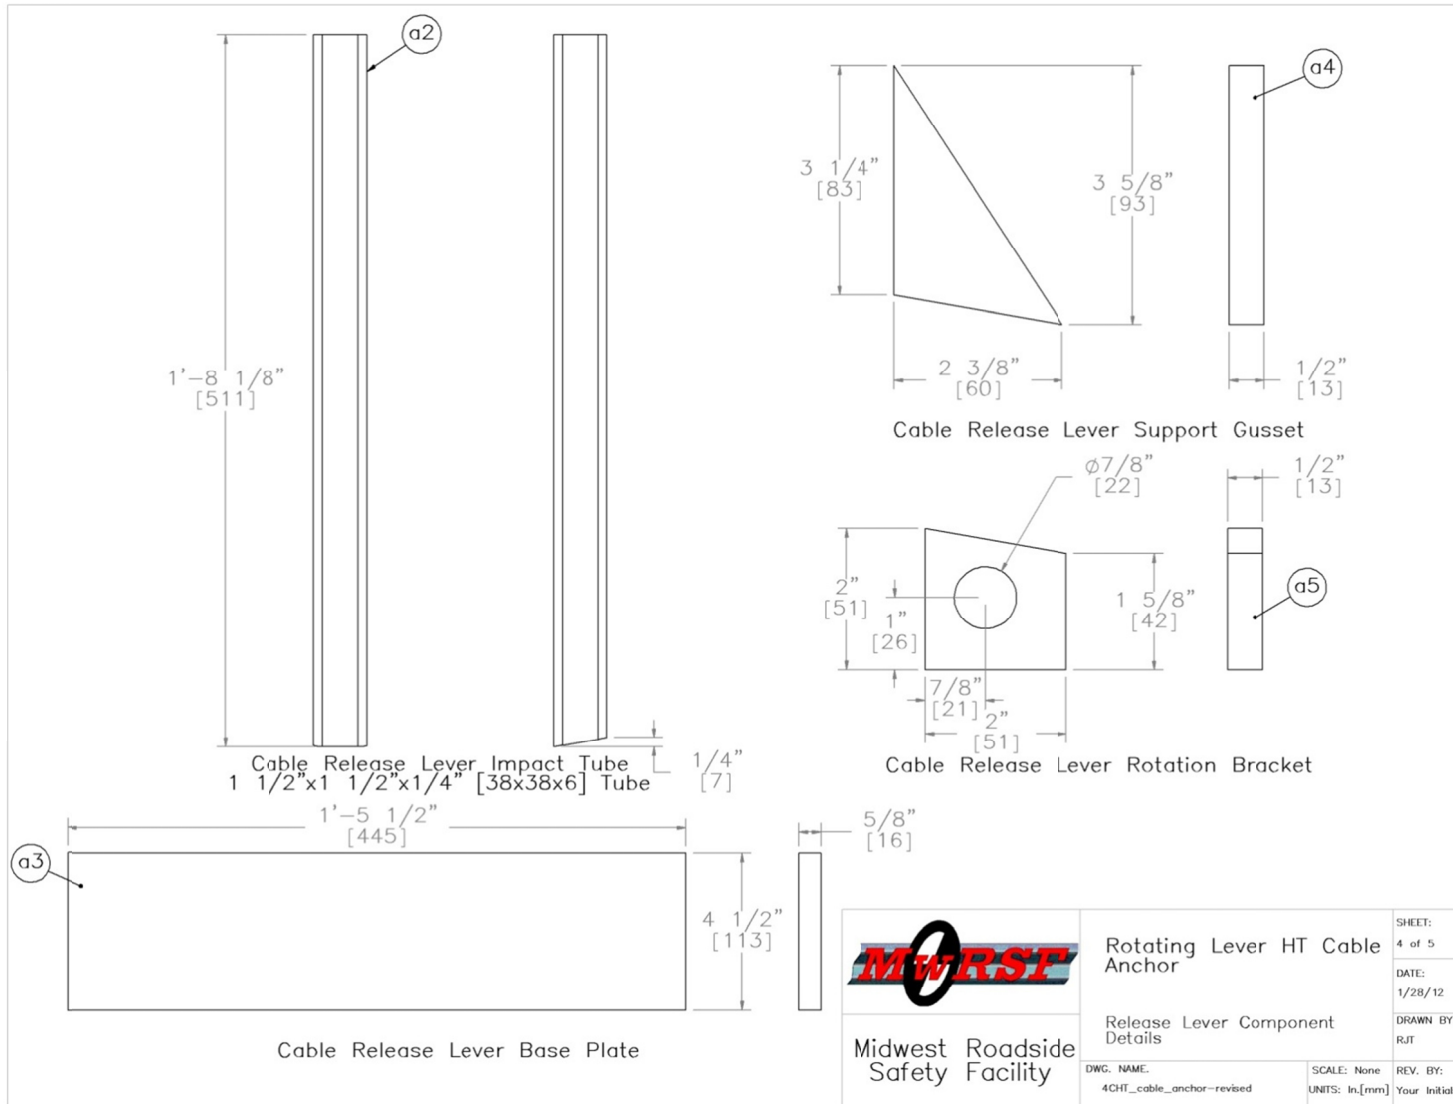


Figure 101. Cable Release Lever Component Details

Item No.	QTY.	Description	Material Specification
a1	1	Cable Anchor Bracket Base Plate	ASTM A36 Steel
a2	2	Cable Release Lever Impact Tube	ASTM A500 Grade B
a3	1	Cable Release Lever Base Plate	ASTM A36 Steel
a4	2	Cable Release Lever Support Gusset	ASTM A36 Steel
a5	2	Cable Release Lever Rotation Bracket	ASTM A36 Steel
a6	2	Cable Anchor Bracket Exterior Gusset	ASTM A36 Steel
a7	3	Cable Anchor Bracket Interior Gusset	ASTM A36 Steel
a8	1	ϕ3/4" Rod with Threaded Ends and Nuts	ASTM A307
a9	2	Cable Anchor Bracket Rotation Bracket	ASTM A36 Steel
a10	1	Cable Anchor Bracket Cable Plate	ASTM A36 Steel
a11	2	ϕ3/4" Flat Washer	ASTM F844


	Rotating Lever HT Cable Anchor	SHEET: 5 of 5
	Bill of Materials	DATE: 1/28/12
Midwest Roadside Safety Facility	DWG. NAME: 4CHT_cable_anchor-revised	DRAWN BY: RJT
	SCALE: 1:100 UNITS: In.[mm]	REV. BY: Your Initials

Figure 102. Redesigned, High-Tension, Cable Anchor Bracket Bill of Materials

9.4.2 Simulation

The bogie model was given an initial velocity of 45.0 mph. The center of the bogie's impact head was aligned with the center of the release lever. An automatic single surface contact was used to specify contact between the slip base post assembly, cable anchor bracket assembly, and the bogie impact head. An automatic nodes to surface contact was used with the cable model to better capture the cable interaction with the cable hangar, bogie impact head, and any other system components that may contact the cables.

Initial impact was between the center of the bogie head and the center of the cable release lever. A sequential description of the impact events is contained in Table 11. Sequential images of the simulation are shown in Figure 103. Note that the outer wheel of the bogie is not shown to clarify the release mechanics of the anchor assembly.

Table 11. Sequential Description of Impact Events, Final Redesign

TIME (sec)	EVENT
0.000	The cable release lever began to rotate backward smoothly and evenly immediately after initial impact with the bogie head.
0.022	All four system cables have been released from their respective slots on the cable anchor bracket.
0.044	The top of the cable release lever impacted the ground. After the lever rebounded, it remained connected to the cable anchor bracket assembly.
0.061	The bogie head impacted the top system cable.
0.065	The bogie head impacted the remaining three system cables simultaneously. All four cables are now in contact with the bogie head and begin to coil against it.
0.107	The bogie head impacted the upstream side of the slip base post.
0.125	The bottom slip base post base plate separated from the slip base post support plates. The failure of the slip base post was due to element erosion along the boundary between the bottom slip base post plate and the slip base post support plates.

Damage to the cable anchor assembly was minimal. The cable plate sustained no plastic deformation. The rotational joint for the cable release lever remained intact throughout the impact event. The only component of the rotational joint that sustained permanent damage was the rotational bolt. Other structural components of the anchor assembly had no deformation. Post-test images of the anchor bracket assembly at the conclusion of simulation are shown in Figures 104 through 106.

After impact, the change in velocity due to impact with the anchor bracket assembly and the release of the cables was 0.48 mph. After the release of the cables, the

bogie maintained a velocity of roughly 44.5 mph. The bogie experienced a linear decrease in velocity due to the cables coiling against the impact head beginning at roughly 63 ms. The cable interaction resulted in a total Δv of 0.38 mph. The bogie then impacted the slip base post which resulted in a Δv of 1.25 mph. The bogie's velocity during the simulation is shown in Figure 107.

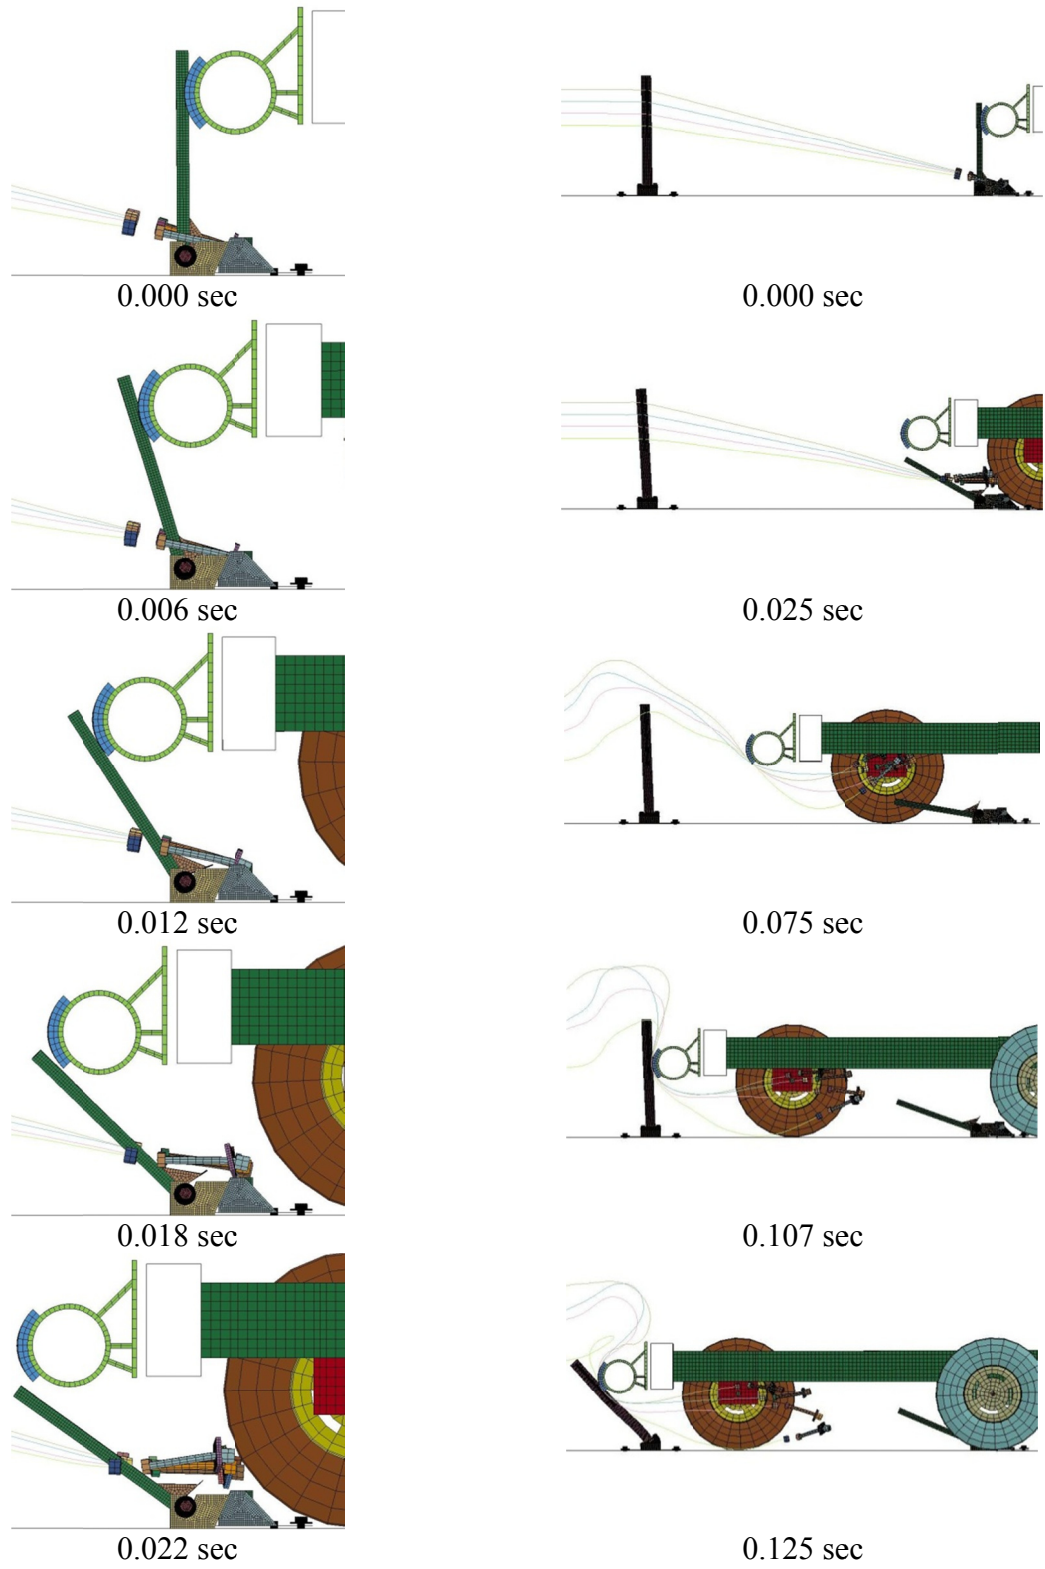


Figure 103. Sequential Photographs, Final Redesign

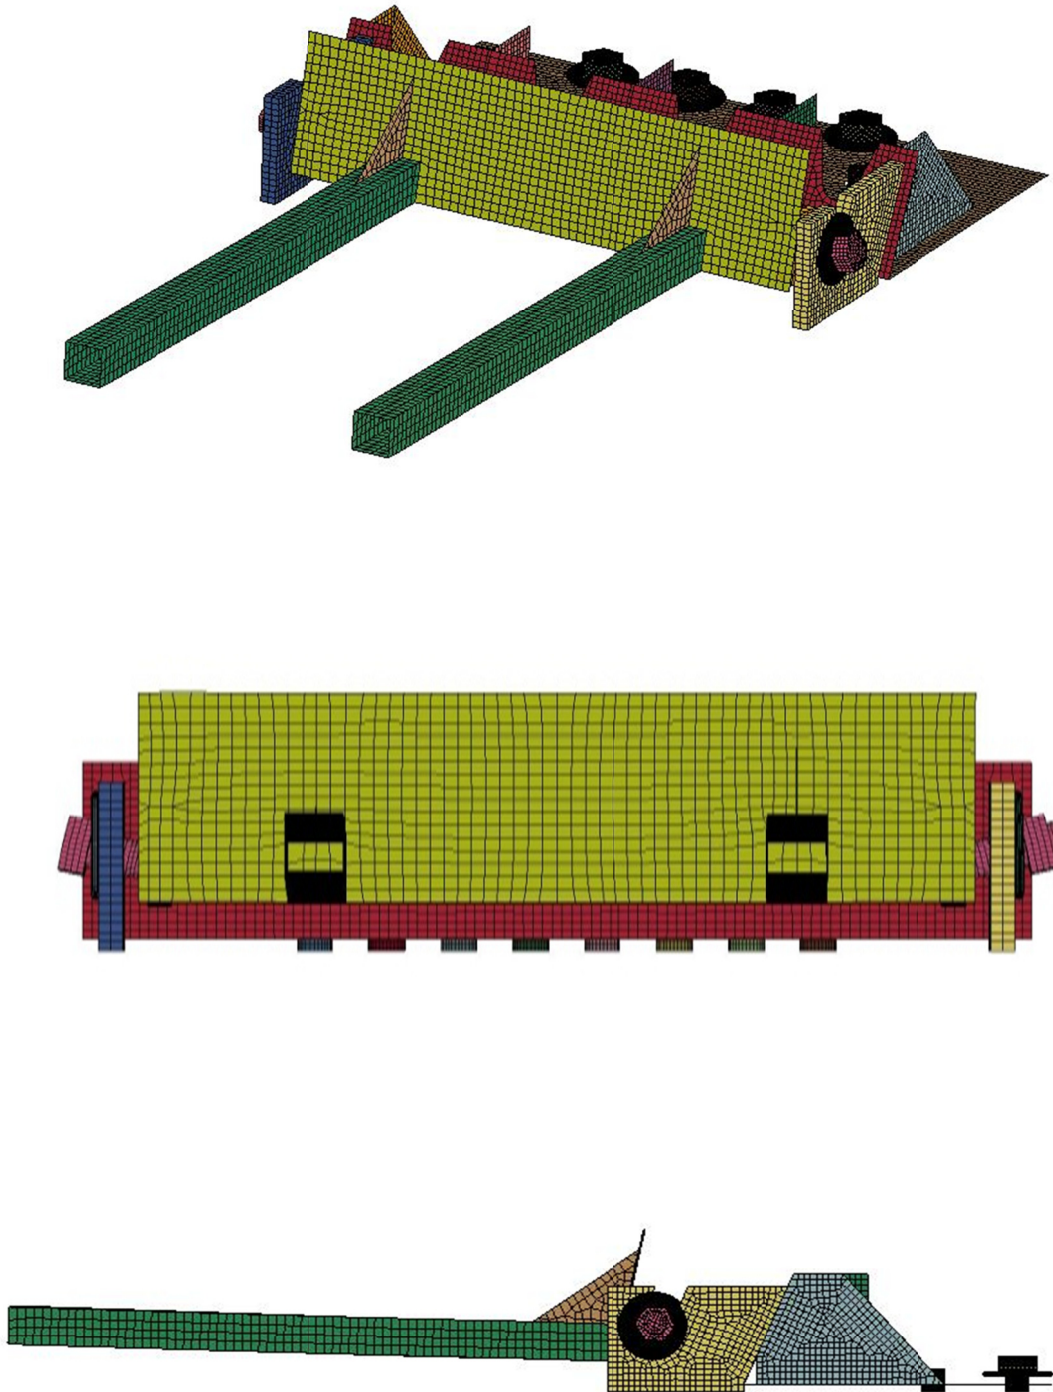


Figure 104. Cable Anchor Bracket Assembly Damage, Final Redesign

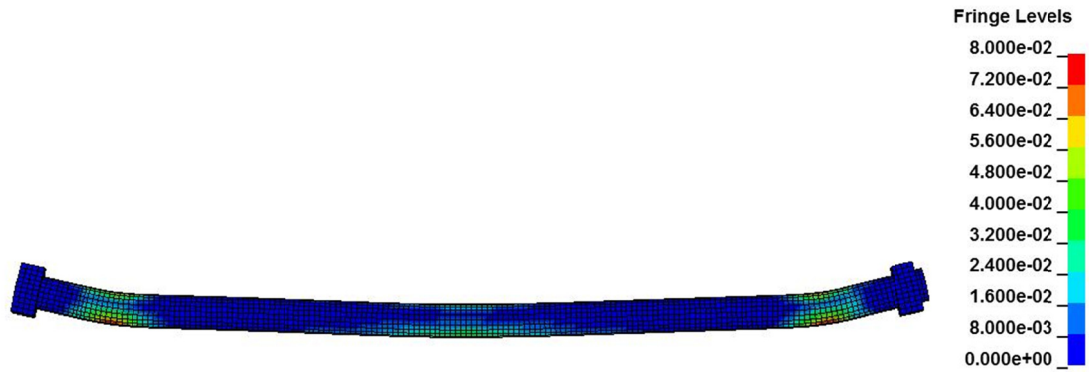
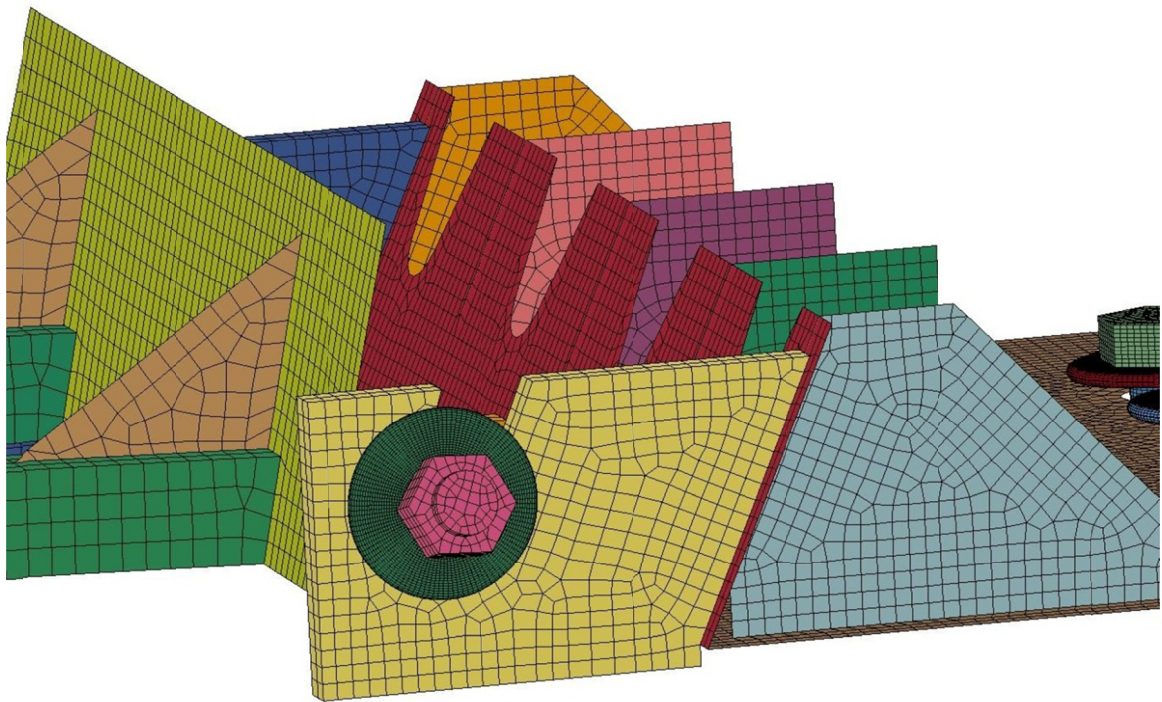


Figure 105. Plastic Strain in Rotational Bolt, Final Redesign



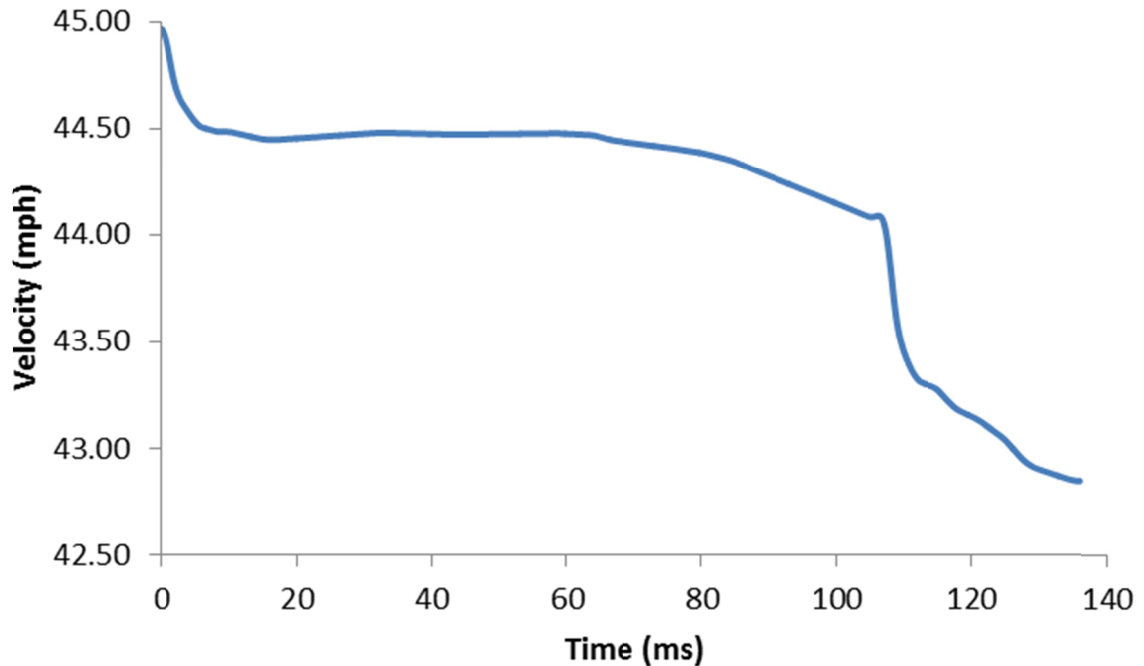


Figure 107. Bogie Velocity, Final Redesign

9.4.3 Discussion

The rotating lever released the cables as designed, eliminating any risk of the vehicle riding up the cables and potentially causing injury to vehicle occupants. At the conclusion of the simulation, the cable release lever was successfully retained by the cable anchor bracket assembly. By retaining the cable release lever assembly, any risk of the vehicle overriding the assembly and causing unstable trajectories or undercarriage damage would be eliminated.

Another goal of the redesign was to make the cable anchor bracket assembly reusable. The current high-tension cable anchor design as well as previous designs exhibited plastic deformation in the cable plate flanges after release of the cables. To eliminate the damage, the thickness of the cable plate was increased. The structural cable anchor gussets used to support the cable plate were also modified to reduce any bending

in the cable plate flanges. The height of the interior gussets was increased to provide extra support during the release of the cables. The increased gusset height also increased the weldable area between the structural gussets and the cable plate.

These modifications eliminated much of the plastic deformation to the assembly, and in many impact scenarios would ultimately allow the assembly to be reused through multiple impacts. The maximum von Mises' stress in the cable plate was reduced from 58.5 ksi to 48.4 ksi. The final simulation showed no permanent deformation to the cable anchor bracket assembly. Based on analysis of the simulation results and engineering judgment, a replacement of the rotational bolt would allow the assembly to be reused without concern for structural adequacy or unintended release mechanics upon impact. Substituting the currently specified bolt in the assembly with one fabricated from a higher grade steel could potentially eliminate the deformation entirely, and is also an option. The maximum stress in the anchor bracket components are shown in Figure 108.

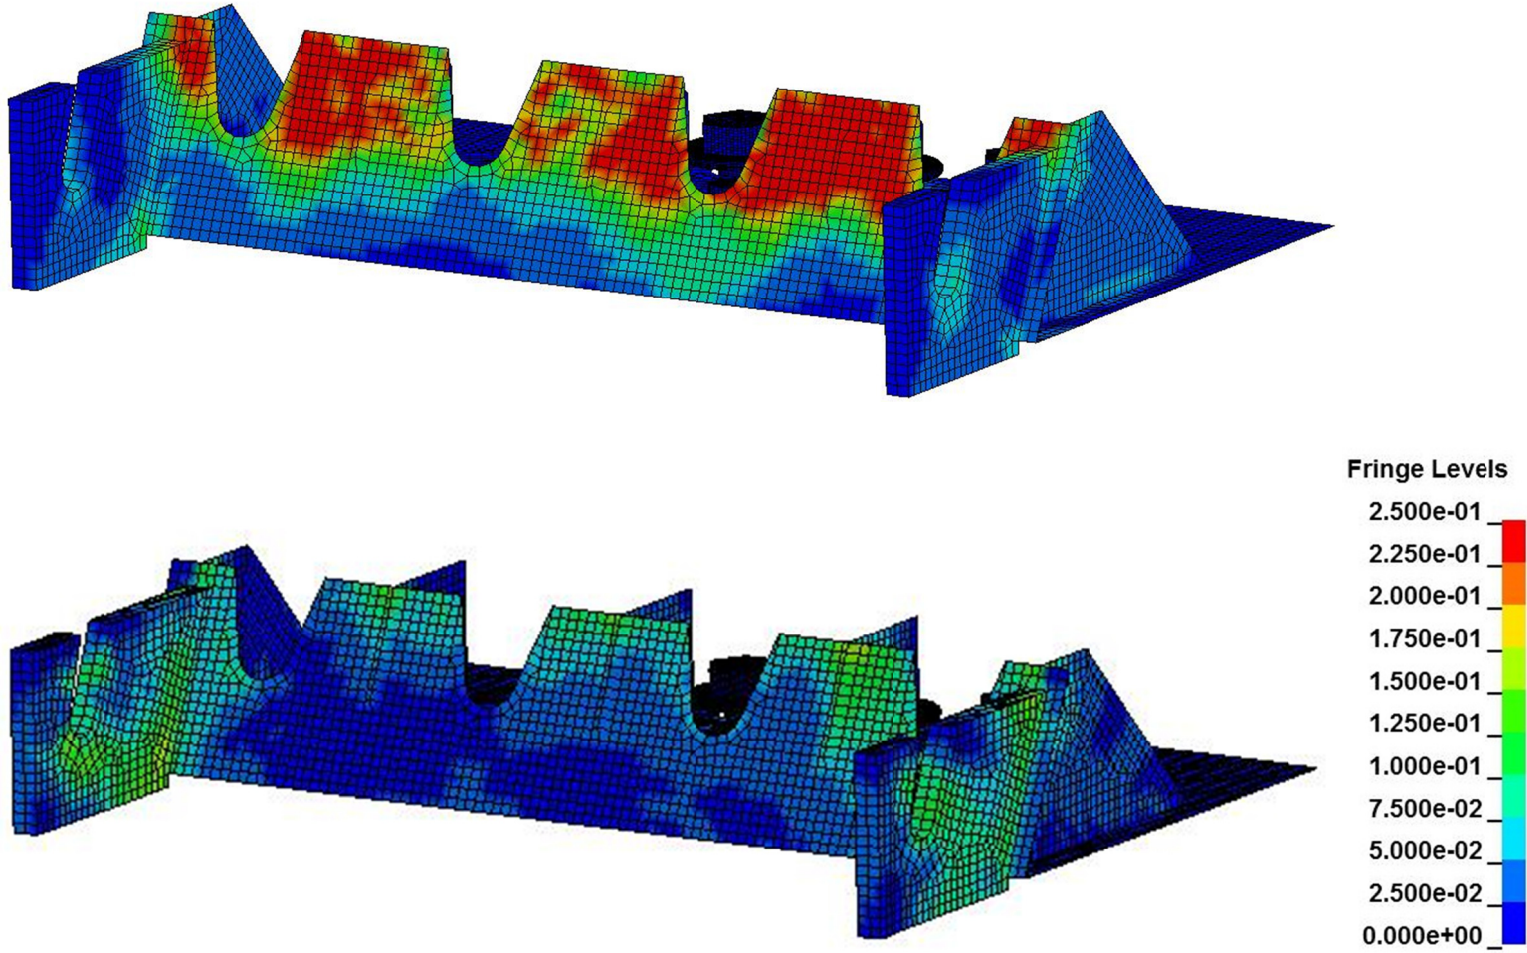


Figure 108. Comparison of Anchor Assembly von Mises' Stress Distribution

The bogie velocity from the simulation with the current, high-tension, cable anchor bracket assembly design as well as that of the redesigned anchor bracket assembly exhibited similar trends. The Δv due to impacts were 0.48 mph and 0.56 mph for the redesign and current simulations, respectively. As such, the impact severity due to the bogie's impact with the cable release lever was reduced in the redesigned anchor bracket assembly simulation as compared to the simulation with the current anchor bracket assembly. The impact severity from the redesigned, high-tension, cable anchor bracket assembly was 166.44 lb-in. compared to 225.72 lb-in for the current anchor bracket assembly. The differences in impact severities resulted in a 26 percent reduction between the current design and the redesigned cable anchor bracket assembly. A comparison of the bogie velocity in the current high-tension cable anchor bracket assembly simulation and the redesigned high-tension cable anchor bracket assembly simulation is shown in Figure 109.

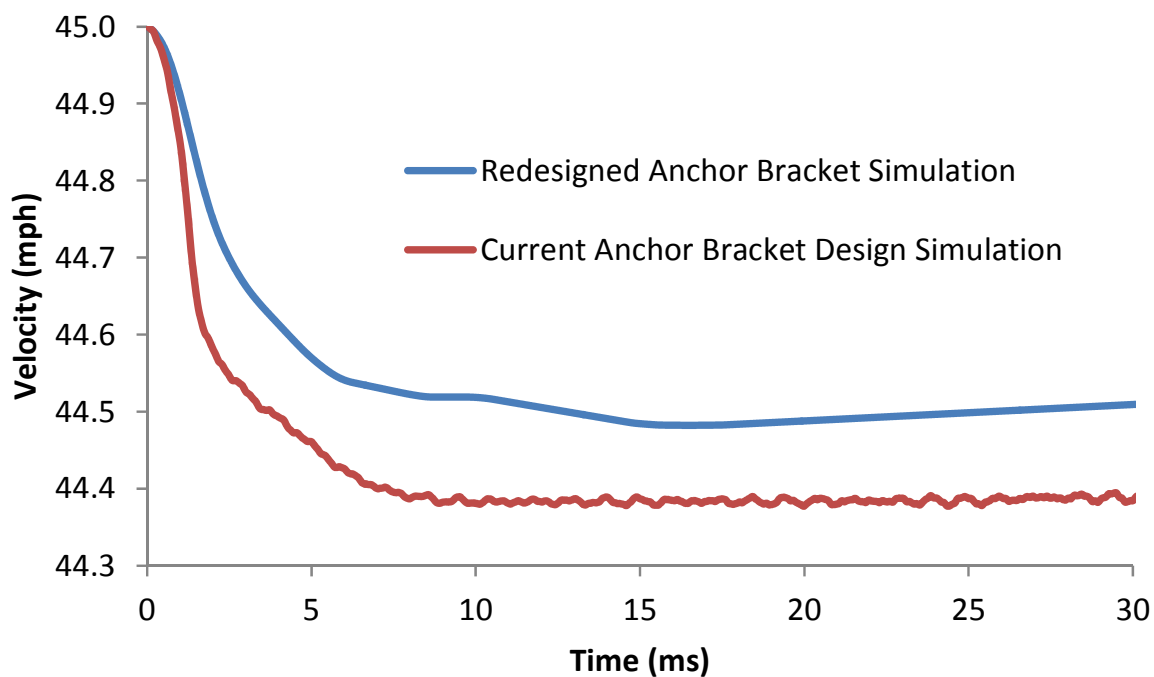


Figure 109. Anchor Bracket Assembly Simulations Velocity Comparison

The primary reason for the reduction in impact severities was due to the change in the overall height in the cable anchor bracket assembly. Since the whole assembly was restricted to a 4-in. maximum height, the anchor point for the cables on the cable plate had to be lowered. The cable release lever support assembly was also lowered to properly align with the cable slots. By lowering the cables and the cable release lever assembly, the moment arm for the impacting vehicle was increased. The increased moment arm allows impacting vehicles to release the cables with less applied force, thus lowering decelerations and Δv . One consequence of increasing the moment arm is that the vertical, cable release tubes will be subjected to higher bending stresses. However, after review of the simulation results, there was no indication that tube deformation would be a potential issue.

The redesigned high-tension, cable anchor bracket assembly performed well in simulations with an abbreviated cable end terminal model. The redesigned hardware eliminated many of the crash performance issues that were identified with the current, high-tension, cable anchor bracket assembly. Although the new design has only been evaluated through numerical modeling, previous comparisons between simulation models and physical testing yielded good initial agreement. Therefore, it is recommended that the redesigned cable anchor bracket assembly be subjected to physical component testing to further evaluate its crashworthiness.

CHAPTER 10 - SUMMARY, CONCLUSIONS, AND RECOMMENDATIONS

10.1 Summary

A new, non-proprietary, high-tension, cable end terminal design was investigated to provide State DOT's with an alternate option to the proprietary designs that are currently available. A literature review of high-tension, cable end terminals revealed that cable anchors with a means of releasing the system cables provided a more crashworthy and robust end terminal system. Terminal post characteristics were also critical to the success of the system. Weak-sectioned terminal posts reduced the threat of vehicle rollover in the case of end-on, terminal impacts.

A study of the non-proprietary, low-tension end terminal system developed by MwRSF was conducted. The high vehicle roll and yaw angles exhibited in test no. CT-4 were the result of a combination of initial vehicle yaw motion as well as vehicle interaction with system debris, including detached slip base post sections and the cable release lever.

Due to the contribution of the low-tension cable anchor bracket assembly to the vehicle trajectory in test no. CT-4, and the similarities between the low-tension anchor bracket and the current high-tension cable anchor bracket design, a further analysis of the high-tension anchor bracket assembly was deemed necessary. Simulation and bogie testing were used to study the assembly. Analysis showed that the current, high-tension cable anchor bracket assembly exhibited similar behavior and cable release mechanics as the previously tested low-tension cable anchor bracket assembly. Thus, there was concern that similar vehicle instabilities may be witnessed during full-scale crash testing of the current design.

Therefore, the high-tension cable anchor bracket assembly was redesigned to improve the crashworthiness of the assembly and end terminal system as a whole. The redesigned assembly was shortened to conform to MASH stub height criteria for breakaway devices. The front end of the assembly was redesigned in order to retain the cable release lever. The redesigned cable anchor bracket assembly was modeled, simulated, and analyzed. The assembly released the cables in a similar manner as both the non-proprietary low-tension and current, high-tension cable anchor bracket assemblies. The anchor bracket assembly successfully retained the cable release lever after release of the cables. The retention of the cable release lever eliminates any potential for undercarriage damage or vehicle interaction with the lever further into the system. Additionally, the modified design reduced the impact severity between the vehicle and the vertical, cable release tubes by 26 percent, as compared with the current, non-proprietary, cable anchor design.

Various alternate impact simulations were conducted including scenarios where only one vertical tube was impacted, reverse direction impacts, angled, frontal impacts, and impacts with cable tensions at higher than design specification. Although there was some plastic deformation exhibited in alternate impact simulations, the cables were released as intended, or in the case of the reverse direction impact, the cable release lever disengaged from the anchor bracket as designed. Since these scenarios represent non-ideal impact situations, the plastic deformation was deemed acceptable. Technical drawings for the assembly were provided in Section 9.4.1.

The investigation of test no. CT-4 also showed that the slip base post may be a less than ideal option for terminal applications. Although the initial impacts with slip base

posts did not produce rollover, secondary impacts with slip base post assembly debris resulted in high roll angles and vehicle instabilities.

An analysis of the standard M4x3.2 post or a weakened S3x5.7 post showed that they may be viable replacement options for the slip base post in the terminal. All alternate post sections have a diminished bending strength in the weak-axis direction, as compared with an S3x5.7 post. The lower strength in the weak-axis direction may prevent the vehicle from ramping up the post during end-on impacts. Also, the post would not introduce any debris into the path of the vehicle that could be hazardous to the stability of the vehicle and the safety of the occupants. Further investigation is required, however, before a decision can be made regarding a selection of a terminal post type.

10.2 Conclusions and Recommendations

Results from all aspects of the study were combined to form the following final set of recommendations for future development of a non-proprietary, high-tension, cable end terminal design:

- replace current high-tension cable anchor bracket assembly with redesigned anchor bracket assembly;
- further investigate the M4x3.2 post or comparable weak-sectioned post for use in the terminal region through simulation, bogie testing, and full-scale testing; and
- further investigate the implications of reduced terminal post torsional stiffness on redirection terminal impacts to determine if a 16 ft terminal post spacing is still adequate.

A redesigned non-proprietary, high-tension, cable anchor showed promising results in simulations. The redesigned anchor released the system cables when impacted end-on and successfully retained the cable release lever after the impact event. Although the redesigned cable anchor bracket assembly would require physical bogie testing to further evaluate the design, simulation results indicated that the redesigned assembly has potential to improve the safety and crashworthiness of the non-proprietary, high-tension cable end terminal design.

Based on the study of current cable end terminal systems, it is recommended that further investigation of an alternate terminal post for the non-proprietary, high-tension, cable end terminal design be undertaken. The non-proprietary, low-tension design utilized slip base posts in the terminal region. These post assemblies, however, caused high vehicle roll and yaw angles in full-scale crash testing due to detached post sections interacting with the undercarriage of the test vehicle. In order to prevent system debris from causing vehicle stability issues in future tests, the slip base posts could potentially be replaced with an assembly that does not completely detach from its base, but rather is retained throughout the impact event. Preliminary investigation indicated that an M4x3.2 post, weakened S3x5.7 post, or similar weak-sectioned post, may be viable replacement options. However, these alternatives require further investigation prior to full-scale crash testing.

Finally, a 16 ft terminal post spacing was utilized in the low-tension, cable end terminal test series (CT series). No issues were discovered during analysis of the crash test series that were directly related to the terminal post spacing. Furthermore, in end terminal simulations the post spacing did not negatively affect the crashworthiness of the

system. However, if one of the recommended alternate post sections is selected for use in the terminal region, further investigation may be required. Due to the alternate terminal post's reduced torsional stiffness, as compared with an S3x5.7 section, it is unclear whether an M4x3.2 post or modified S3x5.7 post would be able to adequately support the system cables in a redirection terminal impact.

Other approved, high-tension cable end terminal designs utilize post spacing of 90-in. or less. The benefit of such short post spacing is that the extra posts provide increased support for the system cables in redirecting impacting vehicles. If a larger post spacing is adequate for redirecting impacting vehicles, however, the system would be cheaper and simpler to install.

Other primary features of the terminal system such as cable tension and number of system cables are dependent upon the design of the non-proprietary high-tension cable guardrail system, which is still in development. At the time of the research and design of the non-proprietary high-tension cable end terminal, the utilized features reflected the latest revision of the high-tension guardrail system.

10.2.1 Future Work

The conclusions and recommendations presented in the previous sections are the result of the conducted research, development, and analysis of high-tension cable guardrail end terminal components. Although the redesigned high-tension, cable anchor bracket assembly design exhibited good mechanics in simulation, the design should be subjected to component testing to validate the simulation results and further evaluate its functionality. Other recommendations including certain alternate terminal post types

should also undergo component testing to fully assess their strength properties. The following component tests are recommended to further evaluate the proposed designs:

- bogie test with the redesigned cable anchor assembly in abbreviated end terminal with inline orientation;
- bogie test with the redesigned cable anchor with 15-degree impact orientation; and
- bogie tests with the M4x3.2 post and S3x5.7 post with weakening holes to determine dynamic bending strength properties of each post type so that comprehensive comparison between terminal post options can be made.

Simulation of alternate terminal posts and post spacing can also be used to preliminarily evaluate configurations of posts and post spacing to determine which show potential for use in full-scale crash testing of a new end terminal system.

If no design issues or concerns are exposed during component testing, full scale testing can be accomplished. Full-scale crash testing of the non-proprietary, high-tension, cable guardrail end terminal design to MASH terminal requirements is necessary for FHWA acceptance. Testing of the terminal's length of need can be utilized to definitively evaluate terminal post spacing. A summary of MASH testing requirements and recommendations for a full scale testing program with the new, non-proprietary, high-tension cable end terminal system is shown in Table 12. Note that some tests may be deemed less critical after component testing has been accomplished and evaluated. Only after a full evaluation of the non-proprietary, high-tension, cable guardrail end terminal through full-scale crash testing can the terminal be implemented along state highways and roadways.

Table 12. Recommended MASH Testing

Test No.	Vehicle Type	Impact Speed (mph)	Impact Angle (Degrees)	Impact Location	Recommended (Y/N)	Comment
3-30	1100C	62	0	Anchor - 1/4 Point Vehicle Offset	Y	Necessary to evaluate selection of terminal post and redesigned anchor
3-31	2270P	62	0	Anchor - Vehicle Centered	N	Small car stability is more critical test (3-30)
3-32	1100C	62	15	Anchor	Y	Necessary to evaluate small car stability and anchor release mechanics in non-ideal vehicle impact orientation on the anchor
3-33	2270P	62	15	Anchor	N	Small car stability in angled impact is more critical (3-32)
3-34	1100C	62	15	Critical Impact Point	N	Strength test of anchor is more critical (3-34)
3-35	2270P	62	25	Beginning of Length of Need	Y	Necessary to evaluate structural adequacy of the redesigned anchor
3-36	2270P	62	25	Critical Impact Point	N	Evaluation of anchor's structural characteristics more critical (3-35)
3-37	2270P	62	25	Reverse Direction	Y	Necessary to evaluate ability of redesigned anchor and cable release lever to disengage in a reverse direction impact without causing significant snag to vehicle or other potentially hazardous vehicle interaction
3-38	1500A	62	0	Anchor - Vehicle Centered	N	Small car stability is more critical test (3-30)

CHAPTER 11 - REFERENCES

1. Albin, D. and Milton, J., *Improving Highway Safety: Cable Median Barrier*, Washington State Department of Transportation, January 2004.
2. O'Hagan, D.C., *High Tension Cable Barriers*, Roadway Design Bulletin 07-08, Florida Department of Transportation, October 25, 2007.
3. *Guard Cable*, Technical Bulletin, Number 2, Missouri Department of Transportation, 2006.
4. Hitz, R.A., Molacek, K.J., Stolle, C.S., Polivka, K.A., Faller, R.K., Rohde, J.R., Sicking, D.L., Reid, J.R., and Bielenberg, R.W., *Design and Evaluation of a Low-Tension Cable Guardrail End Terminal System*, Presented to the Midwest States' Regional Pooled Fund Program, Transportation Research Report No. TRP-03-131-08, Midwest Roadside Safety Facility, July 2008.
5. Griffith, M.S., FHWA Approval Letter CC-111, Federal Highway Administration, Washington, D.C., 2010.
6. Ross, H.E., Sicking, D.L., Zimmer, R.A., and Michie, J.D., *Recommended Procedures for the Safety Performance Evaluation of Highway Features*, National Cooperative Highway Research Program (NCHRP) Report 350, Transportation Research Board, Washington, D.C., 1993.
7. *Manual for Assessing Safety Hardware (MASH)*, American Association of State Highway and Transportation Officials (AASHTO), Washington, D.C., 2009.
8. Jacoby, C.H., FHWA Approval Letter CC-76, Federal Highway Administration, Washington, D.C., 2002.
9. Baxter, J.R., FHWA Approval Letter CC-86, Federal Highway Administration, Washington, D.C., 2004.
10. Baxter, J.R., FHWA Approval Letter CC-92, Federal Highway Administration, Washington, D.C., 2005.
11. Baxter, J.R., FHWA Approval Letter CC-93, Federal Highway Administration, Washington, D.C., 2005.
12. Nicol, D.A., FHWA Approval Letter CC-105, Federal Highway Administration, Washington, D.C., 2009.
13. Hallquist, J.O., LS-DYNA Keyword User's Manual, Livermore, CA, Livermore Software Technology Corporation, March 2001.

14. Terpsma, R.J., Modeling and Validation of CT-4 Cable Anchor Bracket, Mechanical Engineering 950 Term Project, University of Nebraska-Lincoln, December 2010.
15. Hiser, N.R., *Slip Base Modeling for Cable Guardrail Systems*, A Thesis Presented to the Faculty of The Graduate College at the University of Nebraska-Lincoln, April 2003.
16. Reid, J.D., and Coon, B.A., *Finite Element Modeling of Cable Hook Bolts*, 7th International LS-DYNA Users Conference, May 2002.
17. Reid, J.D., Hiser, N.R., and Paulsen, T.J., Simulation and Bogie Testing of a New Cable Barrier Terminal, International Mechanical Engineering Congress and Exposition, November 2003.
18. Luttig, M., and Lechtenberg, K.A., *Cut Cable Post Bogie Testing, Test Nos. CCP-1 through CCP-11*, Internal Report, Midwest Roadside Safety Facility, February, 2012.
19. Kuipers, B.D. and Reid, J.D., *Testing of M203.7x9.7 (M8x6.5) and S76x8.5 (S3x5.7) Steel Posts - Post Comparison Study for the Cable Median Barrier*, Presented to the Midwest State's Regional Pooled Fund Program, Transportation Research Report No. TRP 03 143 03, Midwest Roadside Safety Facility, October, 2003.
20. Stolle, C.S., *A Concise Model of 3x7 Wire Rope Used in Cable Guardrail Systems*, A Thesis Presented to the Faculty of The Graduate College at the University of Nebraska-Lincoln, May 2010.
21. DynaMax User's Manual, Revision 1.75, Instrumented Sensor Technologies, Inc., Okemos, Michigan, April 1993.
22. Society of Automotive Engineers (SAE), *Instrumentation for Impact Test – Part I – Electronic Instrumentation*, SAE J211/1 MAR95, New York City, NY, July, 2007.
23. Wiebelhaus, M.J., Johnson, E.A., Sicking, D.L., Faller, R.K., Lechtenberg, K.A., Rohde, J.R., Reid, J.R., Bielenberg, R.W., and Rosenbaugh, S.K., *Phase I Development of a Non-Proprietary, Four-Cable, High-Tension, Median Barrier*, Presented to the Midwest States' Regional Pooled Fund Program, Transportation Research Report No. TRP-03-213-11, Midwest Roadside Safety Facility, December, 2011.

CHAPTER 12 - APPENDICES

Appendix A. Initial Simulation Results - Metric

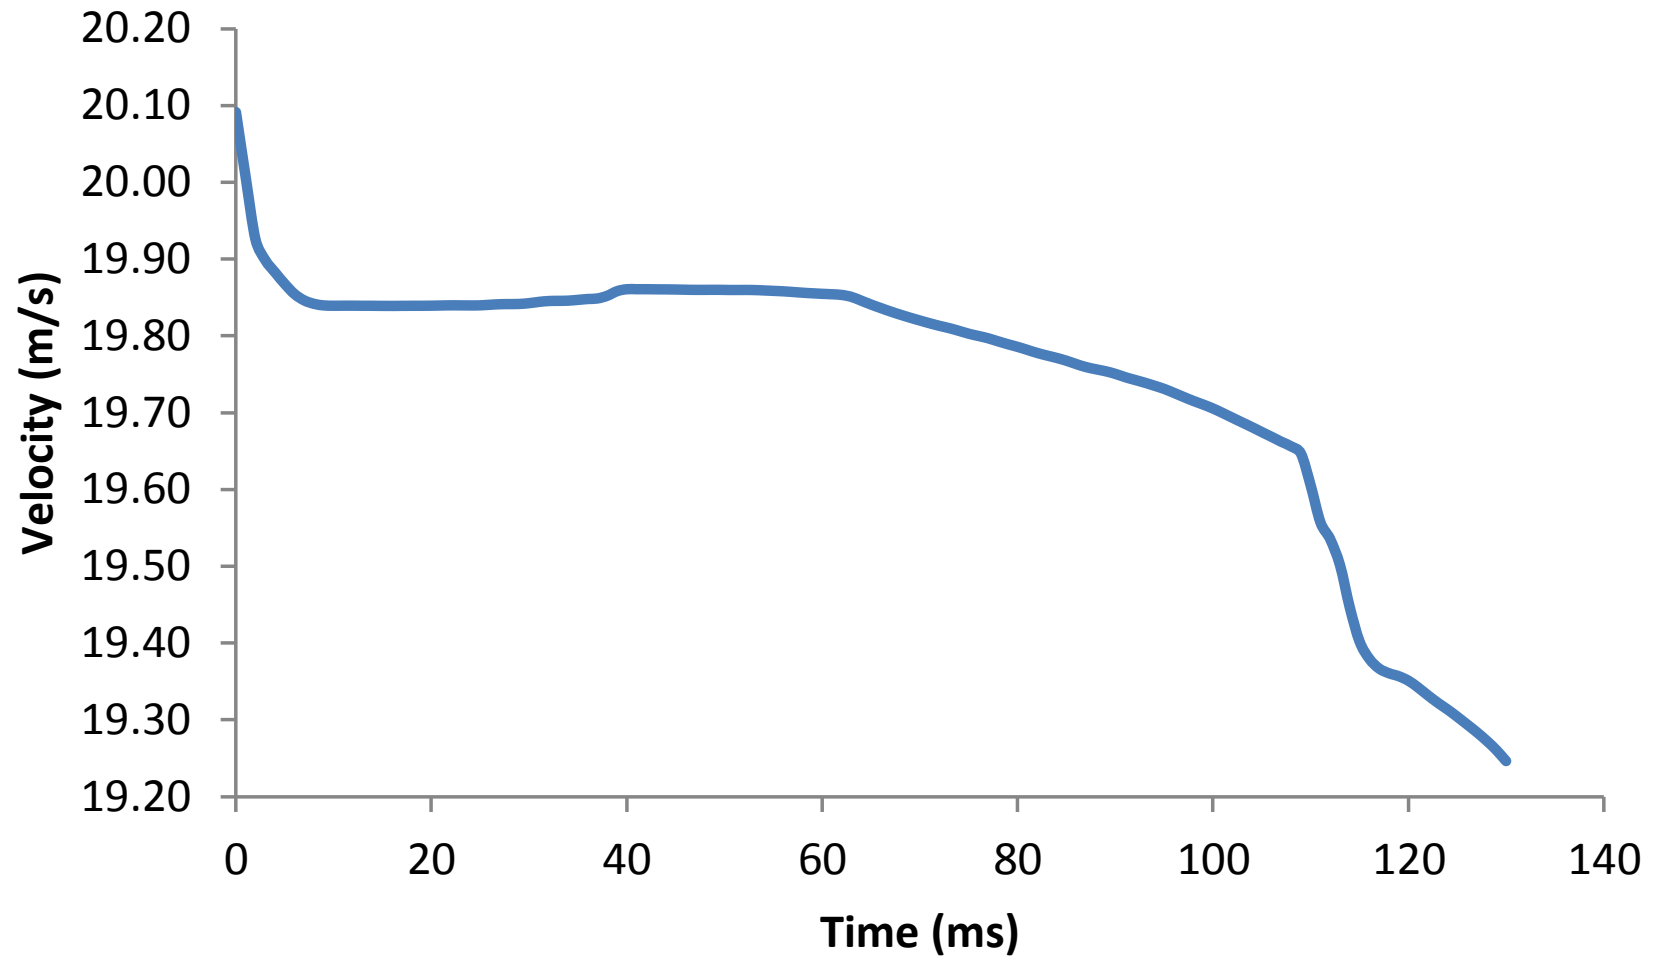


Figure A-1. Bogie Velocity, Initial Simulation

Appendix B. Bogie Test Results - Metric

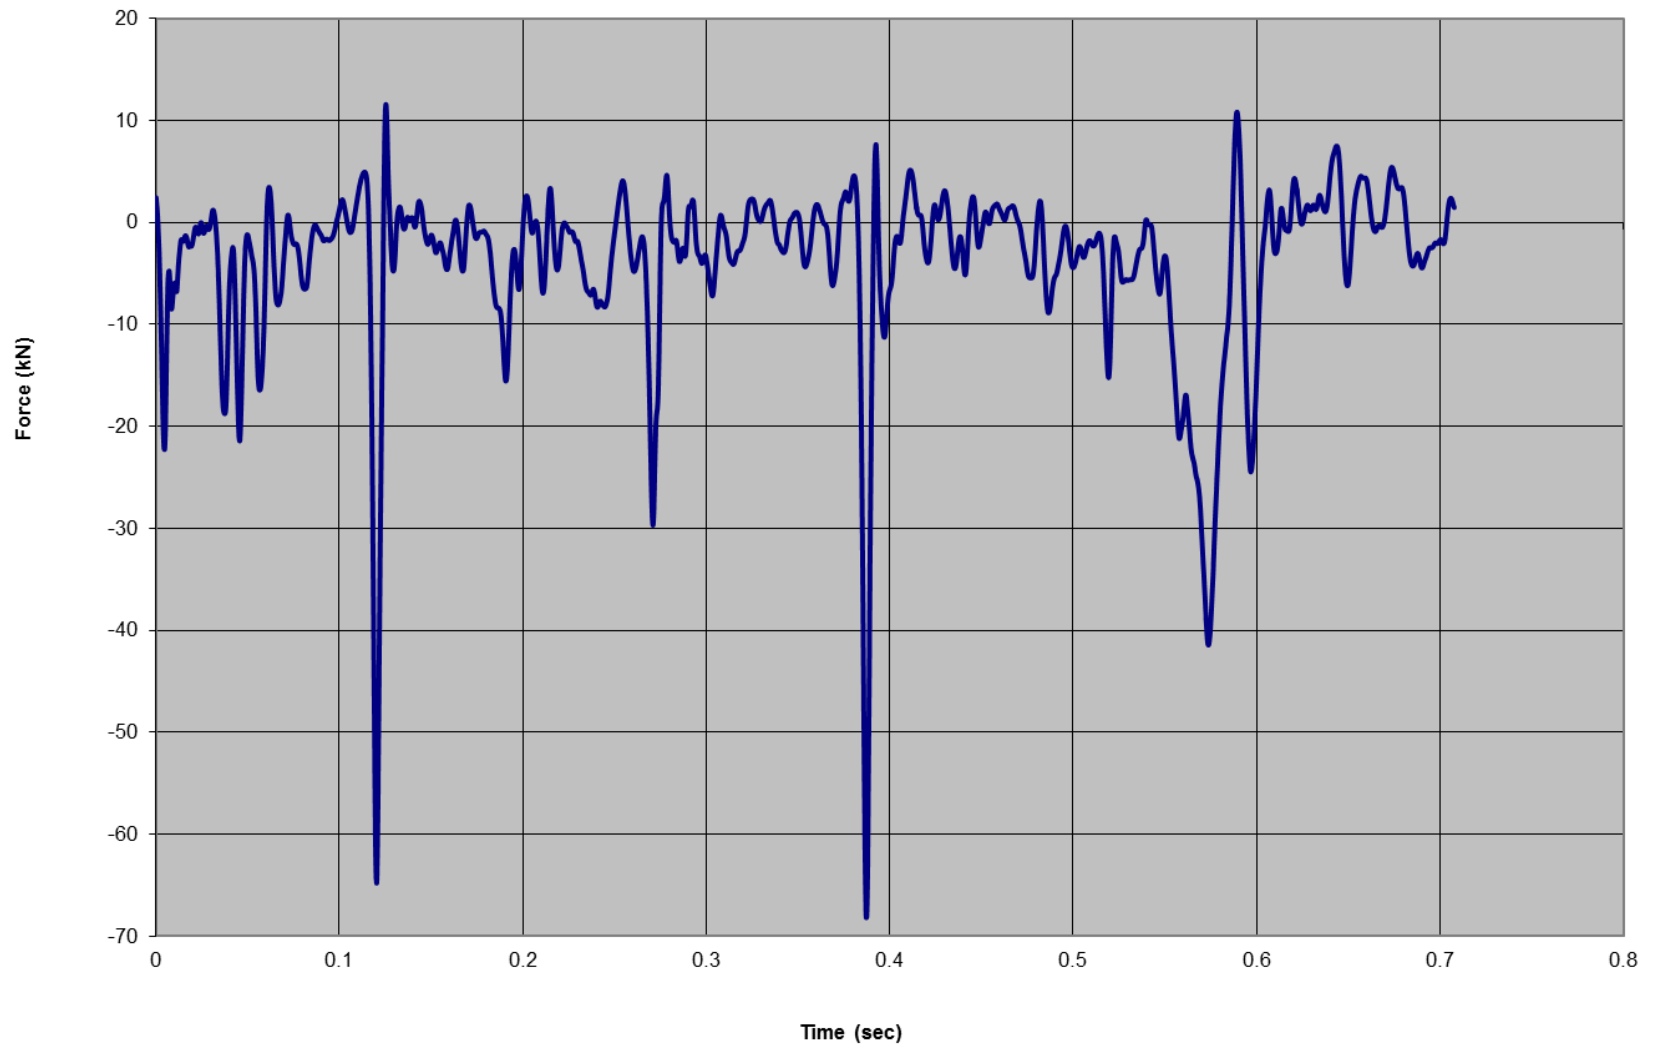


Figure B-1. Force vs. Time, Test No. HTCT-1

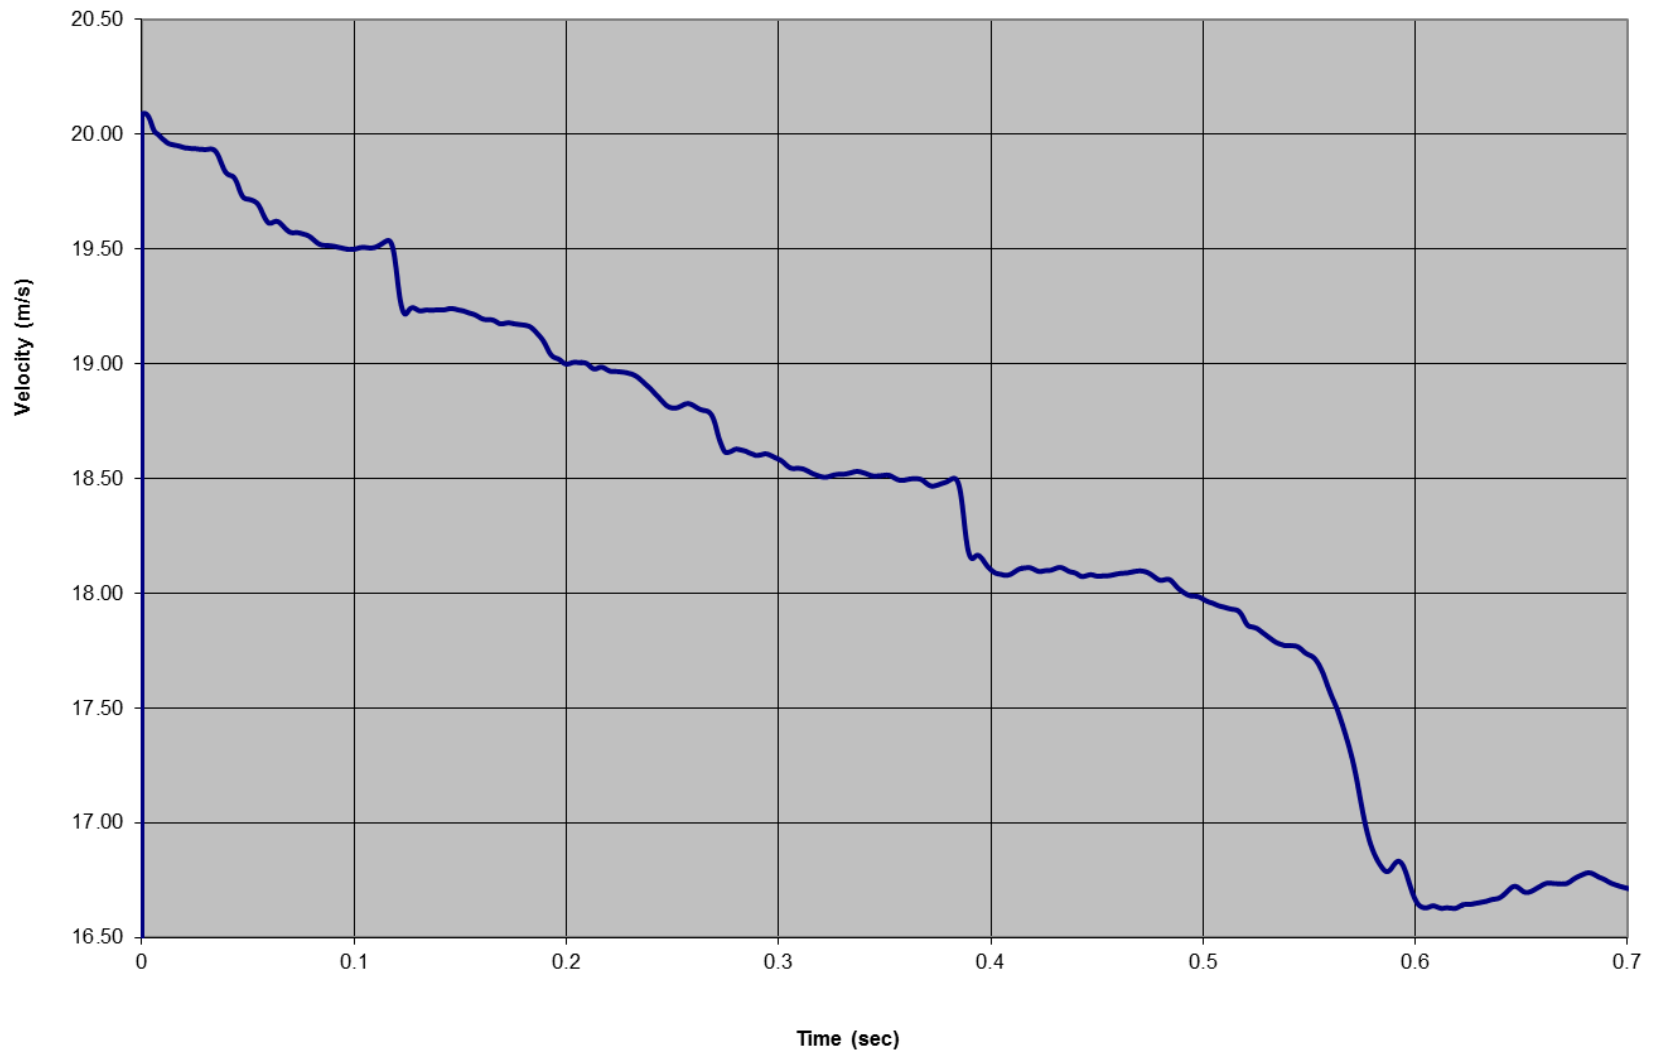


Figure B-2. Velocity vs. Time, Test No. HTCT-1

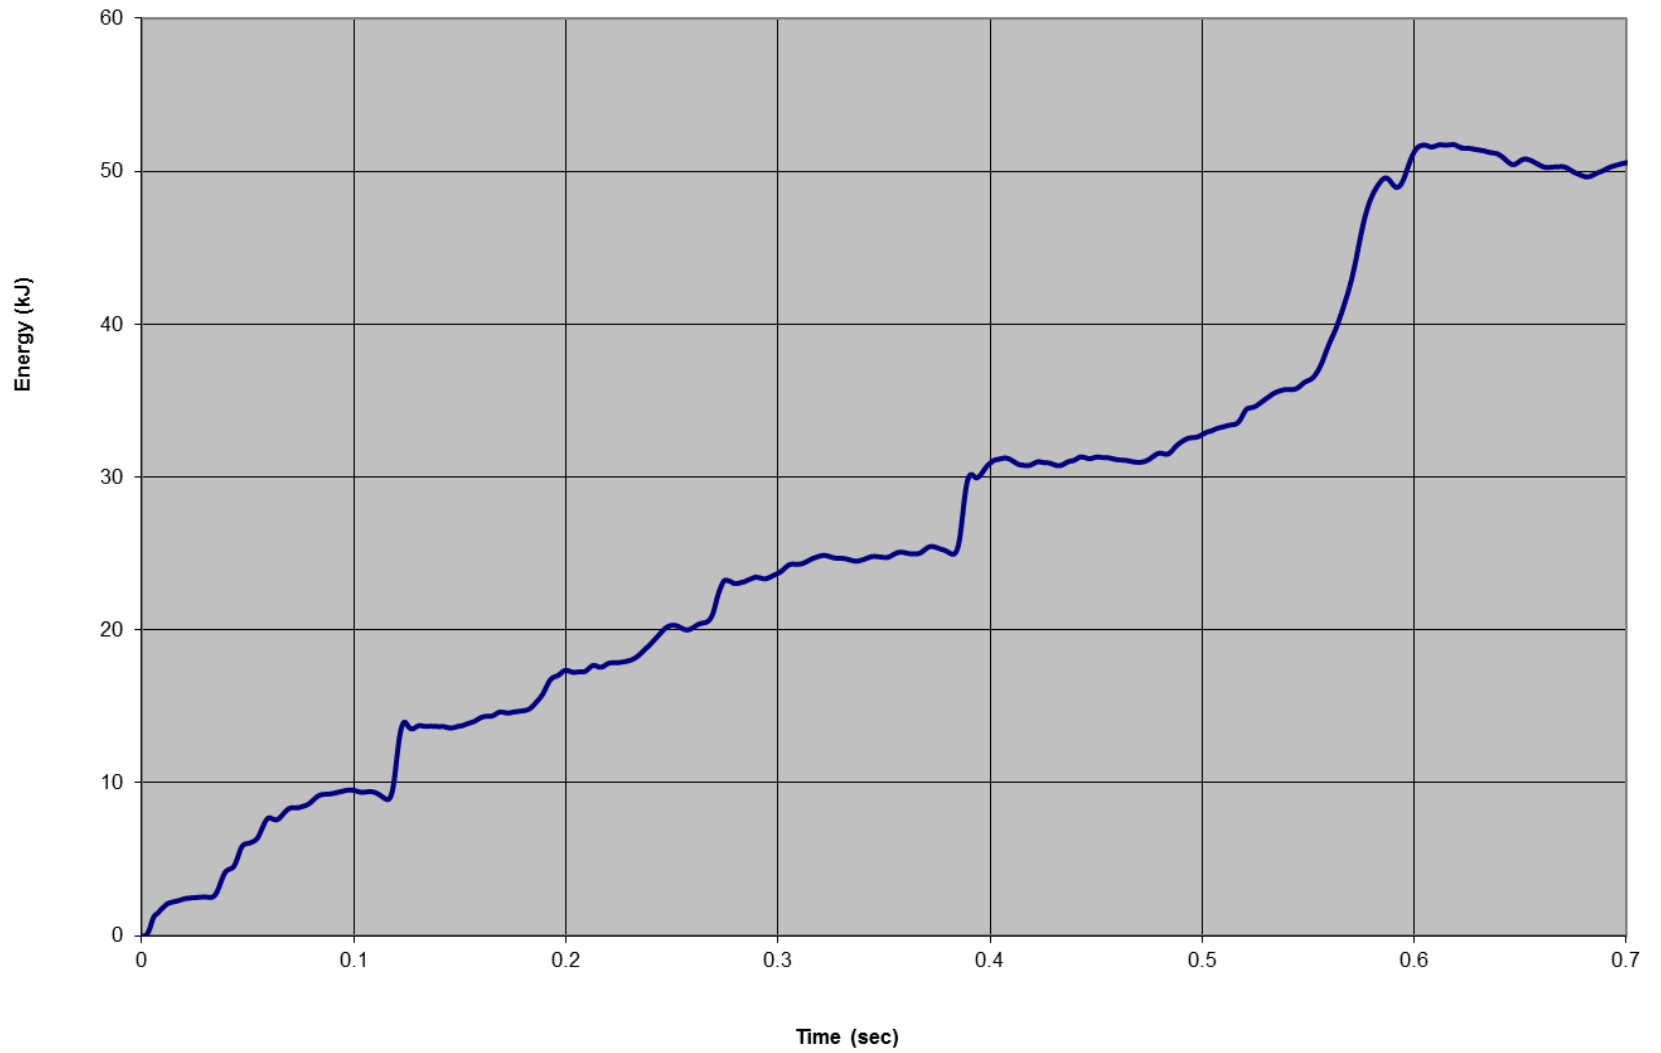


Figure B-3. Energy vs. Time, Test No. HTCT-1

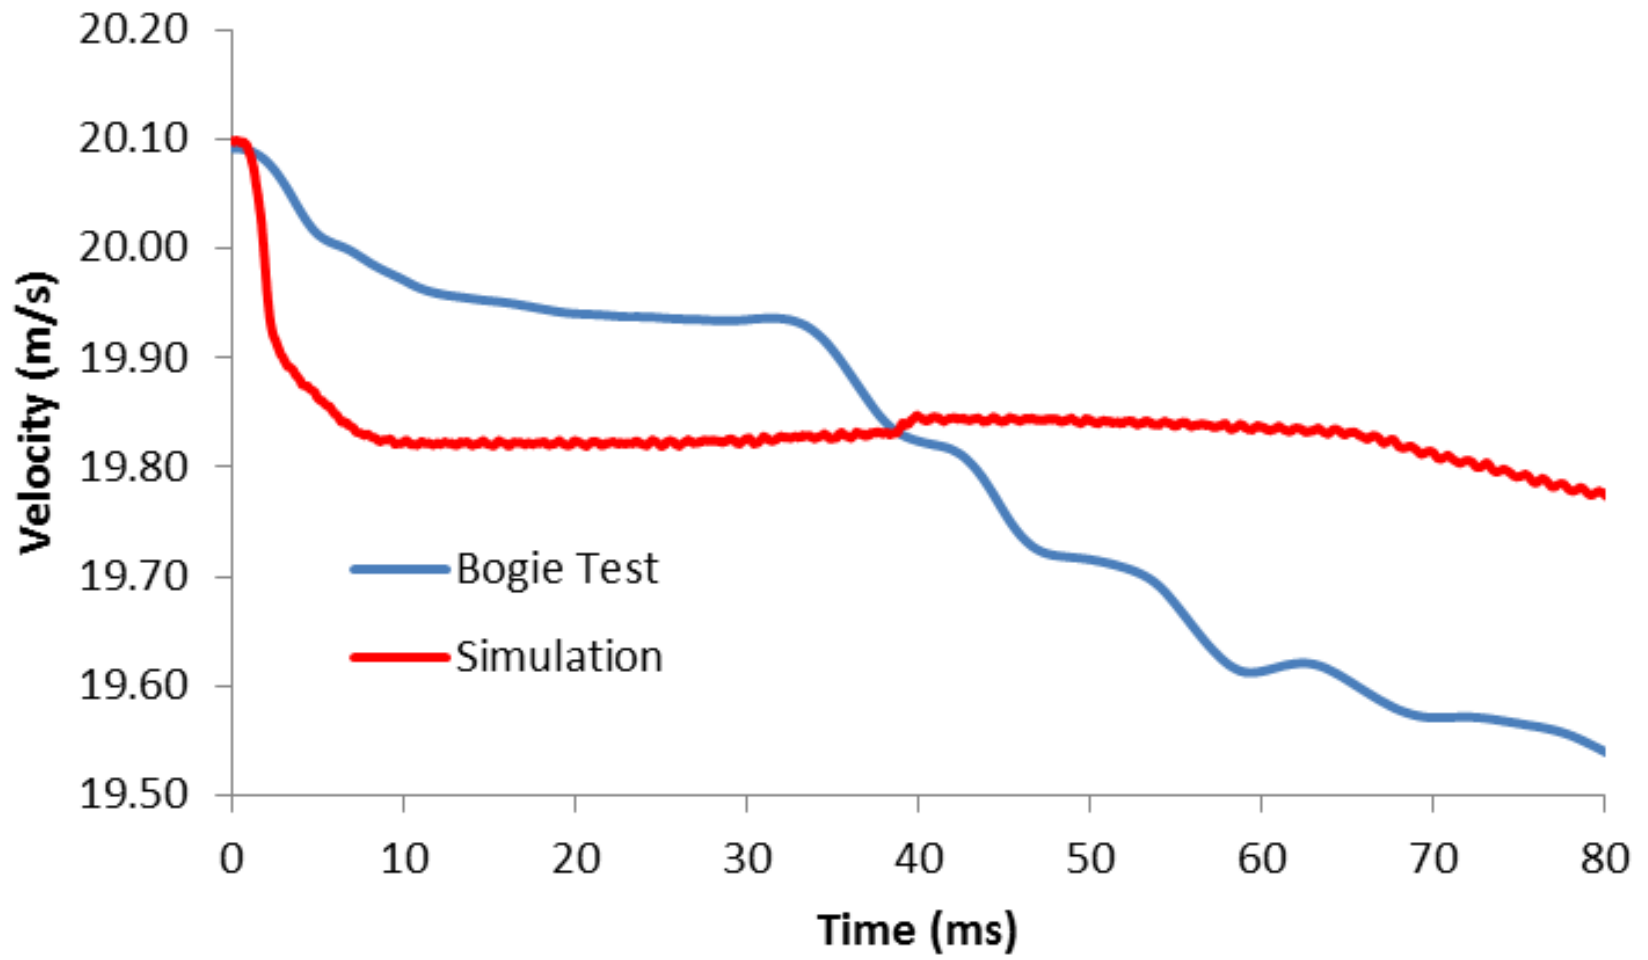


Figure B-4. Bogie Velocity Comparison

Appendix C. Standard MwRSF Bogie Test Sheet, Test No. HTCT-1

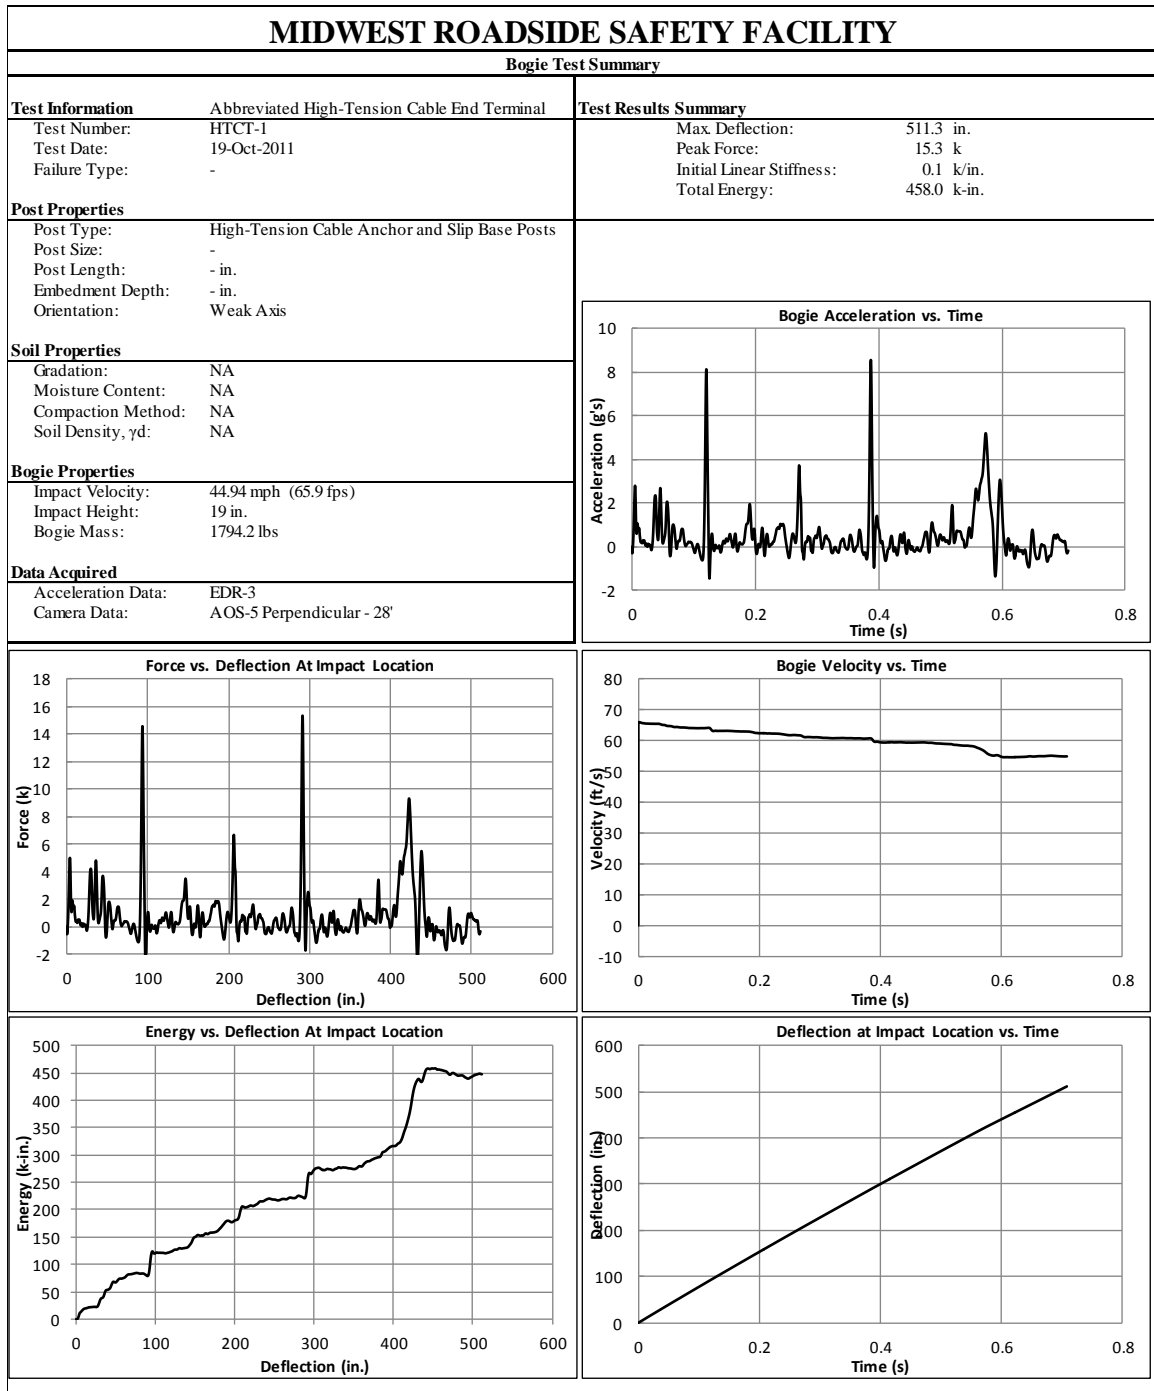


Figure C-1. Results of Test No. HTCT-1 – English

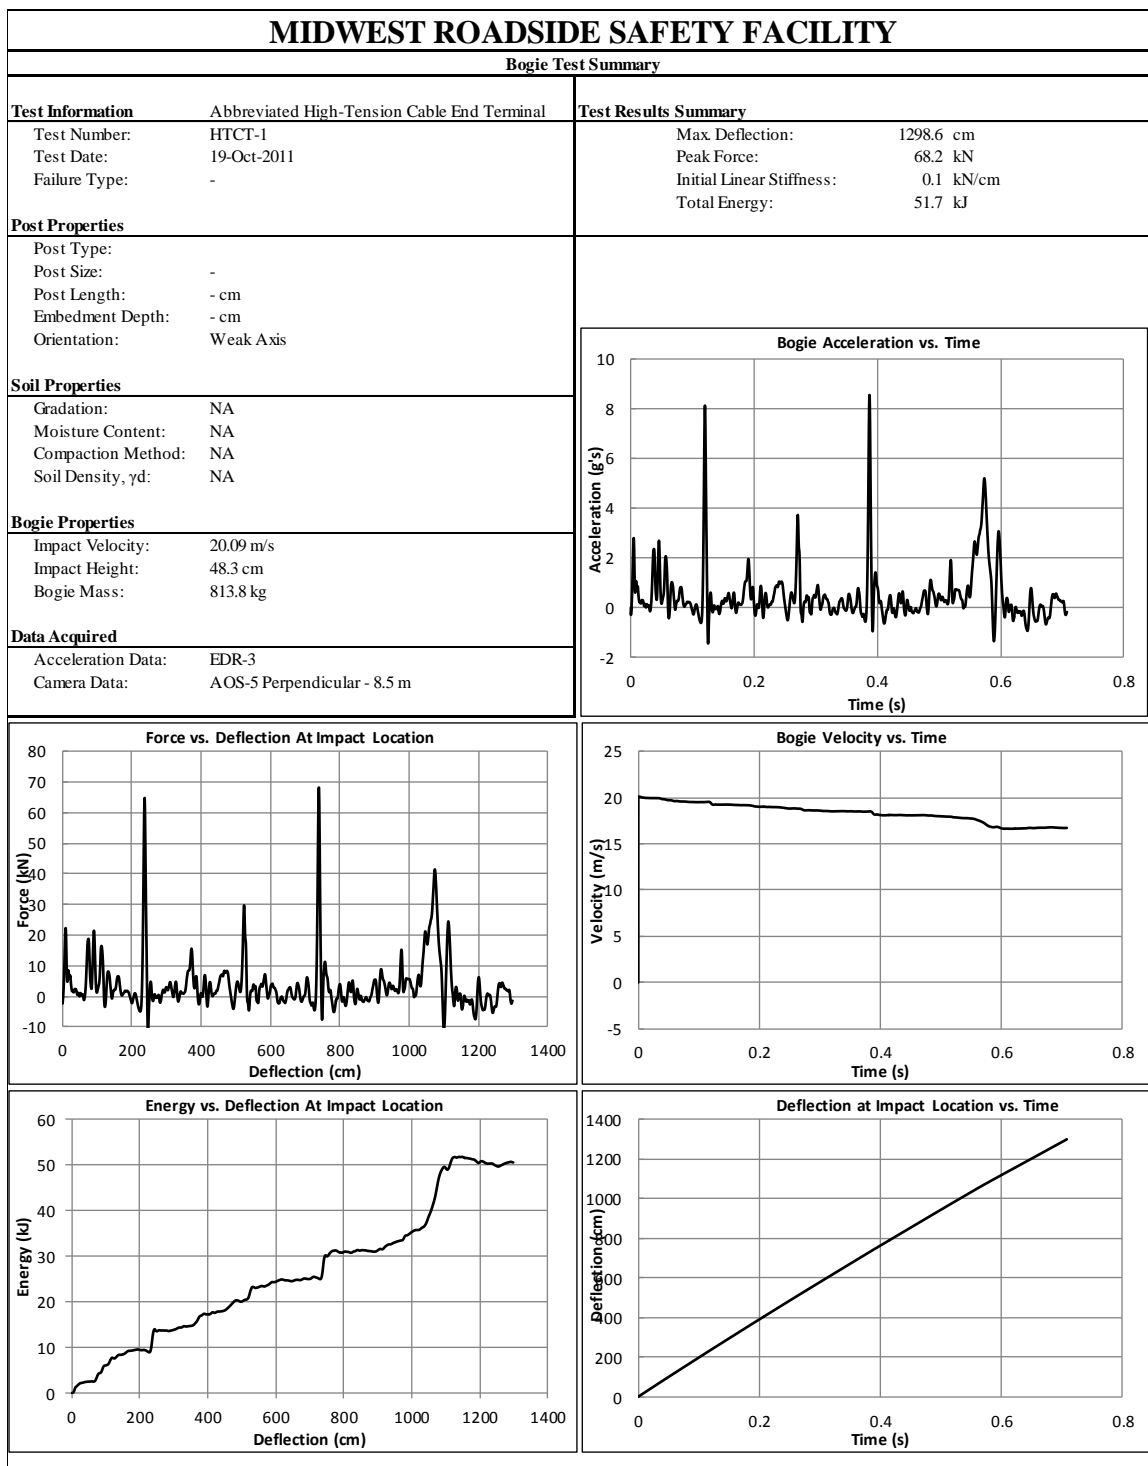


Figure C-2. Results of Test No. HTCT-1 - Metric

Appendix D. Redesigned Cable Anchor Bracket Simulation Results – Metric

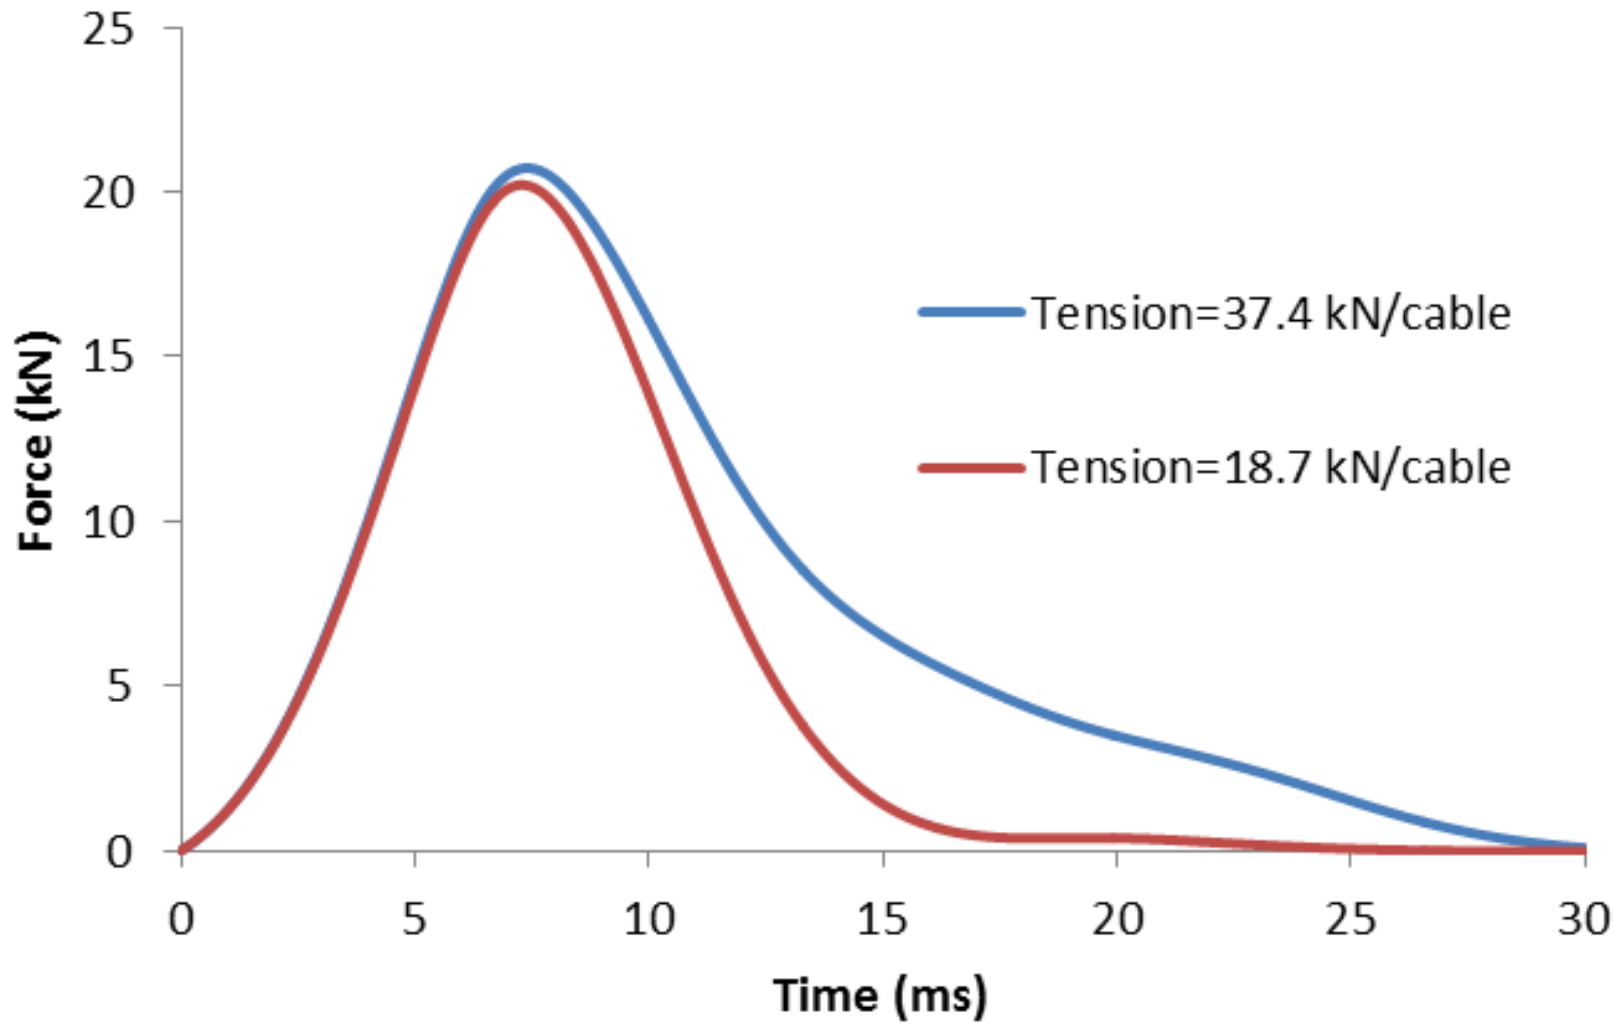


Figure D-1. Impact Force Comparison, Increased Cable Tension vs. Design Tension

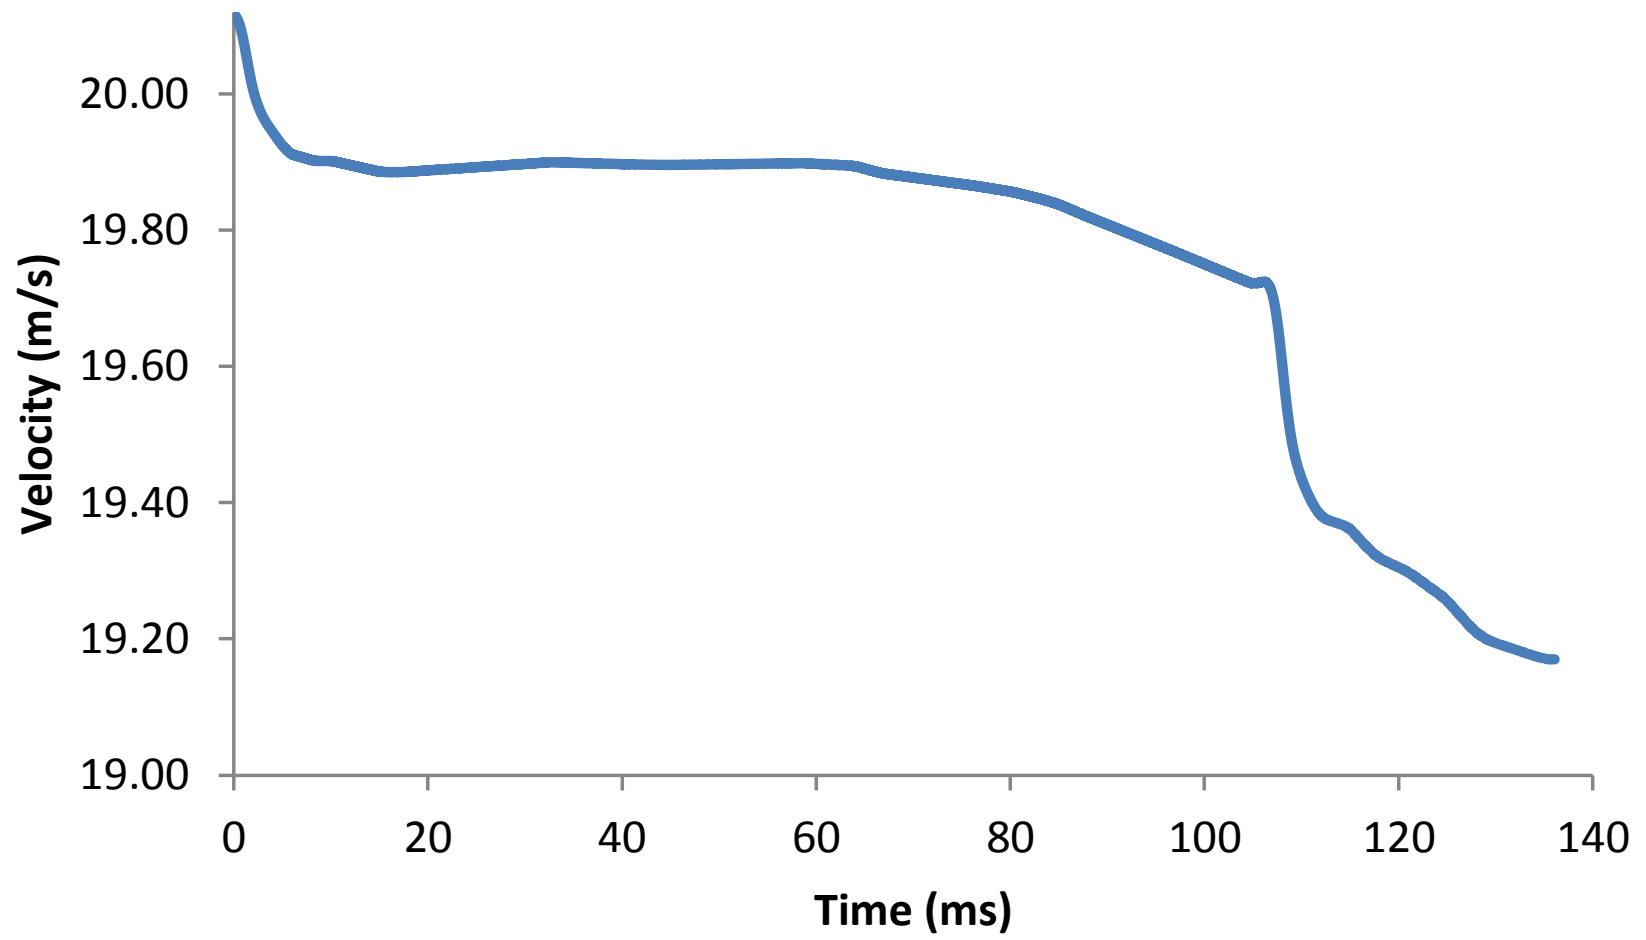


Figure D-2. Bogie Velocity, Final Redesign

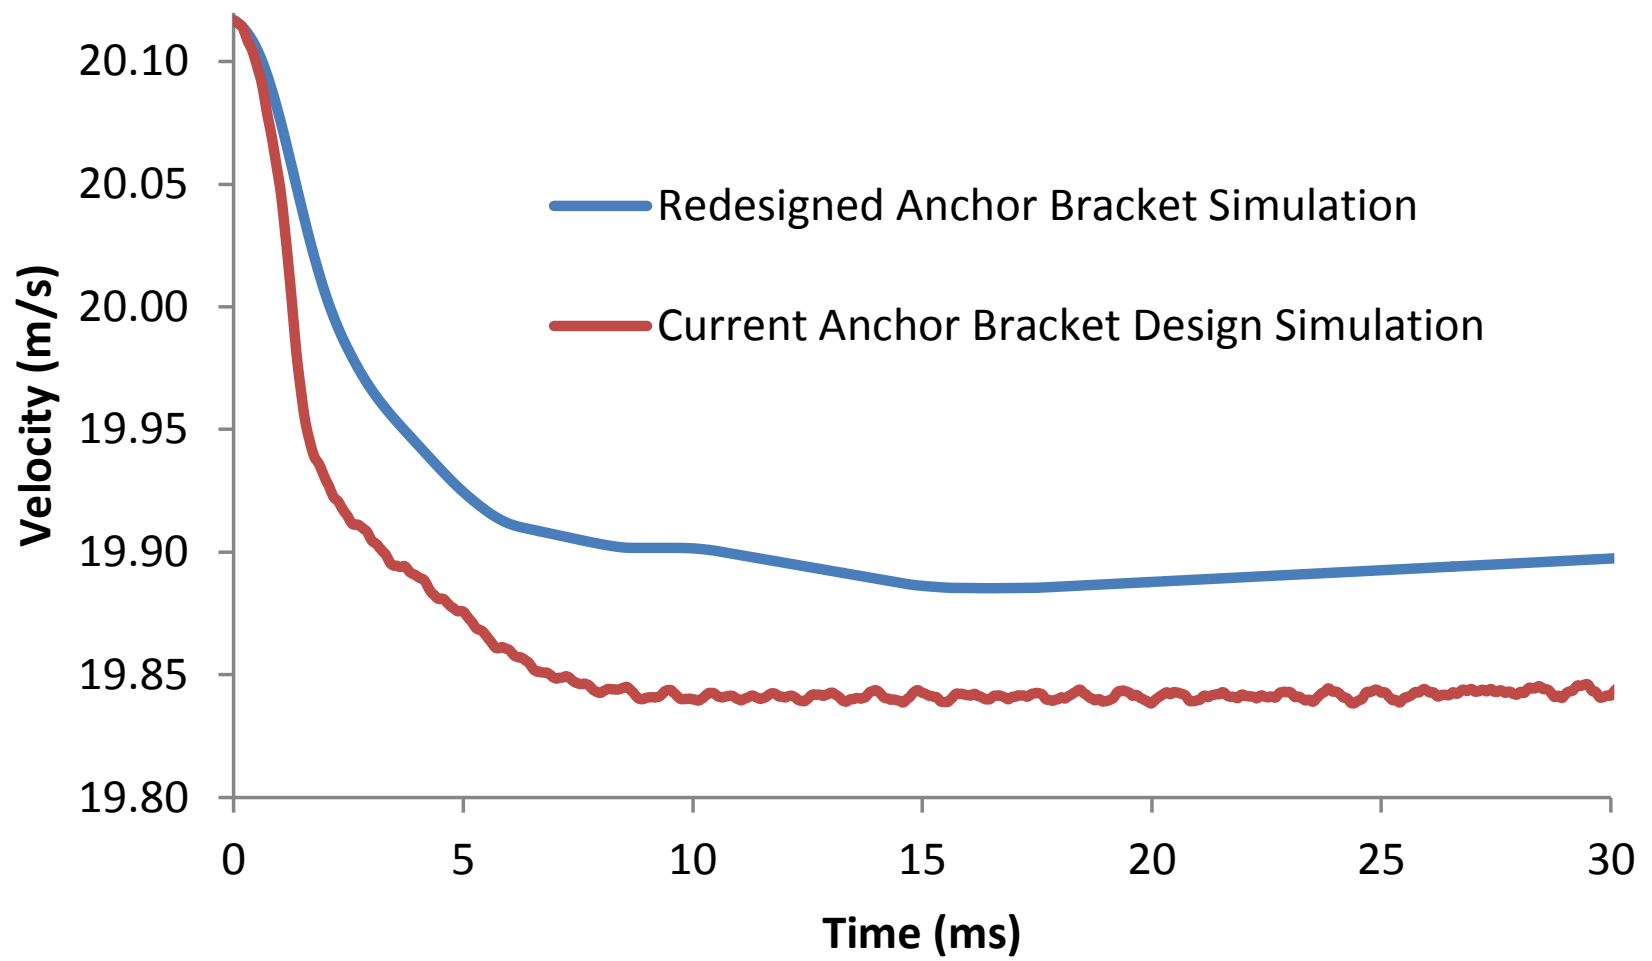


Figure D-3. Anchor Bracket Simulations Velocity Comparison