

Higher Order Multigrid Algorithms for a 2D and 3D RANS- $k\omega$ DG-Solver


Marcel Wallraff, Tobias Leicht

DLR Braunschweig (AS - C²A²S²E)



Wissen für Morgen

Multigrid algorithms

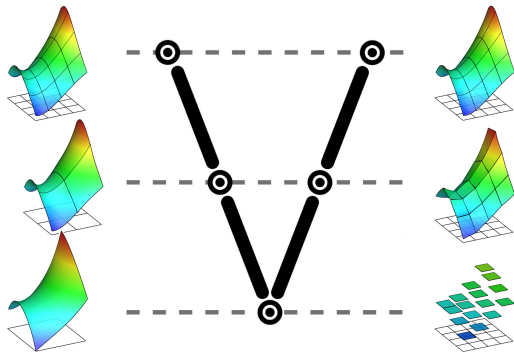

DG discretization

Basis functions


- non-parametric ortho-normal basis functions
- directly formulated in physical space
- also referred to as Taylor-DG
- need to be evaluated for each mesh element

RANS- $k\omega$ equations

- $k\omega$ turbulence model
- second scheme of Bassi and Rebay (BR2) for the viscous terms
- Roe flux as a convective flux, based on an eigen-decomposition of the full jacobian



Non-linear multigrid method



nested hierarchy of linear spaces

$$\mathbf{V}_{l_{\min}} \subset \mathbf{V}_{l_{\min}+1} \subset \dots \subset \mathbf{V}_{l_{\max}-1} \subset \mathbf{V}_{l_{\max}}$$

$$\mathbb{R}^{n_{l_{\min}}} \quad \mathbb{R}^{n_{l_{\min}+1}} \quad \dots \quad \mathbb{R}^{n_{l_{\max}-1}} \quad \mathbb{R}^{n_{l_{\max}}}$$

intergrid transfer operators:

- prolongation: natural injection $I'_{l-1} : \mathbb{R}^{n_{l-1}} \rightarrow \mathbb{R}^{n_l}$
- canonical restriction operator $I_l'^{-1} := \left(I'_{l-1} \right)^\top$

non-linear multigrid algorithm also requires:


- restricted nonlinear state vector:
orthogonal L^2 -projection $\hat{I}_l'^{-1}$ on the space \mathbf{V}_{l-1}



Non-linear multigrid method

Let the non-linear problem to be solved on the fine level l_{\max} be given by

$$\mathbf{L}_{l_{\max}}(\mathbf{u}_{l_{\max}}) = \mathbf{f}_{l_{\max}}.$$




- restrict solution approximation $\mathbf{u}_{l-1} := \hat{l}_l^{-1} \mathbf{u}_l$
- compute forcing function for the coarse level:

$$\mathbf{f}_{l-1} \leftarrow \mathbf{f}_{l-1} + l_l^{-1} (\mathbf{f}_l - \mathbf{L}_l(\mathbf{u}_l)) - (\mathbf{f}_{l-1} - \mathbf{L}_{l-1}(\mathbf{u}_{l-1}^0))$$

- Galerkin-transfer for the Jacobian: $\underline{\mathbf{R}}_{l-1} = l_l^{-1} \underline{\mathbf{R}}_l l_l$



Non-linear smoother / solver



smoother / solver

➤ linearized Backward-Euler

➤ Solve $[(\alpha_i \Delta t)^{-1} \underline{\mathbf{M}} + \underline{\mathbf{R}}_l] (\mathbf{u}_{l,i} - \mathbf{u}_{l,i-1}) = [\mathbf{f}_l - \mathbf{L}_l(\mathbf{u}_{l,i-1})]$,

➤ where $\underline{\mathbf{R}}_l$ is the fully implicit Jacobian matrix and $\underline{\mathbf{M}}$ is the mass matrix. In addition to that $\mathbf{u}_{l,j}$ is a state vector, with $\mathbf{u}_{l,j} \in \mathbf{V}_l \forall j \in \mathbb{N}$.

➤ local pseudo-time steps, adaptive CFL number




Linear smoother / solver

- Krylov method as linear solver (GMRES method)
- line-Jacobi as preconditioner / smoother
 - let $\mathcal{L}_{l,k}(\mathbf{u}_{l,k}) = \mathbf{f}_{l,k}$ the underlying linear problem on line k ,
 - solve $\delta \mathbf{u}_{l,k,i} := \mathbf{u}_{l,k,i} - \mathbf{u}_{l,k,i-1} = \mathbf{R}_{l,k}^{-1}(\mathbf{f}_{l,k} - \mathcal{L}_{l,k}\mathbf{u}_{l,k,i-1})$
 - set $\mathbf{u}_{l,k,i} := \mathbf{u}_{l,k,i-1} + \delta \mathbf{u}_{l,k,i}$,
 - where $\mathbf{R}_{l,k}^{-1}$ is the inverse of the Jacobian matrix computed one line k in the mesh






Relaxation scheme

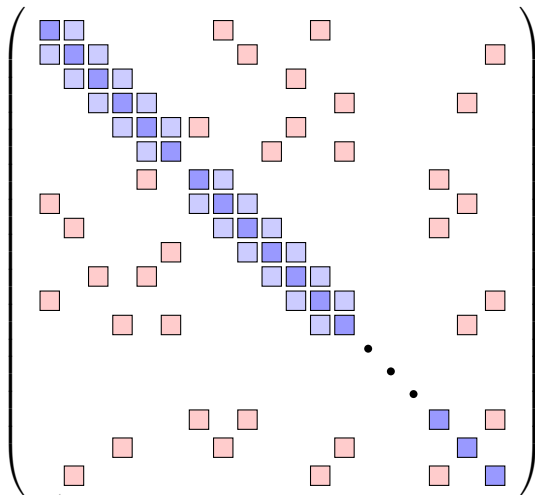Jacobian / system matrix structure



matrix blocks

-  element diagonal
-  line neighbor
-  off-line off-diagonal



Numerical algorithms

possible solver choices

- single grid Backward-Euler
- start up strategy in mesh or order sequencing for improved initial conditions
- linear MG as preconditioner
- non-linear MG to accelerate process in pseudo-time
- non-linear MG with linear MG on each level



Numerical parameters for the non-linear problems

non-linear multigrid

- only V-cycles will be presented
- one pre- and post-smoothing iteration on each level
- one smoothing iteration on the lowest level
- a linearized Backward-Euler scheme as smoother
- using an SER time stepping scheme for the Backward-Euler
- Galerkin-transfer to obtain the Jacobian on the lower levels



Numerical parameters for the linear problems

parameters for solving the resulting linear problems on every level from the Backward-Euler linearization

- GMRES method with a fixed number of max steps on every level
- linear multigrid as a preconditioner for the GMRES method
- one V-cycle is done for preconditioning
- no pre-smoothing iterations
- four post-smoothing iterations
- four smoothing iterations on the lowest level
- line-Jacobi scheme as smoother
- Galerkin-transfer to obtain the lower level matrices




L1T2 high-lift configuration

- flow conditions:
 - Mach: 0.197
 - Reynolds number: 3,520,000
 - $\alpha = 20.18^\circ$
- testcase from EC funded ADIGMA project
- computations will be shown on an unstructured mesh with 23824 mixed elements
- $p = 2$ solution is desired for all computations



L1T2 high-lift configuration

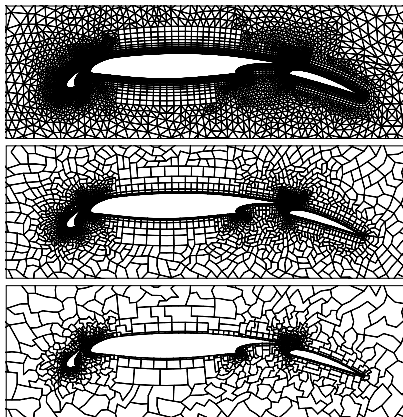


mixed-element mesh
(CENAERO via GMSH)

third order


142 944 DoF

three levels




L1T2 high-lift configuration

run time comparison: h -MG

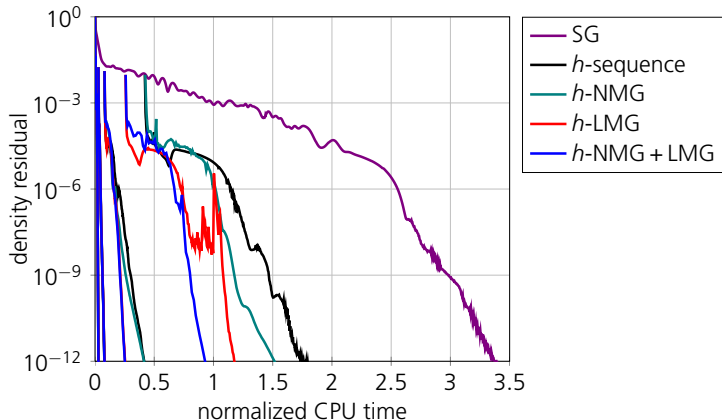

L1T2 high-lift configuration

run time comparison: p -MG

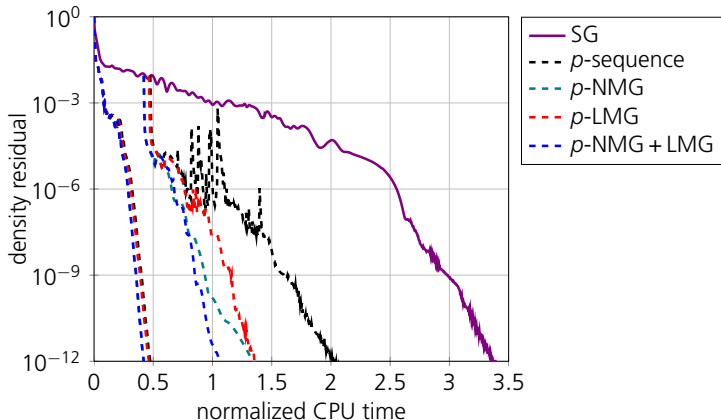


VFE-2 Delta-Wing with rounded leading edge

- flow conditions:
 - Mach: 0.4
 - Reynolds number: 3,000,000
 - $\alpha = 13.3^\circ$, $\beta = 0^\circ$
- testcase from EC funded IDIHOM project
- computations will be shown on a structured mesh with 13816 elements
- $p = 2$ solution is desired for all computations




VFE-2 Delta-Wing with rounded leading edge


- original FV mesh with 884 224 elements was two times agglomerated
- resulting in a higher order mesh with 13 816 curved elements



geometry




original mesh
with straight faces




curved mesh with faces
represented by polynomials of order 4



VFE-2 Delta-Wing with rounded leading edge

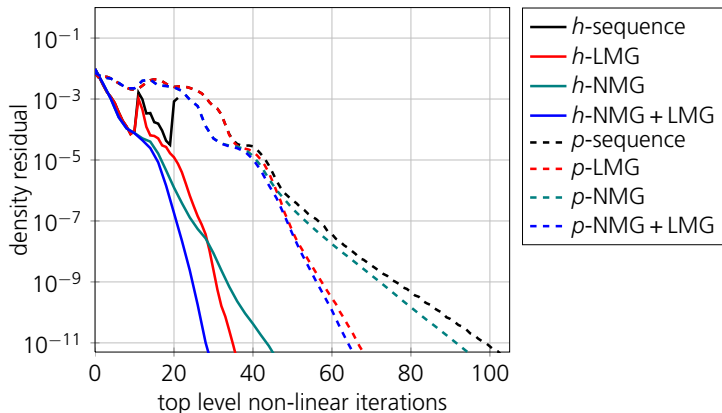


VFE-2 Delta-Wing with rounded leading edge

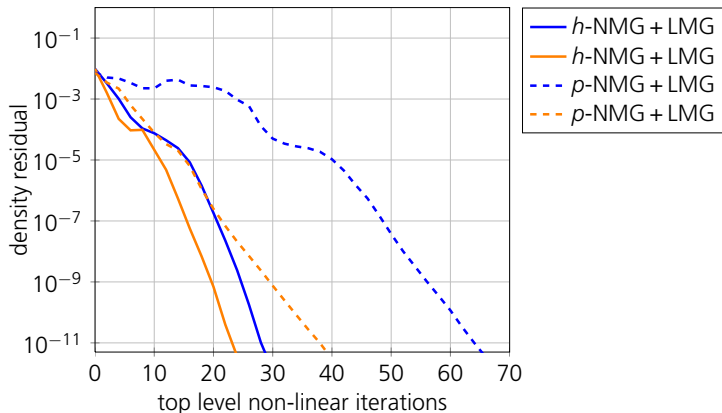

VFE-2 Delta-Wing with rounded leading edge

The *blue* computation on the mesh with 13816 elements and the *red* computation on an adjoint refined mesh with 23877 elements.

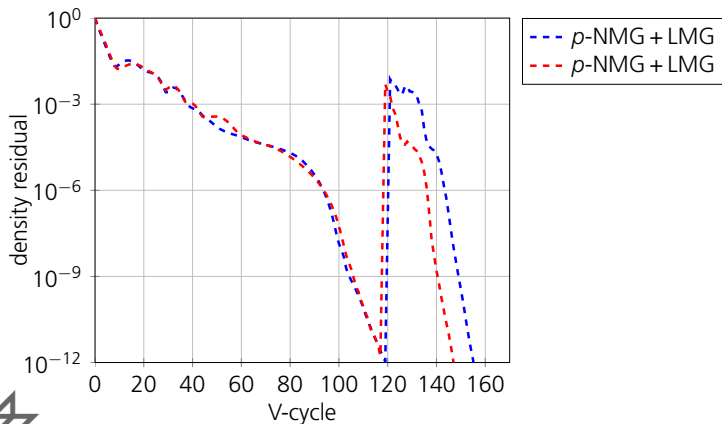

Thanks for your attention!

