



Replacing fossil fuels with biomass at the central power plants

Peter Glarborg

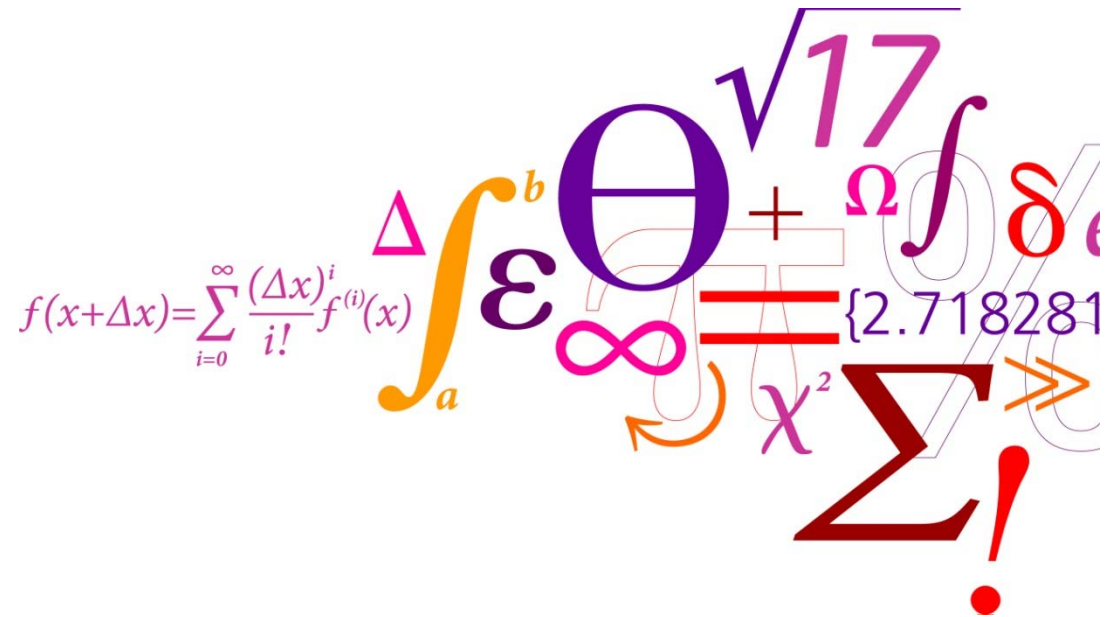

Engineering challenges in the power industry

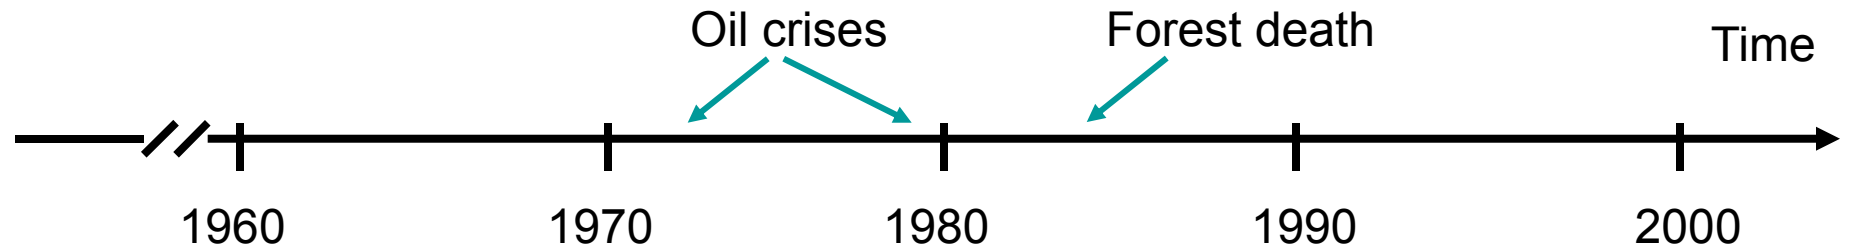

Coal

Oil

Coal

Range of fuels

**Extension of
power
distribution**


**Large
mechanical
constructions**

Expansion

**Environment
Decentralization
Deregulation
Fuel flexibility**

Current challenges for the power sector

Source: Wikipedia

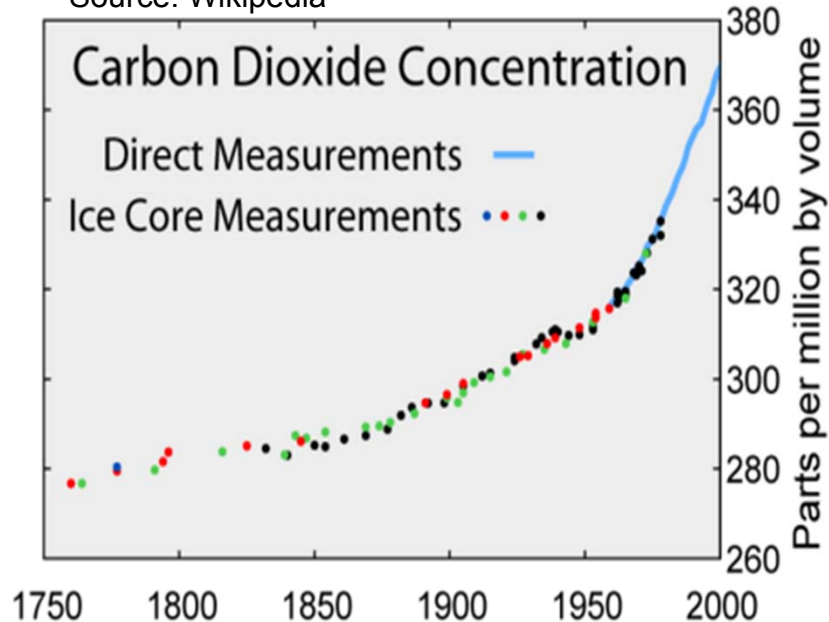


Current power supply

- Wind turbines
- Hydro power
- Solar power
- Thermal power plants
 - Required for balancing
 - Supply district heating
 - Mainly based on coal
 - Challenges
 - Conversion to biomass
 - Flexibility (load, fuel)
 - Electrical efficiency
 - Financial sustainability

Targeting sustainability

- 2020
- 2050

Efficiency and biomass share versus CO₂

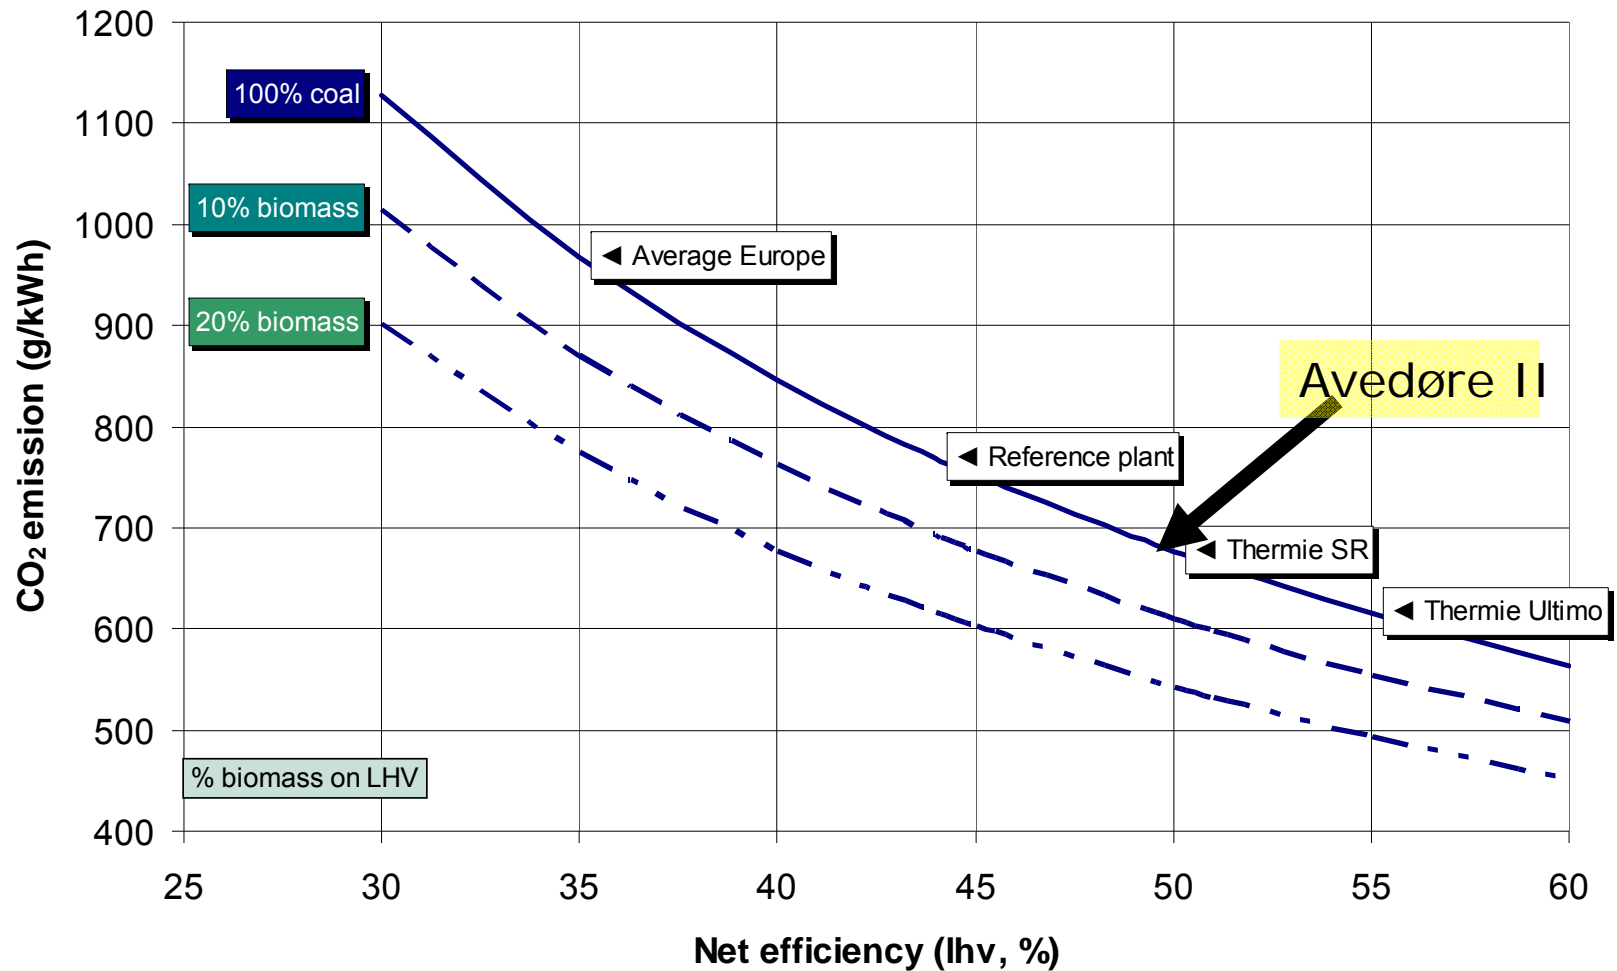

Biomass Fuels in Europe

- Woody biomass fuels:

- Bark
- Industrial wood chips
- Sawdust
- Forest wood chips
- Waste wood
- Pellets, briquettes



- Herbaceous biomass fuels:

- Straw, cereals
- Grasses (miscanthus, giant reed)




- Alternative biomass fuels:

- Kernels, shells, olive stones, shea nuts



Use alternative fuels on power plants

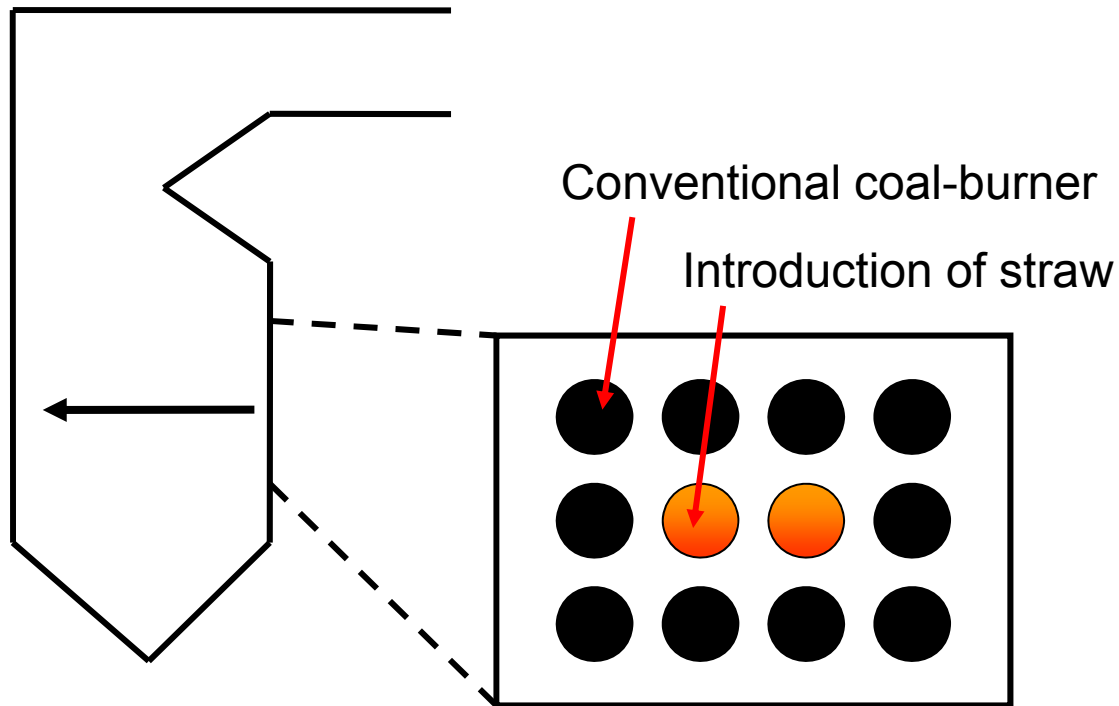

Central power plants


Present:
 High electrical efficiency
 Low fuel-flexibility

Vision:
 100% fuel flexibility
 Retain electrical efficiency

Decentral CHP plants

Present:
 High fuel-flexibility
 Low electrical efficiency


Vision:
 High electrical efficiency
 Retain fuel-flexibility

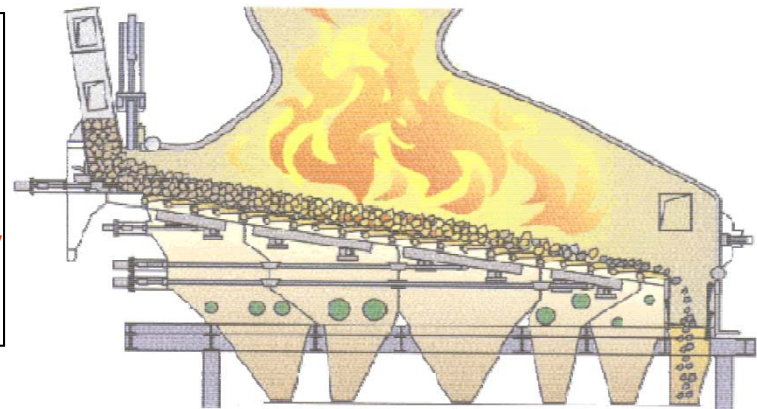

Nightmares of a plant operator



Diagram of coal-fired power plant

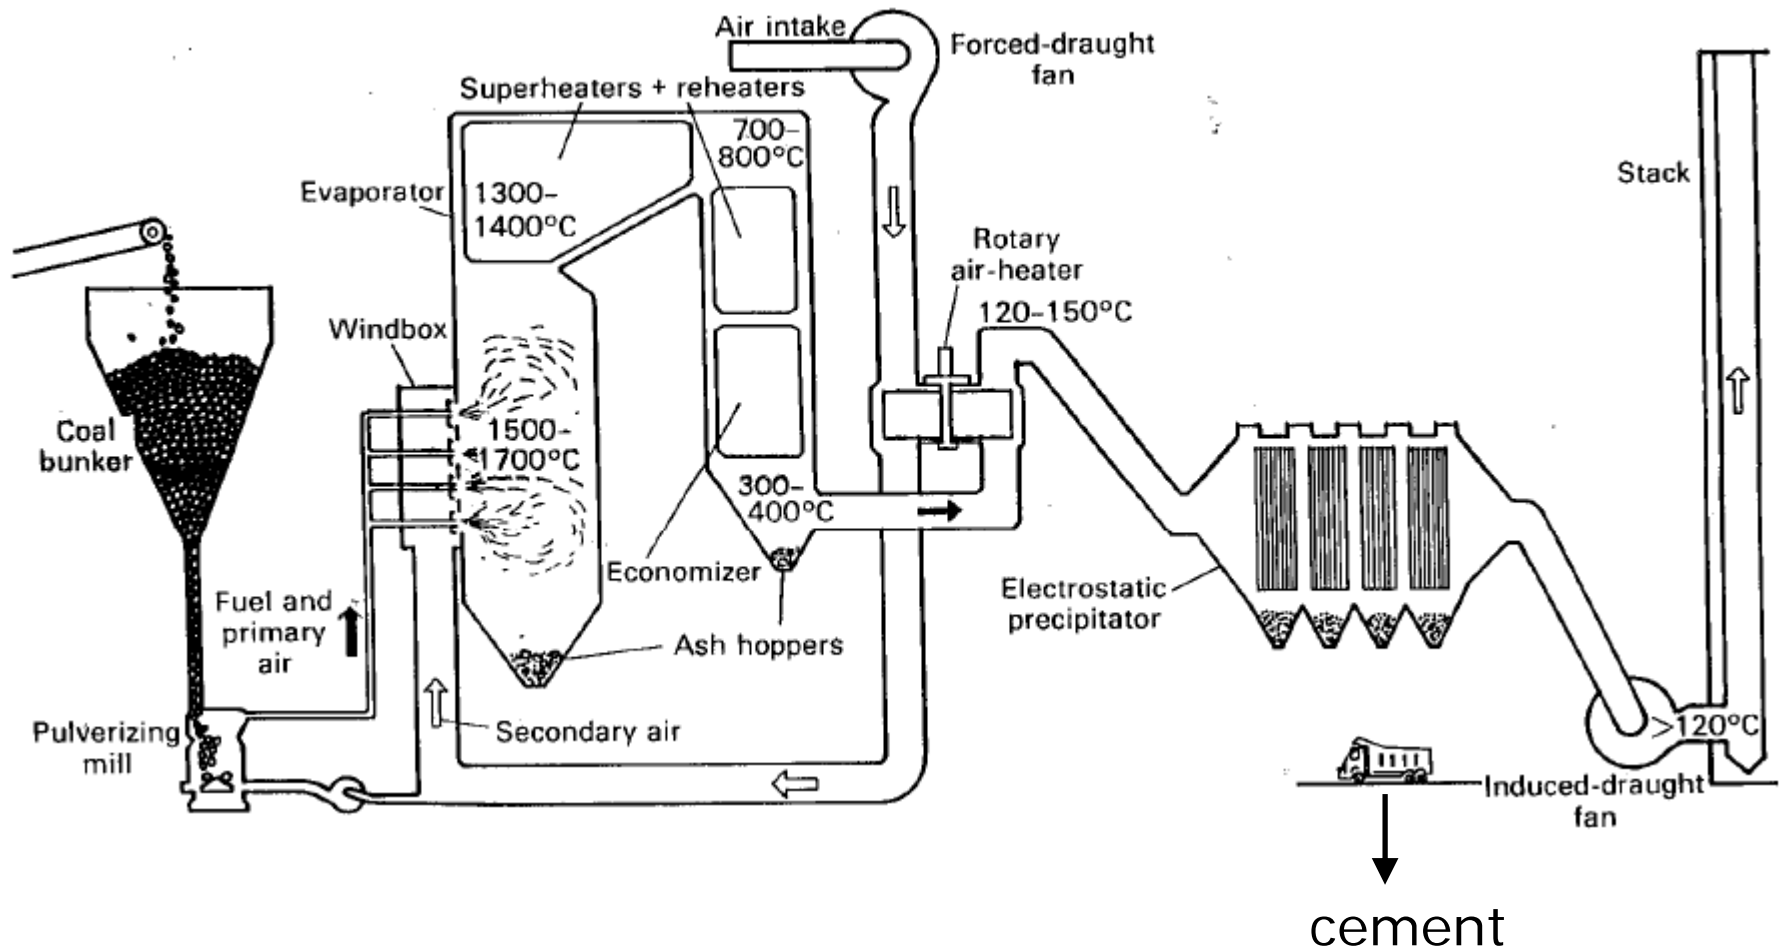


Introduction of biomass

logistics

biomass


deposition,
corrosion

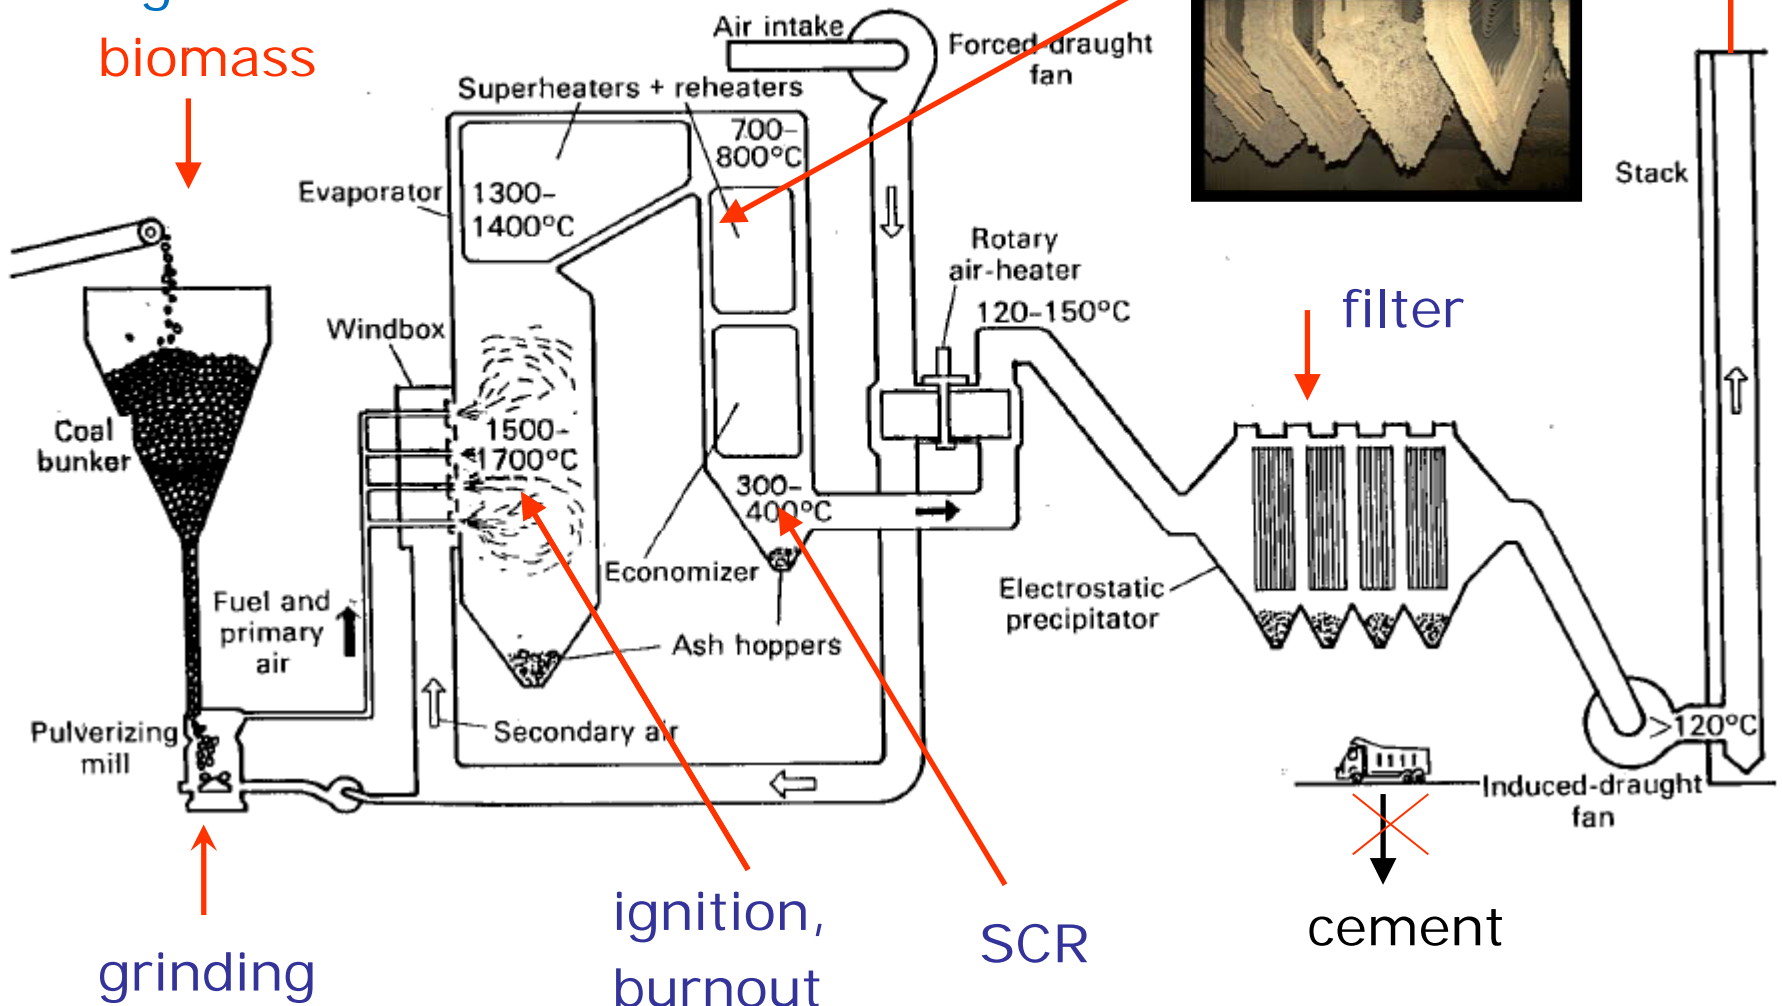

Solid Fuel Characteristics

Fuel	Water content (Wt %)	Heating Value (MJ/Kg)	Density (Kg/m ³)
Straw	15	14 – 15	100
Straw + grains	15	14 – 15	200
Grains	15	15	700
Straw pellets	8	16	600
Wood chips	40	10 – 11	200 – 300
Saw dust	20	15	160
Wood pellets	6	17 – 18	660
Coal	10	25 - 28	800 - 1000

Grindability of solid fuels

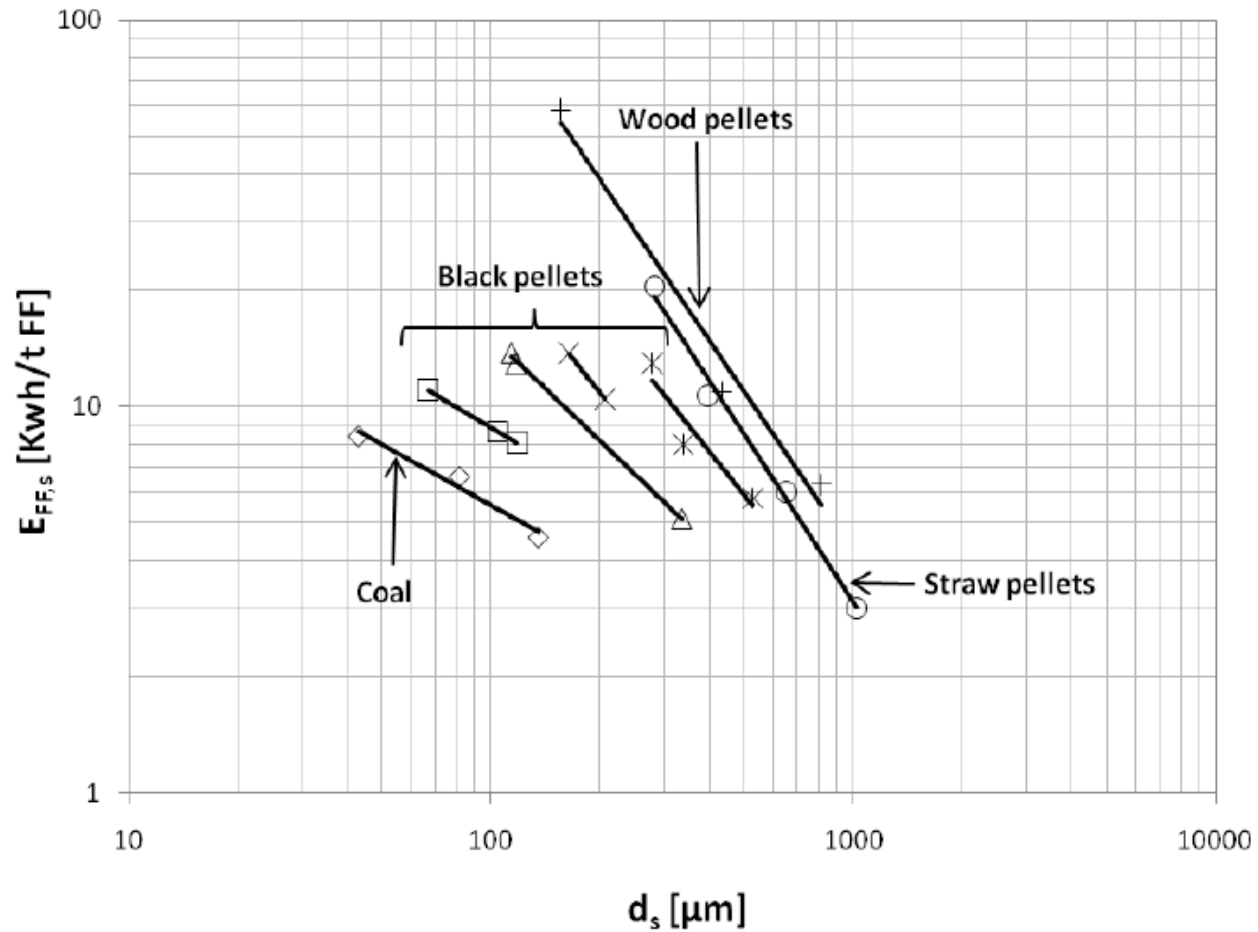

Bio-dust combustion

Differences in properties to coal:

- Particle size and form
- Pyrolysis behavior
- Char reactivity


Fuel conversion aspects:

- *Ignition, flame stability*
- Energy release profile
- NO formation
- *Burnout*


Critical:

- Burner design
- Fuel quality
- Particle size distribution


Wood burner flame seen from above

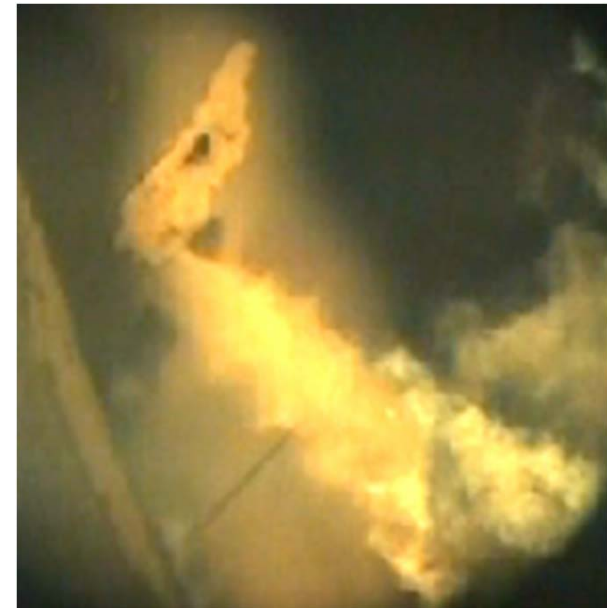


AMV1: Flame attachment

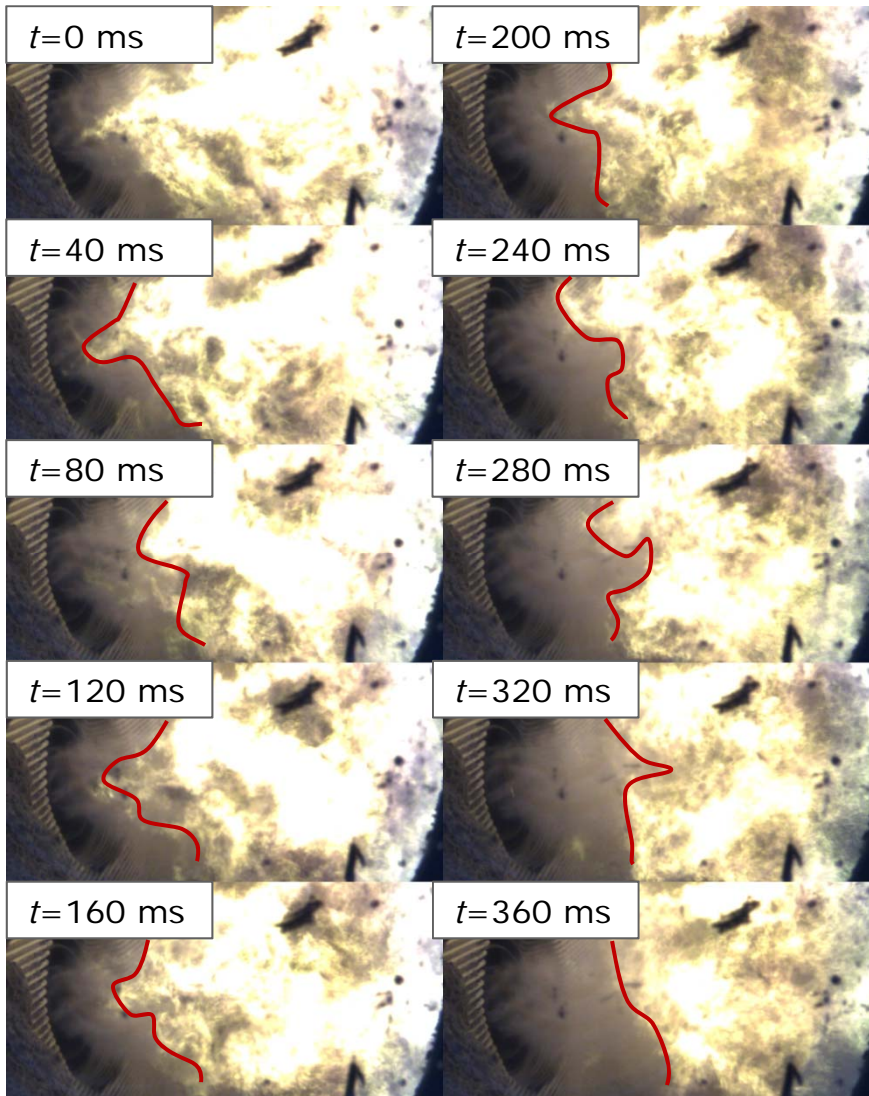


- Flame detachment and re-attachment
- 1 m flame lift
- Stable for several seconds

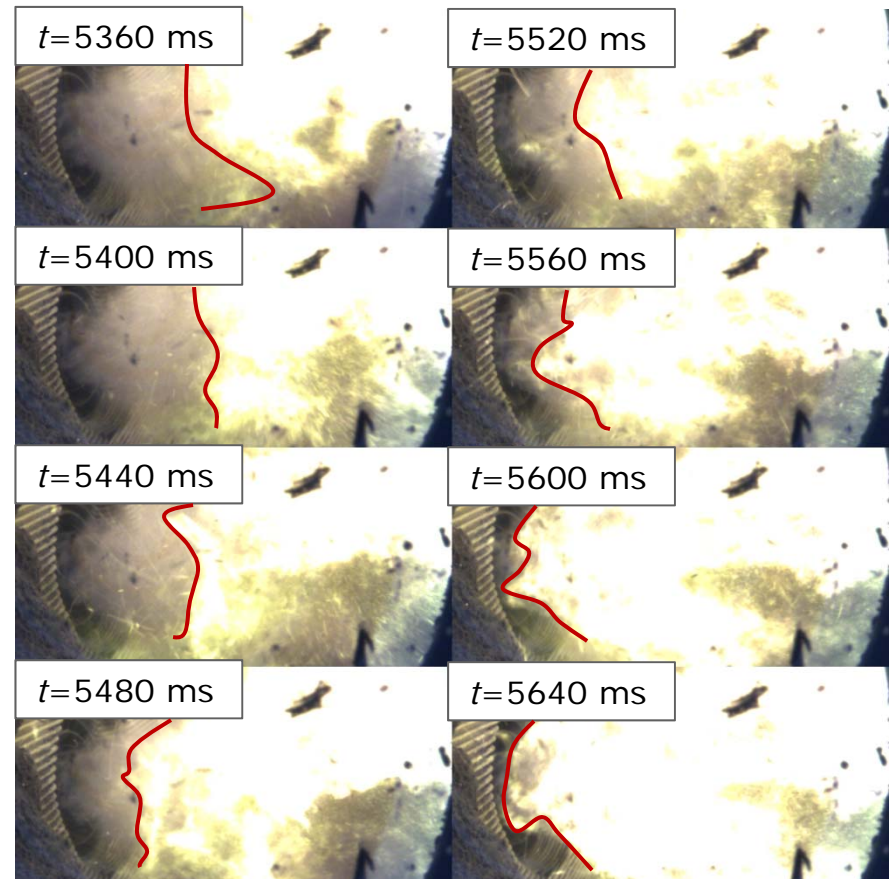


AMV1: Temperature from optical diagnostics

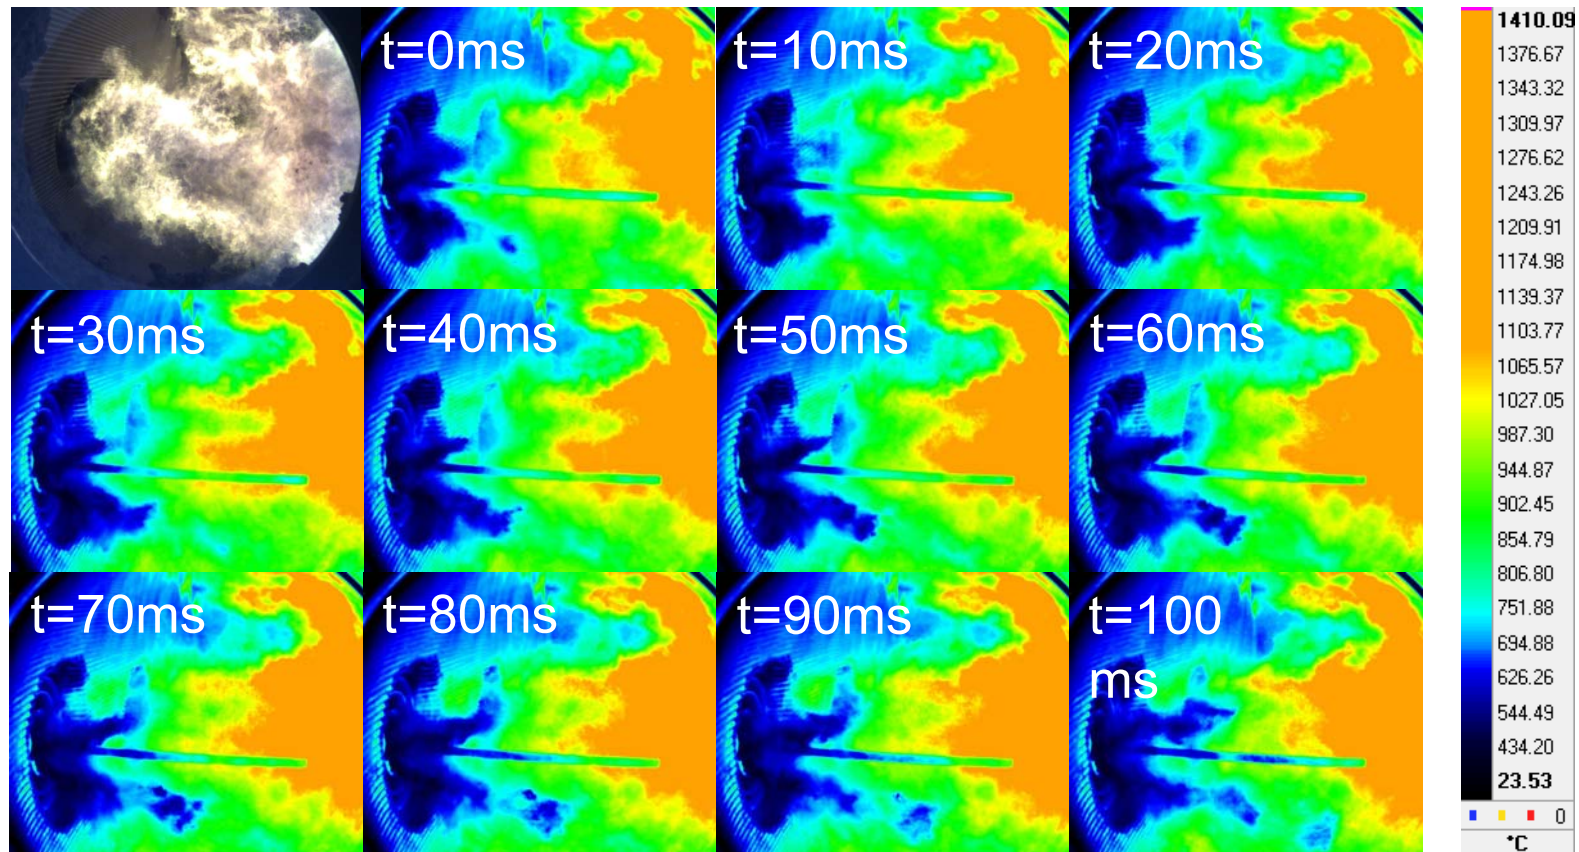



The major challenge: the inorganic elements

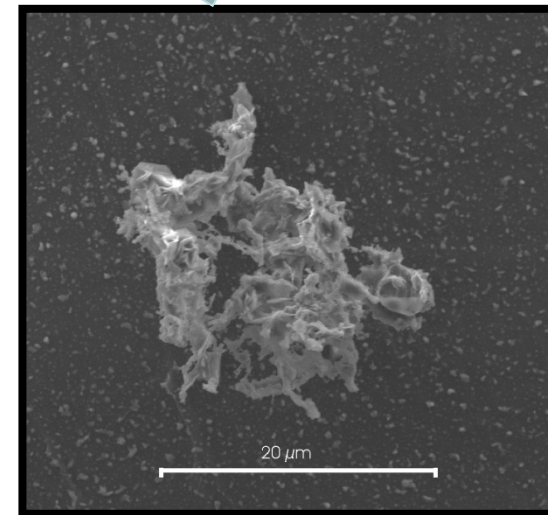

Ash generating elements – typical levels

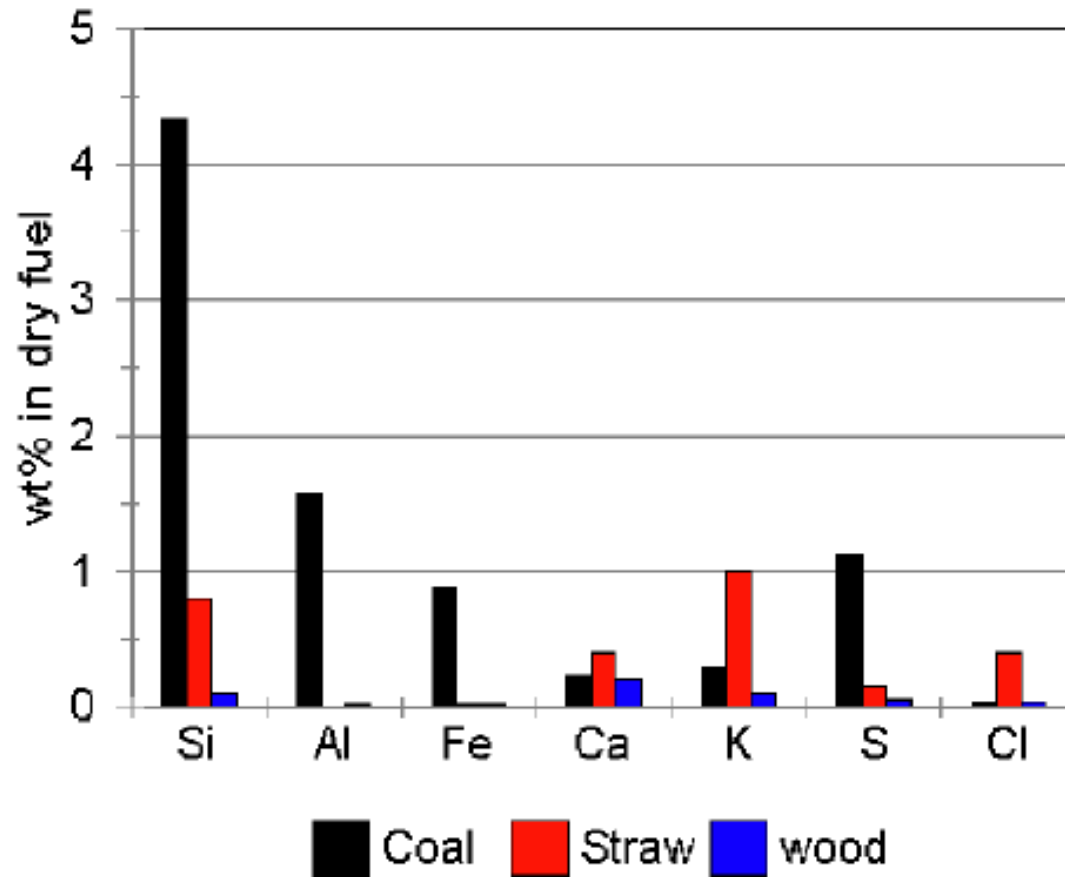


High K+Cl content: Sticky and corrosive ash

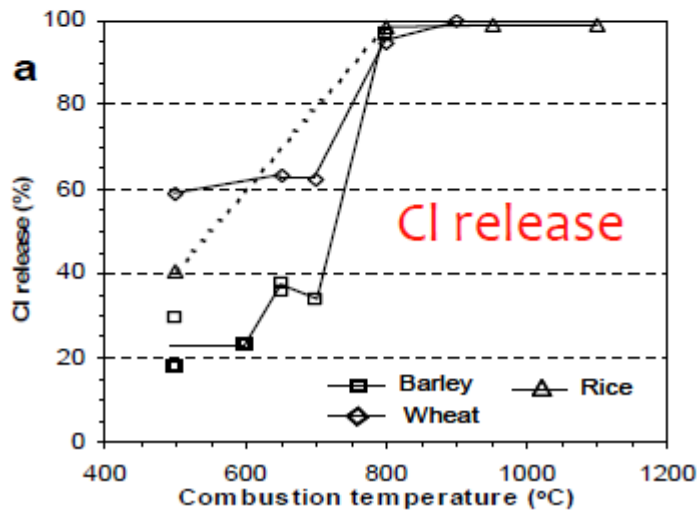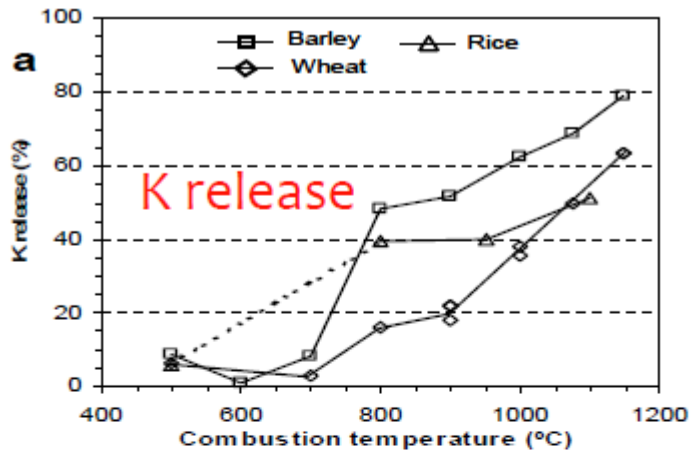

Corrosion

Deposition

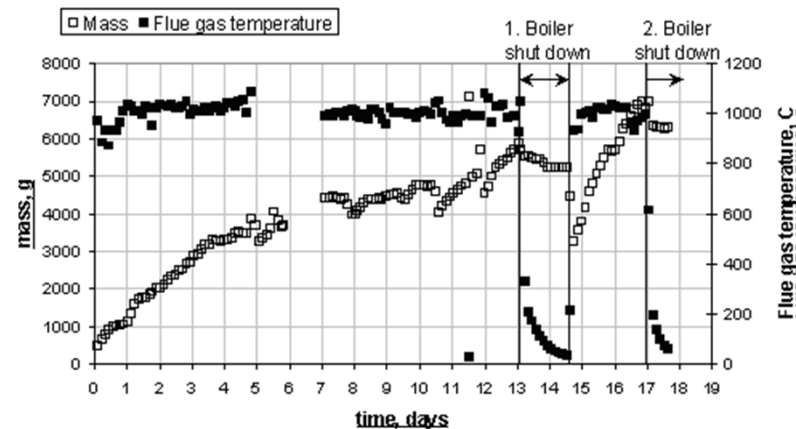

The big chemical scoop of coal-straw co-firing:



+



Ash:

Al, Ca, Fe, K, Mg, Na, Si



K


Ash:

K, Cl, Si




Fly ash:

K-Al-Si, K_2SO_4



HCl(g)

Biomass combustion: SCR catalyst deactivation

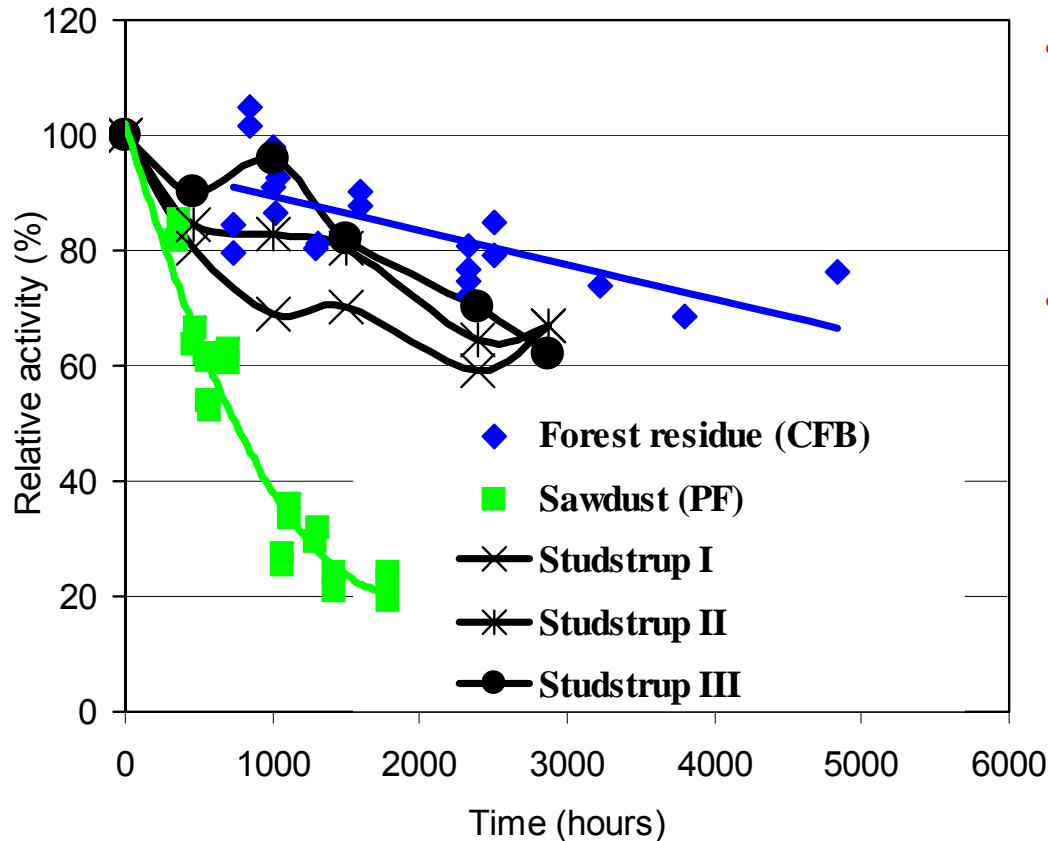

- Biomass is increasingly used for heat and power production alone or with other fuels
- Accelerated deactivation of SCR catalysts has been observed when firing biomass


Khodayari et al. (2000) and Wieck-Hansen et al. (2000)

Potassium speciation in ash: concerns

	Deposition	Corrosion	SCR deactivation	Fly ash quality
KCl	XXX	XXX	XXX	XXX
K ₂ SO ₄	XX	X	XXX	
K-silicates	XX			
K-alumina-silicates	X			

- **Deposition and corrosion:** High K+Cl fuels → low superheater temperatures → low electrical efficiency
- **Fly ash quality:** biomass share in co-combustion with coal ≤20% for use in concrete production

GREEN: Power Generation from Renewable Energy

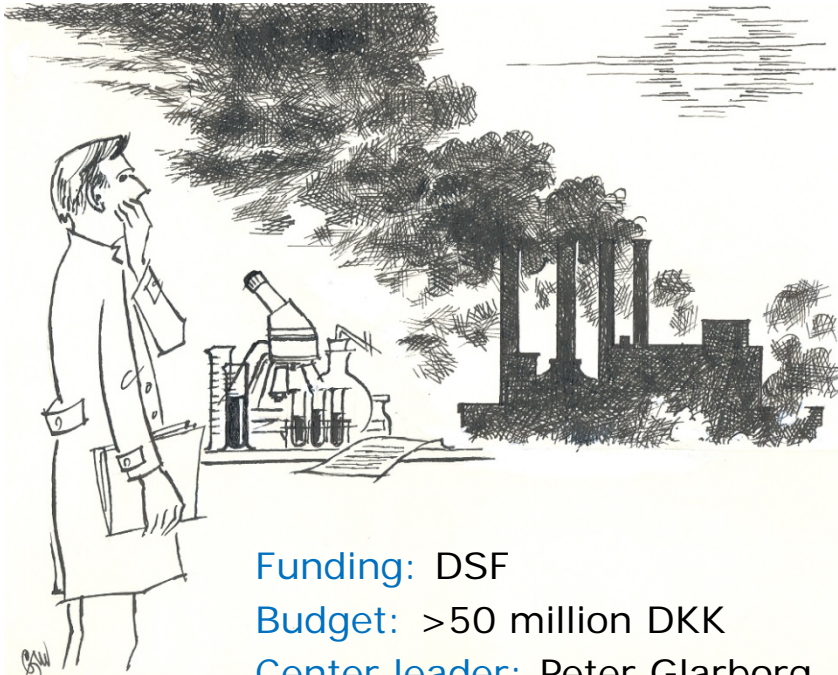

Funding: DSF

Budget: >50 million DKK

Center leader: Peter Glarborg

Coordinator: Jytte Boll Illerup

- Biodust combustion on central power plants – issues:
 - Fuel availability and quality
 - Handling and pretreatment
 - Combustion process
 - Deposition and corrosion
 - Flue gas cleaning technology
 - Solid residue
- Disciplines
 - Agricultural science
 - Materials science
 - Thermodynamics
 - Fluid dynamics
 - Combustion chemistry
 - Catalysis
 - Inorganic chemistry

The GREEN Research Center

- **Objectives:** to facilitate an efficient conversion of coal-fired power plants to biomass, retaining a high electrical efficiency with a broad fuel-band
- **Partners:**
DTU Chemical Engineering, DTU Mechanical Engineering,
Aarhus University
B&W Energy, DONG Energy, Vattenfall
Stanford University, Lund University, HNE Eberswalde,
University of North Texas
- **Associated partners:** Clausthal University, Haldor Topsøe
- **Schedule:** 2011-2015

GREEN Work Packages

- WP1 Agricultural biomass quality (AU with HNEE)
- WP2 Fuel characterization (KT with SU, LU, VF, and DEP)
- WP3 Burner design (KT and Risø with BWE, VF, and DEP)
- WP4 Ash transformation, deposition and additives (KT with LU, UNT, VF, and DEP)
- WP5 Model based development and testing of advanced corrosion resistant super-heater materials (MEK with KT, DEP and VF).
- WP6 Deactivation of SCR catalysts (KT with DEP and VF)
- WP7 Utilization of ash as fertilizer (AU)




From molecular science to advanced technology



Semi-industrial scale experiments




Model (CFD)

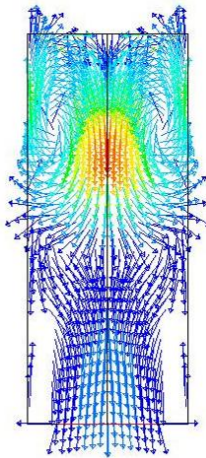

How do we work

Laboratory experiments

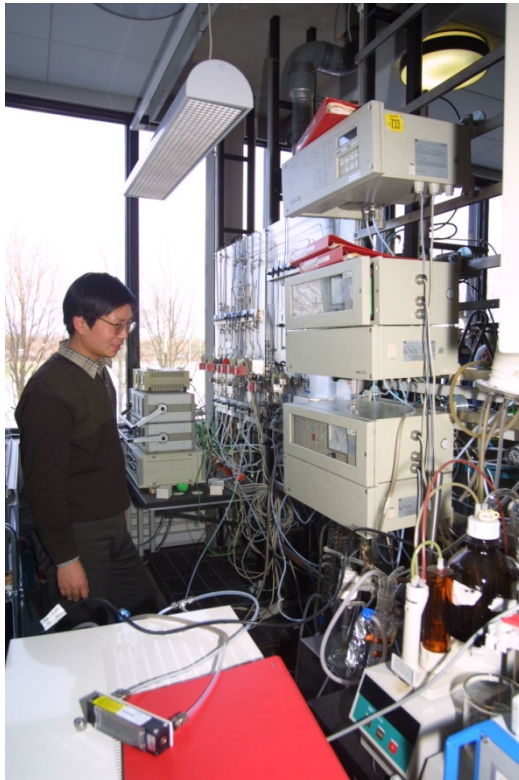

Pilot scale measurements



Full scale measurements



Model development



Concluding remarks: biomass for power

- Denmark worldwide leader in biomass for power and heat since early 1990's, facilitated by strong RD&D efforts
- The Danish power supply structure in rapid transition, imposing needs for adaption of current thermal technologies to biomass
- **Short term needs:** Adaption of current thermal technologies to biomass
 - Accept a large variation in biomass fuel type and fuel pellet particle sizes
 - Facilitate fast shifts between different wood and straw fuel types and fossil fuels
 - Ensure high plant availability and high electrical efficiency when using biomass fuels
- **Long term needs:** Novel technologies
 - Adapt to large changes in electricity output on short timescales

Acknowledgements

- Helpful discussions and input from
 - Kim Dam-Johansen
 - Flemming Frandsen
 - Anker Degn Jensen
 - Peter Arendt Jensen
- Funding from
 - DONG Energy
 - Vattenfall
 - Danish Strategic Research Council
 - Other