

**Manuscript version: Author's Accepted Manuscript**

The version presented in WRAP is the author's accepted manuscript and may differ from the published version or Version of Record.

**Persistent WRAP URL:**

<http://wrap.warwick.ac.uk/112792>

**How to cite:**

Please refer to published version for the most recent bibliographic citation information. If a published version is known of, the repository item page linked to above, will contain details on accessing it.

**Copyright and reuse:**

The Warwick Research Archive Portal (WRAP) makes this work by researchers of the University of Warwick available open access under the following conditions.

Copyright © and all moral rights to the version of the paper presented here belong to the individual author(s) and/or other copyright owners. To the extent reasonable and practicable the material made available in WRAP has been checked for eligibility before being made available.

Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge. Provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.

**Publisher's statement:**

Please refer to the repository item page, publisher's statement section, for further information.

For more information, please contact the WRAP Team at: [wrap@warwick.ac.uk](mailto:wrap@warwick.ac.uk).

# Wireless Body Area Network Mobility-aware Task Offloading Scheme

YANGZHE LIAO<sup>1</sup>, YI HAN<sup>1</sup>, QUAN YU<sup>1</sup>, QINGSONG AI<sup>1</sup>, QUAN LIU<sup>1</sup>, AND MARK LEESON<sup>2</sup>,  
(Senior Member, IEEE)

<sup>1</sup>School of Information Engineering, Wuhan University of Technology, Wuhan 430070, China

<sup>2</sup>School of Engineering, University of Warwick, Coventry CV4 7AL, UK;

Corresponding author: Yi Han (e-mail: hanyi@whut.edu.cn)

This work was supported by the National Natural Science Foundation of China (Grant No. 51475342 and Grant No. 51675389) and the Fundamental Research Funds for the Central Universities (Grant No. 2018IVA098 and 2018IVA099).

**ABSTRACT** The increasing amount of user equipment (UE) and the rapid advances in wireless body area networks (WBANs) bring revolutionary changes in healthcare systems. However, due to the strict requirements on size, reliability and battery lifetime of UE devices, it is difficult for them to execute latency sensitive or computation intensive tasks effectively. In this paper, we aim to enhance the UE computation capacity by utilizing small size coordinator-based mobile edge computing (C-MEC) servers. In this way, the system complexity, computation resources and energy consumption are considerably transferred from the UE to the C-MEC, which is a practical approach since C-MEC is power charged, in contrast to the UE. Firstly, the system architecture and the mobility model are presented. Secondly, several transmission mechanisms are analyzed along with the proposed mobility-aware cooperative task offloading scheme. Numerous selected performance metrics are investigated regarding the number of executed tasks, the percentage of failed tasks, average service time and the energy consumption of each MEC. The results validate the advantage of task offloading schemes compared to traditional relay-based technique regarding the number of executed tasks. Moreover, one can obtain that the proposed scheme archive noteworthy benefits such as low latency and efficiently balance the energy consumption of C-MECs.

**INDEX TERMS** WBANs; C-MEC; task offloading; mobility-aware

## I. INTRODUCTION

**D**UE to the rapid developments in wireless communication technologies, wireless body area networks (WBANs) are becoming of increasing interest to research and industry. The main objective of WBANs is to facilitate communication inside or near the human body to measure different bodily attributes [1-3]. Typically, WBANs are divided into two categories, in-body and on-body WBANs, which are made feasible by taking advantage of small-size, low power consumption and intelligent body sensors or user equipment (UE). Deployment of a list of UE devices to continuously monitor patients' physiological signals can significantly reduce medical expenditures and improve quality of life [4]. However, there exist several technical challenges in WBANs. Firstly, due to the technical constraints of sensor batteries, the power supply becomes a major bottleneck for long-term health monitoring [5]. Secondly, the improvement of UE computing capacity to handle low service latency medical applications is still challenging. In addition, the question of

how to effectively investigate the patient's mobility plays a vital role in the accuracy of WBAN performance [6].

In order to provide communication and computation cooperation, cloud computing has been proposed to enhance UE experience and the computation capacity [7-8]. Numerous cloud-based platforms have been recommended over the last decade such as Amazon Elastic Compute Cloud and Google Cloud Platform [9]. By taking advantage of the cloud computation resources, UE can offload tasks to the cloud server and then receive the results via the downlink. However, the cloud server is generally placed in a remote place, possibly a thousand miles from the users, and consequently the remote transmission route degrades the quality of service regarding service time and energy waste.

To relieve the disadvantage of remote data transmission, an innovative paradigm of mobile computing has been recommended, known as mobile edge computing (MEC) [10-11]. This scheme allows a shift in the employment of computing resources from the core network to network edge such as

base stations or femto clouds [12]. In comparison with the traditional cloud computing facilities MEC can reduce the transmission distance and lowering the energy consumption of UEs. This scheme provides cloud-like computing services at the edge of wireless communication networks such as access points. However, this technique suffers from various drawbacks when considering healthcare applications [13]. For example, with the increasing number of tasks offloaded to the MEC server, the average service time will increase severely. Moreover, since every information is of great importance, UE task offloading decision-making strategy should be carefully studied. One practical solution to handle the aforementioned technical difficulties is to deploy distributed small-cloud computing servers, which are smaller than the traditional MEC as reported in [14] and can be placed in the hospital. Each small size MEC can receive the UE offloading tasks within a certain distance. In this way, the offloaded tasks can be distributed to the coordinator-based MEC (C-MEC) servers to execute promptly.

Practically, it is worth noticing that smart devices are designed to have active and idle periods to reduce energy waste [15-16]. The idle-based scheme can potentially provide the unused computation resources with nearby UE to help other UE execute tasks. The data transmission between two UE entities forms a device to device (D2D) link, which can effectively decrease the network congestion when designing dense networks. Moreover, healthcare applications require reliable data transmission and rapid response once an abnormal condition is detected [1].

In this paper, we investigate a collection of UEs distributed in the network to monitor patients' health status considering the task offloading technique and mobility scenarios. The primary aim is to provide a different aspect to handle the mobility-aware resource intense applications by taking advantage of the task offloading strategy. Firstly, the system architecture and the task offloading model are introduced. Furthermore, we model patient mobility in detail by adopting a Markov model. A series of key performance metrics are selected and discussed. Three different transmission mechanisms are considered to investigate the system performance regarding the number of executed tasks. Moreover, the task offloading based schemes are further analyzed regarding service time, the percentage of failed tasks and the energy consumption of each C-MEC server.

The rest of this paper is organized as follows: In section II, the background to WBANs, edge computing and related topics are presented. Section III illustrates the proposed system architecture and Section IV presents the detailed information of the transmission mechanisms considered. Section V summarizes and discusses the system performance. Section VI concludes the paper and lists potential topics for future research.

## II. RELATED WORK

Generally, WBANs are recognized as a promising technique that can provide data transmission between different UEs or connect to a coordinator within a certain range [1]. In [17], the

authors demonstrated a people-centric healthcare monitoring system by employing a series of wearable devices; as a result, abnormal medical conditions can be detected promptly. However, the authors do not consider patient mobility and the percentage of failed tasks. One efficient solution for data transmission for WBANs is employing efficient routing schemes. The authors in [18] proposed an incremental relay-based cooperative routing protocol, which can forward data collected from smart devices to the external medical server. However, the outcomes show that this technique consumes additional energy caused by the long transmission distances. In real-world patient-related healthcare applications such as medical images, is significant in the process of healthcare services and managing these media data from various WBANs is vital for multiple uses. Zigbee is commercially available for WBANs, all collected data from body sensors can be transmitted to a coordinator [19]. However, this technique cannot support large volumes of e-health media data derived from different resource-constrained body sensors in terms of data transmission, analysis and storage.

Numerous mobility models have been proposed in [20-22]. However, they were designed for wireless sensor networks and are not appropriate for WBANs because of the higher degree of difficulty to predict human movement. Specifically, with high human mobility, choosing a global coordinator to manage the high data rate applications is not applicable. The authors in [23] have presented a mechanism that applies to mitigate interference and coexistence by employing on-body relays on the WBANs to improve the network reliability. Moreover, Nabi *et al.* proved that body sensors' movement could be treated as independent single mobility instances and there is no need to consider the correlation between different body sensors within the same WBAN [22].

Another research challenge is that UE capabilities struggle to keep up with the development of resource-intensive applications due to limitations in batteries, computation capacity and data storage. To address these challenges, several cloud-based healthcare system prototypes have been proposed, which can enhance media healthcare services at a low cost [24-25]. However, the cloud server is usually placed several thousand miles away from the users and cannot support latency-sensitive healthcare data transmission. Typically, when one piece of UE requests task offloading to the cloud, this necessitates the use of the Internet for data transmission [10, 26]. A collection of research challenges exist when designing task offloading enabled WBANs to satisfy rigorous healthcare monitoring requirements [27-29]. As stated in [29], the authors proposed a game-theoretic model that can advise UE to choose where to offload the tasks. However, this approach is only applicable to the Amazon elastic compute cloud. Moreover, Nakamura *et al.* found that small cell networks that can improve the network capacity and combat interference [30]. However, such small cell networks cannot handle the necessary signal processing in the strict time allowance, and therefore fail to meet the demands of healthcare applications.

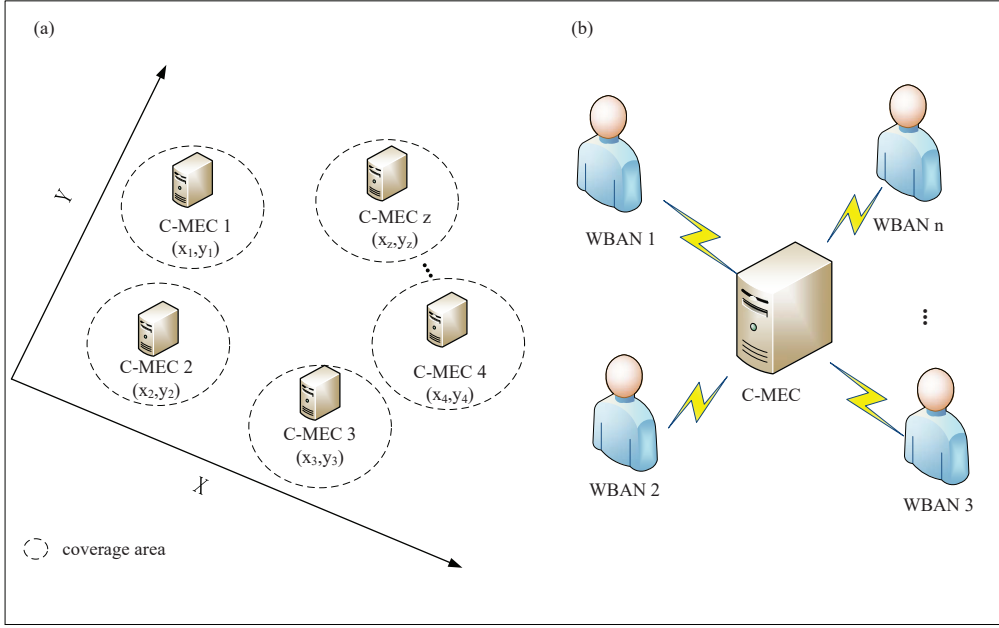


Figure 1. The proposed WBAN-based task offloading system.

### III. SYSTEM ARCHITECTURE

Inspired by the WBAN coordinators proposed to gather collected data from all body sensors, power-charged high computation capacity smart devices are employed as the coordinator-based MEC (C-MEC), to which UE can offload tasks when necessary. The system configuration is shown in Fig.1. We consider a hospital-based healthcare monitoring scenario where a set of C-MECs, each C-MEC  $i$  with a coordinator  $(x_z, y_z)$  for all  $1 \leq i \leq z$ . Moreover, there are  $N_c$  coexisting patients that are denoted by  $\{w_n | n = 1, 2, \dots, N_c\}$  and  $w_n$  indicates the  $n$ -th WBAN. Each WBAN consists of a UE set  $\{r_k | k = 1, 2, \dots, N_s\}$  and serves one patient. The proposed system allows UE to offload tasks to the C-MEC located in the floor, which provides computation resource when UE's computation ability is insufficient.

#### A. TASK OFFLOADING MODEL

**Definition 1.** A task  $U_i$  can be defined as  $U_i = (F_i, P_i, \alpha_i)$  where  $F_i$  and  $P_i$  represent the required computation resource (i.e., CPU cycles per second) and communication resource allocated to the task  $U_i$ , respectively, for all  $i \in \mathcal{N}, j \in \mathcal{N}$ .  $\alpha_i = 1$  denotes that the smart device  $i$  decides to offload the task  $U_i$  while  $\alpha_i = 0$  means that UE  $i$  decides not to offload the task.

We assume that each UE can offload the task either to the C-MEC or the rest of the smart devices, depending on the communication and computation resource of its own, other devices and the C-MEC. If the UE  $i$  decides to offload its task  $D_i$  to the UE  $j$  or the C-MEC via D2D link, the maximum data rate can be given as

$$\mathcal{R}_{ij} = B_{ij} \log_2 \left( 1 + \frac{h_{ij} p_i^T}{\sigma^2} \right), i \in \mathcal{N}, j \in \mathcal{N}, \quad (1)$$

where we ignore the interference caused by other devices and all channels are assumed to be orthogonal.  $h_{ij}$  is the channel state information from UE  $i$  to UE  $j$ , and  $p_i^T$  denotes the transmission power of the UE  $i$ .  $B_{ij}$  represents the allocated bandwidth to the UE  $j$  and  $\sigma^2$  describes the variance of the white Gaussian noise. Consider that UE  $i$  decides to execute the task by itself, let  $f_i$  be the computation capacity of the UE  $i$ , the execution time of local computing can be expressed as

$$T_i = \frac{F_i}{f_i}, i \in \mathcal{N}. \quad (2)$$

If the UE  $i$  decides to execute the task locally, the corresponding computing power consumption can be expressed as

$$p_i = \kappa_i (f_i)^{\nu_i}, i \in \mathcal{N}, \quad (3)$$

where  $\kappa_i^l$  and  $\nu_i^l$  are the pre-configured parameters and both are positive constants as reported in [31]. Realistic measurements of those parameters are  $\kappa_i^l = 10^{-11}$  and  $2 \leq \nu_i^l \leq 3$ . The energy consumption of UE  $i$  to execute the task locally then can be obtained as

$$E_i = p_i \cdot T_i = F_i \cdot \kappa_i \cdot (f_i)^{\nu_i - 1}, i \in \mathcal{N}. \quad (4)$$

When UE  $i$  cannot execute the task by itself due to lack of computation resource  $f_i$  or the execution time  $T_i \geq T_i^r$ , where  $T_i^r$  is the predetermined execution time threshold, it can offload the task either to other UEs or the C-MEC, one can obtain the offloading time as

$$T_i^o(U_i) = \sum_{j \in \mathcal{N} \setminus \{i\}} \alpha_i \left( \frac{D_i}{\mathcal{R}_i} + \frac{F_i}{f_j} \right), i \in \mathcal{N}, j \in \mathcal{N}, i \neq j. \quad (5)$$

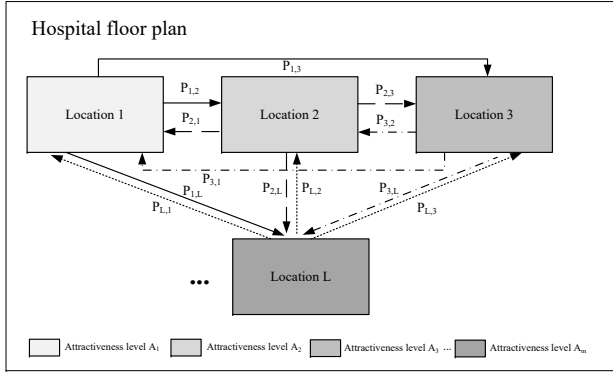


Figure 2. The Markov model of the one patient's global mobility.

The energy consumption of the task offloading can be calculated as

$$E_{ij}(U_i) = p_i^T \cdot T_i^o(U_i), i \in \mathcal{N}, j \in \mathcal{N}, i \neq j. \quad (6)$$

In accordance with [32-33], we neglect the overhead for the C-MEC to send the computation results back to the UE because the size of the computation results is much smaller than the size of the computation input data.

### B. MOBILITY ANALYSIS

Mobility is an essential aspect that cannot be ignored when investigating the network performance [6]. The patients are moving within the hospital from one place to other places randomly and this is difficult to predict. In this paper, we consider a scenario where patients are moving to different locations within the floor based on a nomadic mobility model. Moreover, we evaluate the mobility within a WBAN then present the global movement for the network.

**Definition 2.** We define a mobility scenario as  $L = (A, \tau)$  where  $A$  represents the attractiveness levels, and  $\tau$  denotes the dwell time of different attractiveness locations.

Assume there are  $M$  locations with the corresponding attractiveness levels  $A_1, A_2, \dots, A_M$ , each location with the dwell time  $\tau_1, \tau_2, \dots, \tau_M$ . The probability of moving from one location to another is investigated employing the Markov model as shown in Fig.2. In particular, a high level of location attractiveness means the dwell time is also higher. By using the Markov model, the current location with attractiveness level  $A_M$  and the dwell time  $\tau_M$  are considered for selecting the next location. The probability that a patient moves from location  $i$  to  $j$  is  $P_{ij}$ , one can obtain that

$$\sum_{i=1}^M P_{ij} = 1, 1 \leq i \leq M, i \in \mathcal{N}, j \in \mathcal{N}, \quad (7)$$

where  $i=j$  means that the patient stays in the same place. Moreover, the locations of all patients are updated based on the probability of different attractiveness locations. The probability of changing location can be determined by real human mobility traces. The patient is considered to be

continuously moving among different locations, and stays at one location for a specific period of time (dwell time) according to the attractiveness level of the location.

### C. LINK QUALITY ANALYSIS

Consider the hospital-based healthcare monitoring scenario, one significant factor is characterizing the transmission energy attenuation between the UE and the C-MEC at a distance  $d$  can be mathematically expressed as

$$PL_{dB}(d) = PL_{dB}(d_0) + 10n \log_{10} \left( \frac{d}{d_0} \right) + S, d \geq d_0 \quad (8)$$

where  $d_0$  and  $PL_{dB}(d_0)$  mean the reference distance and the PL(path loss) value at  $d_0$ , respectively.  $S$  denotes the shadow fading effect, which follows a Normal distribution [1,18].  $n$  is the PL coefficient, which depends on the transmission environment. As a result, the transmission distance  $d$  can significantly affect the link quality. Moreover, one should note that efficiently allocate the number of offloaded tasks for each C-MEC to balance the computing and communication costs is of great significance to realize low latency.

### IV. PROBLEM FORMULATION

In this section, we first demonstrate numerous existing selected decentralized task offloading techniques regarding local computation and task offloading schemes. Moreover, a mobility-aware cooperative task offloading scheme is proposed in details.

All tasks locally executed scheme has been widely used in the literature due to its simplified structure [1, 35]. This architecture allows UE to execute all tasks locally. As analyzed in (2) and (6), task failure reason for this strategy can be summarized as follows: 1) when the execution time  $T_i^l > T_i^r$ , which represents that UE  $i$  cannot provide enough computation capacity to execute the large length tasks. 2) the residual energy status of the UE  $i$  becomes  $E_i^{res} < E_{ij}(U_i)$ .

Another effective technique is the cooperative task offloading scheme. All tasks are initially checked by UE and if one UE cannot handle the task, this will offload to another UE within the same patient. If the selected UE executes the task unsuccessfully, the task will offload to the C-MEC. The advantages of this transmission technique are listed as follows: the task is expected to be accomplished within the same WBAN where the medical notices or warnings can be delivered promptly to the patient. This is a useful solution to solve the scenarios when all C-MECs are far away from the patient or when there are too many UE simultaneous offloading requests [13, 36].

The critical idea of the proposed approach in this paper is to decrease service time and achieve load balancing in comparison to the approaches above, which makes it suitable for the offloading of latency sensitive healthcare applications. The mobility-aware cooperative task offloading scheme is proposed to investigate the *patient-on-the-go* conditions where patients move randomly within the hospital. In addition, unlike the work in [7, 34], we consider tasks generated with random

task lengths and thus the UE needs to decide whether to offload the task or not after each task is generated. One algorithm regarding location selection and task generation is given in Algorithm 1. We assume that tasks are randomly generated according to a Poisson distribution and patients move according to the nomadic mobility model given in Section III. UE  $i$  will decide whether to locally execute or offload to another UE after one task generated. A failed task execution as follows:

- When the patients move outside the C-MECs' coverage area, the task cannot offload to the C-MEC. One should note that commercially available platforms, such as Sensium, cover the range from a few millimeters to a few meters [37-39].
- There exists a large number of patients (dense network) producing many task offloading requests, which leads to longer service times.
- Some healthcare applications require strict latency requirements such as medical video transmission. If one task cannot be accomplished within  $T_i^r$ , the task can be regarded as an uncompleted task.

Due to the resource-limited of UEs, consider the transmission strategies of UEs within the same WBAN, one effective transmission strategy is proposed if the overhead  $V(U_i)$  can be minimized, the problem formulation can be expressed as

$$\min_{\alpha_i \in \{0,1\}} V(U_i), i \in \mathcal{N}, \quad (9)$$

where  $V(U_i)$  is the overhead that consists of processing time and energy consumption. Recall (2) and (4), one can obtain the following equation when  $\alpha_i = 0$

$$V_i(U_i) = T_i + \lambda_i E_i(U_i), i \in \mathcal{N}, \quad (10)$$

where  $T_i$  and  $E_i$  represent the time and energy consumption for local computing, respectively.  $\lambda_i$  is the weight factor, depends on the medical healthcare requirements. Similarly, when  $\alpha_i = 1$ ,  $V(U_i)$  can be rewritten as

$$V_i^o(U_i) = T_i^o + \lambda_i^o E_{ij}(U_i), i \in \mathcal{N}, j \in \mathcal{N}, i \neq j, \quad (11)$$

where  $T_i^o$  and  $E_{ij}(U_i)$  have been explained in (5) and (6), respectively.  $\lambda_i^o$  is the weight factor when the UE decides to offload the task.

#### A. TASK GENERATION AND LOCATION SELECTION

In this paper, we assign each static location with an attractiveness level that determines the dwell period that a patient would stay. At the time of  $t$ , one patient can move from location  $i$  (with the corresponding attractiveness level  $A_t$  and the dwell time  $\tau_t$ ) to location  $j$  according to the probability  $P_{ij}$ . The patient stays at the updated location for a period of time  $\tau^t$ . Tasks  $\mathcal{T}_1 \dots \mathcal{T}_n$  are generated by the UEs on the patient that is bond to one location depending on the active period, the idle period and Poisson interarrival configurations.

---

#### Algorithm 1 Proposed iterative method for task offloading scheme

---

**Input:** predetermine time threshold  $T_i^r$   
residual energy status  $E_i^{res}$

**Output:**  $\rho_e, \rho_t$

---

```

1: if  $E_i^{res} \geq E_i^{thr}$  then
2:   calculate the execution time  $T_i^C$  for task  $\mathcal{T}_i$ ;
3:   if  $T_i^C \leq T_i^r$  then
4:      $a_i^* = 0$ ; // task  $\mathcal{T}_i$  is executed on UE  $i$ 
5:     UE  $i$  updates its energy status  $E_i^{res}$  after the
       task executed;
6:   else
7:      $a_i^* = 1$ ;
8:     task  $\mathcal{T}_i$  fails to execute;
9:      $\rho_t = \rho_t + 1$ ;
10:  end
11:else //all UEs do not have sufficient residual energy
       for the task;
12:  generate tasks  $\mathcal{T}$  at location  $l^{t+1}$  from starting
       time  $\tau^t$  to  $\tau^{t+1}$ , depending on the active period, the
       idle period and Poisson interarrival;
13:  task  $\mathcal{T}_i$  fails to execute;
14:   $\rho_e = \rho_e + 1$ ;
14:end
    
```

---

#### B. TASK OFFLOADING DECISION PROCESS

We consider the resource-limited UE  $i$  with a task  $D_i$  where the length of  $D_i$  is randomly generated.

**Lemma 1.** Consider the strategies of UE  $i$ , one can follow the task execution strategy  $a_i^*$  to maintain the network reliability.

$$a_i^* = \begin{cases} 1, & \text{if } \sum_{i \in \mathcal{N}} E_i \leq E_i^{thr}, \\ 0, & \text{otherwise,} \end{cases} \quad (12)$$

where  $E_i^{thr}$  means the predetermined threshold of the residual energy of UE  $i$  and can be expressed as

$$E_i^{thr} = (T_i^o + \lambda_i^o E_i(U_i) - T_i) / \lambda_i \quad (13)$$

*Proof:* For UE  $i$ ,  $i \in \mathcal{N}$ , the overhead can be expressed as

$$\begin{aligned} V_h &= V_i + V_i^o \\ &= (T_i + \lambda_i E_i) + (T_i^o + \lambda_i^o E_{ij}(U_i)), \end{aligned} \quad (14)$$

Consider to decrease the overhead of UE  $i$ , one can obtain that  $V_i^o \geq V_i^l$ . Therefore, (13) can be rewritten as

$$T_i^o + \lambda_i^o E_i(U_i) \geq T_i + \lambda_i E_{ij}(U_i) \quad (15)$$

Then one can obtain that

$$E_i^{thr} \leq T_i^o(U_i) + \lambda_i^o E_{ij}(U_i) - T_i) / \lambda_i \quad (16)$$

The advantage of the proposed scheme is that all residual UE energy is considered as a whole resource for all tasks generated by different sources. As a result, the UE energy can be balanced and the percentage of failed tasks can be decreased. A detailed information regarding the proposed iterative method for task offloading scheme is demonstrated in Algorithm 1. According to the predetermine time threshold

$T_i^r$  and the residual energy status  $E_i^{res}$  of UE  $i$ , the task offloading strategy can be executed in each round to decrease the overhead and maintain the network stability. Moreover, the number of failed tasks caused by lack of residual energy  $\rho_e$  and exceeds the allowance time threshold  $\rho_t$  can be obtained.

### C. TASK OFFLOADING RECEIPT SELECTION

Considering one C-MEC covers an area with a radius of  $R_c$ , when the UE  $i$  decides to offload the task to the C-MEC, the selection function can be given as

$$C_j(w) = \frac{d_u(w)}{E_u(w)}, R_c \geq d_u(w) \quad (17)$$

where  $w$  is the C-MEC's ID,  $d_u(w)$  is the distance between the UE  $i$  and the potential C-MEC and  $E_u(w)$  means the residual energy of the C-MEC.  $E_u(w)$  is obtained by subtracting the currently consumed energy of the offloading task from previous residual energy. After the task offloading request the UE obtains the locations and energy status of all potential C-MECs, and then selects the one with the minimum  $C_j(w)$  as the task offloading receiver, which can efficiently achieve load balancing. One should note that when  $R_c < d_u(w)$ , the number of failed tasks due to mobility  $\rho_c$  will increase as demonstrated in Algorithm 2.

---

#### Algorithm 2 C-MEC selection.

---

**Initialization:** C-MEC is assigned an unique ID  $w$ ;  
 C-MEC coverage area with a radius of  $R_w$ ;  
 number of failed tasks due to coverage is set to  $\rho_c$ ;

---

```

1: for  $i \in \mathcal{N}$  do
2:   calculate  $d_u(w)$ ;
3:   calculate  $E_u(w)$ ;
4:   if  $R_c \geq d_u(w)$  then
5:      $\rho_c = \rho_c + 1$ ;
6:   else
7:     find  $\operatorname{argmin}_{j \in \mathcal{N}} C_j(w)$ ;
8:   end
9: end for
10: return  $w, \rho_c$ ;
```

---

### D. DATA SCHEDULING AND TRANSMISSION

In this phase, the offloaded tasks are executed in a first-come-first-serve manner by the corresponding C-MEC. Define the number of failed tasks due to lack of residual energy  $E_i^{res}$  and exceeding the predetermined time threshold of  $T_i^r$  as  $\rho_t$  and  $\rho_e$ , respectively.

After the active period, the UE then switches to the idle period to decrease energy waste. The percentage of the failed tasks  $r$  can be expressed as the ratio between the number of failed tasks  $\rho_{failed}$  and the total number of generated tasks  $\rho_{total}$  as

$$r = \frac{\rho_{failed}}{\rho_{total}} * 100\%, \quad (18)$$

where

$$\rho_{failed} = \rho_c + \rho_t + \rho_e. \quad (19)$$

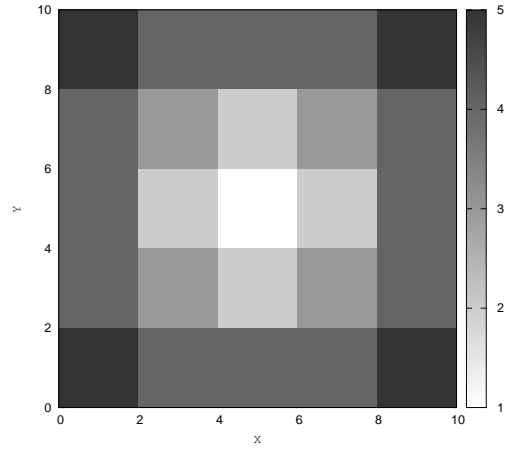


Figure 3. The different locations with multiple attractiveness.

Table 1. Simulation parameters

Parameters	Value (unit)
Poisson interarrival time	25 s
Simulation time	1 hour
Computation capacity	1500
Bandwidth	1 Mbps
$T_i^r$ threshold	10 ms
Transmission power	0.5 mW
Number of attractiveness locations $L$	5
Average task length (low)	250 MI
Average task length (medium)	350 MI
Average task length (heavy)	500 MI
The active period of the UE	15 s
The idle period of the UE	5 s
Probability of $P_{L^k}$	(0.1,0.15,0.2,0.25,0.3)
Attractiveness average waiting time	(300,200,100,50,20)

The detailed information regarding calculating  $\rho_{failed}$  can be found in Algorithm 2. UE  $i$  will update its energy status and select the task offloading strategy after one task is generated. In this way, the energy consumption of UE  $i$  can be significantly reduced and thereby the network lifetime can be prolonged.

## V. PERFORMANCE EVALUATION AND DISCUSSION

### A. THE SELECTED KEY PERFORMANCE METRICS

Some key parameters are proposed as follows:

**Executed task:** One successfully executed task can be seen as implementation by the UE population or offloading receipts when the requirements proposed in Algorithm 2 are met.

**Failed task:** One failed task can be defined as a task that cannot satisfy the requirements mentioned in Section IV. In this paper, uncompleted tasks are seen as failed ones.

**Average service time:** This is an important metric to represent the total time of the task execution services. Generally, the service time will significantly increase when a large amount of patient congestion occurs in the same place(s).

### B. PERFORMANCE EVALUATION AND DISCUSSION

In this section, theoretical analysis is employed for evaluating the performance of the proposed schemes. Due to the strict

requirements of the human body safety, the transmission power is set as -12 dBm as this is maximum value regulated by the IEEE 802.15.6 technical standard [1,40]. The parameters related to the simulation are summarized in Table 1. The patients are moving to different attractiveness locations randomly as mentioned in Section III. The decision weights  $\lambda_i = \lambda_i^o = 1$  as the same with [29]. We investigate the network performance of the proposed schemes regarding the selected key performance metrics; the number of executed tasks, the percentage of the failed task, average service time and energy consumption of all MECs. Also, each patient is provided with five pieces of UE fixed at predetermined locations to monitor the physiological signals. The average task size  $k$  proposed as the low, medium and the heavy payload is defined as 250, 350 and 500 million instructions (MI), respectively. In the same manner as [41], we ignore the effects of channel interference on the data transmission. Also, we assumed there are 25 C-MECs fixed in the predominated positions with different attractiveness values as shown in Fig. 3, as shown in Fig. 3, each C-MEC covers an area of a circular region with a radius  $R_c$  of 5 meters by default. The system performance investigation was implemented using JAVA in the 64-bit Windows 10 Professional operating system using an Intel Xeon(R) E5-1630@3.70GHz processor with 16 GB RAM. We ran the simulation five times and obtained the 90% confidence interval for further analysis. The detailed explanations of the crucial results are given in detail below.

Figs. 4-6 show the comparison between a series of transmission techniques under different average task lengths. One should note that since all tasks are randomly generated and the tasks for UE to execute or offload thus have random lengths. It can be seen that as the number of patients increases, the number of executed tasks increases as one would expect. The task offloading scheme executes approximately 41500, 41300 and 44500 for average task lengths of 250, 350 and 500 MI respectively. When considering patients' mobility, the corresponding figures are 38300, 37900 and 37600. This is because many tasks cannot offload to a C-MEC when patients are moving out of the coverage area of all C-MECs. The total numbers of executed tasks with local execution are roughly 18100, 14800 and 12300 for the average task lengths of 250, 350 and 500 MI, respectively. It should also be noted that with local execution, the number of executed tasks plateaus when the number of patients increases from 180 to 200 as shown in Fig. 5. This is because the number of generated tasks keeps increasing but reaches the limit of the total UE computational capabilities, resulting in significant task failure. Therefore, this strategy is not suitable for computation-intensive applications.

We now pursue the impact of human mobility further. In Fig. 7, the percentage of failed tasks under different task length conditions for multiple schemes is given. The portion of failed tasks increases with the number of patients and larger task lengths result in higher failed percentages. For length  $k=500$  MI, the task offloading scheme reaches a failure rate of 1.45% with 200 patients compared to our proposed scheme delivering just 0.75%.

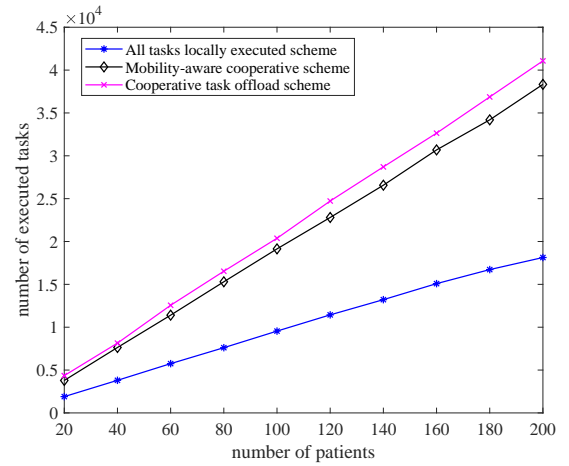


Figure 4. Comparison of the number of executed tasks when  $k=250$  MI.

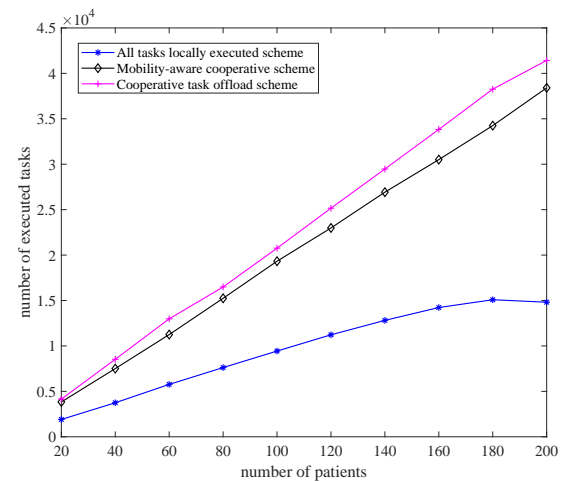


Figure 5. Comparison of the number of executed tasks when  $k=350$  MI.

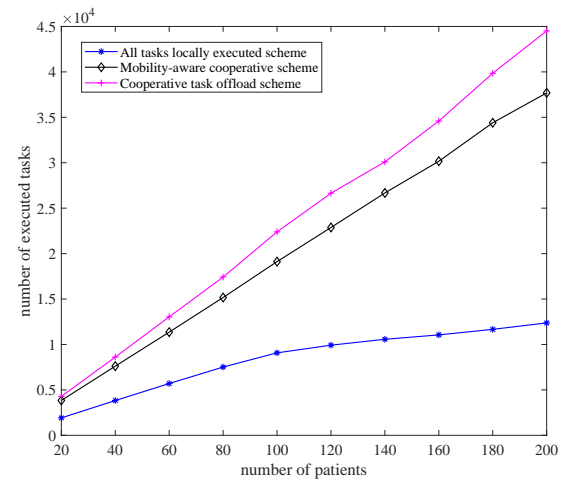


Figure 6. Comparison of the number of executed tasks when  $k=500$  MI.



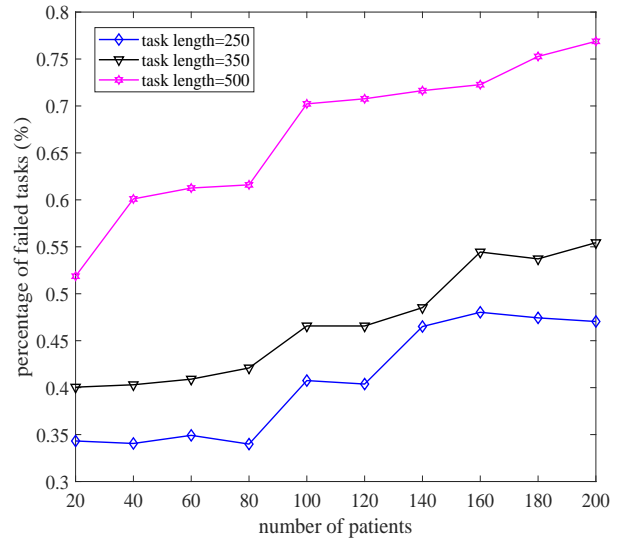
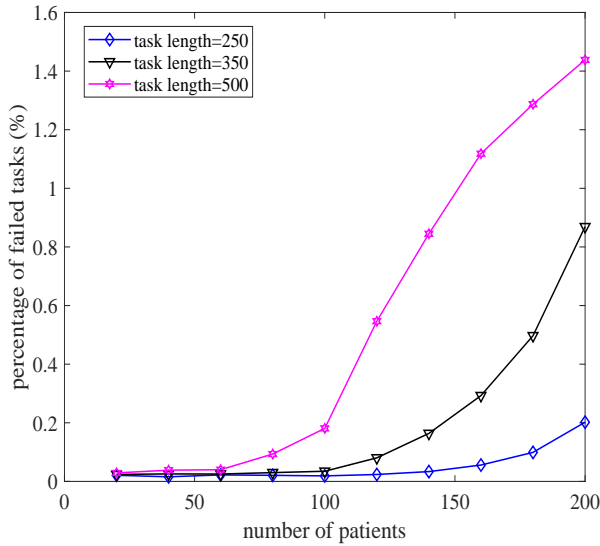


Figure 7. The average percentage of failed tasks for different task lengths. (left) cooperative task offload scheme; (right) the proposed scheme.

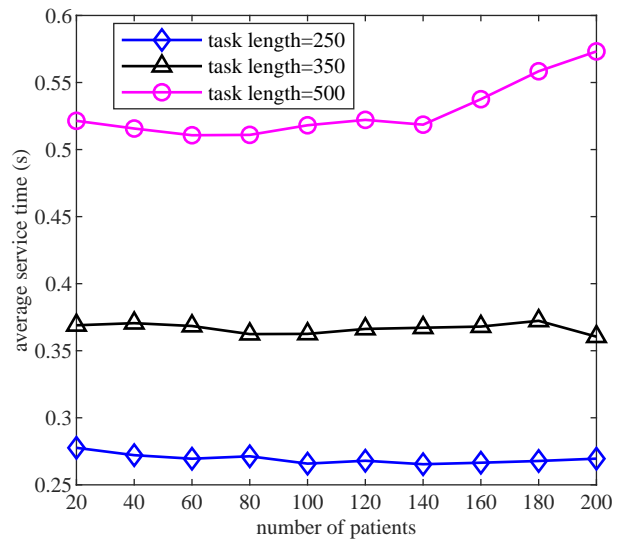
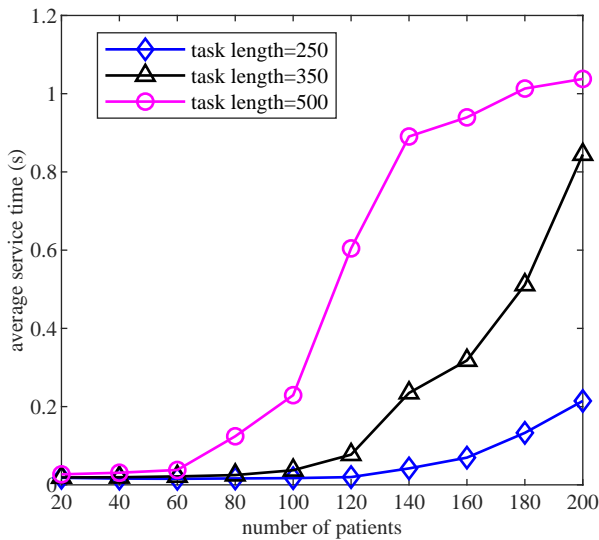


Figure 8. The behavior of the average service time. (left) cooperative task offload scheme; (right) the proposed scheme.

The performance of the average service time under task offloading scenarios are illustrated in Fig. 8. Considering the heavy payload condition, the service time is nearly 0.57 s when used for 200 patients while only 0.27 s when the task length is 250 MI. Moreover, the task offloading scheme achieves the highest service time when task length is 500 MI and there are 200 patients at around 1.05 s. One can obtain that the proposed mobility-aware cooperative task offloading scheme realizes stable average service time performance when considering low and medium payload scenarios. This is because each UE can select the best task offloading recipient according to the selection function proposed in (17).

Figs. 9-11 summarize the energy consumption of each MEC under various conditions. These show that the some

of the C-MEC servers consume significant energy such as 8, 12, 13, 14 and 18. As for our proposed approach, the power consumption of all MECs is nearly the same. This is because of the UEs' MEC selection scheme proposed in Algorithm 2, which means that the load can be balanced across MECs. The energy consumption of all three conditions is approximately 7800 Joule (J), 9100 J and 13500 J for the average task lengths of 250 MI, 350 MI and 500 MI, respectively.

## VI. CONCLUSION

Edge computing provides a great opportunity to reduce latency in WBAN-based healthcare where limitations in UE computation, communication and energy storage capabilities set performance limits. In this paper, a mobility-

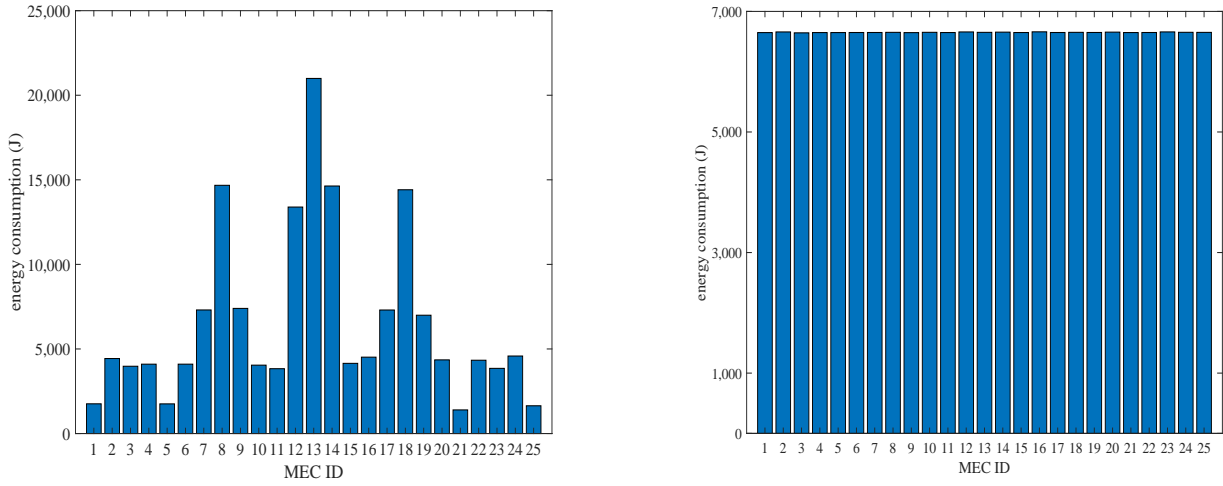


Figure 9. The average energy consumption when task length  $k=250$  MI. (left) cooperative task offload scheme; (right) the proposed scheme.

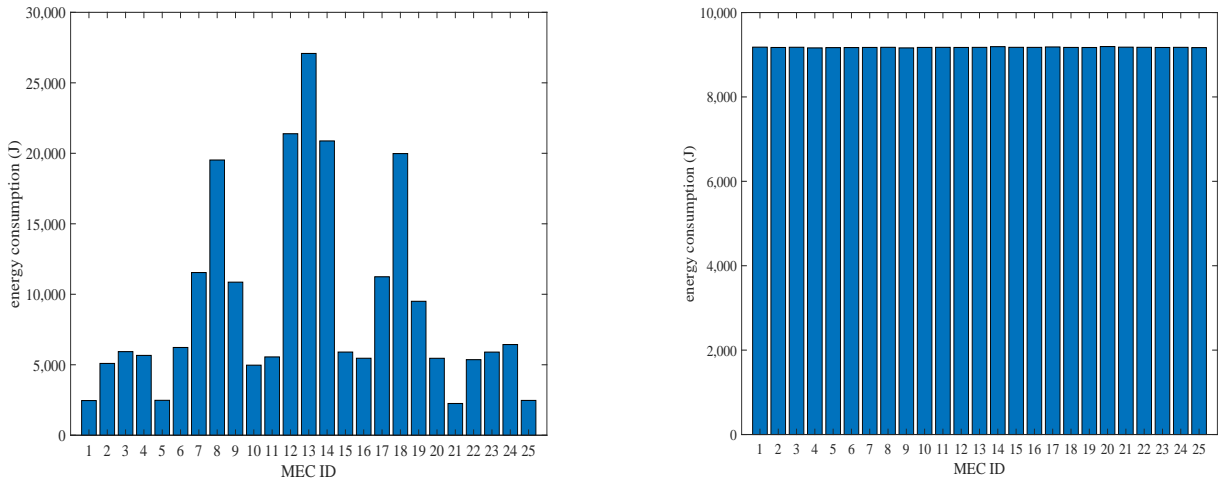


Figure 10. The average energy consumption when task length  $k=350$  MI. (left) cooperative task offload scheme; (right) the proposed scheme.

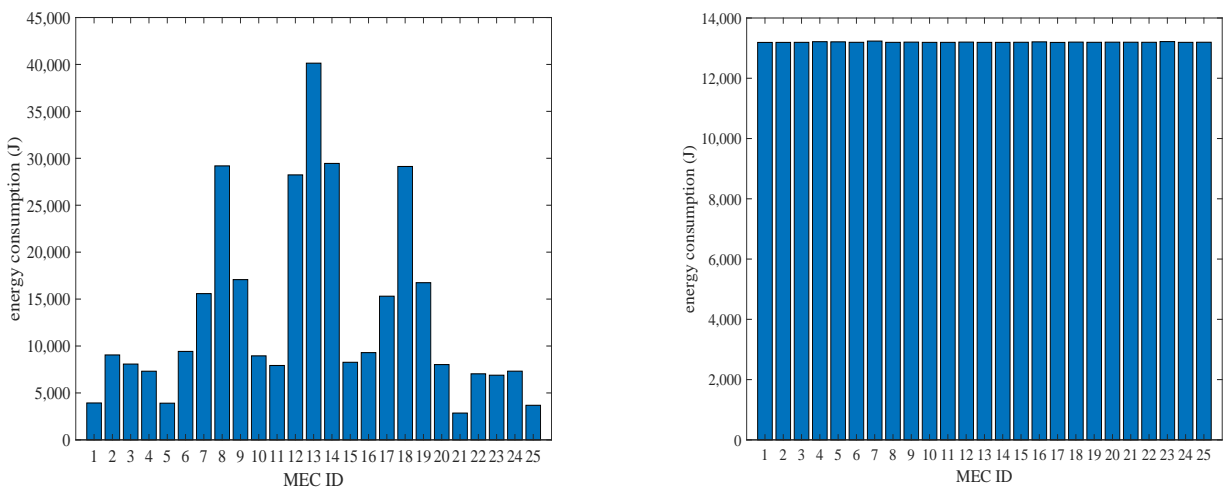


Figure 11. The average energy consumption when task length  $k=500$  MI. (left) cooperative task offload scheme; (right) the proposed scheme.

aware cooperative task offloading scheme is proposed, which employs C-MECs as computation platforms and WBANs as the communication interface. We first present the system architecture and the patient mobility model. Moreover, existing approaches have been analyzed and compared with the proposed one. Algorithms regarding decision making and transmission mechanism have been proposed in detail. The results show that the traditional relay-based transmission scheme achieves poor performance in terms of the number of executed tasks. When comparing the previously published task offloading scheme with the proposed one, it is seen that the new mobility-aware cooperative task offloading approach delivers better performance in term of several aspects such as average service time, the percentage of failed tasks and energy consumption balancing of all C-MECs.

Future work includes the implementation of the proposed protocol on a realistic experimental testbed. Moreover, since the hospital-based healthcare monitoring technique is becoming a promising candidate to decrease medical costs, joint energy minimization and resource allocation in the UEs and C-MECs, femto cloud-based fault tolerance and task offloading system design are worthy of further investigation [42-43].

## References

- [1] S. Movassaghi, M. Abolhasan, J. Lipman, D. Smith and A. Jamalipour, "Wireless Body Area Networks: A Survey," in *IEEE Communications Surveys Tutorials*, vol. 16, no. 3, pp. 1658-1686, 2014.
- [2] T. Hayajneh, G. Almashaqbeh, S. Ullah, and A. V. Vasilakos, "A survey of wireless technologies coexistence in WBAN: analysis and open research issues," *Wireless Networks*, vol. 20, pp. 2165-2199, 2014.
- [3] G. V. Crosby, T. Ghosh, R. Murimi, and C. A. Chin, "Wireless Body Area Networks for Healthcare: A Survey," *International Journal of Ad Hoc Sensor and Ubiquitous Computing*, vol. 3, 2012.
- [4] M. Chen, Y. Ma, J. Song, C. F. Lai, and B. Hu, "Smart Clothing: Connecting Human with Clouds and Big Data for Sustainable Health Monitoring," *Mobile Networks and Applications*, vol. 21, pp. 825-845, 2016.
- [5] Y. Liao, M. S. Leeson, and M. D. Higgins, "Flexible quality of service model for wireless body area sensor networks," *Healthcare Technology Letters*, vol. 3, pp. 12-15, 2017.
- [6] B. S. Kim, K. H. Kim, and K. I. Kim, "A Survey on Mobility Support in Wireless Body Area Networks," *Sensors*, vol. 17, p. 797, 2017.
- [7] K. Wang, K. Yang, H. H. Chen and L. Zhang, "Computation Diversity in Emerging Networking Paradigms," *IEEE Wireless Communications*, vol. 24, no. 1, pp. 88-94, 2017.
- [8] J. Oueis, E. C. Strinati and S. Barbarossa, "The Fog Balancing: Load Distribution for Small Cell Cloud Computing," *IEEE Vehicular Technology Conference (VTC Spring)*, Glasgow, 2015, pp. 1-6.
- [9] N. Sultan, "Cloud computing for education: A new dawn?," *International Journal of Information Management*, vol. 30, pp. 109-116, 2010.
- [10] Y. C. Hu, M. Patel, D. Sabella, D. Sprecher, N. Young, "Mobile edge computing-key technology towards 5G," *TSI white paper*, vol. 11, pp. 1-16, 2015.
- [11] R. Roman, J. Lopez, and M. Mambo, "Mobile edge computing, Fog et al.: A survey and analysis of security threats and challenges," *Future Generation Computer Systems*, vol. 78, pp. 680-698, 2016.
- [12] M. Aazam, S. Zeadally, and K. A. Harras, "Offloading in fog computing for IoT: Review, enabling technologies, and research opportunities," *Future Generation Computer Systems*, vol. 87, pp. 278-289, 2018.
- [13] W. Shi and S. Dustdar, "The Promise of Edge Computing," *Computer*, vol. 49, pp. 78-81, 2016.
- [14] B. R. Chang, H. F. Tsai, C. M. Chen, Z. Y. Lin and C. F. Huang, "Assessment of Hypervisor and Shared Storage for Cloud Computing Server," *2012 Third International Conference on Innovations in Bio-Inspired Computing and Applications*, Kaohsiung, pp. 67-72, 2012.
- [15] S. Pathak, M. Kumar, A. Mohan, and B. Kumar, "Energy Optimization of ZigBee Based WBAN for Patient Monitoring," *Procedia Computer Science*, vol. 70, pp. 414-420, 2015.
- [16] D. T. Huynh and M. Chen, "An energy efficiency solution for WBAN in healthcare monitoring system," in *International Conference on Systems and Informatics*, pp. 685-690, 2017.
- [17] S. Ahmed, N. Javaid, S. Yousaf, A. Ahmad, M. M. Sandhu, M. Imran, et al., "Co-LAEEBA: Cooperative link aware and energy efficient protocol for wireless body area networks," *Computers in Human Behavior*, vol. 51, pp. 1205-1215, 2015.
- [18] Y. Liao, M. S. Leeson, M. D. Higgins and C. Bai, "An incremental relay based cooperative routing protocol for wireless in-body sensor networks," *IEEE International Conference on Wireless and Mobile Computing, Networking and Communications (WiMob)*, New York, NY, pp. 1-6, 2016.
- [19] Y. Kim, S. Lee and S. Lee, "Coexistence of ZigBee-Based WBAN and WiFi for Health Telemonitoring Systems," *IEEE Journal of Biomedical and Health Informatics*, vol. 20, no. 1, pp. 222-230, 2016.
- [20] S. Movassaghi, A. Majidi, A. Jamalipour, D. Smith and M. Abolhasan, "Enabling interference-aware and energy-efficient coexistence of multiple wireless body area networks with unknown dynamics," *IEEE Access*, vol. 4, pp. 2935-2951, 2016.
- [21] M. M. Sandhu, N. Javaid, M. Jamil, Z. A. Khan, M. Imran, M. Ilahi, et al., "Modeling mobility and psychological stress based human postural changes in wireless body area networks," *Computers in Human Behavior*, vol. 51, pp. 1042-1053, 2015.
- [22] M. Nabi, M. Geilen, and T. Basten, "MoBAN: a configurable mobility model for wireless body area networks," in *International ICST Conference on Simulation TOOLS and Techniques*, pp. 168-177, 2011.
- [23] J. Dong and D. Smith, "Joint relay selection and transmit power control for wireless body area networks coexistence," *IEEE International Conference on Communications (ICC)*, Sydney, Australia, pp. 5676-5681, 2014.
- [24] M. Quwaider and Y. Jararweh, "Cloudlet-based Efficient Data Collection in Wireless Body Area Networks," *Simulation Modelling Practice and Theory*, vol. 50, pp. 57-71, 2015.
- [25] G. Almashaqbeh, T. Hayajneh, A. V. Vasilakos, and B. J. Mohd, "QoS-aware health monitoring system using cloud-based WBANs," *Journal of Medical Systems*, vol. 38, pp. 1-20, 2014.
- [26] M. Altamimi, A. Abdrabou, K. Naik and A. Nayak, "Energy Cost Models of Smartphones for Task Offloading to the Cloud," *IEEE Transactions on Emerging Topics in Computing*, vol. 3, no. 3, pp. 384-398, 2015.
- [27] E. H. Cherkaoui and N. Agoulmine, "Context-aware mobility management with WiFi/3G offloading for ehealth WBANs," *IEEE International Conference on e-Health Networking, Applications and Services (Healthcom)*, Natal, Brazil, pp. 472-476, 2014.
- [28] Z. Li, H. Wang, M. Daneshmand and H. Fang, "Secure and efficient key generation and agreement methods for wireless body area networks," *2017 IEEE International Conference on Communications (ICC)*, Paris, France, pp. 1-6, 2017.
- [29] X. Chen, "Decentralized Computation Offloading Game for Mobile Cloud Computing," *IEEE Transactions on Parallel and Distributed Systems*, vol. 26, no. 4, pp. 974-983, 2015.
- [30] T. Nakamura et al., "Trends in small cell enhancements in LTE advanced," *IEEE Communications Magazine*, vol. 51, no. 2, pp. 98-105, 2013.
- [31] A. P. Miettinen and J. K. Nurminen, "Energy efficiency of mobile clients in cloud computing," in *Proceedings of the USENIX Conference on Hot Topics in Cloud Computing*, pp. 4-4, Boston, MA, 2010.
- [32] C. Wang, F. R. Yu, C. Liang, Q. Chen and L. Tang, "Joint Computation Offloading and Interference Management in Wireless Cellular Networks with Mobile Edge Computing," in *IEEE Transactions on Vehicular Technology*, vol. 66, no. 8, pp. 7432-7445, 2017.
- [33] X. Lyu et al., "Selective Offloading in Mobile Edge Computing for the Green Internet of Things," *IEEE Network*, vol. 32, no. 1, pp. 54-60, 2018.
- [34] H. Mei, K. Wang and K. Yang, "Multi-Layer Cloud-RAN With Cooperative Resource Allocations for Low-Latency Computing and Communication Services," *IEEE Access*, vol. 5, pp. 19023-19032, 2017.
- [35] N. Javaid, A. Ahmad, Q. Nadeem, M. Imran, and N. Haider, "iM-SIMPLE: iMproved stable increased-throughput multi-hop link efficient routing protocol for Wireless Body Area Networks," *Computers in Human Behavior*, vol. 51, pp. 1003-1011, 2015.
- [36] M. M. Hassan, K. Lin, X. Yue, and J. Wan, "A multimedia healthcare data sharing approach through cloud-based body area network," *Future Generation Computer Systems*, vol. 66, pp. 48-58, 2017.

- [37] M. Patel and J. Wang, "Applications, challenges, and prospective in emerging body area networking technologies," *IEEE Wireless Communications*, vol. 17, pp. 80-88, 2010.
- [38] J. S. Ping, G. A. E. Vandenbosch, M. Mercuri, and M. P. Schreurs, "Wearable Wireless Health Monitoring: Current Developments, Challenges, and Future Trends," *IEEE Microwave Magazine*, vol. 16, pp. 55-70, 2015.
- [39] K. S. Kwak, S. Ullah and N. Ullah, "An overview of IEEE 802.15.6 standard," in *International Symposium on Applied Sciences in Biomedical and Communication Technologies (ISABEL 2010)*, Rome, Italy, pp. 1-6, 2010.
- [40] Y. Mao, J. Zhang, and K. B. Letaief, "Dynamic Computation Offloading for Mobile-Edge Computing With Energy Harvesting Devices," *IEEE Journal on Selected Areas in Communications*, vol. 34, no. 12, pp. 3590-3605, 2016.
- [41] C. Sonmez, A. Ozgovde and C. Ersoy, "Performance Evaluation of Single-tier and Two-tier Cloudlet Assisted Applications," in *IEEE International Conference on Communications Workshops (ICC Workshops)*, Paris, France, pp. 302-307, 2017.
- [42] K. Wang, K. Yang, and C. S. Magurawalage, "Joint Energy Minimization and Resource Allocation in C-RAN with Mobile Cloud," *IEEE Transactions on Cloud Computing*, vol. 6, no. 3, pp. 760-770, 2018.
- [43] K. Wang, K. Yang, H. Chen, and L. Zhang, "Computation Diversity in Emerging Networking Paradigms," *IEEE Wireless Communications*, vol. 24, no. 1, pp. 88-94, 2017.

• • •