

UNIVERSITY OF BIRMINGHAM

Research at Birmingham

Prediction of Losses in Small Scale Axial Air Turbine Based on CFD Modelling

Bahr Ennil, Ali; Al-Dadah, Raya; Mahmoud, Saad; Al Jubori, Ayad; Rahbar, Kiyarash

DOI:

[10.1016/j.egypro.2015.07.702](https://doi.org/10.1016/j.egypro.2015.07.702)

License:

Creative Commons: Attribution-NonCommercial-NoDerivs (CC BY-NC-ND)

Document Version

Publisher's PDF, also known as Version of record

Citation for published version (Harvard):

Bahr Ennil, A, Al-Dadah, R, Mahmoud, S, Al Jubori, A & Rahbar, K 2015, 'Prediction of Losses in Small Scale Axial Air Turbine Based on CFD Modelling', Energy Procedia, vol. 75, pp. 3271-3276.
<https://doi.org/10.1016/j.egypro.2015.07.702>

[Link to publication on Research at Birmingham portal](#)

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.



The 7th International Conference on Applied Energy – ICAE2015

Prediction of Losses in Small Scale Axial Air Turbine Based on CFD Modelling

A. S. Bahr Ennil^{a,*}, R. K. Al-Dadah^a, S. Mahmoud^a, A. M. Al-Jubori^a, K. Rahbar^a

^aSchool of Mechanical Engineering

University of Birmingham

Birmingham, United Kingdom, B15-2TT

Abstract

Efficient small scale axial air turbines play a major role in determining the overall conversion efficiency in certain energy cycles using renewable energy sources. Loss predictions are vital for the development and optimization of such small scale turbines. Since all published loss prediction schemes were developed for large scale turbines, therefore there is a need for an effective approach to predict such losses for the small scale axial turbines. This work aims to develop a new approach to predict the losses in a small scale axial air turbine using both conventional loss models and computational fluid dynamics (CFD) simulations. Results showed that the Kacker & Okapuu model gave the closest values to the CFD simulation results thus it can be used to produce the initial turbine design that can be further optimised through CFD simulations.

© 2015 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license

(<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of Applied Energy Innovation Institute

Keywords: Small Scale Axial turbine, CFD, Simulation, Total Loss.

Nomenclature:

Y	Total Loss Coefficient	Y_{Tl}	Trailing Loss coefficient	X_{Te}	Ainely Correction factor
Y_p	Profile Loss Coefficient	Y_k	Tip Clearance Loss	K_p	Mach number Factor
Y_s	Secondary Loss Coefficient	Y_{shock}	Loss due to shocks	ζ_N	Nozzle Loss Factor
C_L	Lift Coefficient	C_d	Drag Coefficient	ζ_R	Rotor Loss Factor

1. Introduction:

The availability of efficient small scale axial air turbines is vital for the development of renewable energy systems like the solar thermal air driven Brayton cycle [1-2] and small scale compressed air energy storage systems [3-4], were compressed air can be used to drive air turbines and generate power output.

* Corresponding author. Tel.: +441214143513

E-mail address: asb208@bham.ac.uk.

In general, published losses predictions correlations have been developed for large scale turbines, but as turbine sizes get smaller the effect of aerodynamic losses becomes more significant, therefore, the development of more accurate loss prediction techniques is required for small scale turbines where the efficiency is reduced due to loss development [2].

The estimation of losses using Ainely- Mathieson correlations is the most widely method used in turbine design [1]. This approach was improved by Dunham and Came (1971), also Craig and Cox (1971) proposed an improved correlations for losses prediction. Moustapha et al. (1990) provided a review about exist correlation for losses prediction and concluded that all the used correlation needs improvements to meet continues developments in blade airfoil shapes.

Benner et al. (2006) presented a new scheme for secondary losses prediction, in his study the losses were obtained based on a new empirical correlation which includes span wise penetration depth. This work aims to develop a new approach to predict the losses in a small scale axial air turbine using both the conventional loss models and computational fluid dynamics (CFD) simulations.

2. Loss Prediction Correlations:

2.1 Soderberg:

Soderberg (1949) provided a relation to predict total profile and secondary loss and neglecting tip clearance:

$$\zeta_N = \left(\frac{10^5}{Re}\right)^{1/4} \left[(1 + \zeta^*) \left(0.993 + 0.075 \frac{l}{H}\right) - 1 \right] \quad (1)$$

$$\zeta_R = \left(\frac{10^5}{Re}\right)^{1/4} \left[(1 + \zeta^*) \left(0.975 + 0.075 \frac{l}{H}\right) - 1 \right] \quad (2)$$

2.2 Ainely & Mathieson:

This model was provided by Ainely & Mathieson (1951). In this scheme, Ainely and Mathieson assumed that the effect of Mach number and flow outlet angles on pressure distribution is negligible.

$$Y = (Y_P + Y_S + Y_{Tl}) \chi_{Te} \quad (3)$$

$$Y_{P(i=0)} = \left\{ Y_{P(\alpha'_{in}=0)} + \left(\frac{\alpha'_{in}}{\alpha_{out}}\right)^2 \left[Y_{P(\alpha'_{in}=\alpha_{out})} - Y_{P(\alpha'_{in}=0)} \right] \right\} \left(\frac{t_{max/l}}{0.2}\right)^{\frac{\alpha'_{in}}{\alpha_{out}}} \quad (4)$$

$$Y_S = \lambda \left(\frac{c_L}{t/l}\right)^2 \left(\frac{\cos^2 \alpha_{out}}{\cos^3 \alpha_m}\right) \quad (5)$$

2.3 Dunham & Came:

Dunham & Came (1970) made an improvement on Ainely & Mathieson approach by considering the influence of Reynolds number on losses.

$$Y = \left((Y_P + Y_S) \left(\frac{Re}{2 \times 10^5}\right)^{-0.2} + Y_{Tl} \right) \chi_{Te} \quad (6)$$

$$Y_P = [1 + 60(M_{out} - 1)^2]\chi_i Y_{P(i=0)} \tag{7}$$

$$Y_s = 0.0334 \left(\frac{l}{H}\right) [4(\tan\alpha_{in} - \tan\alpha_{out})^2] \left(\frac{\cos^2\alpha_{out}}{\cos\alpha_m}\right) \left(\frac{\cos\alpha_{out}}{\cos\alpha_{in}}\right) \tag{8}$$

$$Y_{TI} = B \frac{l}{h} \left(\frac{\tau}{l}\right)^{0.78} 4(\tan\alpha_{in} - \tan\alpha_{out})^2 \left(\frac{\cos^2\alpha_{out}}{\cos\alpha_m}\right) \tag{9}$$

2.4 Kacker & Okapuu:

Kacker & Okapuu (1982) developed his coloration by adding the influence of shock losses into the loss calculation with a new breakdown model for profile and secondary loss are presented.

$$Y = \chi_{Re} Y_P + Y_s + Y_{TI} + Y_{Te} \tag{10}$$

The correction factor (χ_{Re}) can be calculated using following equation:

$$\chi_{Re} = \begin{cases} \left(\frac{Re}{2 \times 10^5}\right)^{-0.4} & Re \leq 2 \times 10^5 \\ 1.0 & 2 \times 10^5 > Re < 10^6 \\ \left(\frac{Re}{10^6}\right)^{-0.2} & Re > 10^6 \end{cases} \tag{11}$$

$$Y_P = 0.914 \left(\frac{2}{3} K_P \chi_i Y_{P(i=0)} + Y_{shock}\right) \tag{12}$$

$$Y_{shock} = 0.75 (M_{in,H} - 0.4)^{1.75} \left(\frac{r_H}{r_T}\right) \left(\frac{P_{in}}{P_{out}}\right) \frac{1 - \left(1 + \frac{\gamma-1}{2} M_{in}^2\right)^{\frac{\gamma}{\gamma-1}}}{1 - \left(1 + \frac{\gamma-1}{2} M_{out}^2\right)^{\frac{\gamma}{\gamma-1}}} \tag{13}$$

$$Y_s = 0.04 \left(\frac{l}{H}\right) \chi_{AR} [4(\tan\alpha_{in} - \tan\alpha_{out})^2] \left(\frac{\cos^2\alpha_{out}}{\cos\alpha_m}\right) \left(\frac{\cos\alpha_{out}}{\cos\alpha_{in}}\right) \left[1 - \left(\frac{l_x}{H}\right)^2 (1 - K_P)\right] \tag{14}$$

$$Y_{Te} = \frac{\left[1 + \frac{\gamma-1}{2} M_{out}^2 \left(\frac{1}{1 - \Delta E_{Te}} - 1\right)\right]^{-\gamma/\gamma-1}}{1 - \left(1 + \frac{\gamma-1}{2} M_{out}^2\right)^{-\gamma/\gamma-1}} \tag{15}$$

3 CFD Modeling:

In this work, the air flow inside a small axial turbine design, CFD simulation is a powerful tool to obtain a detailed turbine design. In present work, the small scale axial turbine is simulated using ANSYS CFX 15 which is based on finite volume technique to solve governing equations iteratively for each control volume. For high accuracy simulation, Shear Stress Transport (SST) k- ω model is chosen.

Continuity Equation: $\frac{\partial(\rho u_i)}{\partial x_i} = 0$ (16)

Momentum Equation: $\frac{\partial}{\partial x_i} (\rho u_i u_j) = \frac{\partial}{\partial x_i} \left(\mu \frac{\partial u_j}{\partial x_i}\right) - \frac{\partial P}{\partial x_i}$ (17)

Energy Equation:
$$\frac{\partial}{\partial x_i}(\rho u_i T) = \frac{\partial}{\partial x_i} \left(\frac{K}{c_p} \frac{\partial u_j}{\partial x_i} \right) \tag{18}$$

In order to validate the CFD analysis, the simulation was carried out for the large scale axial turbine geometry and the experimental data published by Ning Wei (2000) using the same geometrical parameters and boundary conditions. Figure 1 show the predicted (CFD) efficiency compared to the experimental one with +/- 10% deviations. Also, grid sensitivity analysis was carried out based on turbine total efficiency as shown in figure 2. It is clear from this figure that with number of grid cells higher than 650000, the turbine total efficiency remains constant indicating that the solution is not affected by the number of grid cells.

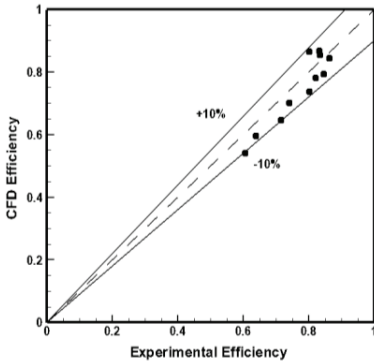


Fig.1: CFD Model Validation based on Ning Wei (2000) data

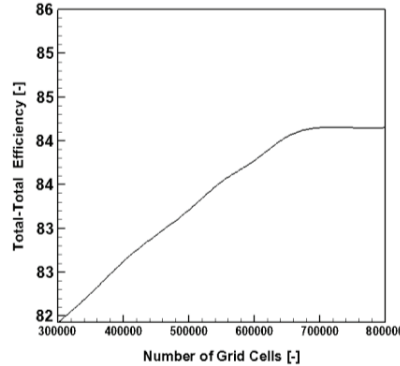


Fig.2: Grid Sensitivity Analysis Based on Total-Total Efficiency

Small Scale Axial air Turbine Losses Prediction:

This section presents a comparison between losses prediction using published colorations and losses obtained using ANSYS CFX simulations for the operating conditions and axial turbine geometry presented in table 1. Figures 3 shows the velocity vectors for 5kW axial air turbine, and figure 4 shows its mean line stream wise pressure distribution.

Table (1): Turbine Design Parameters:

Power output (kW)	5	Total inlet temperature (K)	360
Mass flow rate (kg/sec)	0.3225	Inlet relative flow angle	59.04
Shaft speed (rpm)	14000	Exit absolute flow angle	65.12
Total inlet Pressure (kpa)	200	Hub-tip ratio	0.75
Mean radius (mm)	35mm	Rotor span (mm)	10mm




Fig.3: Velocity vectors for 5kW Axial Air Turbine

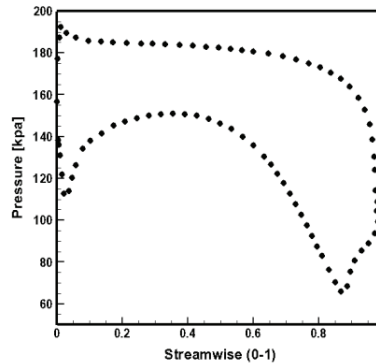


Fig.4: Rotor Blade Loading for 5kW Axial Air Turbine

Figures 5 and 6 present the predicted rotor total losses versus rotational speed and pressure ratio using Came & Dunham, Kacker & Okapuu, and Ainely colorations versus CFD predictions. It is clear from these figures that Kacker & Okapuu predicted losses are the closest to CFD results, while results by Ainely & Mathieson approach are the lowest loss values. Therefore, the CFD and Kacker & Okapuu approach were used to carry out a parametric analysis to study the effects of trailing edge thickness and leading edge radius on turbine rotor total losses at various RPM ranging from 1000 to 18000 RPM, as shown in Figures 7 and 8. These results show that small scale turbine is experienced high loss and choosing acceptable loss prediction scheme is needed for preliminary design stage.

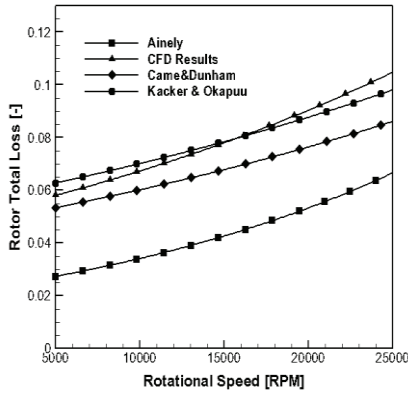


Fig.5: Total loss for different RPM

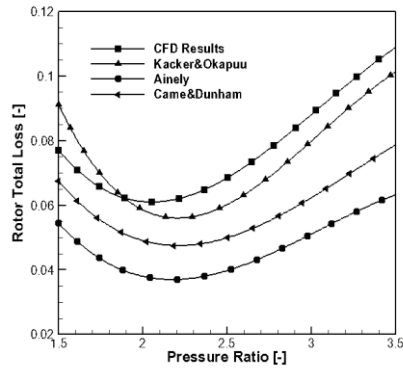


Fig.6: Total loss for different pressure ratio

As shown in Figure 7 the total loss increases with trailing edge thickness due to flow separation. Also, the leading edge radius has a significant impact on loss generation as shown in Figure 8 where the rotor loss decrease till radius of 0.45 then the loss increases for all RPMs. Also it is clear from Figures 7 and 8 that the CFD predictions were close to Kacker & Okapuu for all the study carried out.

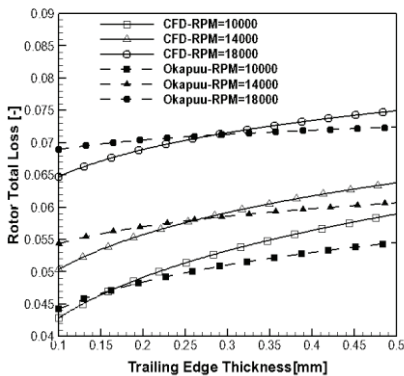


Fig.7: Rotor Loss Vs Trailing Edge Thickness

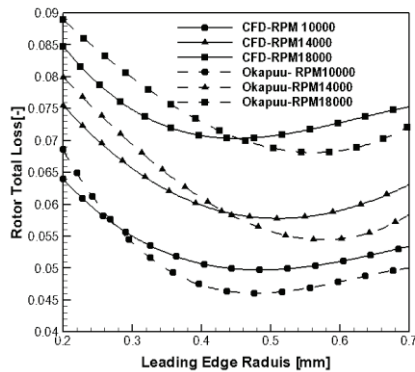


Fig.8: Rotor Loss Vs Leading Edge Radius

Conclusion:

Loss predictions are vital for the development of efficient and cost effective small scale air driven axial turbines. All published loss prediction schemes are developed for large scale turbines. Therefore there is a need for an effective approach to predict such losses for the small scale axial turbines. This work compared the predicted losses based on published literature correlations with those from CFD simulations. Results showed that the Kacker & Okapuu model gave the closest values to the CFD simulation results. Therefore, this work recommends using Kacker & Okapuu approach to predict the losses and to generate the initial blade profile for small scale turbine. Then, the CFD analysis can be used to further improve the initial design by investigating the effects of various parameters that cannot be investigated using correlations like number of blades, leading edge geometry, axial distance between the stator and the rotor and blade turning angle to achieve an optimised design with minimum losses.

References:

- [1] W.G.Le Roux, T. Bello Ochende and J.P. Meyer. The Efficiency of an open-cavity tubular solar receiver for a small-scale solar thermal Brayton cycle. *Energy Conversion and Management* 2014; 84:457:470
- [2] S. H. Moustapha, S. C. Kacker and B. Tremblay. An Improved Incidence Losses Prediction Method for Turbine Airfoils. *J. Turbomach.* 1990; 112(2): 267-276.
- [3] S. Quoilin, V. Lemort. Technological and Economical Survey of Organic Rankine Cycle Systems. *5th European Conference Economics and Management of Energy in Industry*, 2009.
- [4] A. Khamis, Z. Badarudin, A. Ahmad, and N. Abu Bakar. Development of Mini Scale Compressed Energy Storage System. IEEE First Conference on Clean Energy and Technology CET 2011.
- [5] M. W. Benner, S. A. Sjolander and S. H. Moustapha. Influence of Leading-Edge Geometry on Profile Losses in Turbines at Off-Design Incidence: Experimental Results and an Improved Correlation. *J. Turbomach.* 1997; 119(2): 193-200.
- [6] Xinwen Xiao, Andrew A. McCarter, and B. Lakshminarayana. Tip Clearance Effects in a Turbine Rotor: Part II—Velocity Field and Flow Physics. *J. Turbomach.* 2000; 123(2): 305-313.
- [7] Andrew A. McCarter, Xinwen Xiao, and B. Lakshminarayana. Tip Clearance Effects in a Turbine Rotor: Part I—Pressure Field and Loss. *J. Turbomach.* 2001; 123(2): 296-304.
- [8] M. W. Benner, S. A. Sjolander and S. H. Moustapha. An Empirical Prediction Method for Secondary Losses in Turbines—Part I: A New Loss Breakdown Scheme and Penetration Depth Correlation. *J. Turbomach.* 2006; 128(2): 273-280.
- [9] S. C. Kacker, U. Okapuu. A Mean Line Prediction Method for Axial Flow Turbine Efficiency. *Journal of Engineering for Power*, 1982; 104: 111-119.
- [10] J. Dunham, P. M. Came. Improvements to Ainely- Mathieson Method of Turbine Performance Prediction. *ASME*, 1970; 3: 252-256.
- [11] Ainely, D. G. Mathieson. Method of Performance Estimation for Axial Flow Turbines. *British ARC, R&M*, 1951; 2974.
- [12] Ning Wei. Significance of Loss Models in Aerothermodynamics Simulation for Axial Turbines. PhD Thesis, *Royal Institute of Technology*, 2000.
- [13] C. H. Sieverding, 1985, ‘‘ Recent Progress in Understanding of Basic Aspects of Secondary Flows in Turbine Blade Passages, *J. Eng. Gas Turbines Power* 107(2), 248-257.