

Engineering Conferences International ECI Digital Archives

Thermal Barrier Coatings IV

Proceedings

Summer 6-26-2014

Evaluating deformation behavior of a TBC-System during thermal gradient mechanical fatigue by means of high energy X-ray diffraction

M. Bartsch

German Aerospace Center, Cologne

J. Wischek

German Aerospace Center, Cologne

C. Meid

German Aerospace Center, Cologne

K. Knipe

Mechanical and Aerospace Engineering, University of Central Florida, Orlando, Florida

A. Manero

Mechanical and Aerospace Engineering, University of Central Florida, Orlando, Florida

See next page for additional authors

Follow this and additional works at: http://dc.engconfintl.org/thermal_barrier_iv



Part of the [Materials Science and Engineering Commons](#)

Recommended Citation

M. Bartsch, J. Wischek, C. Meid, K. Knipe, A. Manero, S. Raghavan, A. M. Karlsson, J. Okasinski, and J. Almer, "Evaluating deformation behavior of a TBC-System during thermal gradient mechanical fatigue by means of high energy X-ray diffraction" in "Thermal Barrier Coatings IV", U. Schulz, German Aerospace Center; M. Maloney, Pratt & Whitney; R. Darolia, GE Aviation (retired) Eds, ECI Symposium Series, (2015). http://dc.engconfintl.org/thermal_barrier_iv/43

This Conference Proceeding is brought to you for free and open access by the Proceedings at ECI Digital Archives. It has been accepted for inclusion in Thermal Barrier Coatings IV by an authorized administrator of ECI Digital Archives. For more information, please contact franco@bepress.com.

Authors

M. Bartsch, J. Wischek, C. Meid, K. Knipe, A. Manero, S. Raghavan, A. M. Karlsson, J. Okasinski, and J. Almer

Evaluating deformation behavior of a TBC-system during thermal gradient mechanical fatigue by means of high energy X-ray diffraction




M. Bartsch, J. Wischek, C. Meid
German Aerospace Center, Cologne



K. Knipe, A. Manero, S. Raghavan
Mechanical and Aerospace Engineering, University of Central Florida,
Orlando, Florida



A. M. Karlsson
Fenn College of Engineering, Cleveland State University, Ohio

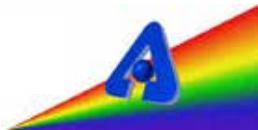

J. Okasinski, J. Almer
Advanced Photon Source, Argonne National Laboratory,
Argonne, Illinois



Knowledge for Tomorrow




Outline

1. Realistic thermomechanical testing with thermal gradients
2. Interpreting experimental results by means of numerical models
3. Model validation by means of in situ strain measurements via high energy X-ray diffraction at Argonne APS*



*APS=Advanced Photon Source




Stress distribution due to thermal gradient

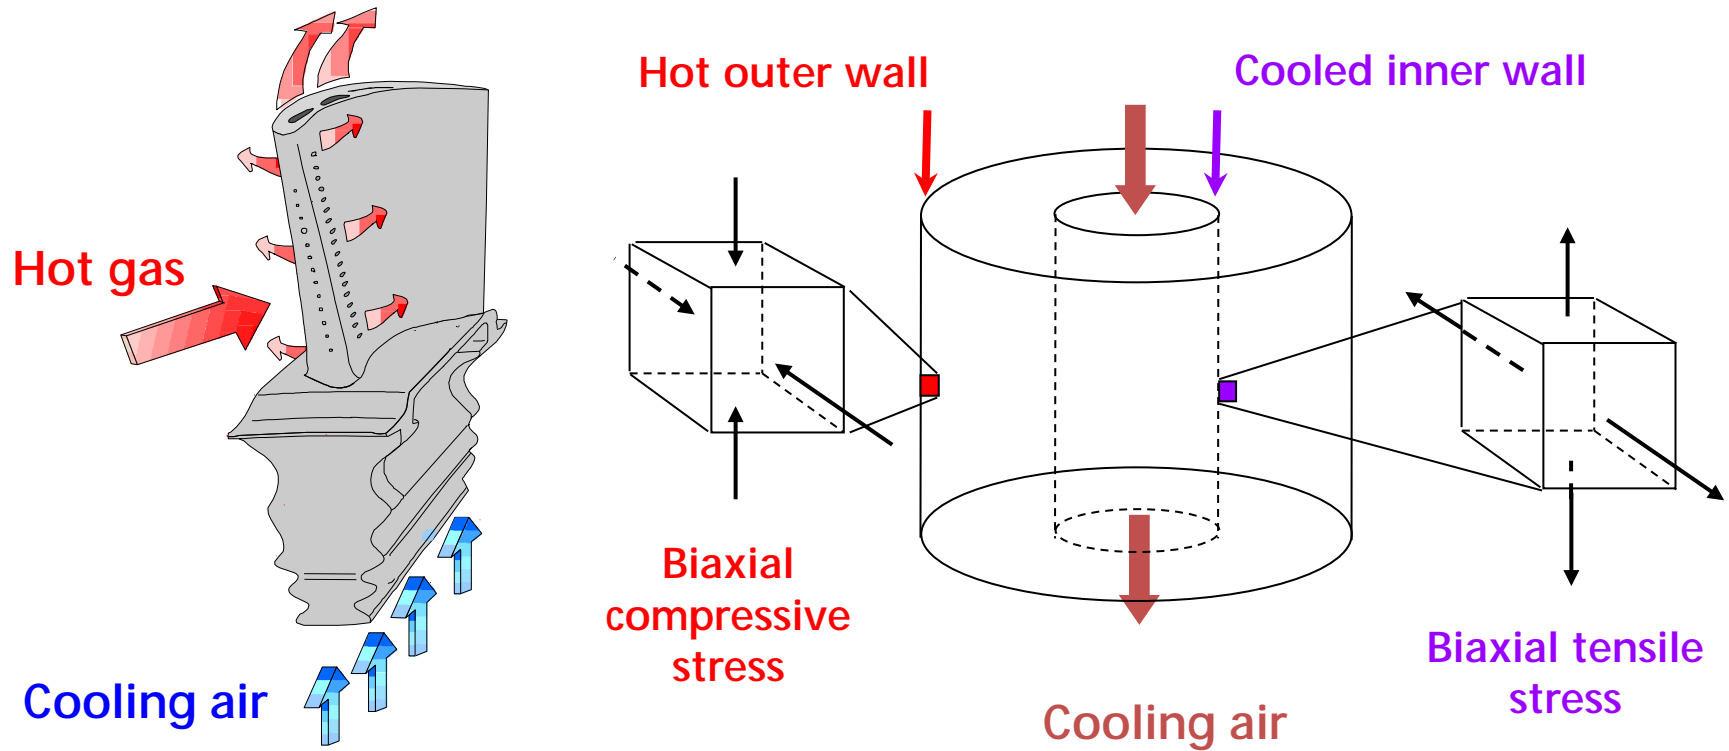

Investigated coating system

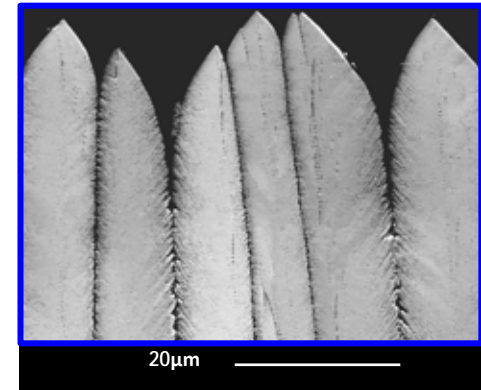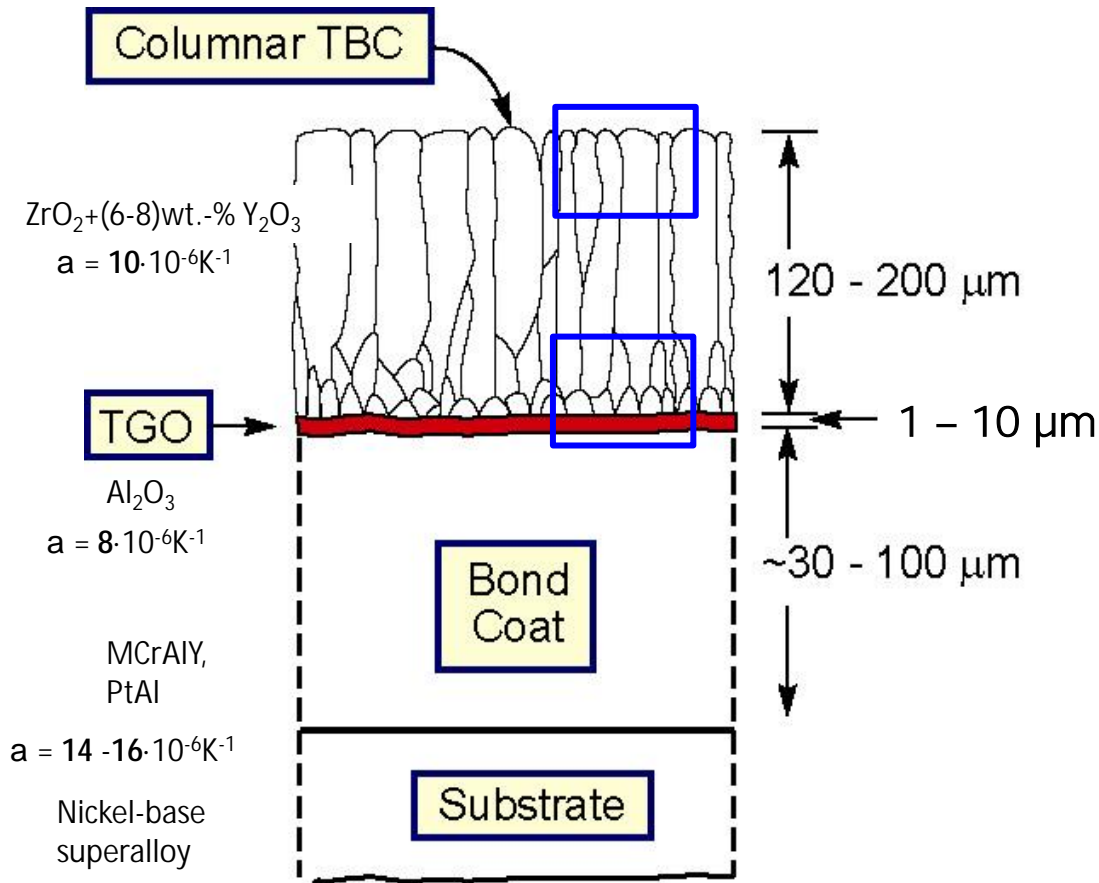

near surface


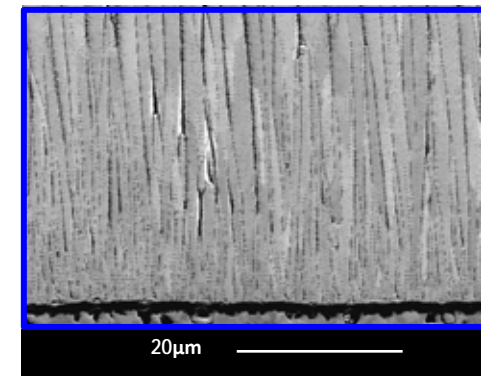


near TGO



Test facility for thermal gradient mechanical fatigue


16 Quartz lamps, 1 kW each

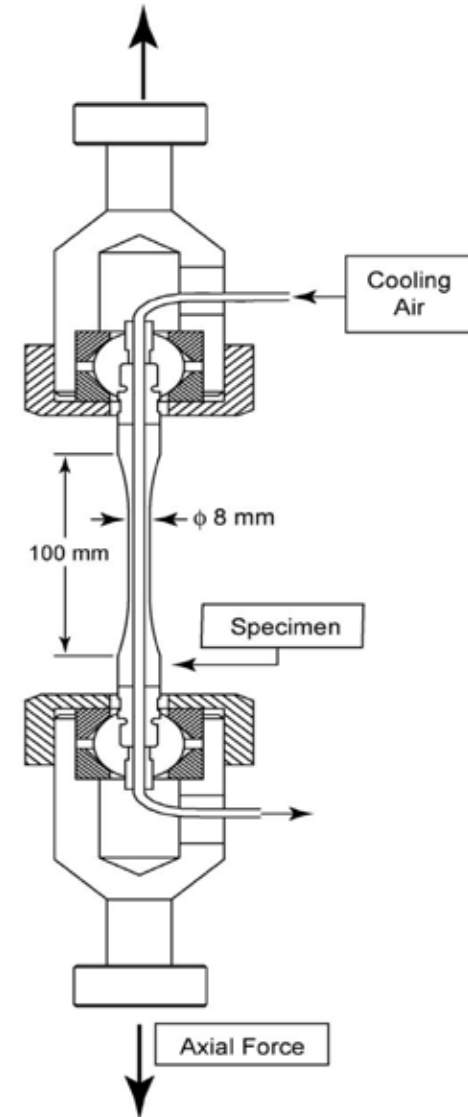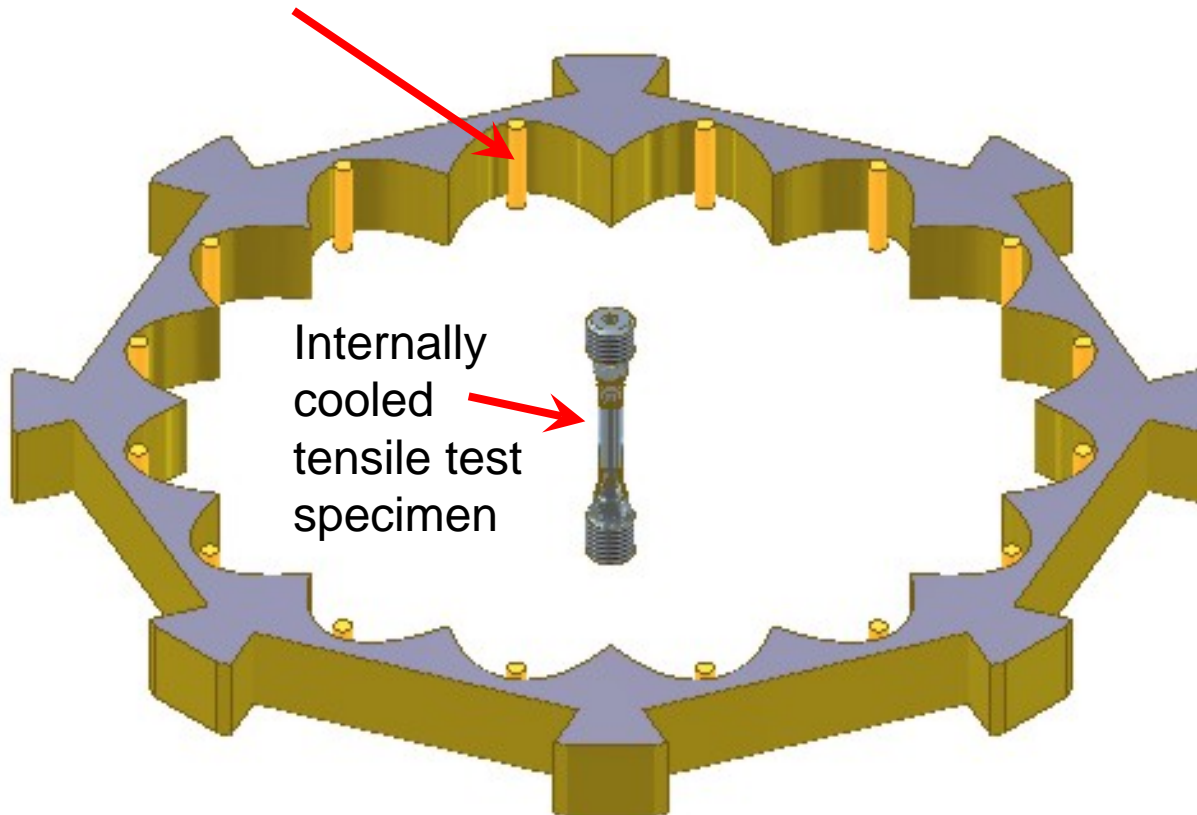

Thermal Gradient Mechanical Fatigue = TGMF



View of open furnace

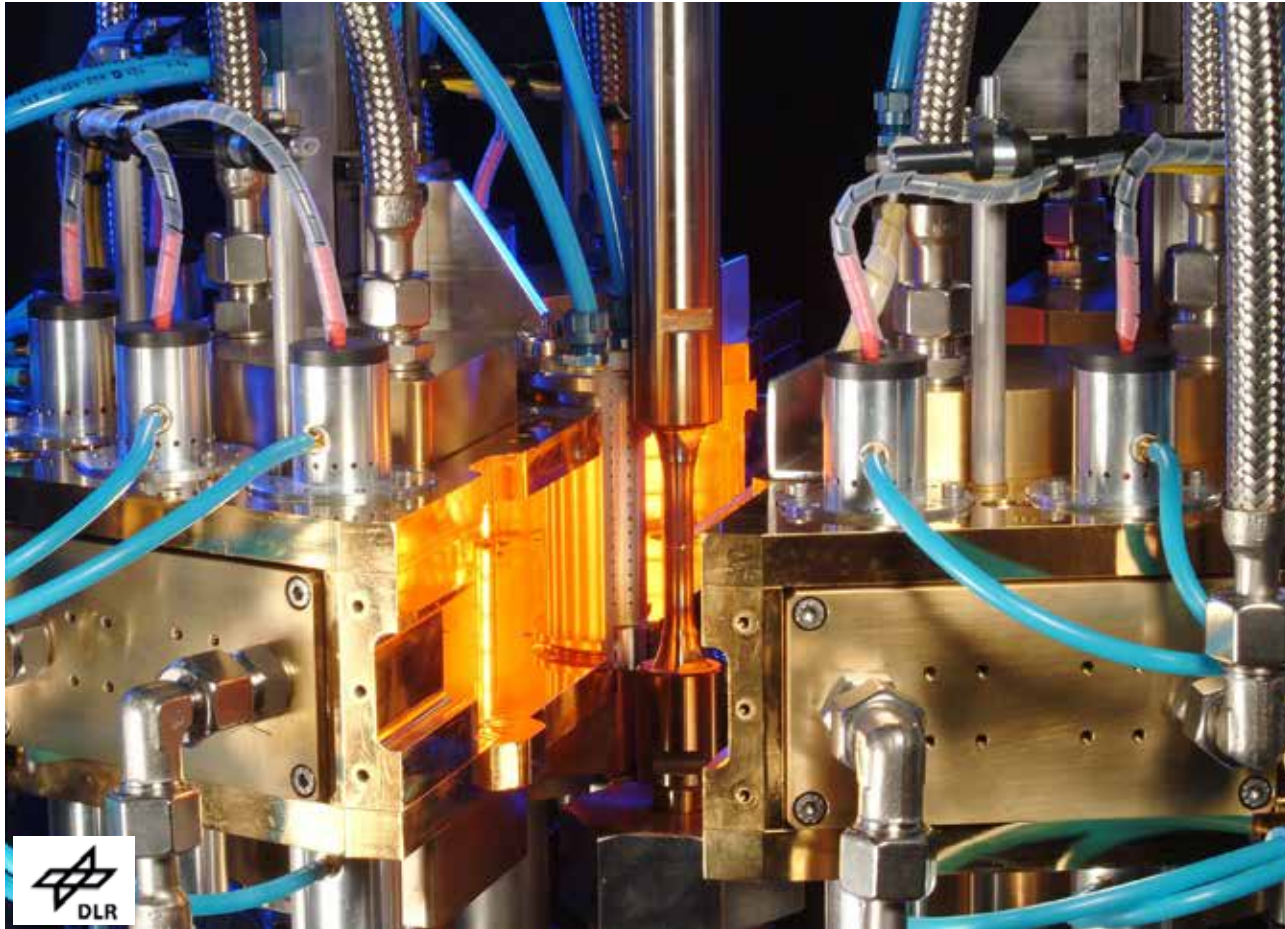


Summarizing thermal and mechanical loads

- Maximal material temperatures ca. 1000°-1100°C
- Thermal gradient (temperature drop over a ceramic TBC of 100-200µm thickness of about 80°-150°C)
 - High thermal heat flux
 - Multiaxial thermally induced stresses
- High thermal transients (heating and cooling rates)
- Superposed mechanical loads (centrifugal forces on rotating blades)



Thermal mechanical load cycle – representing the fatigue load of flight cycle

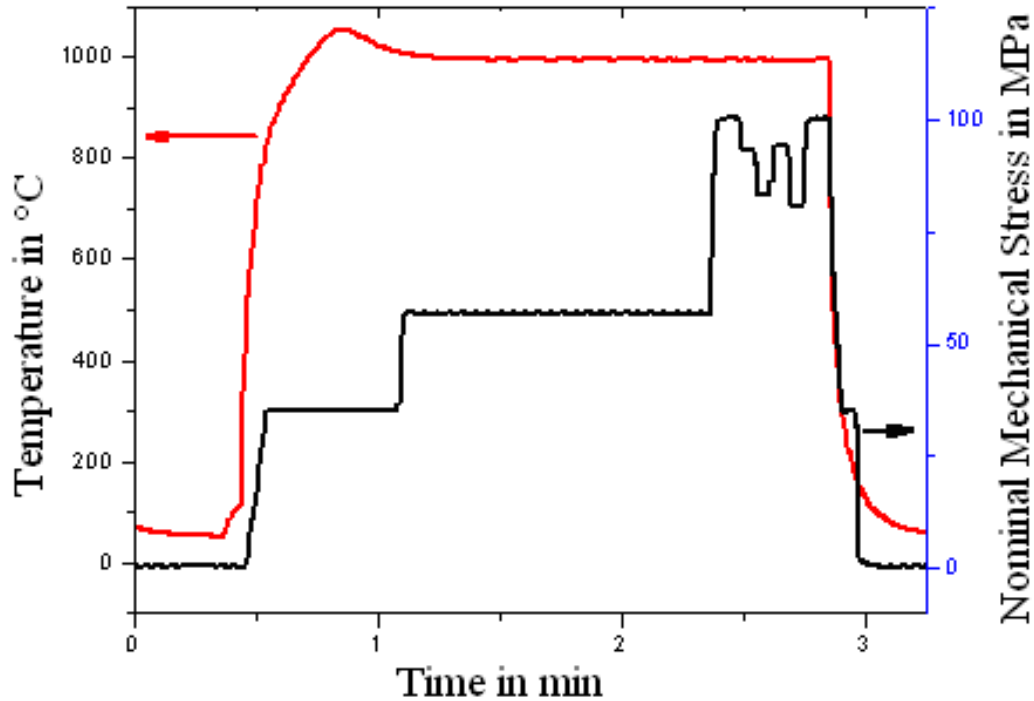

- It is not practical to perform test cycles with realistic cycle duration (e.g. 2 - 10 hour flights) - thus: reduced dwell times
- But: time at high temperature has major impact on lifetime of the coating

M. Bartsch et al., Key Eng. Mat. Vol. 333 (2007) pp. 147-154



Considering time dependent effects by pre-ageing

Time at 1000°C
0 h
250 h
500 h

+

TGMF-cycles
500 (25h)
1000 (50h)
until spallation



Pre-ageing

+

Thermomechanical fatigue




Failure after thermomechanical laboratory testing

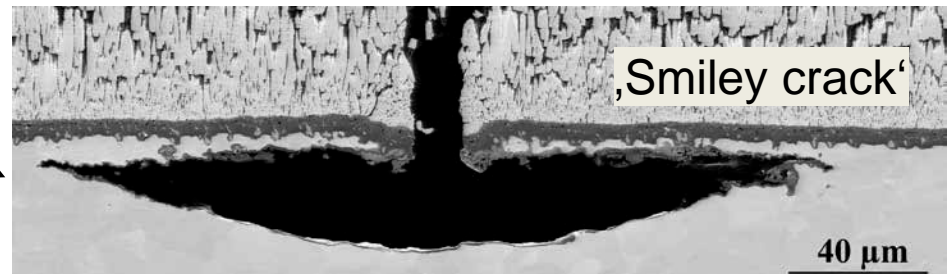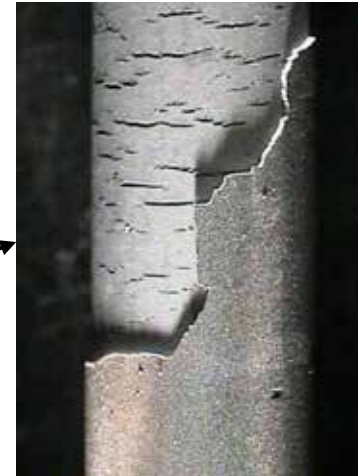

after 933 TGMF-cycles &
500h pre-ageing at 1000°C



3 - dimensional sketch of defects

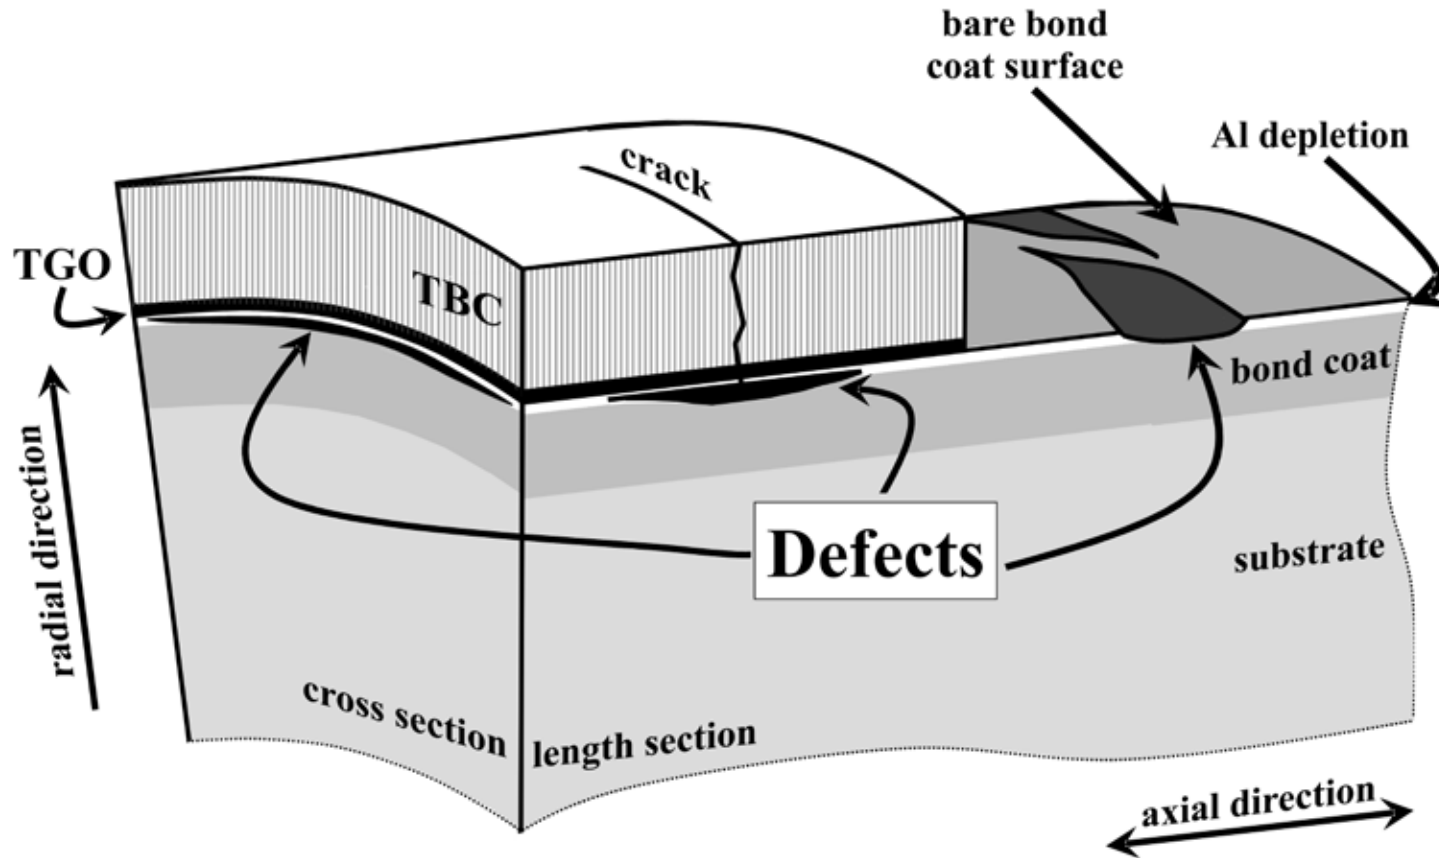

Sketch by Bernd Baufeld, in Key Eng. Mat. Vol. 333 (2007) pp. 147-154




Summary of experimental results

- **Without pre-ageing no spallation up to 7000 cycles**
 - **250h (500h) pre-ageing + 1000 cycles, open delamination cracks, spallation**
- Evolution of the ‚smiley‘ cracks is linked to cracks in the TGO, perpendicular to the applied mechanical load.
- Initial TGO cracks are generated due to axial tensile stresses
- The questions are
- **How can axial tensile stresses evolve in the TGO during TGMF tests?**
 - **Why do they only evolve in pre-aged specimens?**



After pre-ageing: bi-layer thermally grown oxide

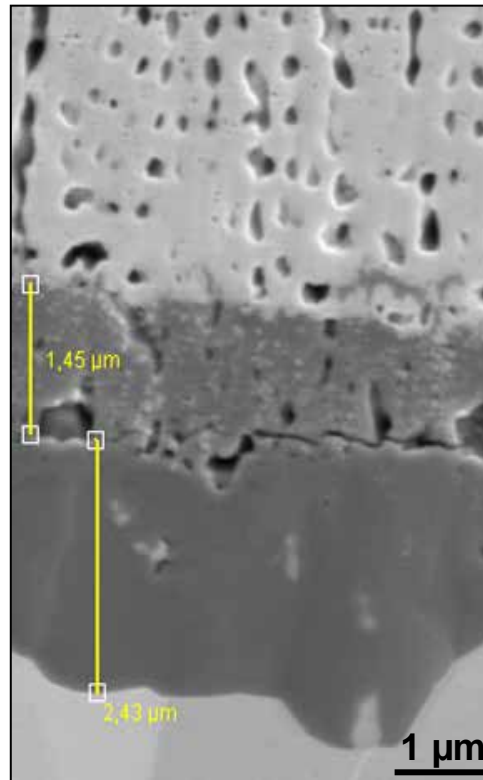


Fine grained
intermixed zone
 $\text{Al}_2\text{O}_3 + \text{ZrO}_2$

Coarse grained
 Al_2O_3

200h/1000°C





Numerical model: Geometry and boundary conditions

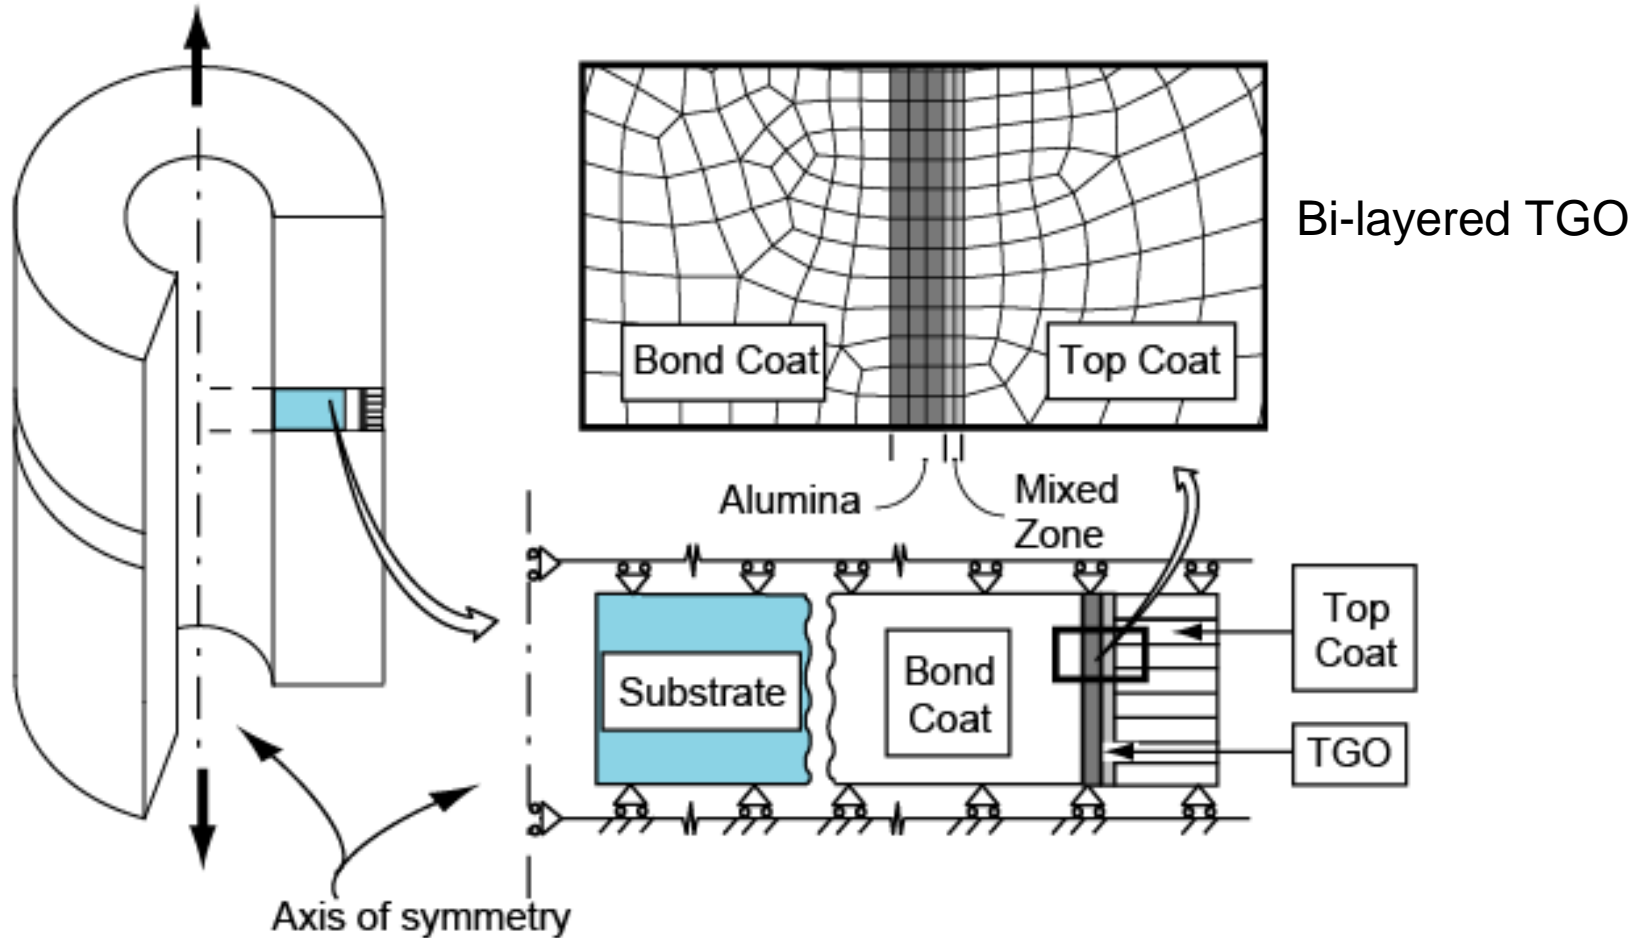

M. Hernandez, A.M. Karlsson, M. Bartsch: Surface Coatings & Technology 203, 3549-58, 2009



Stress free at homogenous temperature of 1000°C

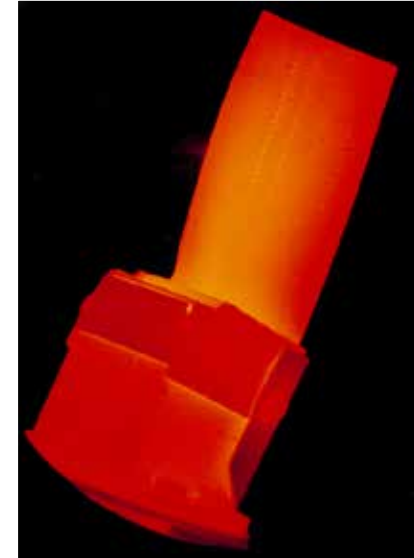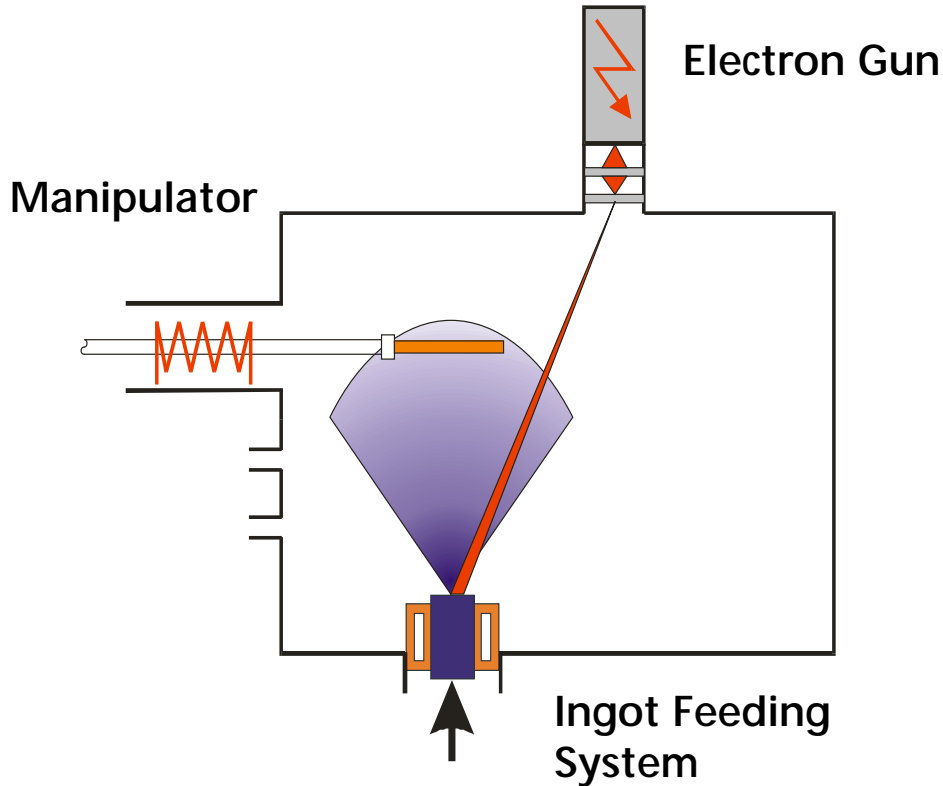

Deposition temperature: ca. 1000°C


Electron Beam - Physical Vapor Deposition (EB-PVD)

▷ high residual stresses at ambient temperature



Numerical model: load cycle


- Temperature at the outer surface is shown
- Thermal gradient: time dependent temperature difference between outer and inner wall (not shown)
- mechanical cycle TGMF

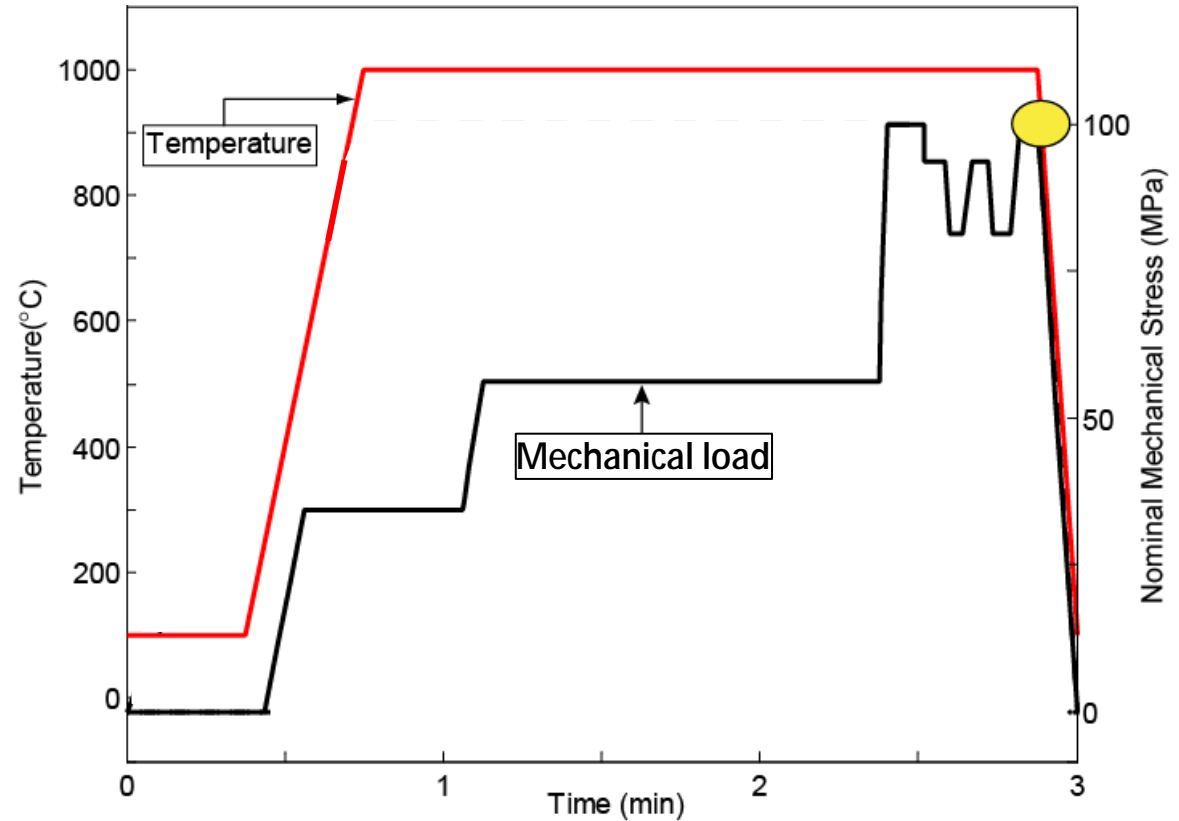

● Highest mechanical tensile load, thermal gradient near stationary conditions



Axial stresses for elastic – plastic material properties

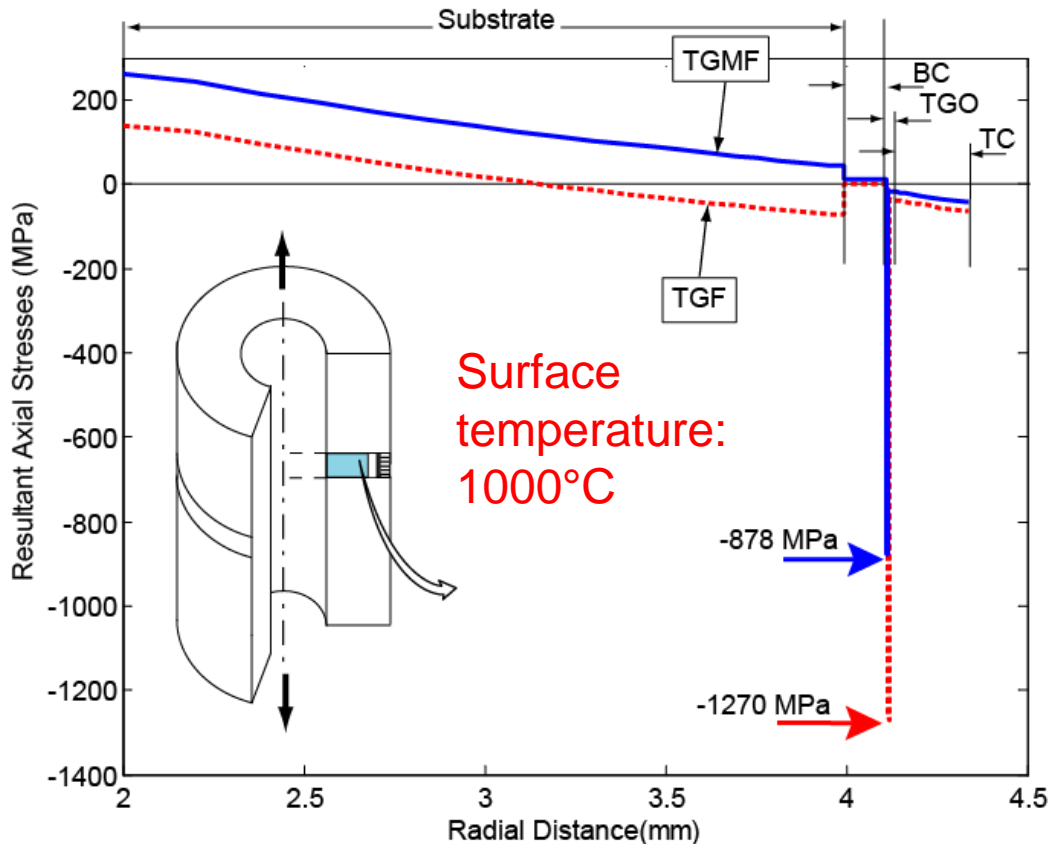

Stress free at $T_{\text{processing}}$
(1000°C, homogenous)

Axial stresses across the specimen wall due to

- thermal gradient
- mechanical load
- property mismatch


→ TGO always under compression

even at highest mechanical tensile load

M. Hernandez, A.M. Karlsson, M. Bartsch: *Surface Coatings & Technology* 203, 3549-58, 2009



Including time dependent TGO properties: growth strain and creep / relaxation

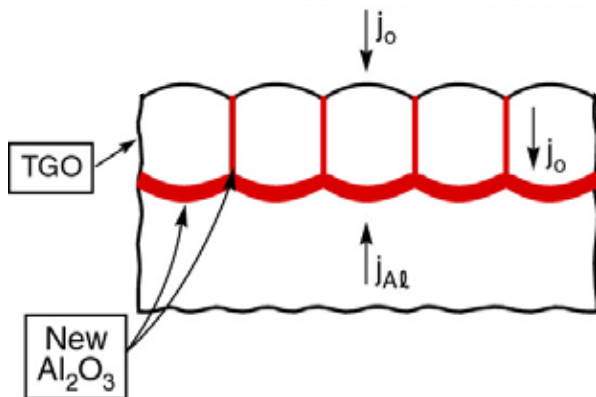


Thickening ϵ_t and lengthening ϵ_l growth strain

$$\epsilon_l = 0.1 \cdot \epsilon_t$$

Growth strain increases the compressive stress in TGO!

Karlsson, A.M. and A.G. Evans, *Acta Materialia*, 2001 **49**(10): p. 1793-1804

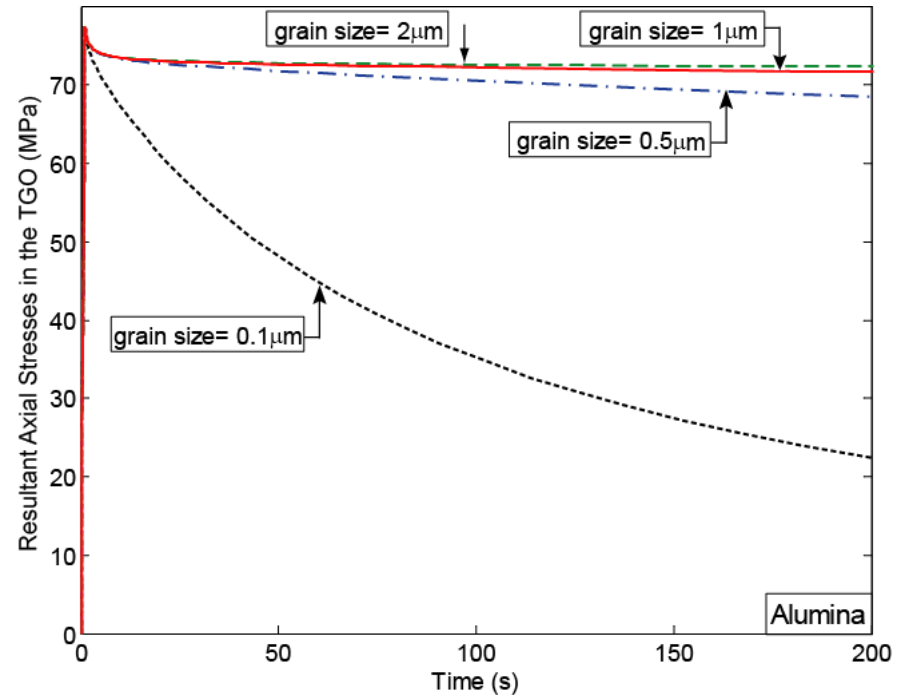


Relaxation decreases the compressive stress in TGO!


With data from J.D. French, J.H. Zhao, M.P. Harmer, H.M. Chan, G.A. Miller. *J. American Ceramic Society* 77 (1994)




Effect of TGO properties on stress accumulation

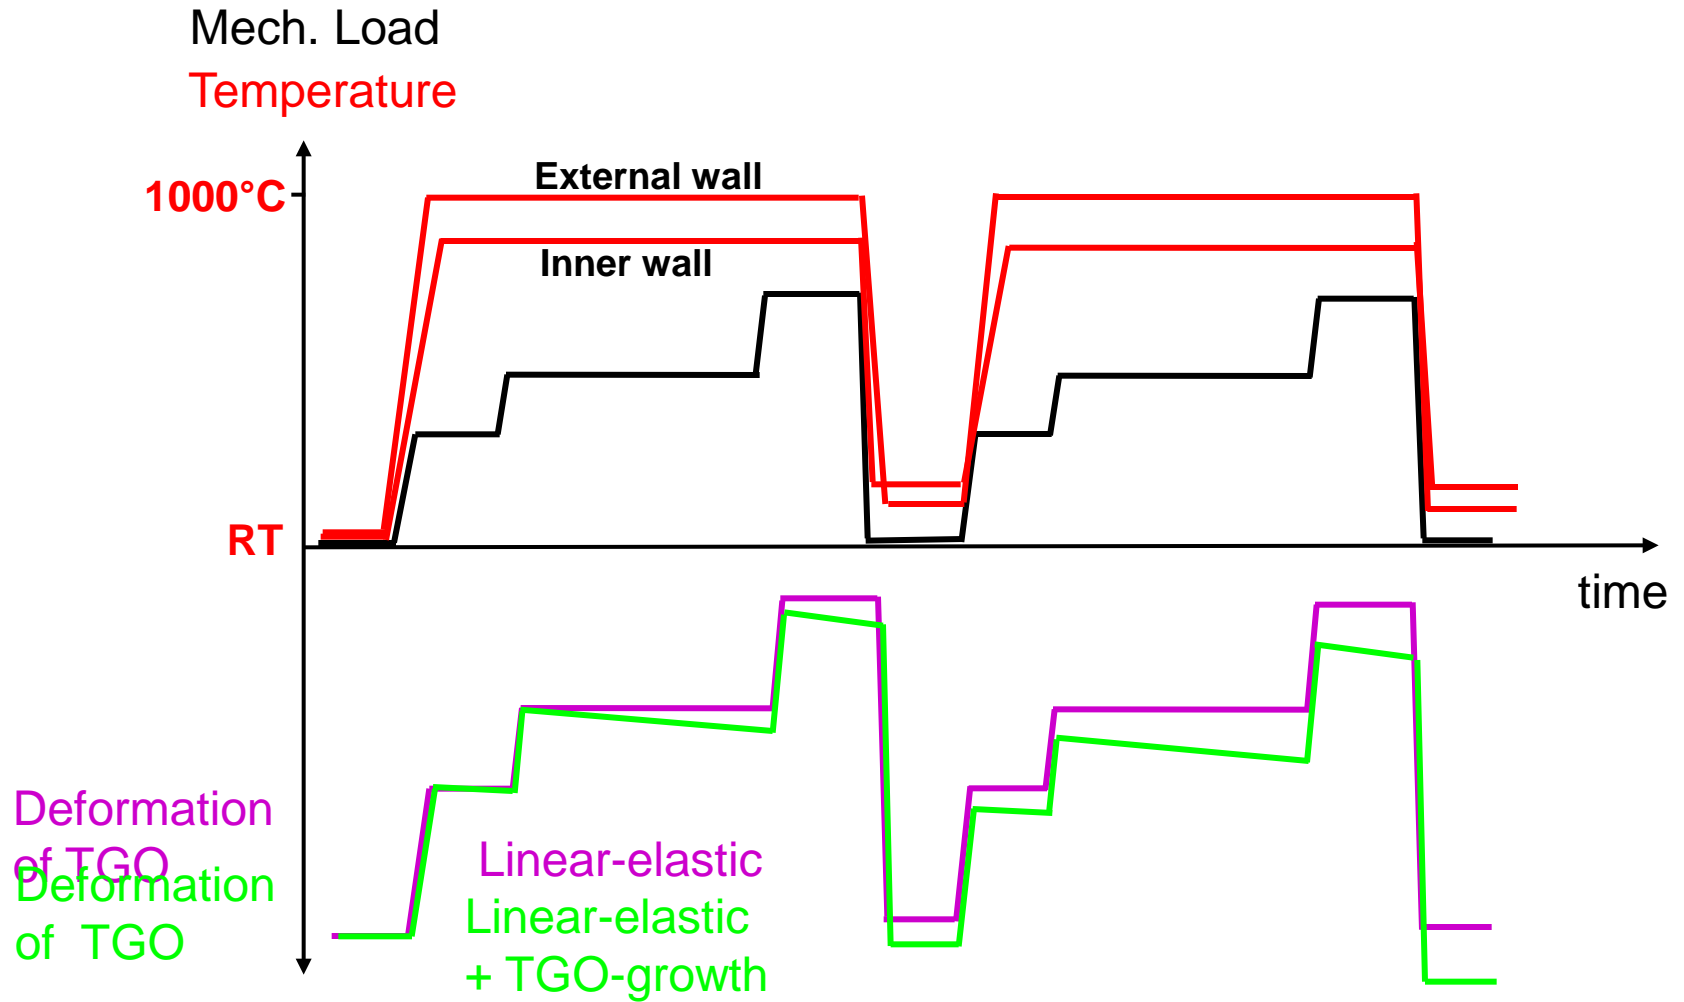

Effect of TGO properties on stress accumulation

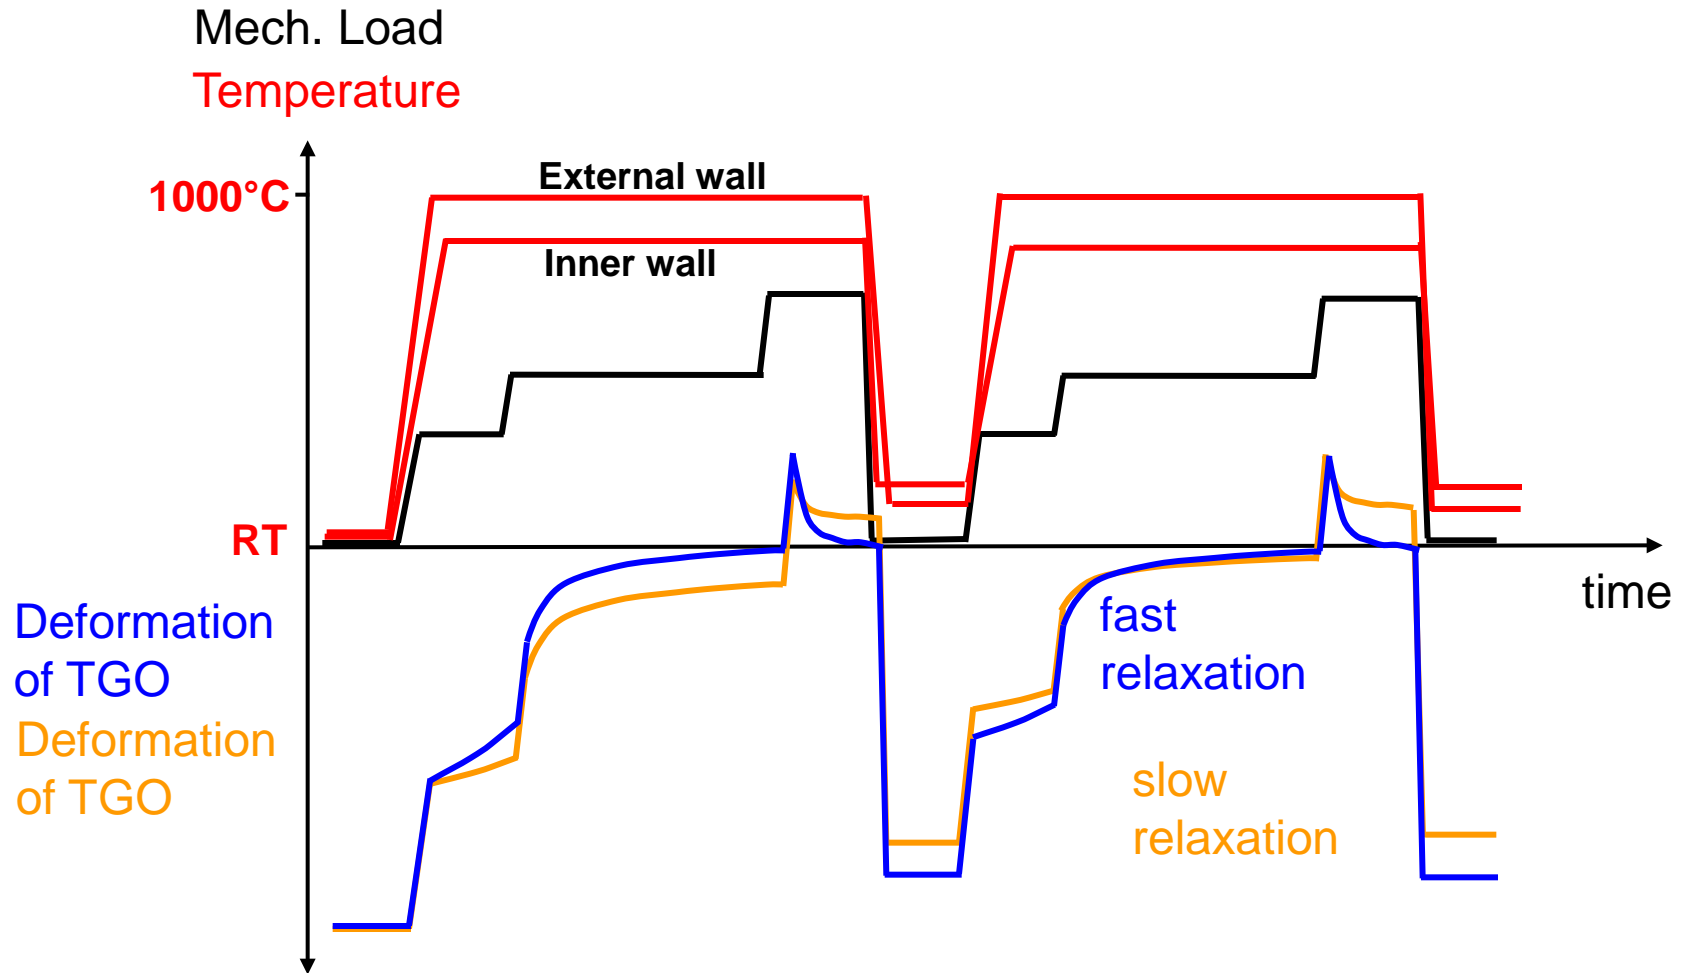

Evolution of axial TGO-stresses

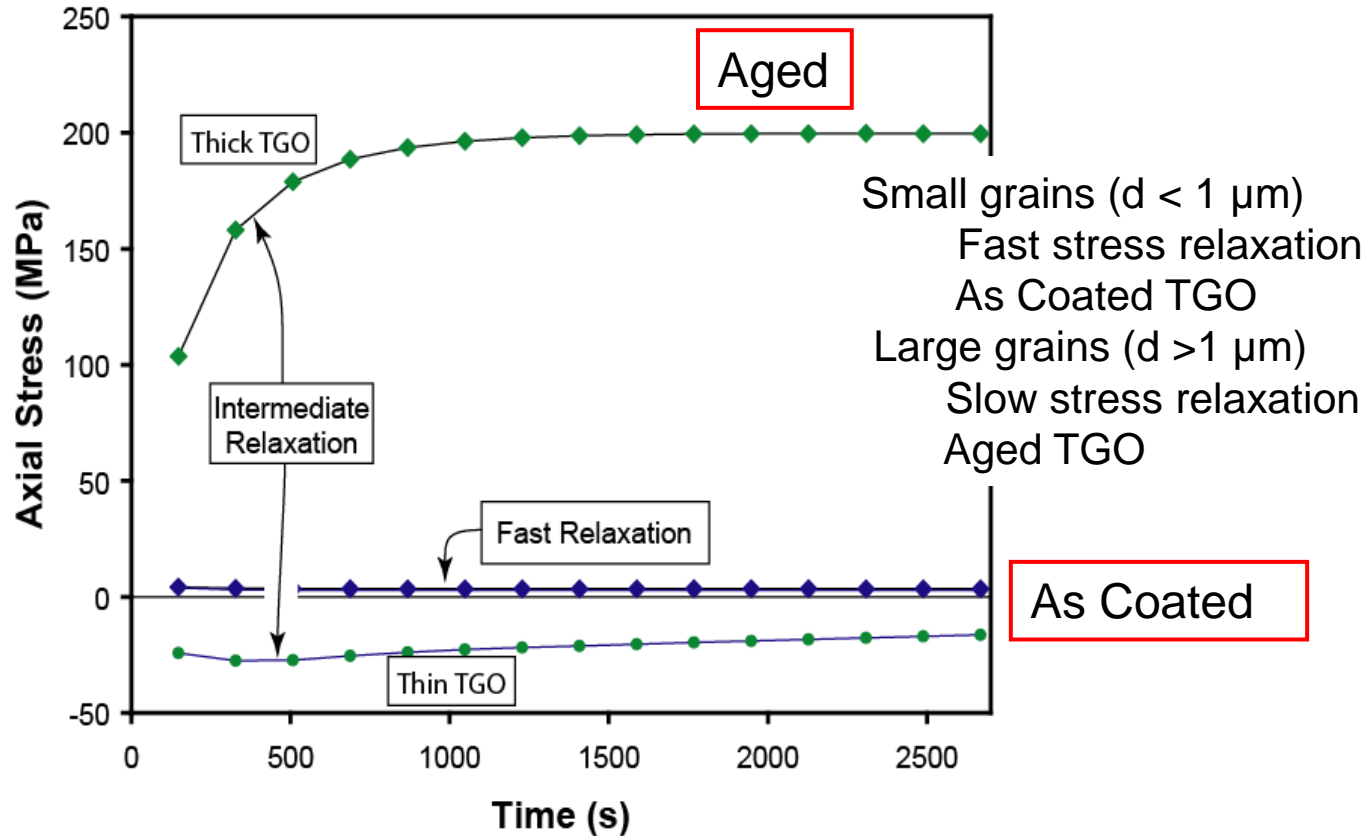

Hypothesis: Initiation of fatigue crack in TGO due to accumulation of tensile stress during subsequent TGMF-cycles



Open questions – and a method to get answers

- Mechanical material properties of the coating materials are still unknown: Temperature dependent elastic properties, yield strength, creep laws of TGO (intermixed zone and coarse grained layer), bond coat and TBC
- Strategy:
 - measuring the strains in the coating system during TGMF by means of high energy X-ray diffraction
 - calculating (fitting) the respective material properties by means of finite element simulation



Experimental set-up at Argonne Advanced Photon source





- Argonne National Laboratory, Argonne, Illinois
- Synchrotron high energy X-Ray beam-line; 65 keV beam energy



Top view of heater and beam

- 4 focused infrared lamps
 - 8 kW total
- Beam exit window
 - $17^\circ 40'$

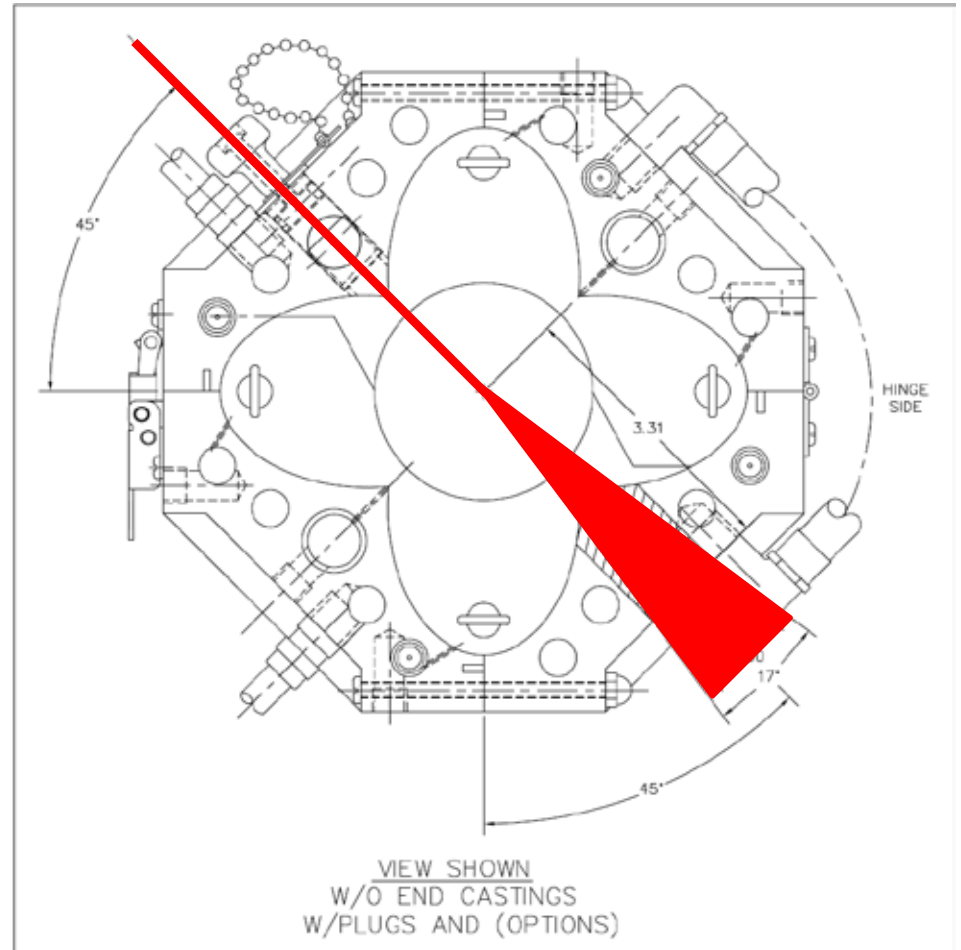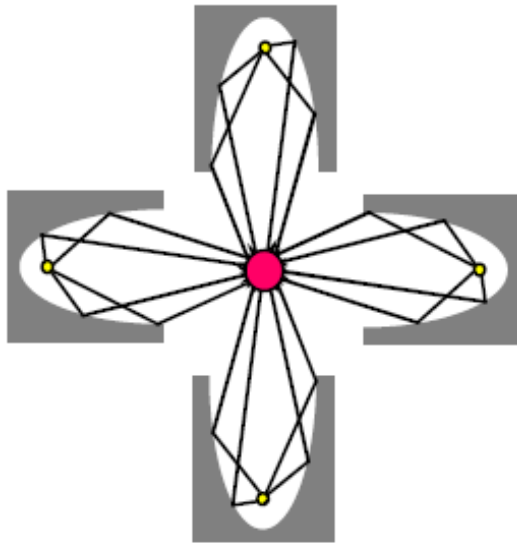

S. F. Siddiqui et al., Rev. Sci. Instr., 84 - 083904 (2013)



Servo-hydraulic testing machine on μm - positioning rig



Assembling heater, grips and specimen at Argonne APS




Measurement method

Loading parameter:

- thermal cycle (80 min)
- outer surface temperature max. 1000°C, temperature difference between outer and inner surface ca. 150°C
- variation of thermal gradient by variation of cooling flow rate
- superposition of mechanical load

Beam parameter:


- 65 keV beam energy
- exposure time 0.5 to 15 sec.

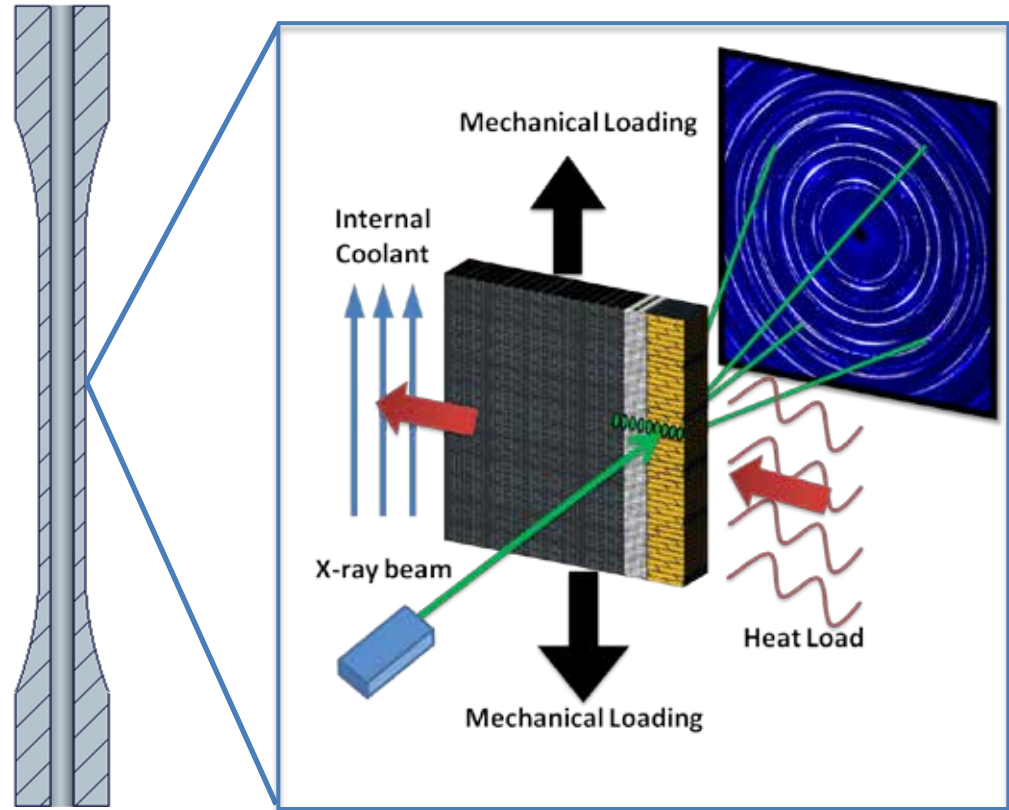


K. Knipe et al., AIAA Structures, Struct. Dynamics & Mat. Conf., Boston, MA, 2013



X-Ray diffraction 2-D strain measurements

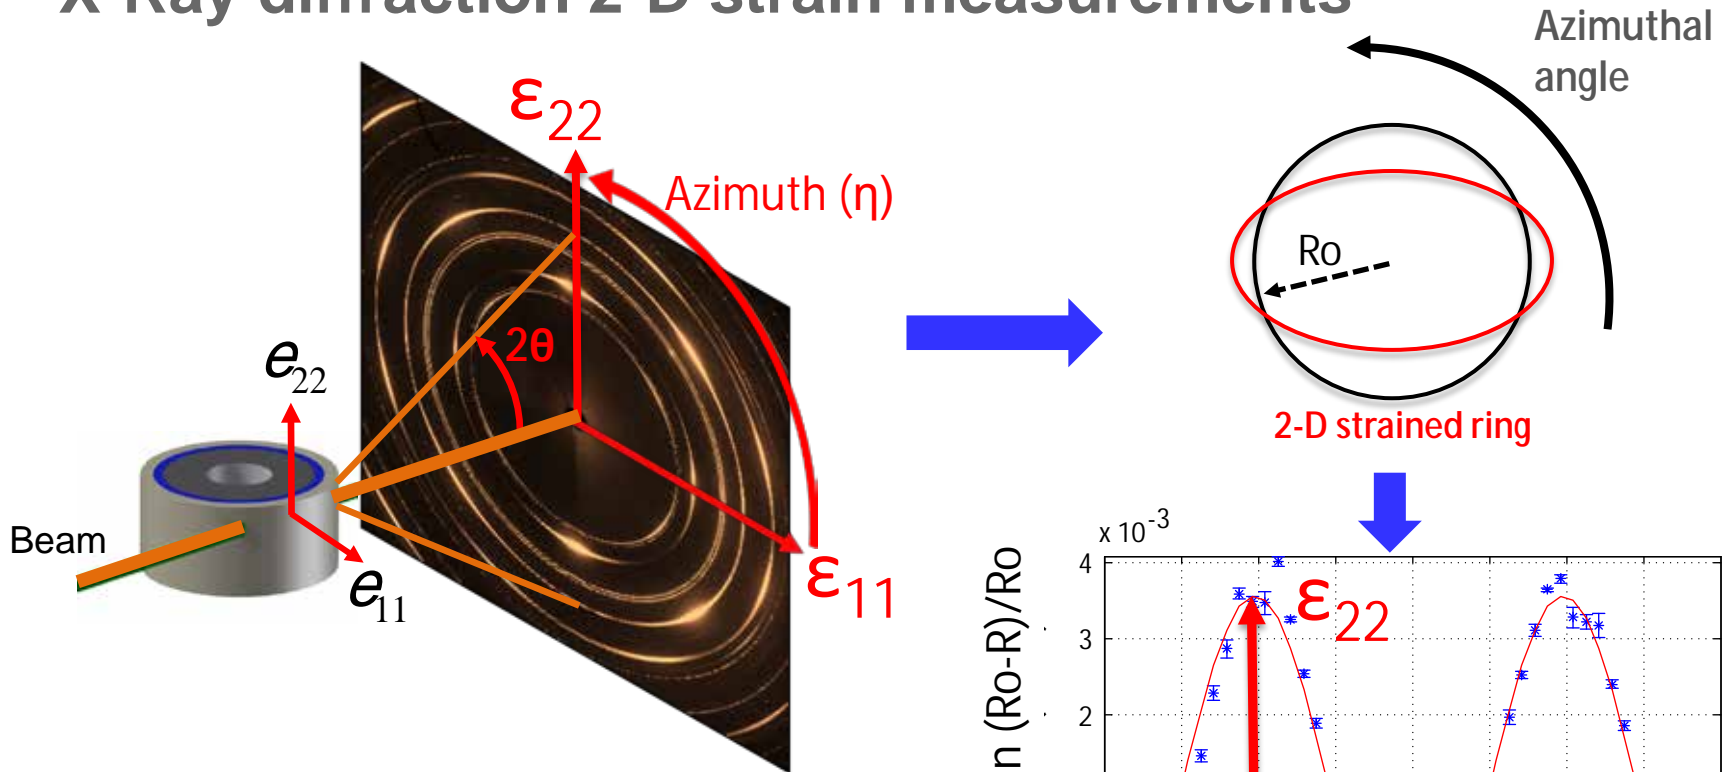


- Measure radial position around azimuthal angle
- Calculate each directional strain using $(R_0 - R)/R_0$
 - R = measured radius
 - R_0 = strain free radius

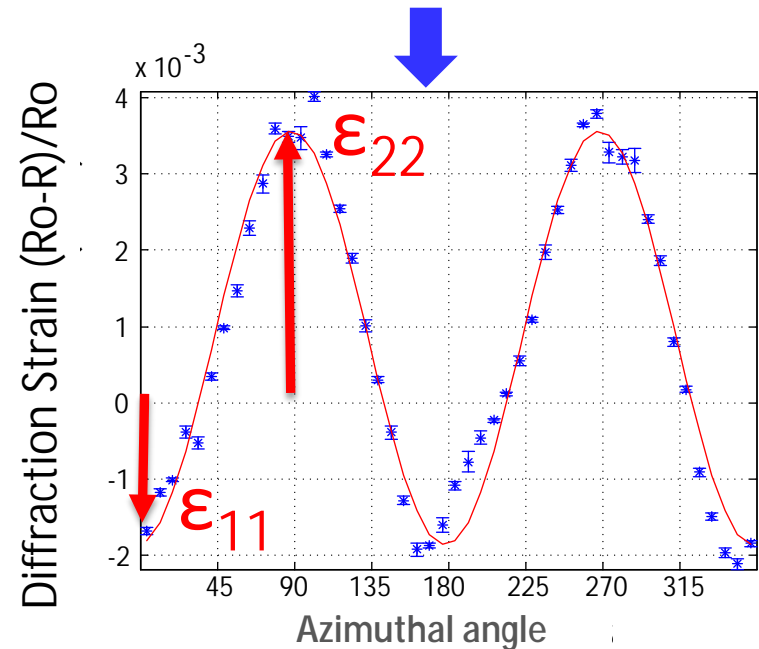


K. Knipe, Nature Comm. 5 (2014) article Nr. 4559





YSZ - strain results

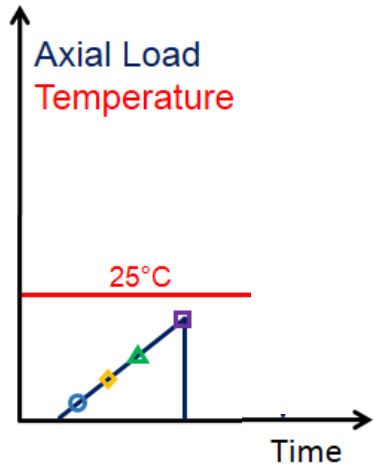

- No thermal gradient
- 25°C
- variation of mechanical load

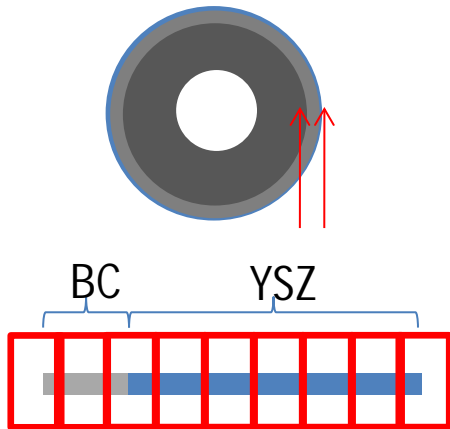


- X-Ray scan through coating thickness
- every 3.5 minutes
- window size 30 x 300 microns
- 10 window scan

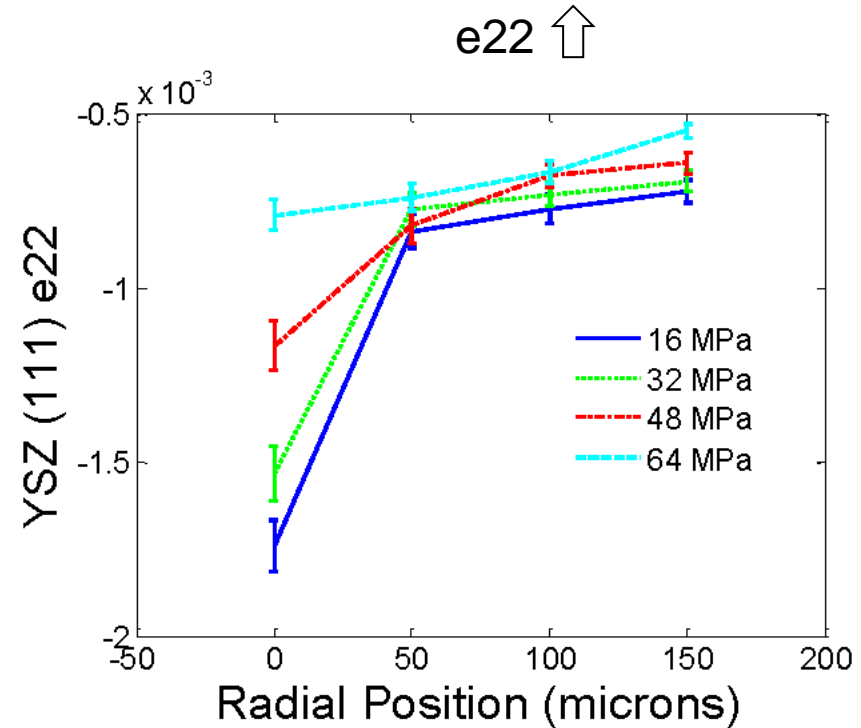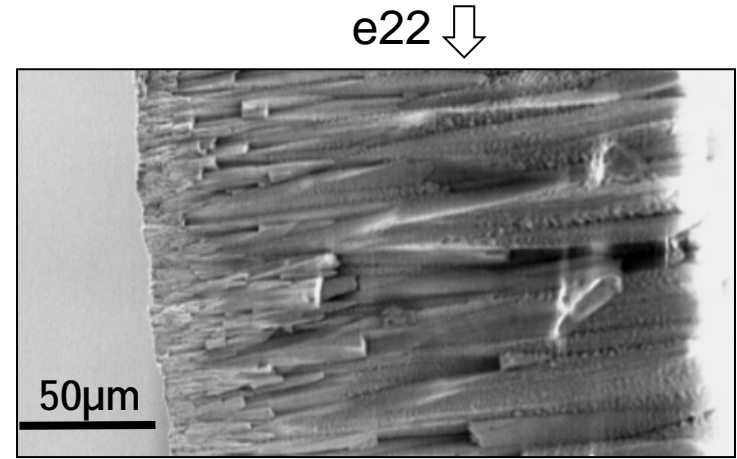

Strain measurement during cyclic loading


- Outer surface ramped up to 1000°C in 20 minutes and then held for 40 minutes
- Coolant flow rate for gradient varied
 - 30, 50, and 75 % max. flow (100 SLPM* max)
- Constant nominal mechanical stress
 - 32, 64 and 128 MPa applied

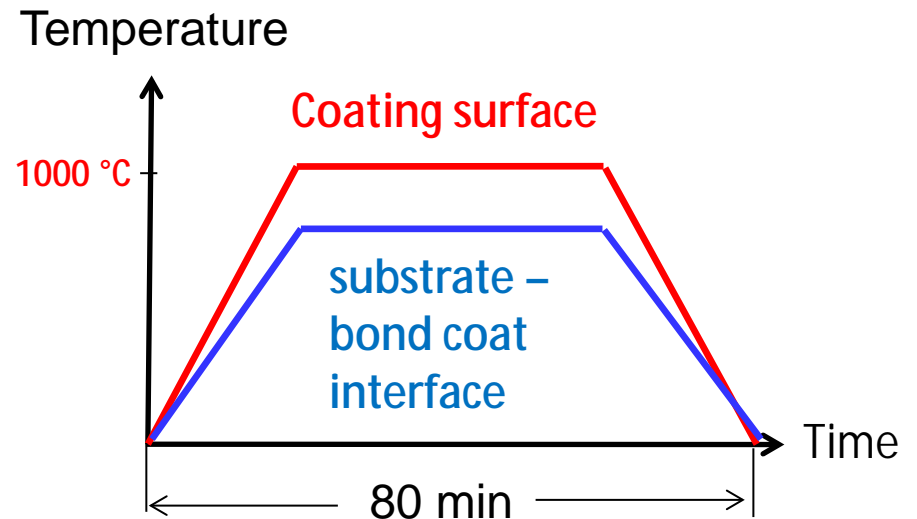

SLPM* = standard liter per minute



Strain in YSZ during thermal cycle

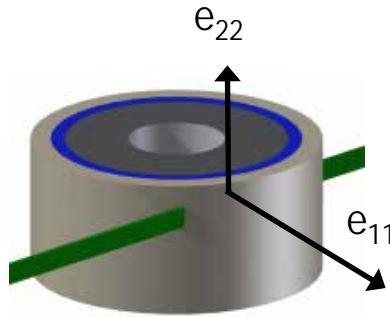



- 64 MPa
- 75% cooling air flow rate

at room temperature:

- compressive in plane strain e_{22}
- tensile out of plane strain e_{11}

at high temperature:


- strain reduces (closer to stress free condition at manufacturing temperature)

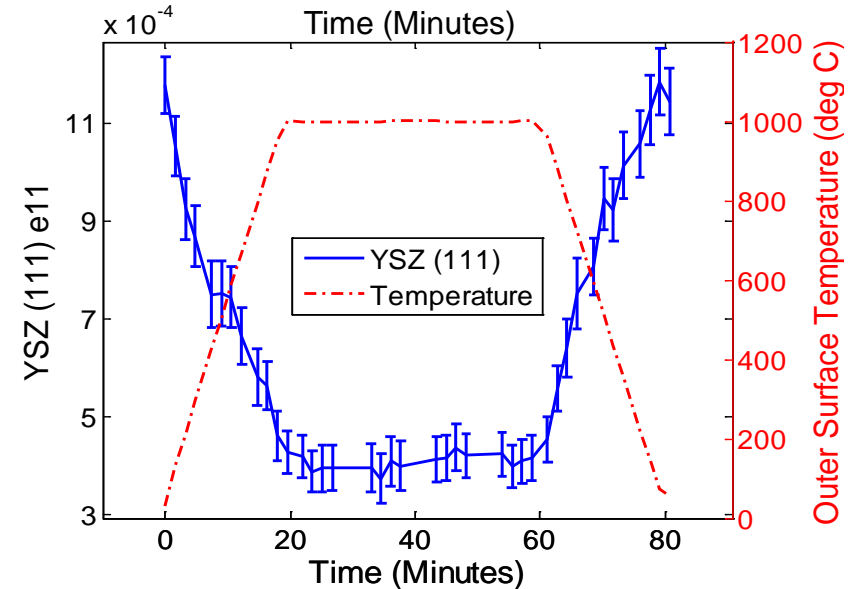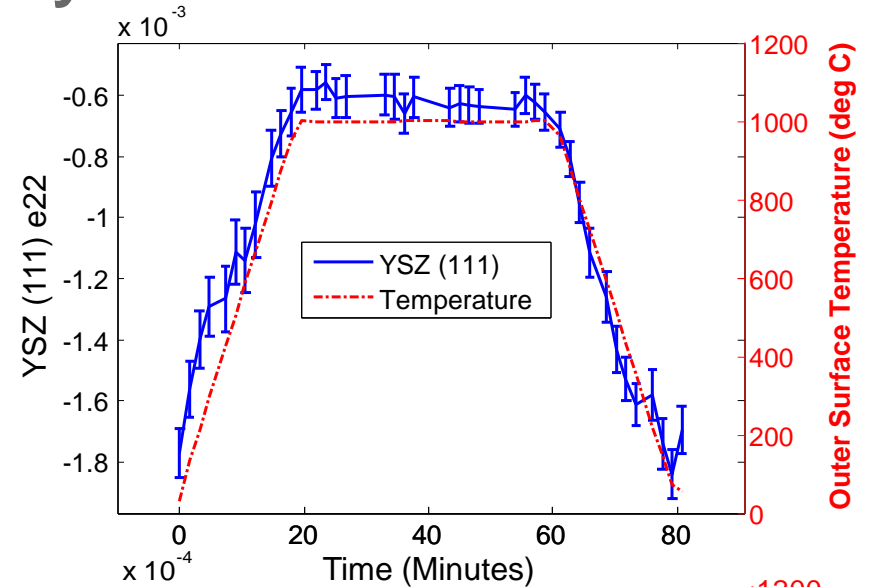

K. Knipe, Nature Comm. 5 (2014) article Nr. 4559



Strain in bond coat β -NiAl during thermal cycle

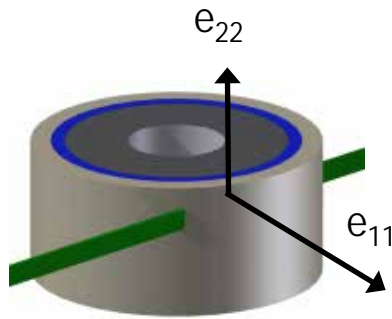



- 64 MPa
- 75% cooling air flow rate

at room temperature:

- tensile in plane strain e_{22}
- compressive out of plane strain e_{11}

at high temperature:


- strain reduces (stress free at manufacturing temperature)

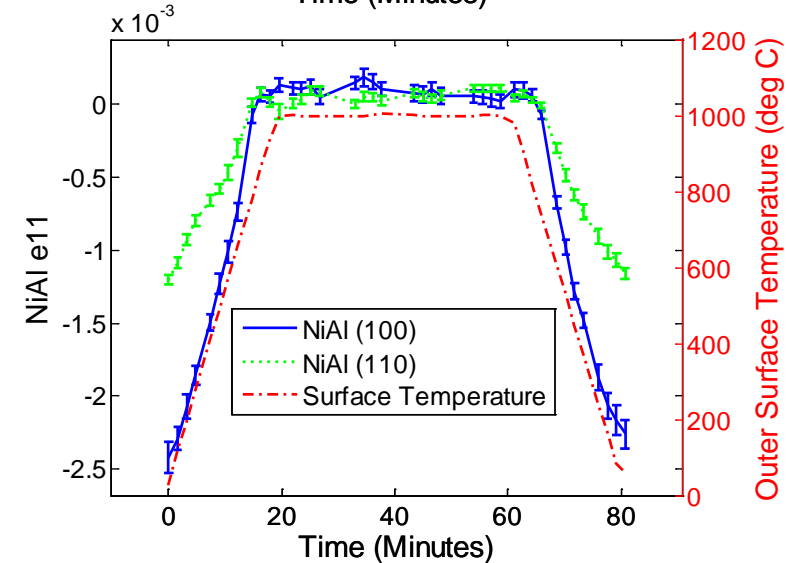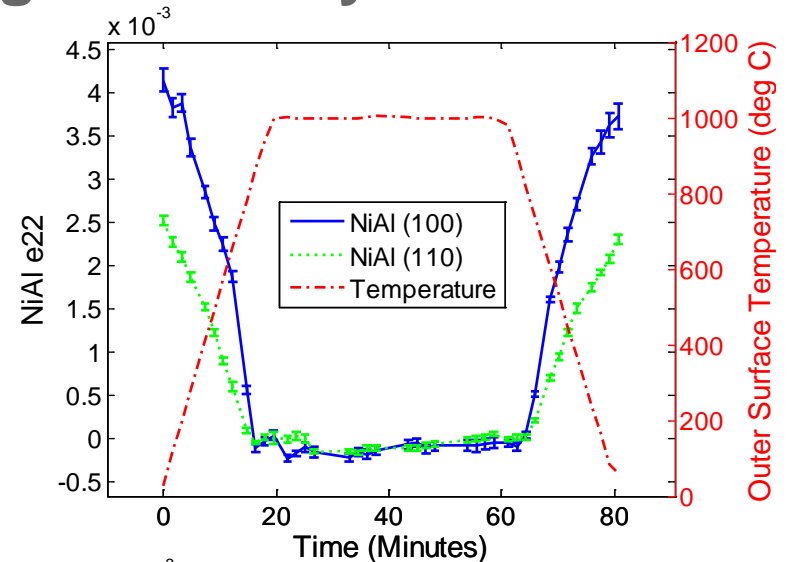

K. Knipe, Nature Comm. 5 (2014) article Nr. 4559



TGO stress in pre-aged specimen during thermal cycle

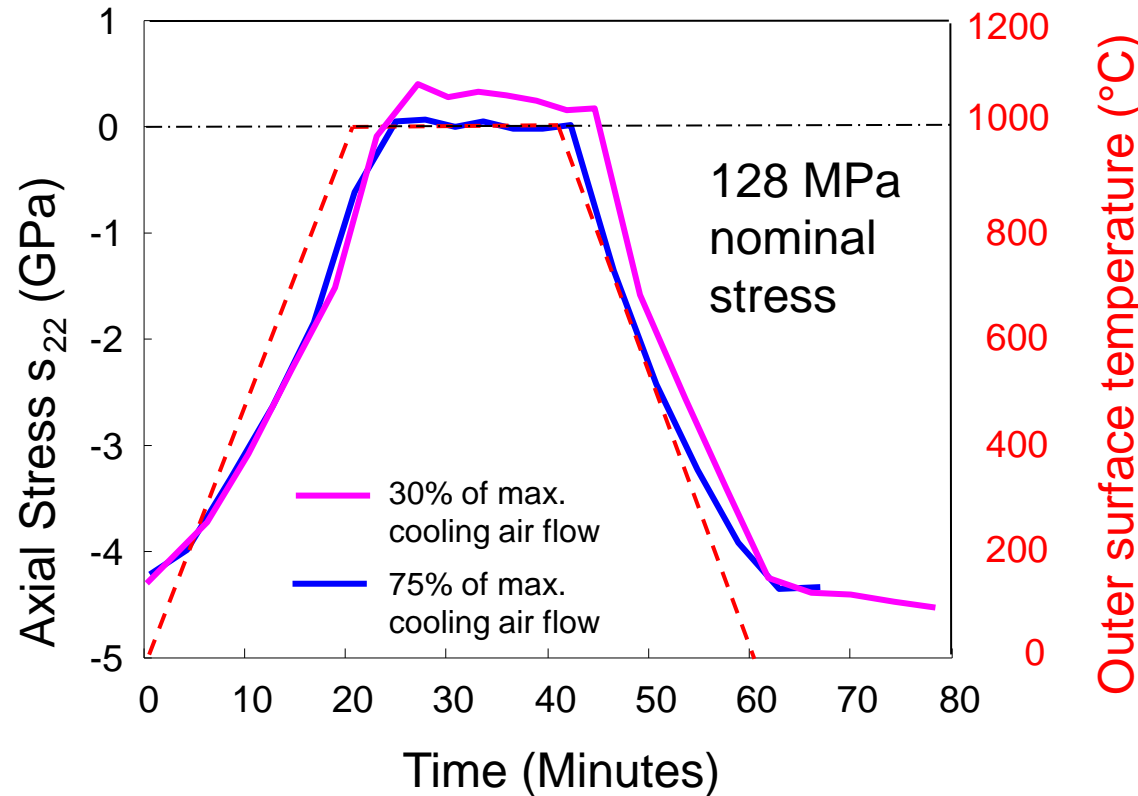

Pre-aged specimen:
304h at 1000°C

- the TGO experience tensile stresses under TGMF loading depending on applied mechanical tensile load and thermal gradient.
- Relaxation occurs during dwell time at high temperature, which is a condition for accumulating tensile stress during cycling.



Conclusions and outlook

- In situ strain measuring by X-ray diffraction
 - gives for each load case an equation for determining the respective material properties
 - test results can be used for validating numerical models and adapting laboratory experiments to more realistic conditions, e.g.
 - are dwell times and transients appropriate, e.g. time for relaxation processes within one load cycle appropriate? – example: stress accumulation in TGO
 - effect of time dependent processes captured?– TGO growth? Material property changes?
- Aim: validated realistic laboratory test for turbine blade materials for investigating damage mechanisms and contributing to life time modelling.
- Relevance-check of laboratory test: are observed damage mechanism and failure mode realistic?



Thank you for your attention!

Questions?

Acknowledgements:

- This material is based upon work supported by the National Science Foundation Grants OISE 1157619 and CMMI 1125696
- German Science Foundation (DFG) grant SFB-TRR103, project A3
- Use of the Advanced Photon Source, an Office of Science User Facility operated for the U.S. Department of Energy (DOE) Office of Science by Argonne National Laboratory, was supported by the U.S. DOE under Contract No. DE-AC02-06CH11357.

Publication list 



Publications

- J. Shi, A.M. Karlsson, B. Baufeld, M.Bartsch: *Evolution of surface morphology in thermo-mechanically cycled NiCoCrAlY- bond coats*, Mat. Sci. & Eng. A 434 (2006) 39-52
- M.Bartsch, B. Baufeld, M. Heinzelmann, A. M. Karlsson, S. Dalkilic, L. Chernova: *Multiaxial thermo-mechanical fatigue on material systems for gas turbines*, Materialwiss. & Werkstofftechnik 38, (2007) 712-719
- B. Baufeld, M. Bartsch, M. Heinzelmann: *Advanced thermal mechanical fatigue testing of CMSX-4 with oxidation protection coating*, Int. J. fatigue 30 (2008) 219-225
- M. Bartsch, B. Baufeld, S. Dalkilic, L. Chernova, M. Heinzelmann: *Fatigue cracks in a thermal barrier coating system on a super alloy in multiaxial thermomechanical testing*, Int. J. fatigue 30 (2008) 211-218
- M. Hernandez, A. Karlsson, M. Bartsch: *On TGO creep and the initiation of a class of fatigue cracks in thermal barrier coatings*, Surf. Coat. Techn. 203 (2009) 3549-3558
- M. T. Hernandez, D. Cojocar, A. M. Karlsson, M. Bartsch: *On the crack opening of a characteristic crack due to thermo-mechanical fatigue testing of thermal barrier coatings*, Comp. Mat. Sci. (50) (2011) 2561-2572
- S. F. Siddiqui, K. Knipe, A. Manero, C. Meid, J. Schneider, J. Okasinski, J. Almer, A.M. Karlsson, M. Bartsch, S. Raghavan: *Synchrotron X-Ray Measurement Techniques for Thermal Barrier Coated Cylindrical Samples under Thermal Gradients*, Review of Scientific Instruments, 84 - 083904 (2013)
- K. Knipe, A. Manero, S. F. Siddiqui, C. Meid, J. Wischek, J. Okasinski, J. Almer, A. M. Karlsson, M. Bartsch & S. Raghavan: *Strain response of Thermal Barrier Coatings captured under extreme engine environments through Synchrotron X-ray Diffraction*, Nature Communications 5 (2014), article number 4559

Contact: Prof. Dr.-Ing. Marion Bartsch
German Aerospace Center (DLR) , Institute of Materials Research
Linder Höhe
D-51147 Köln
Phone: +49-(0)2203-601-2436
e-mail: marion.bartsch@dlr.de

