

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

---

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.  
Larsen

---

January 1998

## Test 1779: Challenger MT 425 Diesel

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Applied Mechanics Commons](#)

---

"Test 1779: Challenger MT 425 Diesel" (1998). *Nebraska Tractor Tests*. 312.

<https://digitalcommons.unl.edu/tractormuseumlit/312>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

# SUMMARY OF OECD TEST 1779 – NEBRASKA SUMMARY 276A CHALLENGER MT 425 DIESEL 12 SPEED

## POWER TAKE-OFF PERFORMANCE (540 RPM Shaft)

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
<b>MAXIMUM POWER AND FUEL CONSUMPTION</b>					
<b>Rated Engine Speed—(PTO speed—624 rpm)</b>					
54.8 (40.9)	2200	3.81 (14.44)	0.507 (0.309)	14.37 (2.83)	
<b>Maximum Power (2 hours)</b>					
55.4 (41.3)	2100	3.74 (14.15)	0.492 (0.299)	14.82 (2.92)	
<b>Standard Power Take-off Speed (540 rpm)</b>					
53.4 (39.8)	1903	3.44 (13.03)	0.470 (0.286)	15.50 (3.05)	

## VARYING POWER AND FUEL CONSUMPTION

54.8 (40.9)	2200	3.81 (14.44)	0.507 (0.309)	14.37 (2.83)	Air temperature
48.0 (35.8)	2267	3.55 (13.43)	0.539 (0.328)	13.53 (2.66)	68°F (20°C)
36.6 (27.3)	2301	3.14 (11.88)	0.625 (0.380)	11.67 (2.30)	Relative humidity
24.5 (18.3)	2323	2.39 (9.03)	0.708 (0.431)	10.29 (2.03)	36%
12.3 (9.2)	2340	1.74 (6.59)	1.032 (0.628)	7.08 (1.39)	Barometer
--	2347	1.25 (4.74)	--	--	29.9" Hg (101.6 kPa)

Maximum Torque -169.4 lb.-ft. (229.7 Nm) at 1300 rpm

Maximum Torque Rise -29.4%

Torque rise at 1800 engine rpm -18%

## POWER TAKE-OFF PERFORMANCE (1000 RPM Shaft)

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
<b>MAXIMUM POWER AND FUEL CONSUMPTION</b>					
<b>Rated Engine Speed—(PTO speed—1100 rpm)</b>					
56.1 (41.8)	2200	3.81 (14.42)	0.495 (0.301)	14.72 (2.90)	
<b>Maximum Power (2 hours)</b>					
56.9 (42.4)	2104	3.73 (14.13)	0.478 (0.291)	15.23 (3.00)	
<b>Standard Power Take-off Speed (1000 rpm)</b>					
55.9 (41.7)	2001	3.57 (13.53)	0.466 (0.284)	15.64 (3.08)	

## VARYING POWER AND FUEL CONSUMPTION

56.1 (41.8)	2200	3.81 (14.42)	0.495 (0.301)	14.72 (2.90)	Air temperature
49.1 (36.6)	2267	3.54 (13.41)	0.526 (0.320)	13.86 (2.73)	70°F (21°C)
37.3 (27.8)	2302	3.11 (11.77)	0.607 (0.369)	12.00 (2.37)	Relative humidity
25.1 (18.7)	2321	2.41 (9.14)	0.702 (0.427)	10.38 (2.04)	32%
12.7 (9.5)	2335	1.74 (6.58)	0.995 (0.606)	7.33 (1.44)	Barometer
--	2349	1.27 (4.80)	--	--	30.0" Hg (101.6 kPa)

Maximum Torque -174.7 lb.-ft. (236.9 Nm) at 1303 rpm

Maximum Torque Rise -30.6%

Torque rise at 1800 engine rpm -16%

**Location of Test:** Silsoe Research Institute, Wrest Park, Silsoe Bedford England MK45 4HS

**Dates of Test:** March-June, 1998

**Manufacturer:** AGCO Limited, P.O. Box 62, Banner Lane, Coventry, West Midlands, England CV4 9GF

**FUEL and OIL:** Fuel No. 2 Diesel Specific gravity converted to 60°/60° F (15°/15°C) 0.875 Fuel weight 7.28 lbs/gal (0.873 kg/l) Oil SAE 15W-30 API service classification CD Transmission and hydraulic lubricant SAE 15W-30 Front axle lubricant SAE 15W-30

**ENGINE:** Make Perkins Diesel Type four cylinder vertical Serial No. U839020C Crankshaft lengthwise Rated engine speed 2200 Bore and stroke 3.937" x 5.00" (100.0 mm x 127.0 mm) Compression ratio 17.3 to 1 Displacement 243 cu in (3990 ml) Starting system 12 volt Lubrication pressure Air cleaner two paper elements Oil filter one full flow cartridge Oil cooler radiator for hydraulic and transmission oil Fuel filter one paper element Muffler underhood Exhaust vertical Cooling medium temperature control thermostat

**CHASSIS:** Type front wheel assist Serial No. CBAD24BCXAE15999 Tread width rear 60.4" (1535 mm) to 83.9" (2130 mm) front 63.4" (1610 mm) to 75.4" (1915 mm) Wheelbase 92.5" (2350 mm) Hydraulic control system direct engine drive Transmission selective gear fixed ratio Nominal travel speeds mph (km/h) first 1.41 (2.27) second 1.85 (2.97) third 2.42 (3.89) fourth 3.17 (5.10) fifth 3.98 (6.40) sixth 5.20 (8.37) seventh 6.82 (10.98) eighth 8.94 (14.38) ninth 10.74 (17.29) tenth 14.04 (22.59) eleventh 18.42 (29.65) twelfth 24.13 (38.83) reverse 1.60 (2.57), 2.08 (3.35), 2.73 (4.40), 3.59 (5.77), 4.50 (7.24), 5.88 (9.46), 7.71 (12.41), 10.10 (16.26), 12.15 (19.55), 15.87 (25.54), 20.83 (33.52), 27.27 (43.90) Clutch single dry disc operated by foot pedal Brakes multiple wet disc hydraulically operated by two foot pedals that can be locked together Steering hydrostatic Power take-off single speed- 540 rpm at 1789 engine rpm, dual speed - 540 rpm at 1902 engine rpm or 1000 rpm at 2000 engine rpm Unladen tractor mass 7630 lb (3460 kg)

**DRAWBAR PERFORMANCE**  
**(UNBALLASTED—FRONT DRIVE ENGAGED)**  
**FUEL CONSUMPTION CHARACTERISTICS**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Temp. °F cool- ing med	°C Air dry bulb	Barom. inch Hg (kPa)
<b>Maximum Power—5th (1M) Gear</b>									
42.5 (31.7)	4090 (18.2)	3.90 (6.27)	2206	4.6	0.600 (0.365)	11.67 (2.30)	189 (87)	73 (23)	29.7 (100.5)
<b>75% of Pull at Maximum Power—5th (1M) Gear</b>									
33.3 (24.8)	3065 (13.6)	4.07 (6.55)	2279	3.5	0.680 (0.414)	10.30 (2.03)	189 (87)	73 (23)	29.7 (100.5)
<b>50% of Pull at Maximum Power—5th (1M) Gear</b>									
22.8 (17.0)	2050 (9.1)	4.17 (6.71)	2310	2.4	0.847 (0.515)	8.27 (1.63)	189 (87)	73 (23)	29.6 (100.4)
<b>75% of Pull at Reduced Engine Speed—6th (2M) Gear</b>									
33.3 (24.8)	3065 (13.6)	4.07 (6.55)	1744	3.5	0.545 (0.332)	12.84 (2.53)	187 (86)	75 (24)	29.6 (100.4)
<b>50% of Pull at Reduced Engine Speed—6th (2M) Gear</b>									
22.7 (16.9)	2040 (9.1)	4.17 (6.71)	1766	2.4	0.624 (0.380)	11.22 (2.21)	185 (85)	73 (23)	29.6 (100.4)

**MAXIMUM POWER IN SELECTED GEARS**

1st (1L) Gear									
26.3 (19.6)	7680 (34.2)	1.28 (2.07)	2295	15.0	0.816 (0.496)	8.58 (1.69)	189 (87)	77 (25)	29.6 (100.4)
2nd (2L) Gear									
33.9 (25.3)	7600 (33.8)	1.67 (2.69)	2259	13.5	0.707 (0.430)	9.90 (1.95)	189 (87)	75 (24)	29.6 (100.4)
3rd (3L) Gear									
41.4 (30.9)	6945 (30.9)	2.24 (3.61)	2200	9.5	0.620 (0.377)	11.28 (2.22)	189 (87)	75 (24)	29.6 (100.4)
4th (4L) Gear									
42.5 (31.7)	5305 (23.6)	3.00 (4.83)	2169	6.1	0.600 (0.365)	11.67 (2.30)	189 (87)	75 (24)	29.7 (100.5)
5th (1M) Gear									
43.3 (32.3)	4380 (19.5)	3.71 (5.97)	2106	4.9	0.579 (0.352)	12.08 (2.38)	189 (87)	73 (23)	29.7 (100.5)
6th (2M) Gear									
43.2 (32.2)	3315 (14.7)	4.88 (7.86)	2099	3.7	0.582 (0.354)	12.03 (2.37)	189 (87)	73 (23)	29.7 (100.5)
7th (3M) Gear									
42.5 (31.7)	2455 (10.9)	6.49 (10.44)	2103	2.8	0.589 (0.359)	11.88 (2.34)	189 (87)	73 (23)	29.7 (100.5)
8th (4M) Gear									
40.9 (30.5)	1790 (8.0)	8.57 (13.79)	2106	2.1	0.610 (0.371)	11.47 (2.26)	189 (87)	72 (22)	29.7 (100.5)

**REPAIRS AND ADJUSTMENTS:** No repairs or adjustments.

**REMARKS:** All test results were determined from observed data obtained in accordance with official OECD test procedures. The performance results on this summary were taken from OCED tests conducted under the Code II test procedure.

**NOTE:** The data on this summary was obtained from OECD report 1779 conducted on the Massey Ferguson 4225 Diesel.

**Report reissued:** Supplemental sales permit for Massey Ferguson 4325 Diesel, April, 2002.

**Report reissued:** Supplemental sales permit for Challenger MT 425 Diesel, July 2003

We, the undersigned, certify that this is a true summary of data from OECD Report No. 1779, Nebraska Summary 276A, July 2, 2003.

Leonard L. Bashford  
Director

M.F. Kocher  
V.I. Adamchuk  
W.P. Campbell  
Board of Tractor Test Engineers

**TIRES AND WEIGHT**

**Rear Tires**—No., size, ply & psi (kPa)  
**Front Tires**—No., size, ply & psi (kPa)

**Tested Without Ballast**

Two 18.4R30; \*\*, 12(83)  
Two 360/70R24; \*\*, 15(103)

**Height of Drawbar**

**Static Weight with operator** — Rear  
— Front  
— Total

19.3 in (490 mm)  
4730 lb (2145 kg)  
3065 lb (1390 kg)  
7795 lb (3535 kg)

**DRAWBAR PERFORMANCE**  
**(UNBALLASTED - FRONT DRIVE DISENGAGED)**  
**FUEL CONSUMPTION CHARACTERISTICS**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption		Temp.°F (°C)	Barom.	
					lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	cool- ing med	Air dry bulb inch Hg (kPa)	
<b>Maximum Power—6th (2M) Gear</b>									
42.5 (31.7)	3175 (14.1)	5.02 (8.08)	2199	4.9	0.605 (0.368)	11.57 (2.28)	189 (87)	70 (21)	29.6 (100.3)
<b>75% of Pull at Maximum Power—6th (2M) Gear</b>									
33.4 (24.9)	2385 (10.6)	5.25 (8.45)	2278	4.0	0.690 (0.419)	10.15 (2.00)	189 (87)	70 (21)	29.6 (100.3)
<b>50% of Pull at Maximum Power—6th (2M) Gear</b>									
23.0 (17.2)	1605 (7.1)	5.37 (8.65)	2313	3.4	0.865 (0.526)	8.10 (1.60)	189 (87)	68 (20)	29.6 (100.3)
<b>75% of Pull at Reduced Engine Speed—7th (3M) Gear</b>									
33.4 (24.9)	2390 (10.6)	5.24 (8.43)	1733	4.0	0.549 (0.334)	12.74 (2.51)	187 (86)	66 (19)	29.6 (100.3)
<b>50% of Pull at Reduced Engine Speed—7th (3M) Gear</b>									
22.9 (17.1)	1595 (7.1)	5.38 (8.65)	1765	3.4	0.641 (0.390)	10.91 (2.15)	187 (86)	66 (19)	29.6 (100.3)

**MAXIMUM POWER IN SELECTED GEARS**

<b>1st (1L) Gear</b>									
20.9 (15.6)	6090 (27.1)	1.29 (2.07)	2313	15.0	0.945 (0.575)	7.41 (1.46)	189 (87)	68 (20)	29.6 (100.3)
<b>2nd (2L) Gear</b>									
27.4 (20.4)	5960 (26.5)	1.72 (2.77)	2299	12.1	0.783 (0.476)	8.94 (1.76)	189 (87)	68 (20)	29.6 (100.3)
<b>3rd (3L) Gear</b>									
34.1 (25.4)	5720 (25.5)	2.24 (3.60)	2269	11.8	0.692 (0.421)	10.12 (1.99)	189 (87)	66 (19)	29.6 (100.3)
<b>4th (4L) Gear</b>									
42.4 (31.6)	5420 (24.1)	2.93 (4.71)	2199	9.0	0.618 (0.376)	11.33 (2.23)	189 (87)	66 (19)	29.6 (100.4)
<b>5th (1M) Gear</b>									
43.0 (32.1)	4450 (19.8)	3.62 (5.82)	2109	6.6	0.589 (0.358)	11.89 (2.34)	189 (87)	70 (21)	29.6 (100.3)
<b>6th (2M) Gear</b>									
43.2 (32.2)	3375 (15.0)	4.80 (7.72)	2104	5.0	0.584 (0.355)	11.99 (2.36)	189 (87)	70 (21)	29.6 (100.3)
<b>7th (3M) Gear</b>									
42.6 (31.8)	2515 (11.2)	6.35 (10.22)	2104	4.1	0.599 (0.364)	11.68 (2.30)	189 (87)	68 (20)	29.6 (100.3)
<b>8th (4M) Gear</b>									
40.7 (30.4)	1820 (8.1)	8.39 (13.51)	2110	3.7	0.621 (0.378)	11.27 (2.22)	187 (86)	66 (19)	29.6 (100.4)
<b>9th (1H) Gear</b>									
41.8 (31.2)	1560 (6.9)	10.05 (16.17)	2095	3.3	0.610 (0.371)	11.47 (2.26)	189 (87)	66 (19)	29.6 (100.3)

<b>TRACTOR SOUND LEVEL WITH CAB</b>	<b>Front Wheel Drive</b>	
	<b>Disengaged dB(A)</b>	<b>Engaged dB(A)</b>
Maximum sound level in 5th(1M) gear	84.0	84.0
Bystander in 12th(4H) gear	83.0	--

### THREE POINT HITCH PERFORMANCE (OECD Static Test)

CATEGORY: II

QuickAttach: None


Maximum Force Exerted Through Whole Range: 3665 lbs (16.3 kN)

i) Opening pressure of relief valve: NA  
Sustained pressure of the open relief valve: 3045 psi (210 bar)

ii) Pump delivery rate at minimum pressure: 10.2 GPM (38.6 l/min)

iii) Pump delivery rate at maximum  
hydraulic power: 9.6 GPM (36.3 l/min)  
Delivery pressure: 2755 psi (190 bar)  
Power: 15.4 HP (11.5 kW)

HITCH DIMENSIONS AS TESTED - NO LOAD

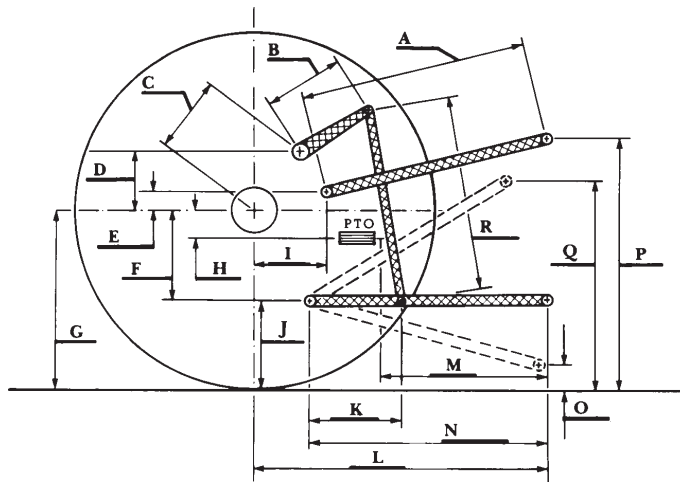

	inch	mm
A	32.0	815
B	12.2	310
C	12.0	304
D	9.2	233
E	8.1	205
F	8.3	212
G	28.3	720
H	5.4	136
I	7.3	186
J	20.0	508
K	26.6	675
L	38.1	968
M	25.0	635
N	39.4	1000
O	7.8	197
P	44.0	1118
Q	33.3	845
R	30.7	780