



## Tertiary nutrient removal from wastewater by immobilised microalgae: impact of wastewater nutrient characteristics and hydraulic retention time (HRT)

Rachel Whitton<sup>a,\*</sup>, Martina Santinelli<sup>b</sup>, Marc Pidou<sup>a</sup>, Francesco Ometto<sup>c</sup>, Rita Henderson<sup>d</sup>, Felicity Roddick<sup>e</sup>, Peter Jarvis<sup>a</sup>, Raffaella Villa<sup>a</sup> and Bruce Jefferson<sup>a</sup>

<sup>a</sup> Cranfield University, Cranfield MK43 0AL, UK

<sup>b</sup> Marche Polytechnic University, Via Breccie Bianche 12, 60131 Ancona, Italy

<sup>c</sup> Scandinavian Biogas Fuels AB, Linköping University, 58 183 Linköping, Sweden

<sup>d</sup> University of New South Wales, Sydney, NSW 2052, Australia

<sup>e</sup> RMIT University, Melbourne, Victoria 3001, Australia

\*Corresponding author. E-mail: [r.whitton@cranfield.ac.uk](mailto:r.whitton@cranfield.ac.uk)

### Abstract

Immobilising microalgal cells has been proposed as a process solution to overcome the barriers associated with the implementation of microalgae for wastewater remediation. This work evaluated the performance and remediation mechanisms of immobilised microalgae for continuous wastewater treatment under varying hydraulic retention times (HRT). Three domestic secondary wastewaters with differing concentrations of orthophosphate (PO<sub>4</sub>-P), ammonium (NH<sub>4</sub>-N) and nitrate (NO<sub>3</sub>-N) were treated by *Scenedesmus obliquus* immobilised within 2% calcium alginate. Trials were run in continuous operation at HRTs of 3, 6, 12 and 20 h. Removal rates for PO<sub>4</sub>-P improved with increasing HRT, with minimum residual concentrations of 0.3–3.1 mg·L<sup>-1</sup> observed at 3 h and 0.01–0.2 mg·L<sup>-1</sup> at 20 h. Ammonium remediation was not linked to HRT or NH<sub>4</sub><sup>+</sup> concentration with minimum residual concentrations of <0.001 mg·L<sup>-1</sup>. Reduction in NO<sub>3</sub>-N improved with increasing HRT, with minimum residual concentrations of ≤19.3 at 3 h and ≤0.4 mg·L<sup>-1</sup> at 20 h. Remediation was achieved through a combination of mechanisms including biological uptake and precipitation as a by-product of photosynthesis and nutrient metabolism. As such, immobilised microalgae have been proven to be an effective alternative solution for PO<sub>4</sub><sup>3-</sup> and NH<sub>4</sub><sup>+</sup> remediation of wastewater effluents at HRTs of 6–12 h.

**Key words:** hydraulic retention time, immobilised microalgae, wastewater

### INTRODUCTION

Microalgae are photosynthetic organisms that assimilate mainly inorganic nitrogen (N) and phosphate (P) during their growth when present in wastewater effluent. As such, they have been proposed as an alternative solution for the remediation of wastewater for both secondary and tertiary treatment (Lau *et al.* 1995; Martínez *et al.* 2000). For instance, the freshwater species *Scenedesmus obliquus* has been shown to achieve >98% remediation for total phosphate (TP) and ammonium

This is an Open Access article distributed under the terms of the Creative Commons Attribution Licence (CC BY 4.0), which permits copying, adaptation and redistribution, provided the original work is properly cited (<http://creativecommons.org/licenses/by/4.0/>).

(NH<sub>4</sub><sup>+</sup>) (Martínez *et al.* 2000). Both contaminants were reduced to <0.3 mg·L<sup>-1</sup> over a 7 day period when treating a domestic secondary wastewater with an influent concentration of 27.4 mg·L<sup>-1</sup> NH<sub>4</sub><sup>+</sup> and 11.8 mg·L<sup>-1</sup> PO<sub>4</sub><sup>-</sup> (Martínez *et al.* 2000). The application of algal-based technologies for nutrient removal offers a number of advantages over traditional nutrient removal options. For example, when using algal systems, the residual biomass has value as a bioenergy source following appropriate pre-treatment (Ometto *et al.* 2014b) and hence offers the possibility of meeting low discharge consents in an energy neutral, sustainable manner. Another advantage of algal treatment systems is the perception that they are more natural which helps to promote the public's receptivity of such processes.

To date, the majority of research conducted on wastewater nutrient removal with microalgae has focused on the use of high rate algal ponds (Christenson & Sims 2011) containing a symbiotic suspended culture of microalgae and bacteria. Typical hydraulic retention times (HRT) from 4 to 10 days are required due to the dilute biomass concentration resulting in large footprints (Picot *et al.* 1992; Craggs *et al.* 2012). Furthermore, in suspended systems the algal biomass need to be removed (harvested) prior to discharge, requiring large coagulant demands or energy inputs (Ometto *et al.* 2014a). Such attributes restrict the attractiveness of suspended microalgal technologies, particularly in locations with limited land availability and/or concerns over energy/chemical use.

The immobilisation of microalgae by confining the living microalgal cells within a gel that is shaped into beads overcomes many of these barriers (Mallick 2002). These gels are hydrophilic in nature, with small pores to enable the diffusion of wastewater to the entrapped microalgal cells (de-Bashan & Bashan 2010). Immobilisation provides the opportunity to seed a bioreactor with a chosen biomass concentration (and species), with concentrations ranging from 0.9 g(DW)·L<sup>-1</sup> to a reported hyper-concentration of 3.3 g(DW)·L<sup>-1</sup> (Chevalier & De la Noue 1985). Furthermore, immobilisation provides a significant advantage when the biomass is harvested, as the algal beads can be easily settled from the water by gravity without the addition of coagulant chemicals. Immobilisation also assists in the prevention of biomass from washing out of the reactor (Travieso *et al.* 1992; Mallick & Rai 1994) in addition to protecting against predation and contamination of the microalgal culture (Park *et al.* 2010).

The onset of the water framework directive (WFD) across Europe will require further reductions in wastewater P discharges to below the current 1–2 mg·L<sup>-1</sup> specified within the Urban Wastewater Treatment Directive (UWWTD) (European Commission 1991), to 0.5 mg·L<sup>-1</sup> with some sites expected to be as low as 0.1 mg·L<sup>-1</sup> (Jarvie *et al.* 2006). While conventional coagulation strategies support satisfactory remediation of wastewater P, the treatment strategy aligns to current linear economy approaches where potential resources are unrecovered and ultimately disposed. As such, there is a desire to move towards technology options, such as microalgae, that offer wider environmental benefits through resource recovery and/or energy generation aligned to circular economy thinking.

With the majority of wastewater treatment works (WWTW) within the UK categorised as small (treating a population equivalence (PE) of <2,000 (Upton *et al.* 1995)), certain attributes are desirable in regards to the design and performance of a microalgal bioreactor before considering retrofitting to an existing WWTW. These attributes include: (1) low technology footprint due to potentially limited land availability around existing WWTW; (2) treatment time (<1 day) to coincide with upstream processes enabling constant output and flow as previously attained by the works; and (3) a residual P concentration of <0.5 mg·L<sup>-1</sup> to satisfy the forthcoming requirements of the WFD.

To date, immobilised microalgae have demonstrated the ability to fulfil these requirements, with the majority of research undertaken using synthetic wastewater in batch or semi-continuous treatment (Mallick & Rai 1994; Tam & Wong 2000; Jiménez-Pérez *et al.* 2004) with limited studies on remediation performance within real wastewater effluents (Ruiz-Marin *et al.* 2010) and continuous operation simulating real-world conditions. One such study by Filippino *et al.* (2015) demonstrated the performance of immobilised microalgae for a continuous system treating a PO<sub>4</sub><sup>3-</sup> with a maximum concentration of between 0.4 and 1.8 mg·L<sup>-1</sup>, with a 60–100% remediation at a 12 h HRT and

10–40% at a 6.5 h HRT under differing lighting conditions and CO<sub>2</sub> addition. The current paper extends previous work to specifically investigate the role of HRT on the remediation performance when using immobilised algae for tertiary treatment of three real secondary wastewaters under continuous operation. Three different source waters have been used to represent the potential range of nutrient characteristics that are commonly encountered for tertiary treatment to provide an understanding of performance and the ability of the immobilised microalgae to satisfy forthcoming P consents in addition to N removal, and the mechanism of remediation.

## METHODS

### Wastewater

Secondary wastewater effluent was collected from three wastewater treatment sites located in the Midlands and south east of England. Sites A, B and C represent WWTW with a population equivalent (PE) of 200,000, 3,000 and 32,000, respectively, with effluent collected following secondary treatment by trickling filters (site A and B) and an oxidation ditch (site C). Average wastewater characteristics during the experimental period are summarised in Table 1. Effluent from site C was supplemented with NH<sub>4</sub>Cl and KH<sub>2</sub>PO<sub>4</sub> to increase residual concentrations. Supplementation for Site C was necessary, as the treated effluent is discharged into a catchment designated as a Special Area of Conservation (SAC) under the EC Habitats Directive (92/43/EEC) and a Site of Special Scientific Interest (SSSI). Effluent from this site therefore undergoes enhanced treatment (i.e., increased chemical dosing) to ensure the required residual concentrations are comfortably achieved and, as such, does not represent average residual nutrient concentrations observed following secondary treatment within the UK. Wastewater was used upon collection, with the remainder stored at 4 °C during the period of the trial until use.

**Table 1** | Average wastewater characteristics ( $\pm$  Std dev)

Parameter (mg·L <sup>-1</sup> )	Site A (n = 4)	Site B (n = 5)	Site C <sup>a</sup> (n = 4)
PO <sub>4</sub> -P	0.7 (0.2)	4.4 (0.6)	1.1 (0.01)
NH <sub>4</sub> -N	4.2 (1.4)	0.3 (0.2)	2.6 (0.2)
NO <sub>3</sub> -N	20.3 (1.4)	29.1 (8.3)	2.2 (1.0)
N:P (molar)	78	15	10
pH	7.8	7.3	7.7

<sup>a</sup>Average concentrations of 0.3 mg·L<sup>-1</sup> PO<sub>4</sub>-P and 0.1 mg·L<sup>-1</sup> NH<sub>4</sub>-N prior to supplementation.

### Microalgae cultivation and immobilisation procedure

The freshwater species *S. obliquus* (276/3A) was obtained from the Culture Collection for Algae and Protozoa (CCAP) (Oban, UK) and cultured in 50 L of Jaworski medium. This medium was chosen as a result of the enhanced algal growth observed during preliminary experiments and following recommendations from the algal supplier. Algae were cultured in a temperature-controlled room at 20 °C under constant mixing by a circulation pump (900 L·h<sup>-1</sup>) (Koralia Nano 900, Hydor). Cultures were illuminated at a light intensity of 100–150  $\mu\text{mol}\cdot\text{m}^{-2}\cdot\text{s}^{-1}$  at the culture surface, under constant light to adapt the biomass for continual activity and the accompanying remediation necessary for continuous wastewater treatment. Microalgal biomass was harvested prior to the onset of stationary growth phase to enable maximum biomass recovery. The biomass was stored overnight at 4 °C prior to immobilisation.

Beads were prepared following the method of Tam & Wong (2000) and Ruiz-Marin *et al.* (2010) for a final 2% sodium alginate (Na-alg) concentration and solidified within 2% CaCl<sub>2</sub>. The natural resin, sodium alginate, was selected over artificial resins which would enable greater light transparency, due to the ability to digest the Na-alg material alongside the algal biomass for energy recovery (San Juan *et al.* 2017), hence contributing to a circular economy approach.

The algal biomass was mixed within the Na-alg gel then passed through a peristaltic pump and dripped into a magnetically stirred CaCl<sub>2</sub> solution from a height of 30 cm. Approximately 4,000 beads per 100 mL gel with an approximate biomass concentration of 10<sup>5</sup> cells-bead<sup>-1</sup> were formed. Beads with an average diameter of 3 mm were left to solidify within the CaCl<sub>2</sub> solution overnight and stored in the dark at 4 °C for a period of 24–48 hours prior to use. Preliminary experiments showed that this had no effect on cell viability once placed in the light again. Beads were rinsed several times with DI water to remove any surplus CaCl<sub>2</sub> with no cell lysis observed during this procedure. The beads themselves played no significant role in nutrient removal as confirmed by a negligible change in N and P from batch adsorption tests when beads with no algae were added to wastewater (data not shown).

The cell-bead<sup>-1</sup> concentration was confirmed by removing a sample of ten beads and dissolving in a known volume of 2% sodium citrate. The cell concentration was recorded in triplicate using a haemocytometer and light microscope (Olympus, BH Series) and back-calculated to confirm approximately 10<sup>5</sup> cells-bead<sup>-1</sup>.

### Experimental setup for continuous treatment


Trials were run in continuous operation within an Algem™ Labscale Photobioreactor (Algenuity, Stewartby, UK) (Figure 1) at 20 °C under constant light at a photon irradiance of 200 μmol·m<sup>-2</sup>·s<sup>-1</sup> provided to the base of the photobioreactor over a surface area of 133 cm<sup>2</sup>. An intensity of 200 μmol·m<sup>-2</sup>·s<sup>-1</sup> was selected following preliminary experiments carried out to observe growth and nutrient remediation performance of immobilised *S. obliquus* under varying light intensities.

Continuous flows were achieved using a peristaltic pump simulating a reactor HRT of 3, 6, 12 and 20 h. Influent was fed to the top of the reactor and extracted from the base of the reactor below the bed of beads. Reactors were mixed via a gimbal system (Figure 1) at 120 rpm with fluidisation of the bead bed limited to the lower third of the vessel.

The reactor conical flasks of 1 L within the photobioreactor (Figure 1) were filled with 600 mL of wastewater effluent with a bead concentration of 10 beads·mL<sup>-1</sup>, as suggested by Abdel Hameed (2007), with an approximate initial dry weight concentration of 0.5 g·L<sup>-1</sup> of solely algal biomass. The beads were retained within the reactor throughout the period of the trials. Trials were terminated when: (1) the residual concentration of the target nutrients returned to that of the feed (while the beads remained intact) due to the high nutrient loading and insufficient biomass concentration for nutrient assimilation, defined as performance breakthrough; or, (2) when a substantial release of microalgal cells were observed within the reactor following bead deterioration.

### Sample analysis and biomass growth

Samples of the treated effluent (excluding the microalgal beads) were taken twice daily during the start-up period and once a day when performance stabilised. Daily analysis included pH, NH<sub>4</sub>-N, NO<sub>3</sub>-N and PO<sub>4</sub>-P with analysis of the total and dissolved fraction of phosphorus completed. Insoluble phosphorus was determined by subtracting the dissolved fraction from the total concentration. Dissolved PO<sub>4</sub>-P was analysed daily following syringe filtration at 0.45 μm (Millipore, DE), whereas total phosphate (TP) was analysed every 2–3 days for unfiltered samples.

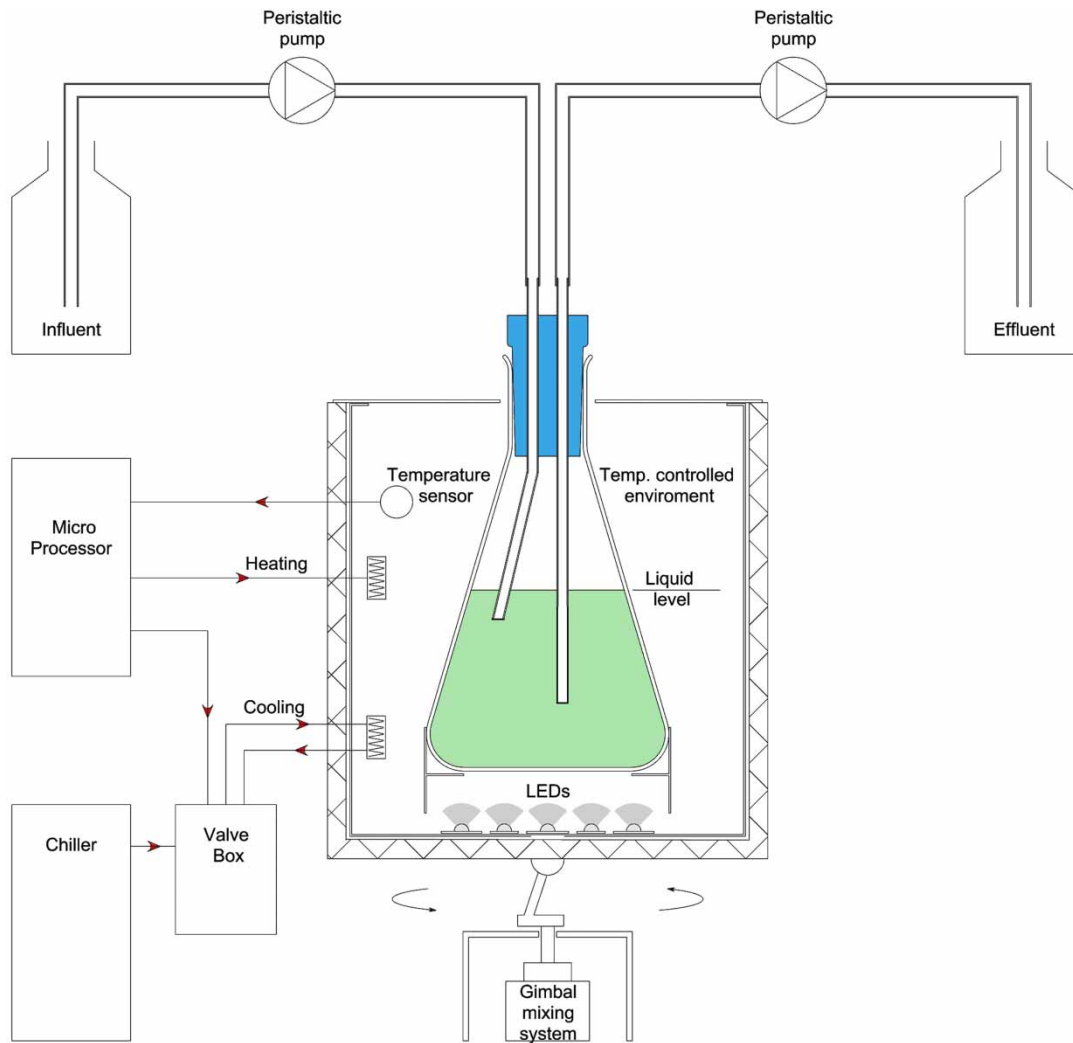

**Figure 1** | Schematic of the Algem™ Labscale Photobioreactor and auxiliary equipment.

Remediation performance was quantified as the difference in the influent and effluent concentration of the continuous flow for the individual reactors, with removal associated with direct uptake and precipitation. The contribution of P removal through the conversion of dissolved P to a precipitate was calculated through Equation (1), with the influent TP and dissolved P concentration found to be equal for each wastewater. Residual concentrations were analysed in duplicate using Spectroquant test kits (Merck Millipore) and read via a Nova 60 spectrophotometer (Spectroquant) and reported as the mean  $\pm$  standard error when possible. Elemental analysis of precipitation was investigated through a scanning electron microscope attached with an energy dispersive electron probe X-ray analyser (SEM-EDS, FEI XL30, Philips).

$$\text{Precipitation \%} = \left( \frac{\text{Effluent total } PO_4^{3-} - \text{Effluent dissolved } PO_4^{3-}}{\text{Influent } PO_4^{3-}} \right) \times 100 \quad (1)$$

Growth of the immobilised biomass was analysed by dissolving a sample of ten beads from the experimental reactors at time points throughout the experimental period as previously described. The specific growth rate was then calculated using Equation (2), where  $\mu$  = specific growth rate

(d<sup>-1</sup>),  $x_1$  and  $x_2$  the number of cells-bead<sup>-1</sup> at time  $t_1$  and  $t_2$ .


$$\mu = \frac{\ln(x_2/x_1)}{t_2 - t_1} \quad (2)$$

Determination of the dry weight biomass concentration within the reactor (g(DW)·L<sup>-1</sup>) was based on previous growth experiments under the same growth conditions (e.g., light and temperature) to correlate dry weight of *S. obliquus* to cell number (data not shown). Suspended biomass released by the beads into the reactor was found to contribute to approximately 0.40 mg·L<sup>-1</sup> (equivalent to 0.07% of the total biomass concentration) from preliminary 24 h batch trials. The contribution of the suspended biomass was therefore considered negligible within performance calculations through the selection of HRTs ≤20 h for the continuous trials. Contribution of bacteria to removal of contaminants was also found to be negligible following controlled experiments containing no algal biomass (data not shown).

## RESULTS AND DISCUSSION

### Phosphate remediation

A consistent treatment profile was observed across each of the wastewater samples analysed from all sites and HRTs with an initial period where the effluent PO<sub>4</sub>-P decreased before reaching a plateau. For example, site A samples demonstrated more than 80% removal at HRTs of 3, 6, 12 and 20 h over a period of approximately 2, 1, 3 and 5 days (Figure 2). Treatment efficiencies are similar to those observed by Filippino *et al.* (2015) for continuous treatment by immobilised *Chlorella vulgaris* treating an average influent concentration of 0.2–0.5 mg·L<sup>-1</sup> PO<sub>4</sub><sup>3-</sup> (similar to the characteristics of Site A) at a contact time of 6.5 h, however this study demonstrates a similar level of performance at a further reduced reactor HRT of ≤6 h.

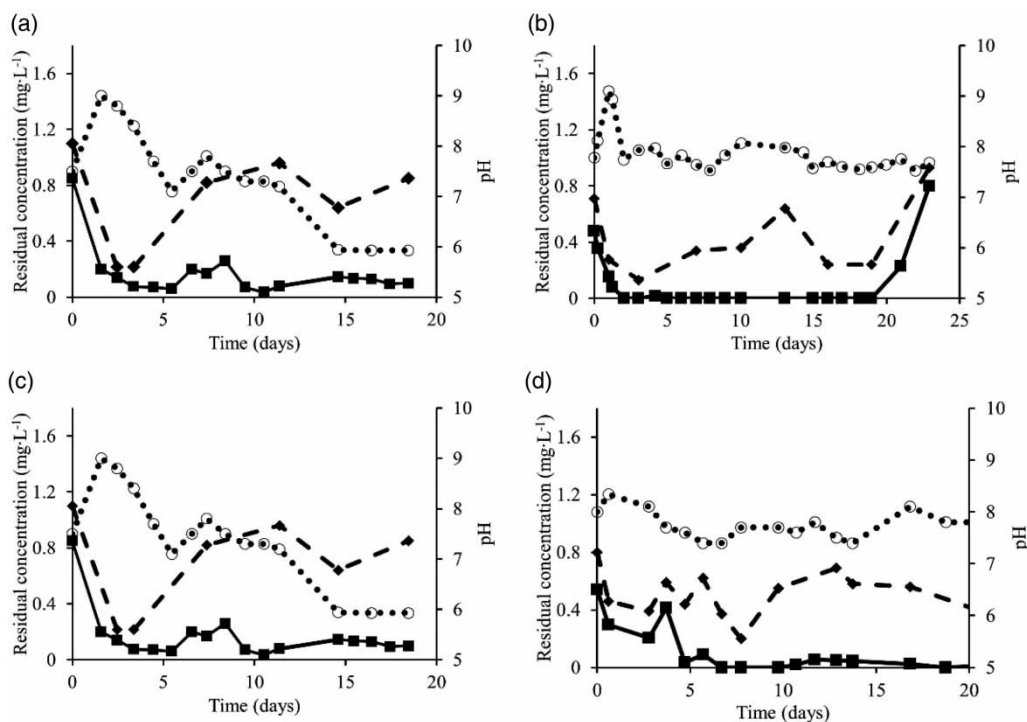

**Figure 2** | Phosphate remediation for site A for (a) 3 h, (b) 6 h, (c) 12 h and (d) 20 h HRT. PO<sub>4</sub>-P (■), TP (◆) and pH (○).

The residual concentration of PO<sub>4</sub>-P averaged 0.10, 0.001, 0.12 and 0.03 mg·L<sup>-1</sup> until day 8, 19, 19 and 19 when a breakthrough in concentration (HRTs 3 and 6 h) or deterioration of the beads (HRTs 12 and 20 h) was observed. Breakthrough in concentration is believed to have occurred at the lower HRTs due to a higher nutrient loading of 3.4 and 1.7 mg P·d<sup>-1</sup> for the 3 and 6 h HRT, respectively, in comparison to a lower loading of approximately 0.8 and 0.5 mg P·d<sup>-1</sup> for the 12 and 20 h HRT. While biomass growth remained similar for all HRTs, the biomass concentration is believed to be insufficient for enhanced nutrient assimilation.

Comparison of samples across the sites revealed that following the initial start-up period, but prior to breakthrough, the minimum PO<sub>4</sub>-P residual concentration for site A and C samples achieved the required <0.5 mg·L<sup>-1</sup> for all HRTs (Table 2). The similar levels of performance observed between site A and C samples are due to the similar PO<sub>4</sub>-P influent concentration. The samples from site B were not reduced to such low levels, achieving <0.5 mg·L<sup>-1</sup> at ≥12 h HRT. The reduced performance was attributed to the higher PO<sub>4</sub>-P influent concentration which was up to six and four times greater than site A and site C samples, respectively, suggesting load limiting conditions had been reached (Whitton *et al.* 2016). Mass balances estimate PO<sub>4</sub>-P uptake by the algal biomass equivalent to ≤0.01 mgP·mg biomass<sup>-1</sup> similar to that observed for *S. obliquus* within non-growth limiting environments (Whitton *et al.* 2016).

The site effluents were characterised by a molar N:P ratio of 78, 15 and 10 for site A, B and C, respectively. These ratios differ to the recommended N:P of 16 for marine microalgae (Redfield 1934), but are more suited to the range of N:P ratios deemed suitable for freshwater species of 8–45 (Hecky *et al.* 1993). The growth rate of the immobilised biomass (for trials terminated through performance breakthrough) ranged between 0.22 and 0.42 d<sup>-1</sup> with an increase in cell concentration from 10<sup>5</sup> to approximately 10<sup>6</sup> cells·bead<sup>-1</sup> suggesting phosphorus was not limiting for sites A, B and C. These findings are supported by previous work demonstrating effective N and P removal by immobilised microalgae within growth mediums characterised by N:P ratios between 4 and 230 (Filipino *et al.* 2015).

A change in the removal pathway was observed during the operating cycle for all HRTs and site samples. To illustrate for the site A sample, the TP residual concentration initially followed the

**Table 2** | PO<sub>4</sub>-P minimum residual concentration following initial start-up period and prior to breakthrough, peak pH and maximum removal contribution through precipitation (±Std error)

HRT (h)	Influent PO <sub>4</sub> -P (mg·L <sup>-1</sup> )	Min. effluent PO <sub>4</sub> -P (mg·L <sup>-1</sup> )	Peak pH	Max. precipitation contribution (%)
Site A				
3	1.11 (0.02)	0.09 (0.01)	8.2	43.7
6	0.48 (0.00)	<0.01*	9.1	50.7
12	0.85 (0.02)	0.04 (0.04)	9.0	80.5
20	0.54 (0.00)	<0.01*	8.3	80.0
Site B				
3	5.39 (0.04)	3.10 (0.03)	7.3	nd
6	4.08 (0.00)	0.88 (0.01)	8.2	33.3
12	3.97 (0.01)	0.49 (0.01)	10.6	81.7
20	4.50 (0.00)	0.20 (0.02)	11.0	49.1
Site C				
3	1.07 (0.01)	0.30 (0.01)	8.6	nd
6	1.07 (0.04)	<0.01*	9.7	80.3
12	1.07 (0.01)	<0.01*	10.4	88.5
20	1.08 (0.01)	<0.01*	11.1	44.0

nd = not determined, \* = below limit of detection.

remediation profile for PO<sub>4</sub>-P (Figure 2) suggesting PO<sub>4</sub>-P to be the predominant form of phosphorus within the treated effluent. Microalgal remediation of PO<sub>4</sub><sup>-</sup> is predominantly through a biological uptake pathway (Larsdotter 2006) and, as such, remediation during the initial stages of the cycles contributed to microalgal assimilation. However, as the operating cycle progressed, the residual TP concentration began to deviate with an increase in concentration observed on days 4, 7, 7 and 10 for 3, 6, 12 and 20 hours HRT runs, respectively (for site A sample). The concentration remained higher than the PO<sub>4</sub>-P residual and eventually returned to that of the feed when breakthrough (Figure 2(a) and 2(b)) was observed or the trial was stopped due to bead deterioration (Figure 2(c) and 2(d)). In addition, the effluent pH increased from an average of 7.7 to 8.2, 9.1, 9.0 and 8.3 for HRT of 3, 6, 12 and 20 h, respectively (Figure 2 and Table 2).

The change observed in TP:PO<sub>4</sub>-P during the cycle is congruent with a switch in the removal pathway from microalgae uptake in the initial stages to chemical precipitation during the remainder of the cycle. The precipitation pathway is driven by the increase in pH as a consequence of photosynthesis and its commensurate consumption of the inorganic carbon source, i.e., the bicarbonate ion (HCO<sub>3</sub><sup>-</sup>). This produces hydroxyl ions (OH<sup>-</sup>), creating a localised increase in pH (Nurdogan & Oswald 1995; Larsdotter *et al.* 2007; Kim *et al.* 2010) causing the onset of phosphate precipitation with calcium (Ca) and magnesium (Mg) cations found within the wastewater (Larsdotter *et al.* 2007). Precipitation then proceeds, even when the pH reduces to neutral, and continues to contribute to remediation (House 1999). Preliminary investigatory analysis of the precipitate revealed it to be predominately amorphous calcium phosphate.


An initial increase in the effluent pH subsequently followed by an increase in residual TP concentration was demonstrated in all wastewaters at all HRTs, with a maximum pH of 11.1 after 2 days observed for the 20 h HRT trial for the site C sample (Table 2). Across all the trials, precipitation accounted for a maximum of 33.3–88.5% for phosphorus removal (Table 2) equivalent to 0.001 to 0.06 mgP·mg biomass<sup>-1</sup>. Greater contribution through precipitation generally occurred at the longer HRTs; however, the percentage contribution by precipitation at 20 h HRT reduced to between 44 and 49% even though the pH peaked at 11 for samples from site B and C. Such observations of a reduction in pH following a peak, and a subsequent decrease in TP, are congruent with a switch in the relative competition for Ca between carbonate and phosphate. While the formation of calcium phosphate remains thermodynamically favourable, the relative precipitation kinetics significantly favours calcium carbonate formation reducing the amount of phosphate precipitate (Montastruc *et al.* 2003).

Equivalent findings have been reported in suspended systems with, for instance, precipitation accounting for 16–63% P removal for a suspended culture of *Monoraphidium* species at a HRT of 5 days growing within sterile filtered domestic wastewater (Larsdotter *et al.* 2007). This extends previous discussions concerning the significant role of indirect remediation (Mesplé *et al.* 1996; Garcia *et al.* 2000) to include systems based on immobilised microalgae. The increased contribution in the immobilised systems compared to suspended systems is attributed to the greater algal biomass concentrations involved; with suspended systems up to an order of magnitude less concentrated than immobilised systems.

### Ammonium remediation

Remediation of NH<sub>4</sub>-N exhibited a similar pattern of remediation to PO<sub>4</sub>-P with a period of initial decrease to a plateau which was consistent for all site samples and HRTs. To illustrate, the site A sample achieved greater than 70% removal following an initial start-up period of 1, 3 and 5 days for 6, 12 and 20 h reactor HRT, respectively, with corresponding averaged residual concentrations of 0.06, 0.25 and 0.35 mg·L<sup>-1</sup> (Figure 3). This pattern of performance was not seen for the 3 h reactor HRT trial, presumably due to the high NH<sub>4</sub>-N loading of approximately 20.2 mg·d<sup>-1</sup> in comparison to <10.1 mg·d<sup>-1</sup> for HRTs of 6–20 h. As such, the 3 h HRT resulted in only a 14.3% NH<sub>4</sub>-N reduction



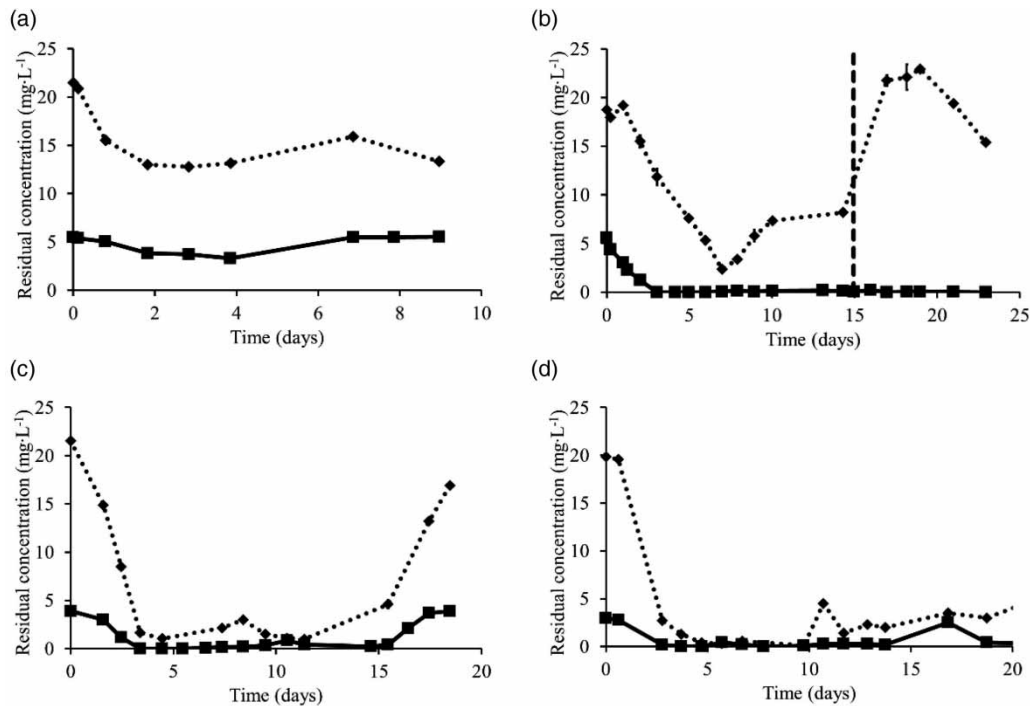

**Figure 3** | Ammonium and nitrate remediation for site A samples for (a) 3 h, (b) 6 h (addition of fresh feed on day 15.0), (c) 12 h and (d) 20 h HRT. NH<sub>4</sub>-N (■) and NO<sub>3</sub>-N (◆). Average influent concentration 4.2 mg·L<sup>-1</sup> NH<sub>4</sub>-N and 20.3 mg·L<sup>-1</sup> NO<sub>3</sub>-N.

after a period of 4 days followed by an increase in the residual concentration which returned to that of the feed by day 7 (Figure 3). The enhanced uptake and improved residual concentrations for NH<sub>4</sub>-N in comparison to PO<sub>4</sub>-P during these trials are consistent with the greater nitrogen content of algal biomass, at around ten times that of phosphorus. The increased nitrogen composition leads to an enhanced assimilation of nitrogen in comparison to phosphorus (Nurdoğan & Oswald 1995). This was further demonstrated through increased biomass productivity ranging between 0.04 g·L<sup>-1</sup>·d<sup>-1</sup> and 0.2 g·L<sup>-1</sup>·d<sup>-1</sup>. The higher rates of productivity were observed for the shorter HRTs (i.e., 3 hours) for sites with a higher NH<sub>4</sub>-N concentration (i.e., sites A and C) in comparison to a longer HRT (i.e., 20 hours) for sites characterised by a lower NH<sub>4</sub>-N concentration (i.e., site B).

Unlike PO<sub>4</sub>-P, the minimum residual effluent NH<sub>4</sub>-N concentration, following the start-up period and prior to breakthrough, did not show improvement with increasing HRT (Table 3). A residual concentration of ≤0.001 mg·L<sup>-1</sup> NH<sub>4</sub>-N was observed for the majority of wastewaters despite varying influent NH<sub>4</sub>-N concentration (excluding site A sample and 3 h HRT). Treatment was comparable to >90% TN remediation efficiency observed by Filippino *et al.* (2015) for immobilised *C. vulgaris* at HRTs of 6.5 and 20 h, and consistent with the system remaining non-limiting up to loading rates of at least 20.8 g·m<sup>-3</sup>·d<sup>-1</sup>.

### Nitrate remediation


The remediation of nitrate (NO<sub>3</sub>-N) was observed in parallel to the uptake of NH<sub>4</sub>-N offering the potential of the immobilised process to provide TN remediation (Figure 3). Average residual NO<sub>3</sub>-N concentrations for the complete cycle for the site A sample of 14.1, 9.8, 2.4 and 3.0 mg·L<sup>-1</sup> was observed for 3, 6, 12 and 20 h HRT, respectively. The residual concentration was maintained throughout the trial and showed a deterioration in remediation performance following the addition of fresh feed (>20 mg·L<sup>-1</sup> NO<sub>3</sub>-N) (Figure 3(b)). The increased TN load contributed to bead deterioration after 19 days of treatment.

**Table 3** | NH<sub>4</sub>-N and NO<sub>3</sub>-N minimum residual concentration following initial start-up period and prior to breakthrough ( $\pm$  Std error)

HRT (h)	Influent NH <sub>4</sub> -N (mg·L <sup>-1</sup> )	Min. effluent NH <sub>4</sub> -N (mg·L <sup>-1</sup> )	Influent NO <sub>3</sub> -N (mg·L <sup>-1</sup> )	Min. effluent NO <sub>3</sub> -N (mg·L <sup>-1</sup> )
Site A				
3	5.52 (0.02)	3.30 (0.00)	21.50 (0.20)	12.8 (0.00)
6	5.60 (0.40)	<0.001*	18.75 (0.35)	2.35 (0.15)
12	3.89 (0.01)	<0.001*	21.55 (0.25)	1.00 (0.00)
20	2.95 (0.05)	<0.001*	19.85 (0.05)	0.30 (0.00)
Site B				
3	0.20 (0.02)	<0.001*	40.90 (0.70)	19.3 (0.10)
6	0.51 (0.00)	<0.001*	21.00 (0.00)	1.00 (0.00)
12	0.52 (0.02)	<0.001*	27.50 (0.30)	1.55 (0.05)
20	0.33 (0.01)	<0.001*	33.65 (0.35)	0.40 (0.10)
Site C				
3	2.61 (0.09)	<0.001*	1.90 (0.10)	nd
6	2.28 (0.40)	<0.001*	1.35 (0.05)	nd
12	2.75 (0.00)	<0.001*	nd	nd
20	2.60 (0.13)	<0.001*	3.30 (0.10)	0.4 (0.00)

nd = not determined, \* = below limit of detection.


The impact of the relative removal of both nitrogen species was observed in relation to the evolution of pH (Figure 4). The sample from site A, with an influent concentration of 5.6 mg·L<sup>-1</sup> NH<sub>4</sub>-N and 18.8 mg·L<sup>-1</sup> NO<sub>3</sub>-N peaked at a maximum pH of 9.1 before reducing to an average of 7.9 for the remainder of the run for the 6 h HRT (Figure 4(a)). Whereas the sample from site B, with a lower NH<sub>4</sub>-N influent concentration of 0.5 mg·L<sup>-1</sup> and a higher NO<sub>3</sub>-N concentration of 27.5 mg·L<sup>-1</sup>, peaked at a maximum pH of 10.6 before averaging 9.2 for the remainder of the trial for the 12 h HRT (Figure 4(b)). The pH of the effluent mirrored that of the NO<sub>3</sub>-N residual concentration for site B (Figure 4(b)), with a reduction from a pH of 10.0 to 7.2 after 19 days following an increase in NO<sub>3</sub>-N residual from 2.4 to 20.1 mg·L<sup>-1</sup>. The ratio of NH<sub>4</sub>-N to NO<sub>3</sub>-N influences pH as assimilation of NO<sub>3</sub><sup>-</sup> results in a net H<sup>+</sup> uptake by co-transportation through the ATPase extrusion pump within microalgal cells whereas assimilation of NH<sub>4</sub><sup>+</sup> creates a net release of H<sup>+</sup> (Ullrich 1983). Furthermore, while not directly measured, the remediation opportunity related to the ammonia speciation pKa estimates volatilisation of free ammonia contributing between 1 and 98% at the peak pH values of 7.3–11.1 (Table 2). The presumed elimination of NH<sub>3</sub> through volatilisation at the higher pH values would further facilitate alkalisation due to the microalgae assimilating NO<sub>3</sub><sup>-</sup> in the absence of

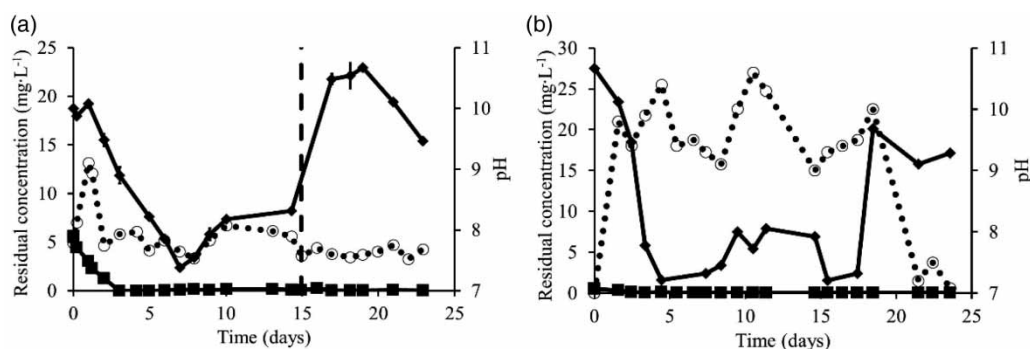**Figure 4** | Ammonium and nitrate residual concentration and pH for (a) site A sample at 6 h HRT and (b) site B sample at 12 h HRT. Fresh feed introduced on day 15.0 for site A. NH<sub>4</sub>-N (■), NO<sub>3</sub>-N (◆) and pH (○).

NH<sub>4</sub><sup>+</sup> through co-transportation with H<sup>+</sup>, resulting in a further increase in pH of the localised medium (Whitton *et al.* 2015).

### Bead remediation characteristics

The nutrient removal rate ranged from 0.03 to 74.6 mgP·h<sup>-1</sup>·10<sup>6</sup> beads<sup>-1</sup> (equivalent to 0.0003 to 0.75 µgP·h<sup>-1</sup>·10<sup>6</sup> cells<sup>-1</sup>) (Figure 5(a)) and 0.03 to 142.7 mgNH<sub>4</sub>-N·h<sup>-1</sup>·10<sup>6</sup> beads<sup>-1</sup> (equivalent to 0.0003 to 1.43 µgNH<sub>4</sub>-N·h<sup>-1</sup>·10<sup>6</sup> cells<sup>-1</sup>) (Figure 5(b)) with an average of 0.16 µgP·h<sup>-1</sup>·10<sup>6</sup> cells<sup>-1</sup> and 0.43 µgNH<sub>4</sub>-N·h<sup>-1</sup>·10<sup>6</sup> cells<sup>-1</sup> (when considering only those trials which were halted through performance breakthrough). Such data demonstrate enhanced cell uptake rates when compared to previous studies using microalgae in the treatment of urban wastewater. For example, for a feed concentration of 32.5 mg·L<sup>-1</sup> NH<sub>4</sub>-N and 2.5 mg·L<sup>-1</sup> PO<sub>4</sub>-P operating in 50 h batch trials, uptake rates for suspended *S. obliquus* of 0.05 µgP·h<sup>-1</sup>·10<sup>6</sup> cells<sup>-1</sup> and 0.18 µgNH<sub>4</sub>-N·h<sup>-1</sup>·10<sup>6</sup> cells<sup>-1</sup> were observed (Ruiz-Marin *et al.* 2010).

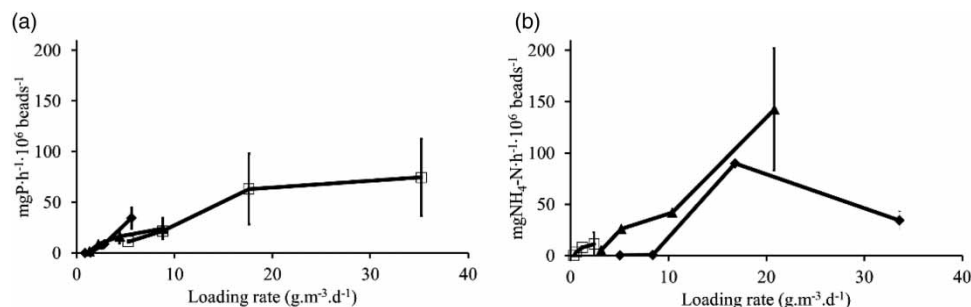


**Figure 5** | Bead removal rate for (a) PO<sub>4</sub>-P and (b) NH<sub>4</sub>-N for samples from site A (◆), site B (□) and site C (▲).

The bead PO<sub>4</sub>-P uptake rate increases until a loading of approximately 20 g·m<sup>-3</sup>·d<sup>-1</sup>, after which the rate levels out (Figure 5(a)) with results suggesting a maximum uptake rate of approximately 75 mgP·h<sup>-1</sup>·10<sup>6</sup> beads<sup>-1</sup>. A similar relationship was observed for NH<sub>4</sub>-N (Figure 5(b)); however, a rapid decrease was observed at 33.6 g·m<sup>-3</sup>·d<sup>-1</sup> concurrent with performance breakthrough within 8 days for the site A sample at 3 h HRT. Accordingly, the data suggest a maximum effective loading rate between 20.8 g·m<sup>-3</sup>·d<sup>-1</sup> and 33.6 g·m<sup>-3</sup>·d<sup>-1</sup>, corresponding to a maximum uptake rate of approximately 116 mgNH<sub>4</sub>-N·h<sup>-1</sup>·10<sup>6</sup> beads<sup>-1</sup>.

The effective cycle time was defined by either performance breakthrough or loss of bead integrity through deterioration. In cases of lower nutrient loading, the cycle time was defined by performance breakthrough. This occurred at all HRTs for site C samples and at HRTs of 3 and 6 h for site A samples and 12 and 20 h for site B samples with a reduction in cycle run time from 24 days to 3 days as the beads treated 0.1 to 0.8 µgP·bead<sup>-1</sup>·d<sup>-1</sup> (Figure 6(a)). In such cases, an increase in residual effluent concentration was observed over a period of 2–5 days, providing a signal that the operating cycle had ended, representing a convenient method for cycle time control. No such relationship between specific growth rate or the final bead biomass concentration and the cycle run time was evident.

Site A samples at 12 and 20 h HRT and site B samples at 3 and 6 h HRT demonstrated bead deterioration and continued to remediate the influent wastewater due to the release of the suspended cells into the reactor. Consistent with expectations, bead integrity was breached due to the increase in cell numbers to approximately 10<sup>6</sup> cells·bead<sup>-1</sup> and reduction in bead stability through chemical and biological interactions with components within the effluent (Cruz *et al.* 2013). The beads which did not deteriorate retained form and function for a maximum period of 24 days at a 20 h

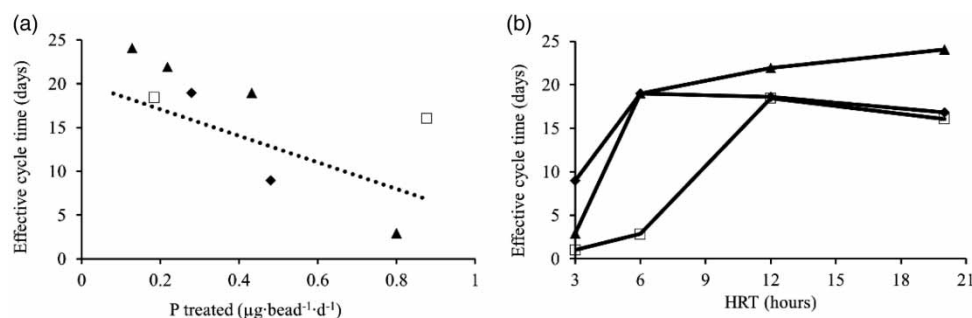

**Figure 6** | (a) Amount of P treated and run time (excluding trials with bead deterioration) and (b) effective cycle time for PO<sub>4</sub>-P remediation for all HRTs for samples from site A (◆), site B (□) and site C (▲).

HRT (Figure 6(b)). This is a significantly longer survival period than experienced by others. For instance, substantial deterioration after 96 hours was observed by Cruz *et al.* (2013).

Implementation of the technology would require that the cycle is terminated and the beads harvested prior to bead deterioration. The harvested beads can then be either applied to land as a fertiliser or converted into methane through anaerobic digestion (San Juan *et al.* 2017). Additional consideration needs to be given to the reactor design to prevent washout of the calcium phosphate precipitate, as the precipitated phosphate will continue to contribute to the total phosphate residual and further presents a useful resource for recovery.

## CONCLUSIONS

- Microalgal immobilisation process enables effective tertiary nutrient removal at contact times significantly lower than in alternative algal reactor systems. Effective removal to  $<0.5\text{ mg}\cdot\text{L}^{-1}$  phosphate, aligned to the WFD, was observed at reactor HRTs of  $\leq 12\text{ h}$ , in addition to residual ammonia concentrations of  $<0.001\text{ mg}\cdot\text{L}^{-1}$ .
- Indirect removal through a pH-induced precipitation process is a significant phosphate remediation pathway.
- The maximum rate of bead performance can be defined through the phosphate loading rate with effective treatment up to a maximum loading rate of  $0.8\text{ }\mu\text{gP}\cdot\text{bead}^{-1}\text{ d}^{-1}$ .
- The effective cycle time of operation is linked to the total phosphate treated with cycle times up to 24 days when operating under low loadings.

## ACKNOWLEDGEMENTS

The authors gratefully acknowledge financial support from the Engineering and Physical Sciences Research Council (EPSRC) through their funding of the STREAM Industrial Doctorate Centre, and from the project sponsors Anglian Water, Severn Trent Water and Scottish Water. Further gratitude is expressed to Algenuity (Spicer Consulting Ltd) for the operational support and guidance in relation to the use of the Algem™ Labscale Photobioreactor.

## REFERENCES

- Abdel Hameed, M. S. 2007 Effect of algal density in bead, bead size and bead concentration on wastewater nutrient removal. *African Journal of Biotechnology* 6(10), 1185–1191.

- Chevalier, P. & De la Noue, J. 1985 Efficiency of immobilized hyperconcentrated algae for ammonium and orthophosphate removal from wastewaters. *Biotechnology Letters* 7(6), 395–400.
- Christenson, L. & Sims, R. 2011 Production and harvesting of microalgae for wastewater treatment, biofuels, and bioproducts. *Biotechnology Advances* 29(6), 686–702.
- Craggs, R., Sutherland, D. & Campbell, H. 2012 Hectare-scale demonstration of high rate algal ponds for enhanced wastewater treatment and biofuel production. *Journal of Applied Phycology* 24(3), 329–337.
- Cruz, I., Bashan, Y., Hernández-Carmona, G. & de-Bashan, L. E. 2013 Biological deterioration of alginate beads containing immobilized microalgae and bacteria during tertiary wastewater treatment. *Applied Microbiology and Biotechnology* 97(22), 9847–9858.
- de-Bashan, L. E. & Bashan, Y. 2010 Immobilized microalgae for removing pollutants: review of practical aspects. *Bioresource Technology* 101(6), 1611–1627.
- European Commission 1991 Directive 91/271/EEC of the Council of 21 May 1991 concerning urban waste water treatment. *Official Journal of the European Community* 135, 40–52.
- Filippino, K. C., Mulholland, M. R. & Bott, C. B. 2015 Phycoremediation strategies for rapid tertiary nutrient removal in a waste stream. *Algal Research* 11, 125–133.
- García, J., Mujeriego, R. & Hernández-Marín, M. 2000 High rate algal pond operating strategies for urban wastewater nitrogen removal. *Applied Phycology* 12(3–5), 331–339.
- Hecky, R. E., Campbell, P. & Hendzel, L. L. 1993 The stoichiometry of carbon, nitrogen, and phosphorus in particulate matter of lakes and oceans. *Limnology and Oceanography* 38(4), 709–724.
- House, W. A. 1999 The physico-chemical conditions for the precipitation of phosphate with calcium. *Environmental Technology* 20(7), 727–735.
- Jarvie, H. P., Neal, C. & Withers, P. J. 2006 Sewage-effluent phosphorus: a greater risk to river eutrophication than agricultural phosphorus? *Science of the Total Environment* 360(1), 246–253.
- Jiménez-Pérez, M. V., Sánchez-Castillo, P., Romera, O., Fernández-Moreno, D. & Pérez-Martínez, C. 2004 Growth and nutrient removal in free and immobilized planktonic green algae isolated from pig manure. *Enzyme and Microbial Technology* 34(5), 392–398.
- Kim, J., Lingaraju, B. P., Rheume, R., Lee, J. & Siddiqui, K. F. 2010 Removal of ammonia from wastewater effluent by *Chlorella vulgaris*. *Tsinghua Science and Technology* 15(4), 391–396.
- Larsdotter, K. 2006 Wastewater treatment with microalgae – a literature review. *Vatten* 62(1), 31.
- Larsdotter, K., La Cour Jansen, J. & Dalhammar, G. 2007 Biologically mediated phosphorus precipitation in wastewater treatment with microalgae. *Environmental Technology* 28(9), 953–960.
- Lau, P. S., Tam, N. F. Y. & Wong, Y. S. 1995 Effect of algal density on nutrient removal from primary settled wastewater. *Environmental Pollution* 89(1), 59–66.
- Mallick, N. 2002 Biotechnological potential of immobilized algae for wastewater N, P and metal removal: a review. *BioMetals* 15(4), 377–390.
- Mallick, N. & Rai, L. C. 1994 Removal of inorganic ions from wastewaters by immobilized microalgae. *World Journal of Microbiology and Biotechnology* 10(4), 439–443.
- Martínez, M. E., Sánchez, S., Jiménez, J. M., El Yousfi, F. & Muñoz, L. 2000 Nitrogen and phosphorus removal from urban wastewater by the microalga *Scenedesmus obliquus*. *Bioresource Technology* 73(3), 263–272.
- Mesplé, F., Casellas, C., Troussellier, M. & Bontoux, J. 1996 Modelling orthophosphate evolution in a high rate algal pond. *Ecological Modelling* 89(1–3), 13–21.
- Montastruc, L., Azzaro-Pantel, C., Biscans, B., Cabassud, M. & Domenech, S. 2003 A thermochemical approach for calcium phosphate precipitation modeling in a pellet reactor. *Chemical Engineering Journal* 94(1), 41–50.
- Nurdogan, Y. & Oswald, W. J. 1995 Enhanced nutrient removal in high-rate ponds. *Water Science and Technology* 31(12), 35–43.
- Ometto, F., Pozza, C., Whitton, R., Smyth, B., Torres, A. G., Henderson, R. K., Jarvis, P., Jefferson, B. & Villa, R. 2014a The impacts of replacing air bubbles with microspheres for the clarification of algae from low cell-density culture. *Water Research* 53, 168–179.
- Ometto, F., Quiroga, G., Pšenička, P., Whitton, R., Jefferson, B. & Villa, R. 2014b Impacts of microalgae pre-treatments for improved anaerobic digestion: thermal treatment, thermal hydrolysis, ultrasound and enzymatic hydrolysis. *Water Research* 65, 350–361.
- Park, J. B. K., Craggs, R. J. & Shilton, A. N. 2010 Wastewater treatment high rate algal ponds for biofuel production. *Bioresource Technology* 102(1), 35–42.
- Picot, B., Bahlaoui, A., Moersidik, S., Baleux, B. & Bontoux, J. 1992 Comparison of the purifying efficiency of high rate algal pond with stabilization pond. *Water Science and Technology* 25(12), 197–206.
- Redfield, A. C. 1934 *On the Proportions of Organic Derivatives in Sea Water and Their Relation to the Composition of Plankton*. University of Liverpool Press, Liverpool, pp. 176–192.
- Ruiz-Marin, A., Mendoza-Espinosa, L. G. & Stephenson, T. 2010 Growth and nutrient removal in free and immobilized green algae in batch and semi-continuous cultures treating real wastewater. *Bioresource Technology* 101(1), 58–64.
- San Juan, M. G., Ometto, F., Whitton, R., Pidou, M., Jefferson, B. & Villa, R. 2017 Energy recovery from immobilised cells. *Frontiers in Wastewater Treatment and Modelling: FICWTM 2017* 4, 266–271.

- Tam, N. F. Y. & Wong, Y. S. 2000 Effect of immobilized microalgal bead concentrations on wastewater nutrient removal. *Environmental Pollution* **107**(1), 145–151.
- Travieso, L., Benitez, F. & Dupeiron, R. 1992 Sewage treatment using immobilized microalgae. *Bioresource Technology* **40**(2), 183–187.
- Ullrich, W. R. 1983 Uptake and reduction of nitrate: algae and fungi. In: *Inorganic Plant Nutrition*, 15th edn (Läuchli, A. & Bielecki, R. L., eds). Springer Verlag, Berlin, Heidelberg, New York, Tokyo, pp. 376–397.
- Upton, J. E., Green, M. B. & Findlay, G. E. 1995 Sewage treatment for small communities: the Severn Trent approach. *Water and Environment Journal* **9**(1), 64–71.
- Whitton, R., Ometto, F., Pidou, M., Jarvis, P., Villa, R. & Jefferson, B. 2015 Microalgae for municipal wastewater nutrient remediation: mechanisms, reactors and outlook for tertiary treatment. *Environmental Technology Reviews* **4**(1), 133–148.
- Whitton, R., Le Mével, A., Pidou, M., Ometto, F., Villa, R. & Jefferson, B. 2016 Influence of microalgal N and P composition on wastewater nutrient remediation. *Water Research* **91**, 371–378.