



Monitoring Conditions Offshore with Satellites

Karagali, Ioanna; Hasager, Charlotte Bay; Badger, Merete; Bingöl, Ferhat; Ejsing Jørgensen, Hans

Publication date:
2013

[Link back to DTU Orbit](#)

Citation (APA):

Karagali, I., Hasager, C. B., Badger, M., Bingöl, F., & Ejsing Jørgensen, H. (2013). Monitoring Conditions Offshore with Satellites [Sound/Visual production (digital)]. DTU-KAIST Workshop, Daejeon, Korea, Republic of, 21/02/2013

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Monitoring Conditions Offshore with Satellites

Ioanna Karagali, Charlotte Bay Hasager, Merete Badger, Ferhat Bingöl, Hans Ejsing Jørgensen

Meteorology Division
DTU Wind Energy, Risø campus – Department of Wind Energy
DTU – Technical University of Denmark

KAIST Workshop, February 2013

Outline



- 1 Introduction
- 2 Wind Offshore
- 3 Waves
- 4 Sea Surface Temperature
- 5 Conclusions
- 6 Perspectives

Motivation

- Offshore renewable energy activities
- Need to understand and monitor conditions offshore
- Wind: resource assessment, forecasts
- Waves: loads on structures, wave energy
- Sea Surface Temperature (SST): forecasts, wind profiles

Wind Measurements


- Offshore masts expensive
- Foundation/maintenance costs increase (depth, distance from land)
- Alternatives:
 - Lidars
 - Satellites
 - Meso/micro scale models

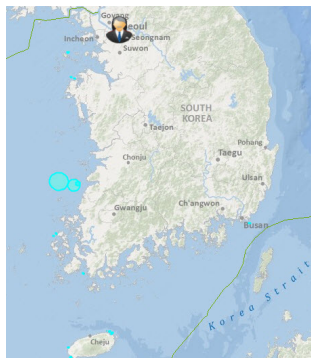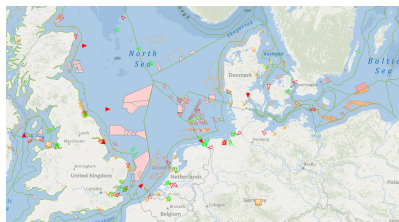

- 1 Introduction
- 2 Wind Offshore
 - Satellite Winds
 - QuikSCAT
 - SAR
- 3 Waves
- 4 Sea Surface Temperature
- 5 Conclusions
- 6 Perspectives

QuikSCAT

- Scatterometer:
backscatter from small
scale ripples
- Operating frequency: 13.2
GHz
- SeaWinds on QuikSCAT:
speed & direction
- Equivalent Neutral Wind
10 m
- $2\text{--}20\text{ m s}^{-1} \rightarrow \text{RMSE}$
 2 m s^{-1}

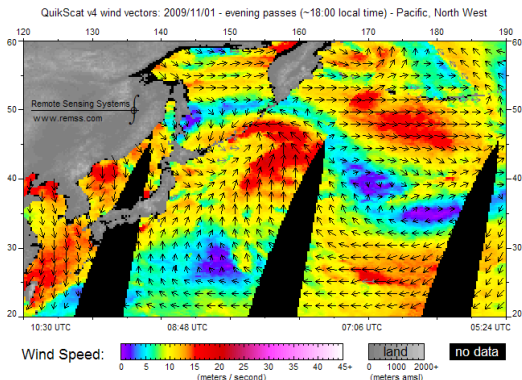

Advanced Scatterometer (ASCAT)

- On MET-OP (A & B)
- Operational since 2007
- Radar frequency 5.2 GHz: less sensitive to rain
- Resolution: 25 km, 12.5 km

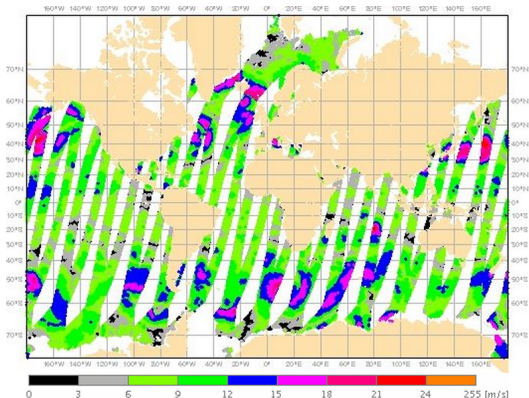


Figure: ASCAT instrument on METOP: example of descending (morning) pass from KNMI (http://www.knmi.nl/scatterometer/ascat_osi_25_prod/ascat_app.cgi).

OCEANSAT-2 Scatterometer (OSCAT)

- Operational since 2009
- Operating frequency 13.5 GHz
- KNMI releases 50 km resolution products
- 10 m Equivalent Neutral Wind
- Wind speed range 0–50 m s⁻¹

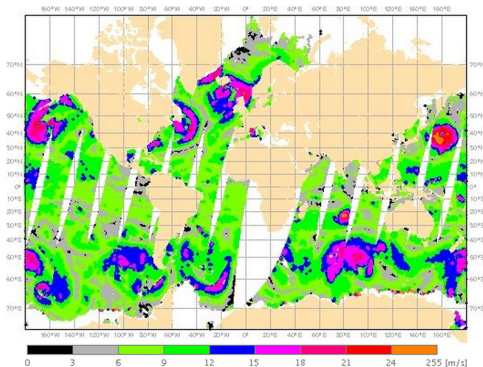


Figure: Morning (descending) OSCAT passes on the 14/02/2013 from KNMI (http://www.knmi.nl/scatterometer/oscat_50_prod/oscat_app.cgi).

Synthetic Aperture Radar

- **Advanced Synthetic Aperture Radar** on ENVISAT: speed
- Operation 2002–2012, infrequent revisiting time
- Very high spatial resolution (~ 150 m on WSM)
- Processing & wind retrieval at DTU Wind Energy
- Johns Hopkins ANSWRS system & NOGAPS model wind directions

ASA_WSM_1FNPDK20101001_L210754_000002202093_00258_44901_7071.N1 with NOGAPS Wind Directions


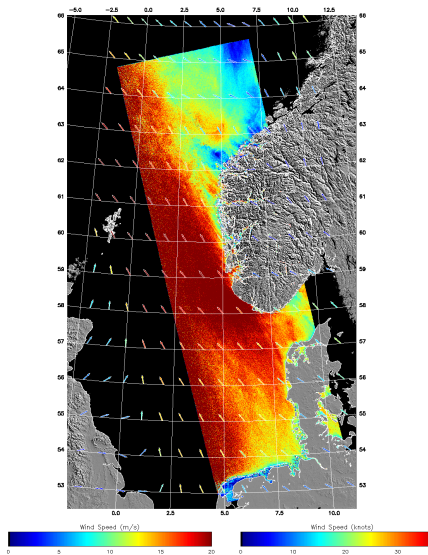


Figure: Wind field retrieved from ENVISAT ASAR, 01/10/2010



Synthetic Aperture Radar

- RadarSat-2: 2007–now
- Sentinel-1 to be launched in 2013




- 1 Introduction
- 2 Wind Offshore
 - Satellite Winds
 - **QuikSCAT**
 - SAR
- 3 Waves
- 4 Sea Surface Temperature
- 5 Conclusions
- 6 Perspectives

QuikSCAT vs North Sea Masts

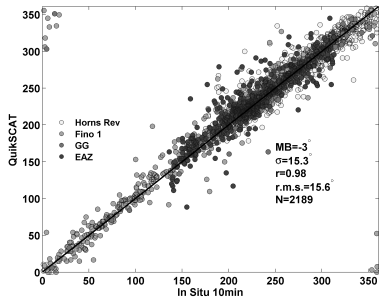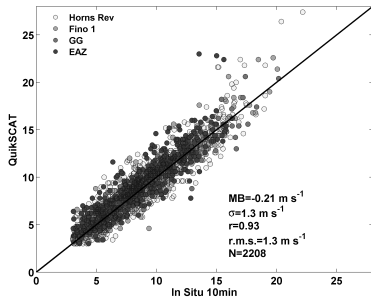


† Karagali et al. 2012, Wind Characteristics from the QuikSCAT satellite, *Wind Energy*, early view

10-year Mean Wind Speed

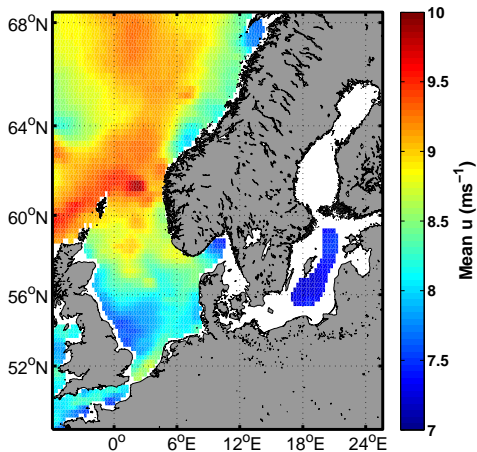


† Karagali et al. 2013, Temporal & spatial variability of 10 m winds, *Renewable Energy*, 57, 200-210.

Wind Direction Distributions

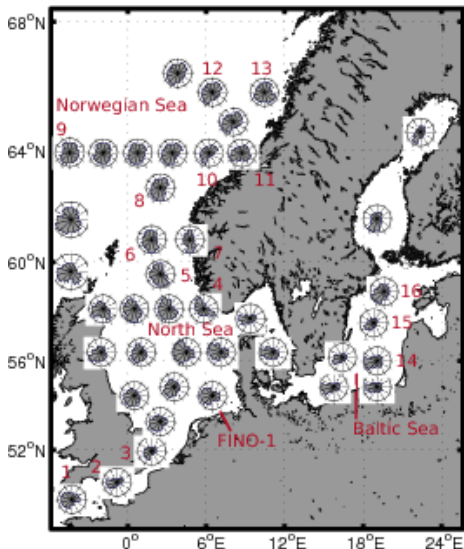

Spatial Correlation of Wind Speed


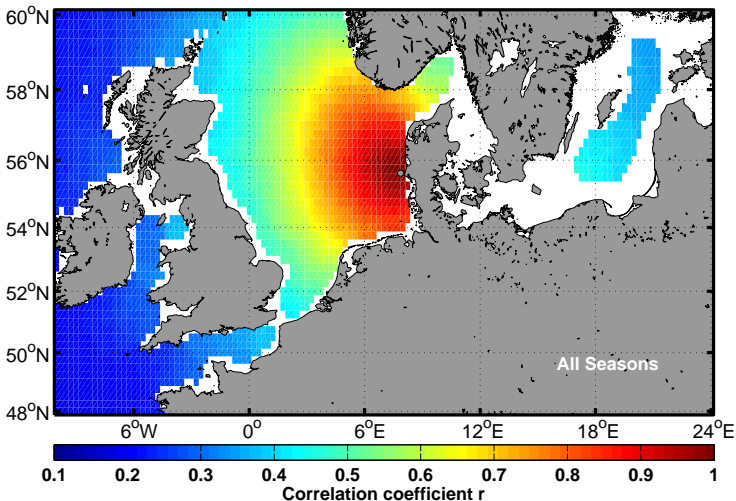


$r > .9$: 68 grid cells $32 \cdot 10^3 \text{ km}^2$ (4% North Sea area)

† Karagali 2012, DTU-Wind Energy PhD Thesis 03


- 1 Introduction
- 2 Wind Offshore
 - Satellite Winds
 - QuikSCAT
 - SAR
- 3 Waves
- 4 Sea Surface Temperature
- 5 Conclusions
- 6 Perspectives

Spectral Properties of SAR, QuikSCAT

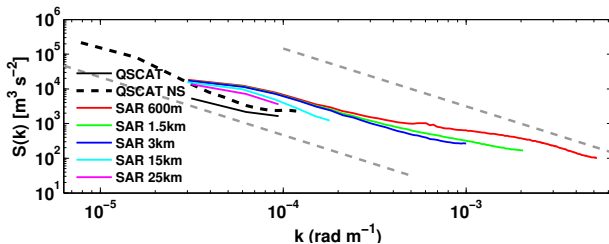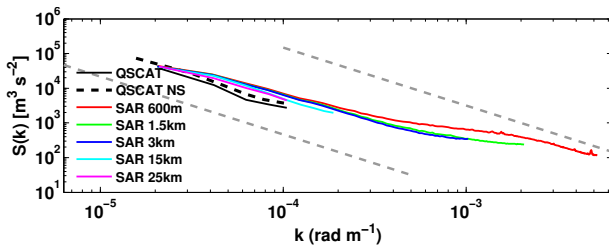

† Karagali 2012, Spectral properties of QuikSCAT & SAR 10 m ocean winds, *DTU-Wind Energy PhD Thesis 03*

Wind Class Sampling

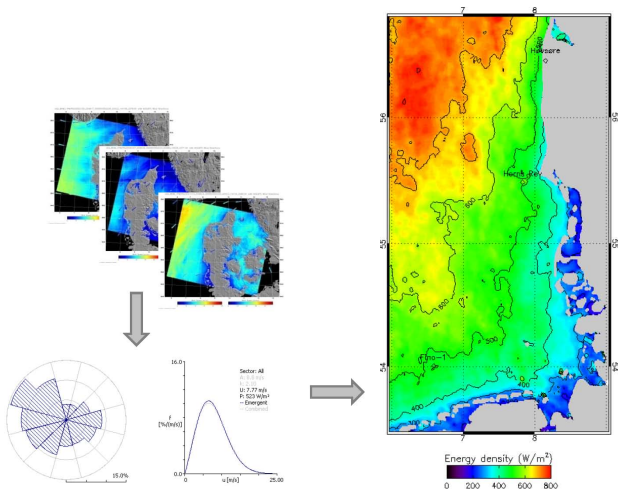


† Badger et al. 2010, Wind class sampling of satellite SAR imagery for offshore wind resource mapping, *J. Applied*

Meteorology & Climatology, 49, 2474-2491


DTU Wind Energy
Department of Wind Energy

NORSEWInD ASAR Wind atlas

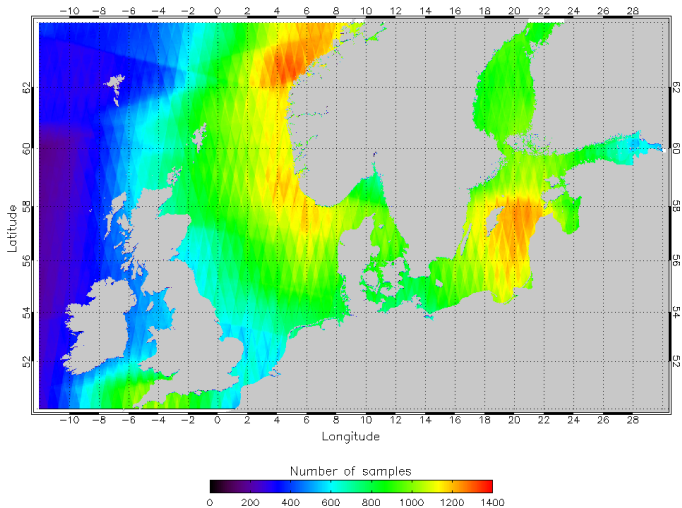

SAR scenes used for the wind resource assessment atlas. Courtesy: DTU Wind Energy & CLS.

NORSEWInD ASAR Wind atlas

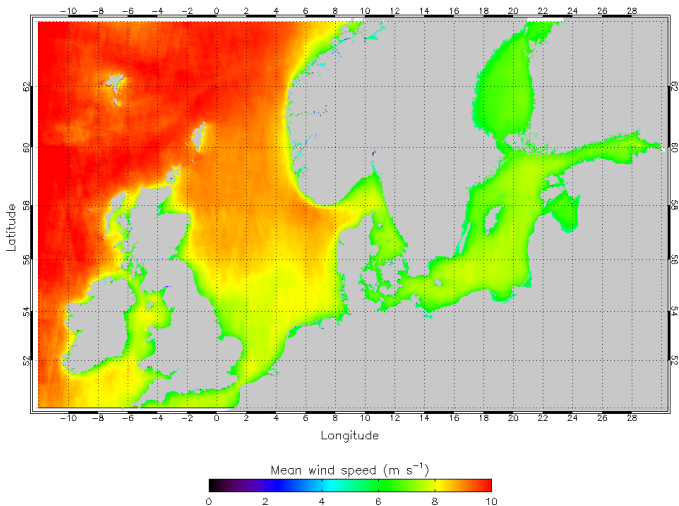

Mean wind speed from the resource assessment atlas. Courtesy: DTU Wind Energy & CLS.

- 1 Introduction
- 2 Wind Offshore
- 3 Waves**
- 4 Sea Surface Temperature
- 5 Conclusions
- 6 Perspectives

Altimeters

- Radar vertically transmitting short pulses towards ocean surface
- Receives reflected signal
- Time between signals = distance satellite–Earth
- Shape of return signal = significant wave height
- Multiple missions: TOPEX/POSEIDON, JASON-1/2, ENVISAT RA-2, CRYOSAT
- Long revisiting times: 10–35 days
- Available climatologies:

ESA's GlobWave

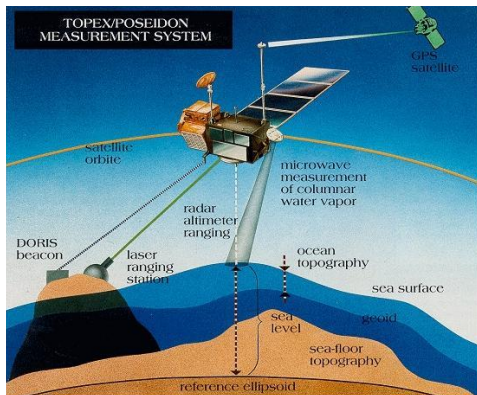


Figure: The TOPEX/POSEIDON principle of function. Image taken from AVISO (<http://www.aviso.oceanobs.com/es/kiosco/newsletter/newsletter01/focus-on.html>)

Significant Wave Height

$$H_s = 4\sqrt{\overline{\eta^2}}$$

- η : wave height
- Average crest-to-trough height of $\frac{1}{3}$ largest waves

Significant Wave height



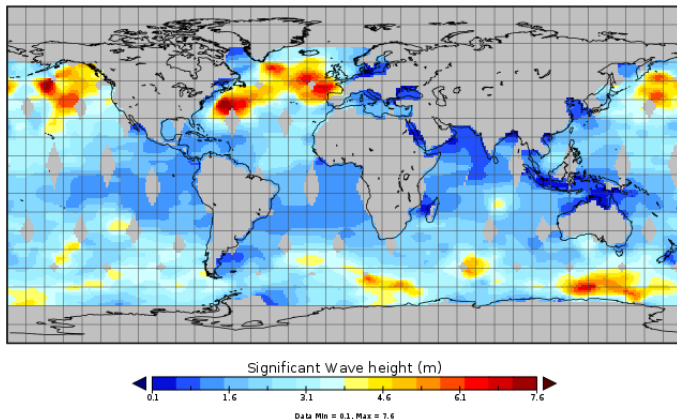


Figure: Latest NRT Significant Wave Height merged product, from Aviso (<http://www.aviso.oceanobs.com/en/data/products/wind-waves-products/mswhmwind.html>)

EU-ORECCA


Roadmap for research activities on offshore renewable energy conversion platforms for

- Wind
- Waves
- Other

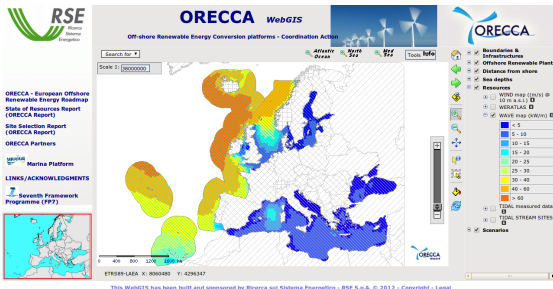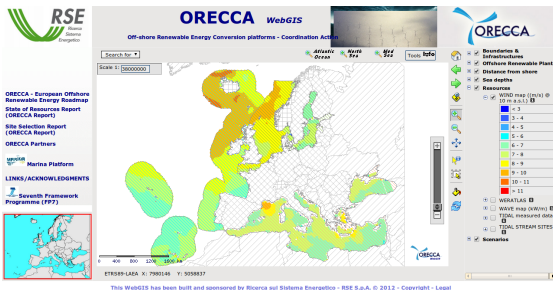


EU-MARINA

- Multi-purpose platforms for marine renewable energy
- Integrated wind and wave/current energy
- Site assessment for deployment of deep offshore renewable energy platforms

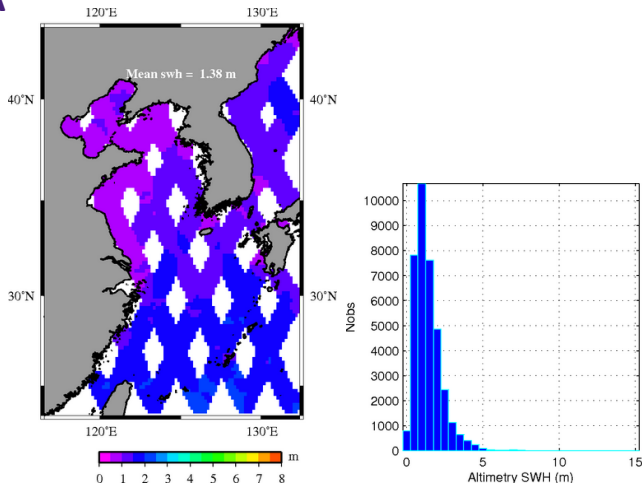


- 1 Introduction
- 2 Wind Offshore
- 3 Waves
- 4 Sea Surface Temperature**
- 5 Conclusions
- 6 Perspectives

Definitions of SST

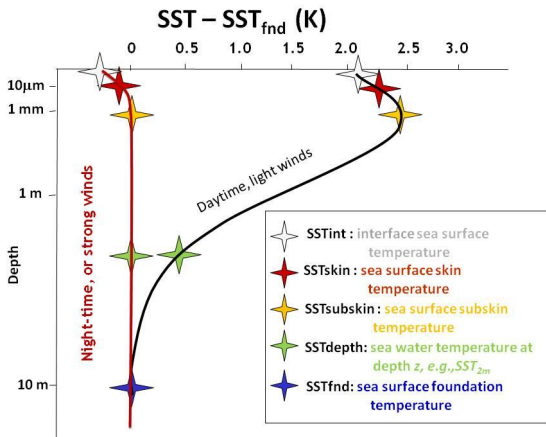

Vertical distribution of SST. From Minnett & Kaiser-Weis (2012)

Satellite Winds & SST

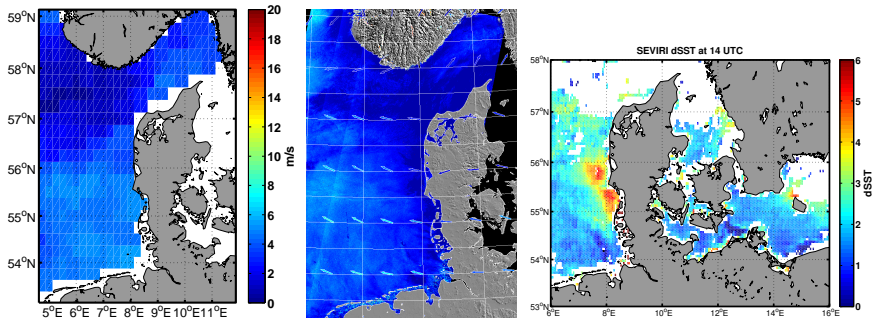


QuikSCAT, SAR and SEVIRI SST warming on the 04/07/2006

Wind Profiles

$$u = \frac{u_*}{\kappa} \left[\ln \left(\frac{z}{z_0} \right) - \Psi_M \right]$$



- u : wind speed at height z
- u_* : friction velocity
- κ : von Kármán constant (~ 0.4)
- z_0 : surface roughness
- Ψ_M : stability & height dependent

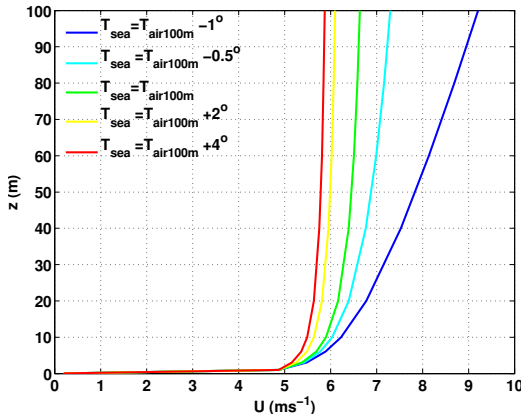

Compared to neutral case

- -1° : 39% increase of u_{100m} (167% for wind power density)
- $+2^\circ$: 8% decrease of u_{100m} (22% for wind power density)

Using SST and Bulk Water Temperature

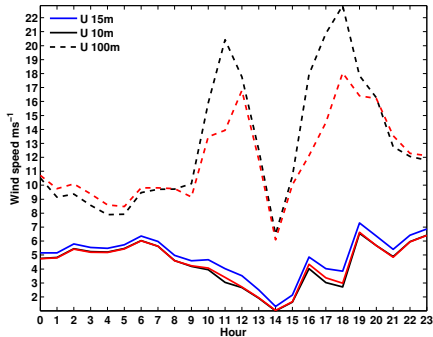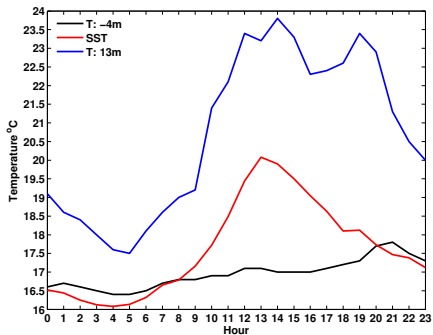

Measured air & sea temperatures at Horns Rev on the 04/07/2006 (left). Measured wind speed at 15 m (blue), extrapolated wind speeds at 10 m (solid) and 100 m (dashed), using the T 13 m for the air temperature & either the T -4 m (black) or the SST (red) for the sea temperature (right).

SST from Space

Infra-red sensors

- Infra-red radiation from “skin”
- No measurement through clouds
- High resolution
- SEVIRI (Geostationary)
- ATSR, AVHRR, MODIS (Polar)

Microwave sensors

- Radiation from “sub-skin”
- Measurement through clouds
- Low resolution – away from land
- TMI and AMSR
- Polar orbiters

Diurnal Warming Thresholds

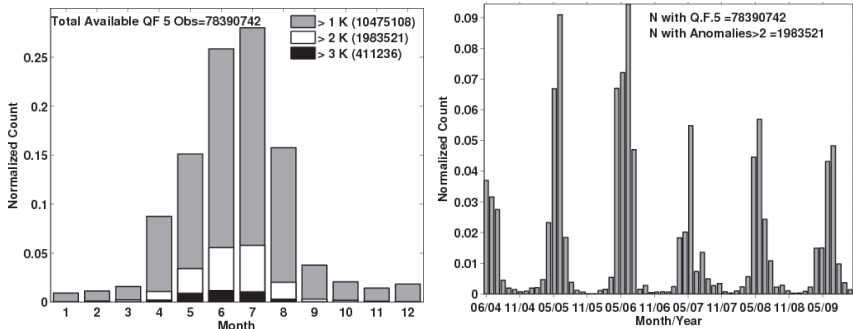


Figure: Left: Annual distribution of anomalies exceeding the threshold of 1, 2 and 3 K from June 2004 to October 2009. Right: Temporal distribution of anomalies exceeding 2 K.

† Karagali et al. 2012, SST diurnal variability in the North Sea and the Baltic Sea, *Rem. Sens. Environ.*, 121, 159-170

Spatial Extend of Diurnal Warming


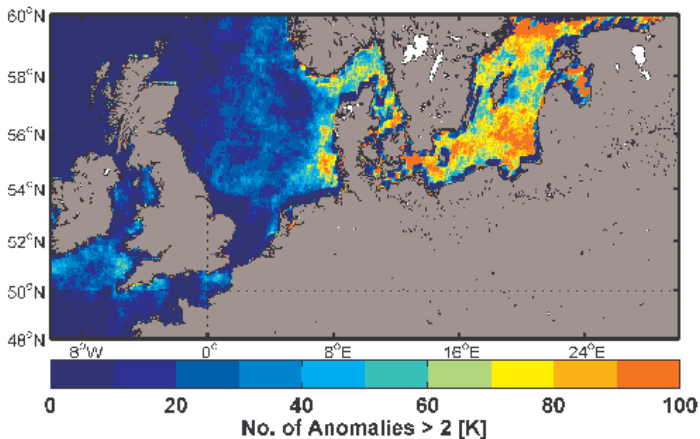


Figure: Spatial distribution of warming cases exceeding greater than 2 K (SEVIRI)

† Karagali et al. 2012, SST diurnal variability in the North Sea and the Baltic Sea, *Rem. Sens. Environ.*, 121, 159-170

Modelling the diurnal cycle

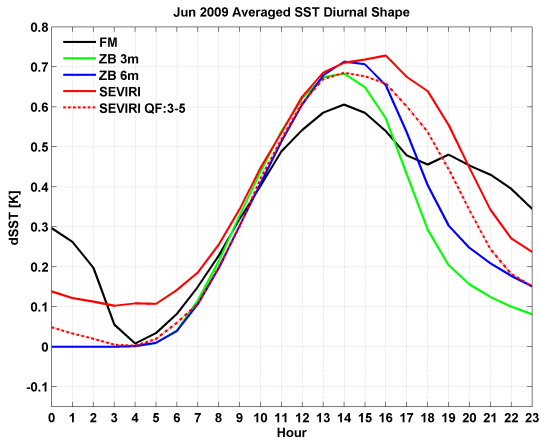

SEVIRI (red), the Filipiak et al. (2011) model (black), the Zeng & Beljaars (2005) $d_1 = 3m$ (green) and $d_2 = 6m$ (blue).

† Karagali & Høyer 2013, Observations and modeling of the diurnal SST cycle in the North and Baltic Seas, *J. Geophys.*

Res.-Oceans, DOI: 10.1002/jgrc.20320

- 1 Introduction
- 2 Wind Offshore
- 3 Waves
- 4 Sea Surface Temperature
- 5 Conclusions**
- 6 Perspectives

Conclusions

- Satellite winds applicable for initial resource assessment
- QuikSCAT: long temporal & spatial coverage → mean wind characteristics
- Roadmap for installation of masts, run high res. models
- SAR: very high resolution, close to land
- Identification of local, small-scale features
- Altimeters can be used for climatological wave resource assessment
- Validation of wave models vs radar altimeter data
- Diurnal SST variability important for certain areas/seasons
- Potentially important for atmospheric modelling

Conclusions

- Satellite winds applicable for initial resource assessment
- QuikSCAT: long temporal & spatial coverage → mean wind characteristics
- Roadmap for installation of masts, run high res. models
- SAR: very high resolution, close to land
- Identification of local, small-scale features
- Altimeters can be used for climatological wave resource assessment
- Validation of wave models vs radar altimeter data
- Diurnal SST variability important for certain areas/seasons
- Potentially important for atmospheric modelling

Conclusions

- Satellite winds applicable for initial resource assessment
- QuikSCAT: long temporal & spatial coverage → mean wind characteristics
- Roadmap for installation of masts, run high res. models
- SAR: very high resolution, close to land
- Identification of local, small-scale features
- Altimeters can be used for climatological wave resource assessment
- Validation of wave models vs radar altimeter data
- Diurnal SST variability important for certain areas/seasons
- Potentially important for atmospheric modelling

Conclusions

- Satellite winds applicable for initial resource assessment
- QuikSCAT: long temporal & spatial coverage → mean wind characteristics
- Roadmap for installation of masts, run high res. models
- SAR: very high resolution, close to land
- Identification of local, small-scale features
- Altimeters can be used for climatological wave resource assessment
- Validation of wave models vs radar altimeter data
- Diurnal SST variability important for certain areas/seasons
- Potentially important for atmospheric modelling

Conclusions

- Satellite winds applicable for initial resource assessment
- QuikSCAT: long temporal & spatial coverage → mean wind characteristics
- Roadmap for installation of masts, run high res. models
- SAR: very high resolution, close to land
- Identification of local, small-scale features
- Altimeters can be used for climatological wave resource assessment
- Validation of wave models vs radar altimeter data
- Diurnal SST variability important for certain areas/seasons
- Potentially important for atmospheric modelling

Conclusions

- Satellite winds applicable for initial resource assessment
- QuikSCAT: long temporal & spatial coverage → mean wind characteristics
- Roadmap for installation of masts, run high res. models
- SAR: very high resolution, close to land
- Identification of local, small-scale features
- Altimeters can be used for climatological wave resource assessment
- Validation of wave models vs radar altimeter data
- Diurnal SST variability important for certain areas/seasons
- Potentially important for atmospheric modelling

Conclusions

- Satellite winds applicable for initial resource assessment
- QuikSCAT: long temporal & spatial coverage → mean wind characteristics
- Roadmap for installation of masts, run high res. models
- SAR: very high resolution, close to land
- Identification of local, small-scale features
- Altimeters can be used for climatological wave resource assessment
- **Validation of wave models vs radar altimeter data**
- Diurnal SST variability important for certain areas/seasons
- Potentially important for atmospheric modelling

Conclusions

- Satellite winds applicable for initial resource assessment
- QuikSCAT: long temporal & spatial coverage → mean wind characteristics
- Roadmap for installation of masts, run high res. models
- SAR: very high resolution, close to land
- Identification of local, small-scale features
- Altimeters can be used for climatological wave resource assessment
- Validation of wave models vs radar altimeter data
- Diurnal SST variability important for certain areas/seasons
- Potentially important for atmospheric modelling

Conclusions

- Satellite winds applicable for initial resource assessment
- QuikSCAT: long temporal & spatial coverage → mean wind characteristics
- Roadmap for installation of masts, run high res. models
- SAR: very high resolution, close to land
- Identification of local, small-scale features
- Altimeters can be used for climatological wave resource assessment
- Validation of wave models vs radar altimeter data
- Diurnal SST variability important for certain areas/seasons
- Potentially important for atmospheric modelling

- 1 Introduction
- 2 Wind Offshore
- 3 Waves
- 4 Sea Surface Temperature
- 5 Conclusions
- 6 Perspectives**

Perspectives

- More scatterometers in operation → longer data sets
- Satellite winds lifted to hub heights
- Resolving of diurnal warming in NWP models
- Using SST when extrapolating measurements
- Evaluate impact of SST daily variability on atmospheric models

Thank you
Questions?