

High performance fuel electrode for a solid oxide electrochemical cell

Jabbar, Mohammad ; Høgh, Jens Valdemar Thorvald; Bonanos, Nikolaos

Publication date:
2013

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):

Jabbar, M., Høgh, J. V. T., & Bonanos, N. (2013). IPC No. C04B35/00; H01M4/86; . High performance fuel electrode for a solid oxide electrochemical cell (Patent No. WO2013060671 .)

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



(51) International Patent Classification:

H01M 4/86 (2006.01) H01M 4/90 (2006.01)
H01M 8/12 (2006.01) C04B 35/00 (2006.01)
H01M 4/88 (2006.01)

(21) International Application Number:

PCT/EP2012/070951

(22) International Filing Date:

23 October 2012 (23.10.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PA 2011 00811 24 October 2011 (24.10.2011) DK

(71) Applicant: TECHNICAL UNIVERSITY OF DENMARK [DK/DK]; Anker Engeldsvej 1, Building 101 A, DK-2800 Kgs. Lyngby (DK).

(72) Inventors: JABBAR, Mohammad; No. 4/4, Manali New Town, Chennai 600103 (IN). HØGH, Jens; Nørre Søgade 29, 4. th., DK-1370 Copenhagen K (DK). BONANOS, Nikolaos; Helligkorsvej 15 A, 2. th., DK-4000 Roskilde (DK).

(74) Agent: CHRISTENSEN, Bent; Topsoe Fuel Cell A/S, Nymøllevej 66, DK-2800 Kgs. Lyngby (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: HIGH PERFORMANCE FUEL ELECTRODE FOR A SOLID OXIDE ELECTROCHEMICAL CELL

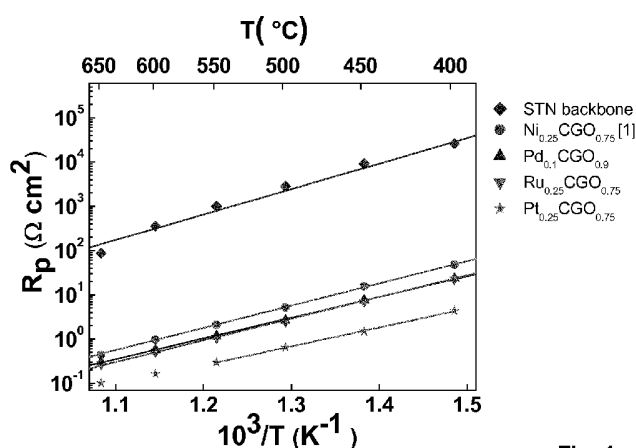


Fig. 1

(57) Abstract: A high performance anode (fuel electrode) for use in a solid oxide electrochemical cell is obtained by a process comprising the steps of (a) providing a suitably doped, stabilized zirconium oxide electrolyte, such as YSZ,ScYSZ, with an anode side having a coating of electronically conductive perovskite oxides selected from the group consisting of niobium-doped strontium titanate, vanadium-doped strontium titanate, tantalum-doped strontium titanate and mixtures thereof, thereby obtaining a porous anode backbone, (b) sintering the coated electrolyte at a high temperature, such as 1200°C in a reducing atmosphere, for a sufficient period of time, (c) effecting a precursor infiltration of a mixed catalyst into the backbone, said catalyst comprising a combination of noble metals Pd or Pt or Pd or Ru and Ni with rare earth metals, such as Ce or Gd, said infiltration consisting of (1) infiltration of Pd, Ru and CGO containing chloride/nitrate precursors and (2) infiltration of Ni and CGO containing nitrate precursors, and (d) subjecting the resulting structure of step (c) to heat treatments, including heat treatments in several steps with infiltration.

WO 2013/060671 A1

Title: High performance fuel electrode for a solid oxide electrochemical cell

The present invention relates to a high performance anode
5 (fuel electrode) for use in a solid oxide electrochemical cell. More specifically, the invention concerns the preparation of a novel anode structure by dual infiltration, where the electrocatalytic activity of the Ni-containing electrode has been increased by adding small quantities of
10 single noble metals or mixtures thereof. The invention is applied in particular to provide a low temperature solid oxide fuel cell (SOFC) anode.

A solid oxide fuel cell (SOFC) is an electrochemical cell
15 with an anode (fuel electrode) and a cathode separated by a dense oxide ion conductive electrolyte, said cell operating at high temperatures (800-1000°C). These conventional high temperatures lead to electrode problems, such as densification and fast degradation of the electrode materials being
20 employed and hence, increased resistance in the electrode/electrolyte interface. These problems are less pronounced at intermediate temperature (600-850°C) operation. Further lowering the operating temperature of such cells ($\leq 600^\circ\text{C}$) may enable the possibility of a wider material selection with relatively fewer of the problems encountered
25 in high temperature operation. In spite of this advantage, lowering the operation temperature leads to increasing interfacial resistance between the electrode and the electrolyte. A low temperature operation also imposes serious
30 challenges to the electrode performance for the hydrogen oxidation. An approach to overcome this challenge is by

precursor infiltration of a specific, properly chosen electrocatalyst with sufficient loadings.

The anode of an SOFC comprises a catalytically active, conductive (for electrons and oxide ions) porous structure, which is deposited on the electrolyte. The function of an SOFC anode is to react electrochemically with the fuel, such as hydrogen or hydrocarbons, while the cathode function is to react with oxygen (or air) and produce electric current. The conventional SOFC anodes include a composite mixture of a metallic catalyst and a ceramic material, more specifically nickel and yttria-stabilized zirconium oxide (YSZ), respectively. However, the interfacial resistance of the nickel-based composite anode is still too high for SOFCs to be operated in low temperature ranges.

Over the recent years a number of efforts have been made to improve the functioning of SOFC anodes. For instance, US 6.051.329 describes an SOFC with a porous ceramic anode comprising a noble metal catalyst chosen from Pt, Rh, Ru and mixtures thereof. The ceramic material in the anode may for example be YSZ; there was no specific mentioning of niobium-doped strontium titanates, but perovskite materials in general are mentioned.

US 2005/0120827 mentions that catalyst alloys, i.a. alloys of Ni, Ni-Pd and Ni-Pt, can be used as anodes in SOFCs.

Furthermore, US 2009/0305090 concerns catalyst compositions for fuel cell use, and according to the publication the catalyst of the anode can be Ce-oxide, Ce-Zr-oxide, Ce-Y-

oxide, Cu, Ag, Au, Ni, Mn, Mo, Cr, V, Fe, Co, Ru, Rh, Pd, Pt, Ir, Os, a perovskite or any combinations thereof.

5 US 2010/0151296 describes an electrode catalyst for fuel cell use, more specifically a non-platinum catalyst (Mn, Pd, Ir, Au, Cu, Co, Ni, Fe, Ru, WC, W, Mo, Se) together with a Ce-catalyst, which can be metallic Ce or Ce-oxide. The electrode catalyst had improved catalytic efficiency because of the presence of Ce.

10

US 2011/0003235 describes an SOFC with a porous anode interlayer with nano-structure, that can consist of a mixture of nano-Ni and nano-Y stabilized zirconia (YSZ/Ni) or a mixture of nano-Ni and nano-Gd doped ceria (GDC/Ni).

15

JP2007-149431 concerns an SOFC with an interlayer consisting of a Ce-oxide coated electrolyte, where the coating has been applied by screen printing. After formation of a Ce-oxide sintering layer a Ni-containing metal precursor was
20 impregnated into the layer.

US 2002/0187389 discloses a high performance electro catalyst based on transition metal perovskites of Pr, Sm, Tb or Nd, which reacts with YSZ and forms a product that is active as fuel cell cathode in itself. An SOFC with a cathode
25 consisting solely of the reaction product between YSZ and PrCoO₃ displays a good performance, indicating that this phase in itself not only was a good conductor, but also a good catalyst for oxygen activation.

30

Finally, Applicant's own publication US 2009/0061284 mentions that i.a. niobium-doped strontium titanate can be

used as SOFC anode, said anode being impregnated with a metal (such as Ni) and doped cerium oxide. However, no mention is made of using noble metal catalysts or "multicatalysts" in order to obtain a possible synergistic effect.

5

The most commonly studied anodes for low temperature SOFCs are based on a Ni-electrocatalyst and an oxide ionic conductor, e.g. selected from Ni-CGO (gadolinium-doped ceria) cermet. The parameters influencing the performance of the Ni-CGO anodes are grain size, porosity, Ni/CGO ratio and the CGO stoichiometry. Specific Ni-CGO anodes deposited by spray pyrolysis on YSZ electrolytes have shown a polarization resistance (R_p) of $7.2 \Omega\text{cm}^2$ at 600°C and $61.5 \Omega\text{cm}^2$ at 400°C in moisturized H_2 fuel (U.P. Muecke et al., *Electrochemical performance of nanocrystalline nickel/gadolinia-doped ceria thin film anodes for solid oxide fuel cells*, Solid State Ionics **178**(33-34), p. 1762-1768 (2008)). The electrochemical performance of the anode can be further enhanced by electrocatalyst precursor infiltration on the porous anodes using precursor infiltration techniques. A polarization resistance of $1.66 \Omega\text{cm}^2$ at 650°C in moisturized H_2 fuel can be obtained by infiltration of Pd in the Ni-CGO backbone (A. Babaei et al., *Electrocatalytic promotion of palladium nanoparticles for hydrogen oxidation on Ni-CGO anodes of SOFCs via spillover*, J. Electrochem. Soc. **156**(9) B 1022-1029 (2009)). Moreover, a perovskite such as Nb-doped SrTiO_3 (STN) infiltrated with Ni-ceria showed an improved electrochemical performance, compared to perovskite only, at intermediate temperatures, and further, Nb-doped SrTiO_3 possesses a stable backbone under anodic conditions to hold the infiltrated catalyst with adequate electronic conductivity at low temperatures (P. Blennow et al., Defect and

30

electrical transport properties of Nb-doped SrTiO₃, Solid State Ionics **179**(35-36), p. 2047-2058 (2008)).

Thus, the recent developments within high performance SOFC
5 anodes have been focused on utilizing the electronically
conductive perovskite oxides, such as niobium-doped stron-
tium titanate (STN). While STN is stable under anode test-
ing conditions and also compatible with the electrolyte, it
lacks electrochemical catalytic activity for the hydrogen
10 oxidation, and moreover the ionic conductivity is insuffi-
cient to extend to the possible sites of oxidation.

STN deposited on the electrolyte has a skeletal porous
structure (termed "backbone" in the following), which is
15 capable of holding the electrocatalyst. One of the recent
trends within the development of anodes has been to incor-
porate a nanostructured electrocatalyst in the backbone by
catalyst infiltration of the respective salts, such as
nickel nitrate or nickel chloride. The electrocatalyst can
20 be a metal, a ceramic material such as gadolinium-doped ce-
rium oxide (CGO) or a mixture of both. In addition to cata-
lytic activity CGO provides oxide ion conductivity in the
STN backbone.

25 At present, STN is the preferred backbone material accord-
ing to the invention, but other materials may be useful as
well. Among these other materials, especially FeCr-3YSZ
should be mentioned. Anodes with very high performance may
thus be produced by infiltration of a multicycatalyst into a
30 backbone consisting of FeCr-3YSZ.

The present invention is based on dual infiltration of precursors of a mixed electrocatalyst in the backbone, preferably an STN backbone, comprising a combination of noble metals (Pd, Ru and Pt) and Ni with CGO. The synergistic effect of the combined electrocatalyst provides for an improved electrochemical reaction in connection with hydrogen oxidation in the STN backbone. The interfacial resistance of the STN backbone incorporated with the mixed catalyst is low compared to CGO, Ni-CGO, Pd-CGO and Ru-CGO as electrocatalyst.

More specifically the present invention relates to a high performance anode (fuel electrode) for use in a solid oxide electrochemical cell, said anode being obtainable by a process comprising the steps of (a) providing a suitably doped, stabilized zirconium oxide electrolyte, such as YSZ, ScYSZ, with an anode side having a coating of electronically conductive perovskite oxides selected from the group consisting of niobium-doped strontium titanate, vanadium-doped strontium titanate, tantalum-doped strontium titanate and mixtures thereof, thereby obtaining a porous anode backbone, (b) sintering the coated electrolyte at a high temperature, such as 1200°C in a reducing atmosphere, for a sufficient period of time, (c) effecting a precursor infiltration of a mixed catalyst into the backbone, said catalyst comprising a combination of noble metals Pd or Pt or Pd or Ru and Ni with rare earth metals, such as Ce or Gd, said infiltration consisting of (1) infiltration of Pd, Ru and CGO containing chloride precursors and (2) infiltration of Ni and CGO containing nitrate precursors, and (d) subjecting the resulting structure of step (c) to calcina-

tions, including calcinations in several steps with infiltration.

It is novel over the existing technology that the electrocatalytic activity of Ni-containing catalysts can be improved by adding a small quantity of a noble metal or mixtures of such metals. The very idea of utilizing the electrocatalytic activity of noble metal catalysts alone or in combination with similar noble metal catalysts, with nickel, with a ceramic electrocatalyst (CGO) or combinations thereof in order to obtain a greater synergistic electrocatalytic activity in a perovskite oxide STN backbone is also novel. The invention in particular finds use for low temperature SOFC anodes, but it is also useful in high temperature operating SOFCs and SOECs (600 to 850°C).

The infiltration of Pd and Ru mixtures or Pt or Pd or Ru and CGO containing chloride/nitrate precursors is preferably followed by a first calcination prior to infiltration of Ni and CGO containing nitrate precursors.

The present invention also relates to a specific anode structure, wherein the infiltrations in the above step (c) are obtained by a process comprising the steps of (1) first infiltrating the STN backbone with Pd-CGO or Pt-CGO or Ru-CGO binary electrocatalyst followed by Ni-CGO binary electrocatalysts to obtain a ternary electrocatalyst combination or (2) first infiltrating the STN backbone with Pd-Ru-CGO ternary electrocatalyst catalyst followed by Ni-CGO binary electrocatalysts to obtain a quaternary electrocatalyst combination.

In the anode structure according to the invention the electrolyte preferably is a tape with a thickness of about 120 μm . Furthermore it is preferred that the heat treatment step (d) is carried out for about 2 hours at a temperature of approximately 650°C in air and that the heat treatment step (f) is carried out for about 1 hour at a temperature of approximately 350°C in air.

The anode structure according to the invention is preferably used in a solid oxide fuel cell (SOFC), but it may also be used in a solid oxide electrolyser cell (SOEC).

In solid oxide cells the interfacial resistance of the electrodes is quite high at low temperatures. With the present invention it has become possible to reduce the interfacial resistance of the anode in the low temperature range significantly by utilizing the synergistic effect of noble metal catalysts in combination with Ni and CGO.

Conventionally the low temperature SOFC anodes are prepared as composite mixtures of catalyst (Ni) and oxide ion conductor (YSZ). The present invention has made it possible to replace such anodes with highly conductive perovskite-type oxides impregnated with noble metal catalysts in combination with Ni and CGO. Among the advantages over the prior art SOFC anodes the low interfacial resistance of the inventive SOFC anodes operating in the low temperature range has already been mentioned. Another substantial advantage is that the electrochemical activity of the Ni-CGO electrocatalyst is increased by addition of a minor quantity of noble metals as additive.

The invention will now be illustrated further by the following specific examples. Reference is also made to the accompanying Figures 1-7, where

5 Fig. 1 shows an Arrhenius plot illustrating the performance of the STN backbone without infiltration and with infiltrations such as Ni-CGO, Pd-CGO, Ru-CGO and Pt-CGO. A considerable enhancement in performance was achieved with infiltration compared to STN without infiltrations;

10

Fig. 2 shows an Arrhenius plot illustrating the improvement in performance of Ni-CGO with the addition of Pd and compared with only Pd-CGO electrocatalyst;

15 Fig. 3 shows an Arrhenius plot illustrating the improvement in performance of Ni-CGO with the addition of Pt and compared with only Pt-CGO electrocatalyst;

20 Fig. 4 shows an Arrhenius plot illustrating the synergetic performance of Ru-Pd-Ni-CGO electrocatalyst and compared with the performance of Ni-CGO and Ru-Pd-CGO. Note: the multicatalyst performance is shown in the STN backbone;

25 Fig. 5 shows an Arrhenius plot illustrating the performance of Ru-Pd-Ni-CGO electrocatalyst in a backbone (FeCr-3YSZ) different from STN. R_p is the total resistance (R_1+R_2), where R_1 is the electrode process resistance and R_2 indicates diffusion resistances;

30 Fig. 6 depicts the transmission electron microscopy (TEM) micrograph showing a well defined STN backbone with pores and the infiltrated multicatalyst covering the STN homoge-

neously (a) and the individual elemental mapping of Ce, Ni, Ru and Pd (b), and

Fig. 7 depicts scanning transmission electron microscopy (STEM) images with energy dispersive spectroscopy (EDS) mapping of Ru-Pd-Ni-CGO multicycatalyst (a), line scanning microanalysis (b) and STEM-EDS results of Ru-Pd-Ni-CGO electrocatalyst (c-d).

The examples describe the electrochemical characterization of porous symmetrical $\text{Sr}_{0.94}\text{Ti}_{0.9}\text{Nb}_{0.1}\text{O}_{3-\delta}$ (STN) cells infiltrated with Pt, Ru, Pd, Ni and CGO or combinations thereof at low working temperature.

The performance of the STN anodes infiltrated with Ni-CGO, Pd-CGO, Pt-CGO and Pd-Ru-CGO have been compared with Ni containing catalyst Pd-Ni-CGO, Pt-Ni-CGO and Ru-Pd-Ni-CGO electrocatalyst, respectively. STN anodes without any infiltrations were also compared with the infiltrated anodes. The improved performance of an infiltrated precursor possibly depends on the catalytic activity of the respective electrocatalyst, the synergistic effect of mixed catalysts and the resulting morphology of the electrocatalysts after the calcinations steps.

25

Example 1

STN powder preparation

This example illustrates the preparation of powdery STN. The STN perovskite oxide was prepared using a wet chemical route known *per se*. Stoichiometric amounts of strontium carbonate (SrCO_3), niobium oxalate (C_2NbO_4) and tita-

30

nium(IV)isopropoxide ($\text{Ti}[\text{OCH}(\text{CH}_3)_2]_4$) were used to obtain $\text{Sr}_{0.94}\text{Ti}_{0.9}\text{Nb}_{0.1}\text{O}_3$. The compounds $\text{Ti}[\text{OCH}(\text{CH}_3)_2]_4$ and C_2NbO_4 were dissolved separately in citric acid monohydrate ($\text{HOC}(\text{COOH})(\text{CH}_2\text{COOH})_2 \cdot \text{H}_2\text{O}$) and the precursors were mixed. Subsequently SrCO_3 powder was added slowly with hydrogen peroxide (H_2O_2) as accelerator for the decomposition of SrCO_3 . The mixtures were heated on a hot plate at 300°C for 5 hours. Then the resulting solids were heat treated at 1000°C for 3 hours in air and subsequently ground to a fine powder.

Example 2

Symmetric cell preparation for anode characterization

Porous STN anodes were deposited on scandia, yttria-stabilized zirconium oxide, 10 mole % Sc_2O_3 in 1 mole % Y_2O_3 stabilized ZrO_2 (ScYSZ) electrolyte tapes by screen printing. STN powders were formulated as a screen printing ink by addition of a surfactant (a polymeric dispersant), a plasticizer (dibutyl phthalate) and a binder (ethyl cellulose) and mixed homogeneously in a mechanical shaker overnight.

Then the screen printed STN on ScYSZ tapes were sintered at 1200°C for 4 hours in a reducing atmosphere (9% H_2/N_2). The porous STN anodes were deposited on both sides of the ScYSZ electrolyte tapes with an area of $6 \times 6 \text{ cm}^2$. Each tape was cut into smaller pieces with an approximate area of 0.25 cm^2 for use in the electrochemical set-up.

A 0.75 M precursor solution of CGO ($\text{Ce}_{0.8}\text{Gd}_{0.2}\text{O}_{2-\delta}$) was prepared by dissolving cerium nitrate ($\text{Ce}(\text{NO}_3)_3 \cdot 6\text{H}_2\text{O}$) and gado-

linium nitrate ($\text{Gd}(\text{NO}_3)_3 \cdot 6\text{H}_2\text{O}$) in water along with polymeric surfactants. Precursor solutions yielding a composition of $\text{Ni}_{0.25}\text{CGO}_{0.75}$, $\text{Pd}_{0.1}\text{CGO}_{0.9}$, $\text{Ru}_{0.25}\text{CGO}_{0.75}$, $\text{Pt}_{0.25}\text{CGO}_{0.75}$, $\text{Pt}_{0.08}\text{Ru}_{0.07}\text{CGO}_{0.85}$, $\text{Pt}_{0.07}\text{Pd}_{0.08}\text{CGO}_{0.85}$, $\text{Ni}_{0.16}\text{Pt}_{0.09}\text{CGO}_{0.75}$, $\text{Pd}_{0.04}\text{Ru}_{0.16}\text{CGO}_{0.75}$, $\text{Ni}_{0.16}\text{Ru}_{0.09}\text{CGO}_{0.75}$ or $\text{Ni}_{0.16}\text{Pd}_{0.04}\text{CGO}_{0.75}$ were prepared by dissolving the metal nitrates/chlorides of the respective metal(s) in CGO precursor. The subscripts mentioned in the above compositions represent the weight percentages of metal(s) and CGO. For Ni, Pt and Pd metals, nickel nitrate ($\text{Ni}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$), tetraammine platinum(II)nitrate ($\text{H}_{12}\text{N}_6\text{O}_6\text{Pt}$) and palladium nitrate ($\text{Pd}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$), respectively, was used. In case of the Ru-containing infiltrates, ruthenium chloride ($\text{RuCl}_3 \cdot x\text{H}_2\text{O}$) and palladium chloride (PdCl_2) were used as precursors. The volume percentage of the catalyst mixtures in the STN backbone is indicated in the tables on the following page.

Backbone I: STN (reduced)

Inf.	Loading in STN (vol%)						Rp ($\Omega \cdot \text{cm}^2$) 600°C	Rp ($\Omega \cdot \text{cm}^2$) 500°C	Activ. energy (eV)
	Metal 1	Metal 2	CGO	Met.1 + CGO	Met.2 + CGO	total			
A	3.17	NA	9.50	12.66	NA	12.66	0.96	5.13	1.09
B	6.17	NA	18.50	24.66	NA	24.66	0.4	2.28	0.99
C	1.91	NA	5.72	7.63	NA	7.63	0.16	0.64	0.84
D	1.30	NA	10.56	11.86	NA	11.86	0.57	2.62	0.93
E	4.52	NA	13.57	18.09	NA	18.09	0.51	2.5	0.97
F	0.60	2.62	12.72	5.47	10.47	16.00	1.3	5.95	0.91
G	0.79	0.86	9.35	3.15	7.84	11.00	0.16	0.52	0.89
H	1.27	1.16	13.16	5.07	10.52	15.59	0.09	0.26	0.83

Ni-containing mixed catalysts

Inf.	Loading (vol%)						Rp ($\Omega \cdot \text{cm}^2$) 600°C	Rp ($\Omega \cdot \text{cm}^2$) 500°C	Activ. energy (eV)
	Metal 1	Metal 2	CGO	Met.1 + CGO	Met.2 + CGO	total			
J	1.14	2.16	9.90	4.56	8.64	13.20	0.1	0.3	0.85
K	0.62	2.15	11.49	5.67	8.59	14.26	0.31	1.62	0.98
L	1.28	2.27	10.65	5.12	9.08	14.20	0.82	4.35	0.93
M	3.90	2.06	17.86	15.59	8.22	23.81	0.28	1.02	0.96

Backbone II: FeCr-3YSZ

Inf.	Loading (vol%)						Rp ($\Omega \cdot \text{cm}^2$) 600°C	Rp ($\Omega \cdot \text{cm}^2$) 500°C	Activ. energy (eV)
	Metal 1	Metal 2	CGO	Met.1 + CGO	Met.2 + CGO	total			
N	4.02	3.57	22.78	16.08	14.29	30.37	0.26	0.35	0.40

5

In the above table, the infiltrates (Inf.) are as follows:

- A: $\text{Ni}_{0.25}\text{CGO}_{0.75}$ [1]
 B: $\text{Ni}_{0.25}\text{CGO}_{0.75}$ [2]
 10 C: $\text{Pt}_{0.25}\text{CGO}_{0.75}$
 D: $\text{Pd}_{0.1}\text{CGO}_{0.9}$
 E: $\text{Ru}_{0.25}\text{CGO}_{0.75}$
 F: $\text{Pd}_{0.04}\text{Ru}_{0.16}\text{CGO}_{0.75}$
 G: $\text{Pt}_{0.07}\text{Pd}_{0.08}\text{CGO}_{0.85}$
 15 H: $\text{Pt}_{0.08}\text{Ru}_{0.07}\text{CGO}_{0.85}$

 J: $\text{Ni}_{0.16}\text{Pt}_{0.09}\text{CGO}_{0.75}$
 K: $\text{Ni}_{0.16}\text{Pd}_{0.04}\text{CGO}_{0.75}$
 L: $\text{Ni}_{0.16}\text{Ru}_{0.09}\text{CGO}_{0.75}$
 20 M: $(\text{RuPd})_{0.16}\text{Ni}_{0.09}\text{CGO}_{0.75}$

 N: $(\text{RuPd})_{0.13}\text{Ni}_{0.12}\text{CGO}_{0.75}$

Note: The subscripts mentioned in A-N represent the weight percentages of metal(s) and CGO.

5 The table illustrates the weight percentage of metal (Ni) and ceramic (CGO) loading in the backbone. The column "total" indicates the total amount of catalyst including Ni-CGO. Also the performance, expressed in terms of activation energy at 500 and 600°C in H₂/3%H₂O, is indicated.

10

The infiltrated STN anodes were prepared by dropping the precursors into the porous STN symmetrical cells, and then the cells were placed in a vacuum chamber. A vacuum was applied to remove the air bubbles from the porous STN backbone and to facilitate the solution precursors to homogeneously coat the surface of the anode with the capillary forces. Ni-CGO, Pd-CGO, Pt-CGO and Ru-CGO were infiltrated 15 3 times to increase the loadings in the porous STN, and after each infiltration the cells were calcined at 350°C for 20 1 hour. Ru-Pd-Ni-CGO infiltrations were done by infiltrating once with the Ru-Pd-CGO mixed precursor followed by calcination at 650°C for 2 hours in order to remove the chloride residues. Afterwards the symmetrical cells were infiltrated 3 times with Ni-CGO by using the procedure mentioned above. A similar procedure was followed for Ni-Pt- 25 CGO, Ni-Pd-CGO and Ni-Ru-CGO electrocatalysts, wherein Pt-CGO, Pd-CGO and Ru-CGO was infiltrated first and followed by 3 times of Ni-CGO infiltrations. The change in weight after the calcinations was recorded after each infiltration. 30 tion.

Example 3*Anode characterization*

The symmetrical cells were electrically contacted using Pt-paste and a Pt-grid. The cells were heated to 650°C in 9% H₂/N₂, whereafter the gas composition was changed to dry H₂ and the temperature was kept at 650°C for 12 hours. The EIS data were recorded at open circuit conditions (OCV) by applying an amplitude of 50 mV (the output voltage of the Solartron frequency response analyzer varies from 5 to 50 mV depending on the temperature) in the frequency range of 1 MHz-1 mHz. The impedance was measured in the temperature range from 650 to 350°C in H₂ with 3% H₂O. The gas compositions were made by humidifying the H₂ in water at room temperature. The partial pressure of oxygen (pO₂) was measured using an oxygen sensor. The EMF values were -1.125, -1.131, -1.140 and -1.147 V and the corresponding pO₂ was 10⁻²⁶, 10⁻²⁷, 10⁻²⁹ and 10⁻³¹ at 650, 600, 550 and 500°C, respectively. The percentage of H₂ was calculated to be approximately 97% with 3% water vapour.

STN without infiltration has R_p values that are several orders of magnitude higher. Table 1 lists the activation energy of the anodes being examined. The activation energy of only STN as anode is 1.14 eV as shown. The activation energies of infiltrated anodes lowered slightly compared to STN backbone without infiltration.

Fig. 6 depicts the microstructure of STN anodes infiltrated with Ru-Pd-Ni-CGO. A well defined STN backbone with pores and the infiltrated electrocatalyst covering the STN homo-

geneously is shown in Fig. 6(a). The elements presented in the microstructure were mapped using TEM-EDS.

The individual elemental mapping of Ce, Ni, Ru and Pd is depicted in Fig. 6(b) corresponding to the microstructure in Fig. 6 (a). The quantity of Ni, Pd and Ru infiltrated in the structure is low and thus the x-ray signals detected were weak, however the major composition of the electrocatalyst is CGO. Ce being a heavier element shows clear x-ray mappings illustrating a uniform coating of STN backbone.

Shown in Fig. 7 are the STEM images with EDS mapping. The maximum operating temperature of the anodes was 650°C and the size of the Ni electrocatalyst determined by TEM was around 10-15 nm. Other elements (Ru, Pd and Ce) in the nanocomposites are less than 10 nm as depicted in Fig. 7(a). Line scanning microanalysis was done across the nanocomposite marked with an arrow as shown in Fig. 7(b) for a distance of 115 nm. Ni appears to have formed an alloy with Pd as illustrated in Fig. 7(c) and this could have enhanced the electrochemical activity compared to only Ni at low temperature. Fig. 7(d) shows concentrations of Ce and Gd in the microstructure, and Ru and Pd are in low concentration. It is seen from the analysis that the mixed nanocomposites of Ce and Ru cover the places that are less covered by Ni and Pd and because of this they are catalytically active throughout the anode area. Ni-Pd, Ru with CGO facilitates electrochemical oxidation of H₂. In addition, CGO nanoparticles help in promoting oxygen ions. Thus the three phase boundary is enhanced for more electrochemical active sites.

Claims:

1. A high performance anode (fuel electrode) for use in a solid oxide electrochemical cell, said anode being obtain-
5 able by a process comprising the steps of:
- (a) providing a suitably doped, stabilized zirconium oxide electrolyte, such as YSZ, ScYSZ, with an anode side having a coating of electronically conductive perovskite oxides selected from the group consisting of niobium-doped strontium titanate (STN), vanadium-doped STN, tantalum-doped STN and mixtures thereof, thereby obtaining a porous anode backbone,
10
 - (b) sintering the coated electrolyte at a high temperature, such as 1200°C in air or in a reducing atmosphere, for a sufficient period of time,
15
 - (c) effecting a precursor infiltration of a mixed catalyst into the backbone, said catalyst comprising a combination of noble metals Pd, Pt and/or Ru and Ni with rare earth metals, such as Ce or Gd, where the infiltration combinations are binary (Pt-CGO or Pd-CGO or Ru-CGO or Ni-CGO), ternary (Ni-Pt-CGO or Ni-Pd-CGO or Ni-Ru-CGO) or quaternary (Ni-Pd-Ru-CGO) electrocatalysts, and where the precursors for infiltration are in chloride or nitrate forms, and
20
25
 - (d) subjecting the resulting structure of step (c) to calcinations in air to form the nano-structured electrocatalyst, including calcinations in several steps with infiltration.
30

2. Anode structure according to claim 1, wherein the infiltrations in step (c) are obtained by a process comprising the steps of (1) first infiltrating the STN backbone with Pd-CGO or Pt-CGO or Ru-CGO binary electrocatalyst followed by Ni-CGO binary electrocatalysts to obtain a ternary electrocatalyst combination or (2) first infiltrating the STN backbone with Pd-Ru-CGO ternary electrocatalyst catalyst followed by Ni-CGO binary electrocatalysts to obtain a quaternary electrocatalyst combination.

3. Anode structure according to claim 1, wherein the electrolyte is a tape with a thickness of about 120 μm screen-printed with 20 μm STN backbone.

4. Anode structure according to claim 1, wherein the heat treatment step (d) is carried out at a temperature of about 650°C.


5. Anode structure according to claim 1, wherein the heat treatment step (f) is carried out at a temperature of about 350°C.

6. Anode structure according to claim 1, wherein a multi-catalyst is infiltrated in the FeCr-3YSZ backbone by adopting the steps (c)-(f).

7. Use of the anode structure according to any of the claims 1-6 in a solid oxide fuel cell (SOFC).

8. Use of the anode structure according to any of the claims 1-6 in a solid oxide electrolyser cell (SOEC), in which case it is a cathode.
- 5 9. Use of the anode structure according to any of the claims 1-6 in a high temperature (600 to 850°C) operating SOEC or SOFC.

Fig. 1

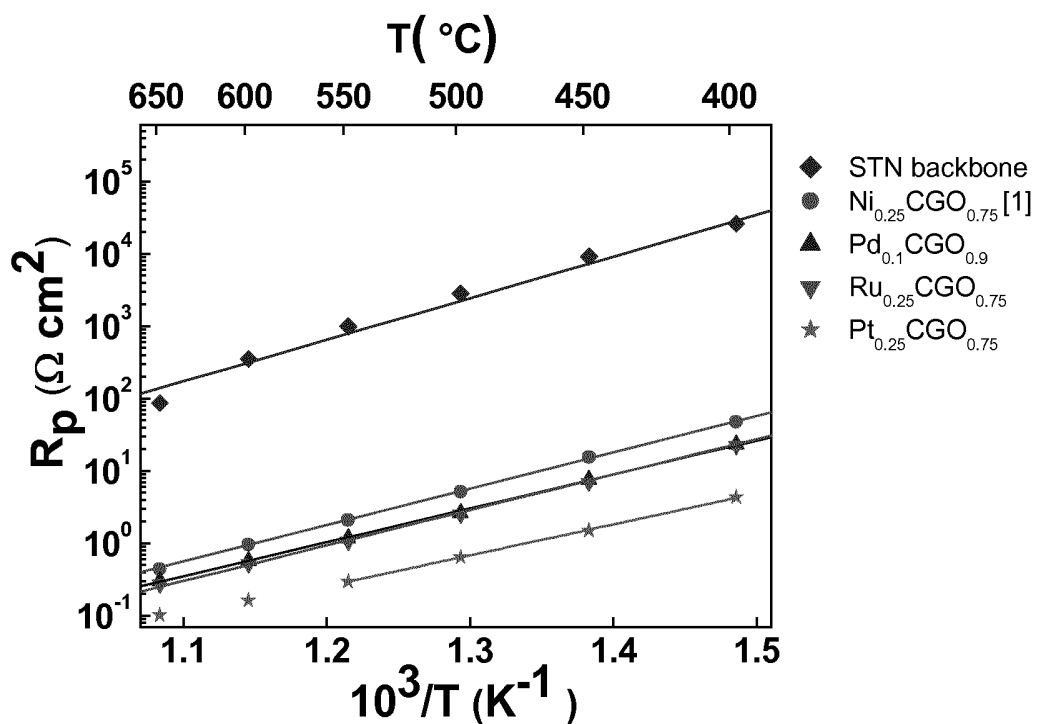

2/7

Fig. 2

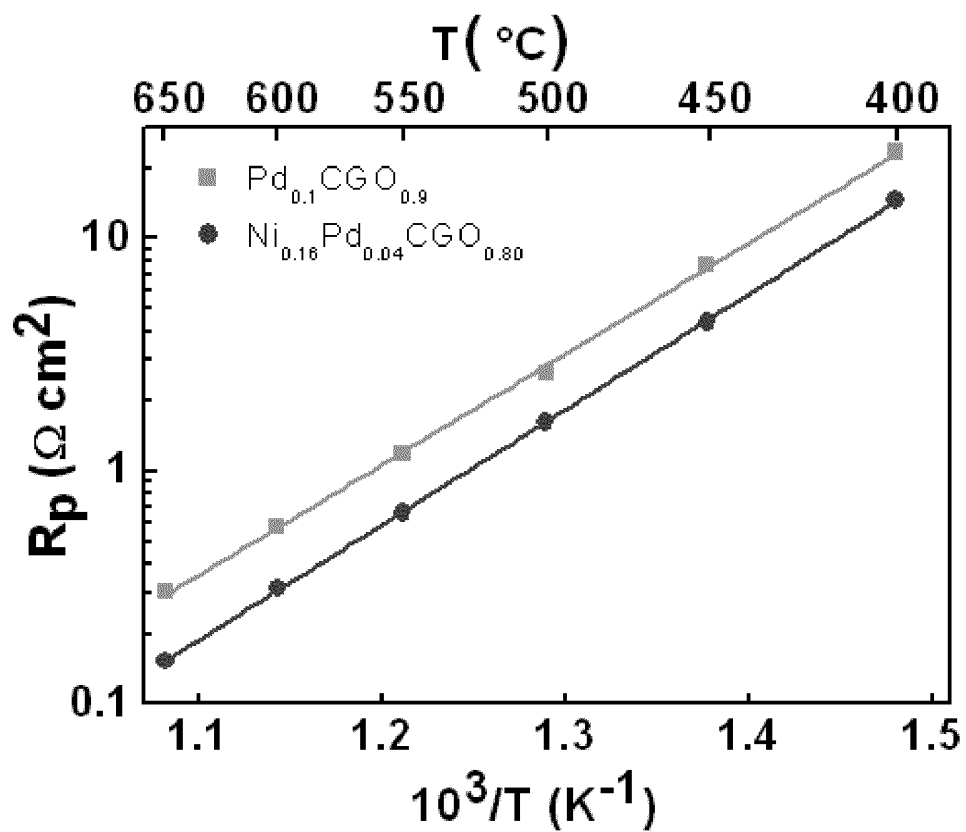


Fig. 3

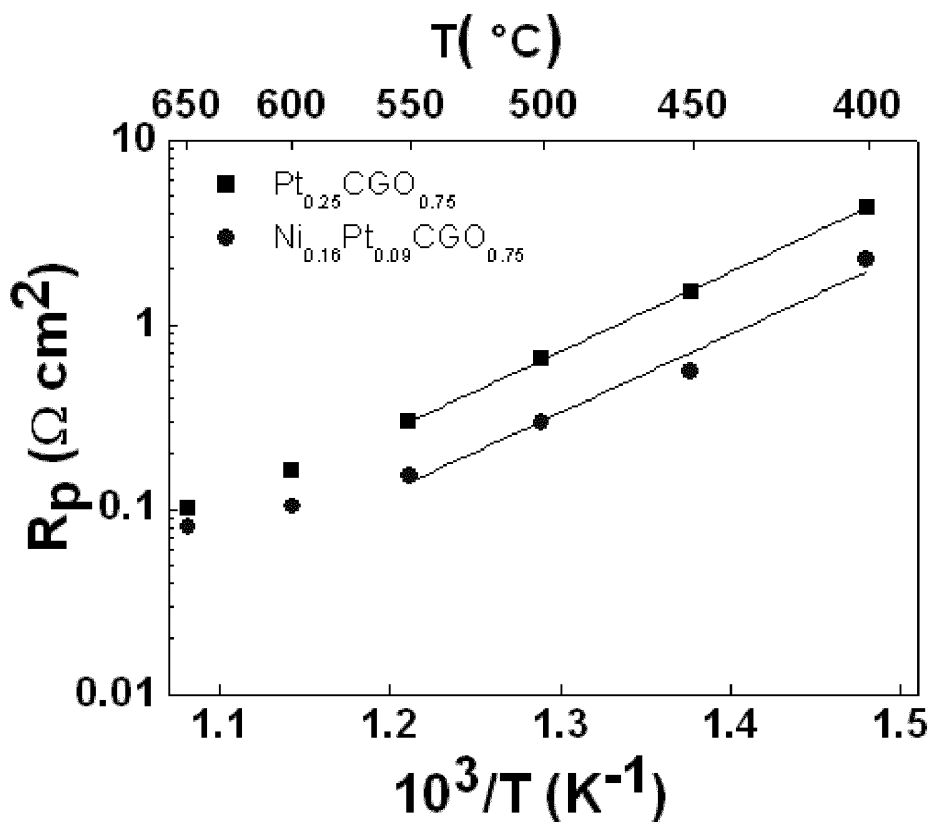


Fig. 4

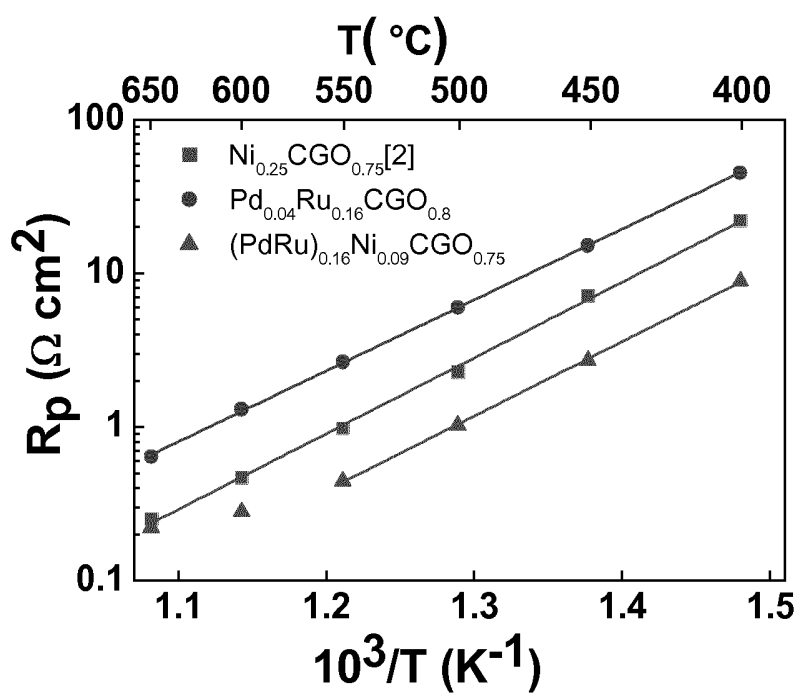


Fig. 5

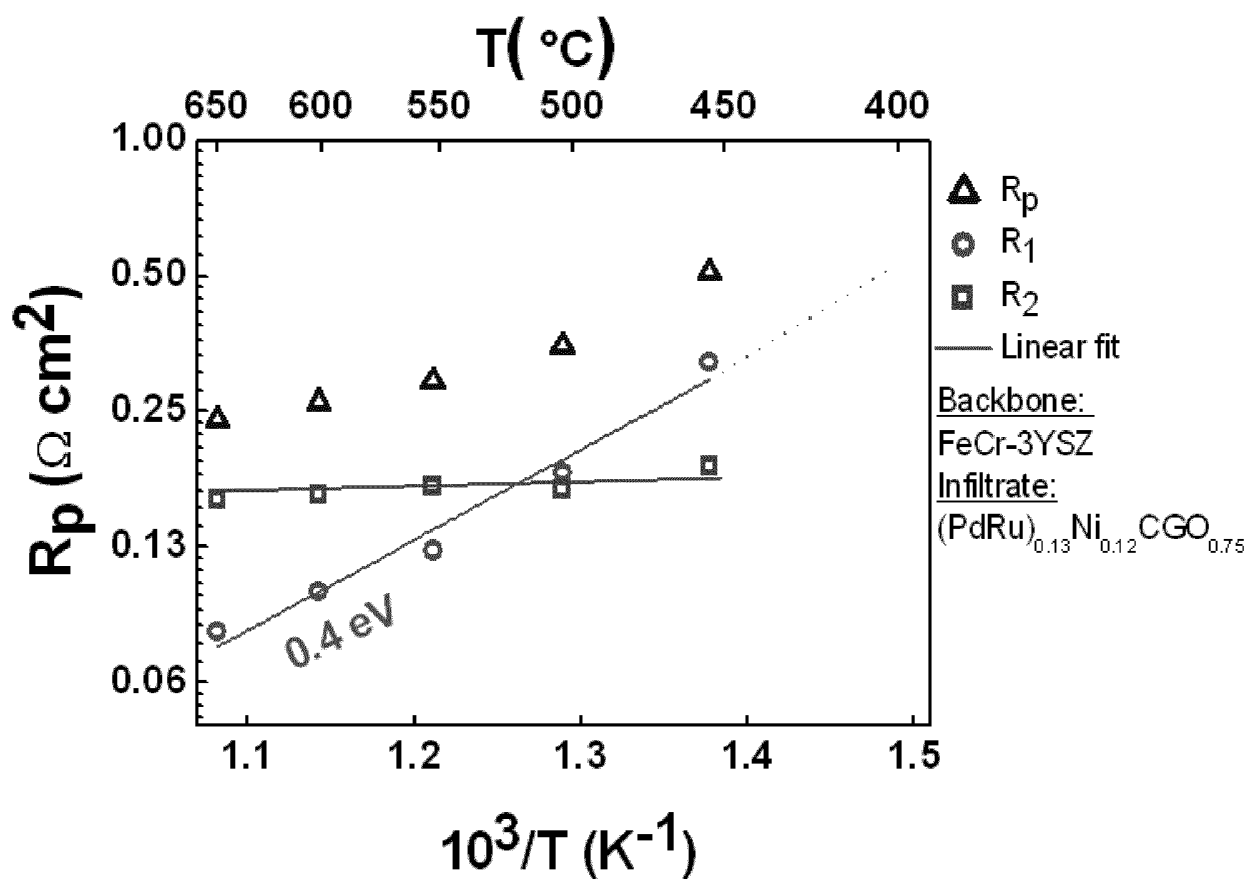


Fig. 6




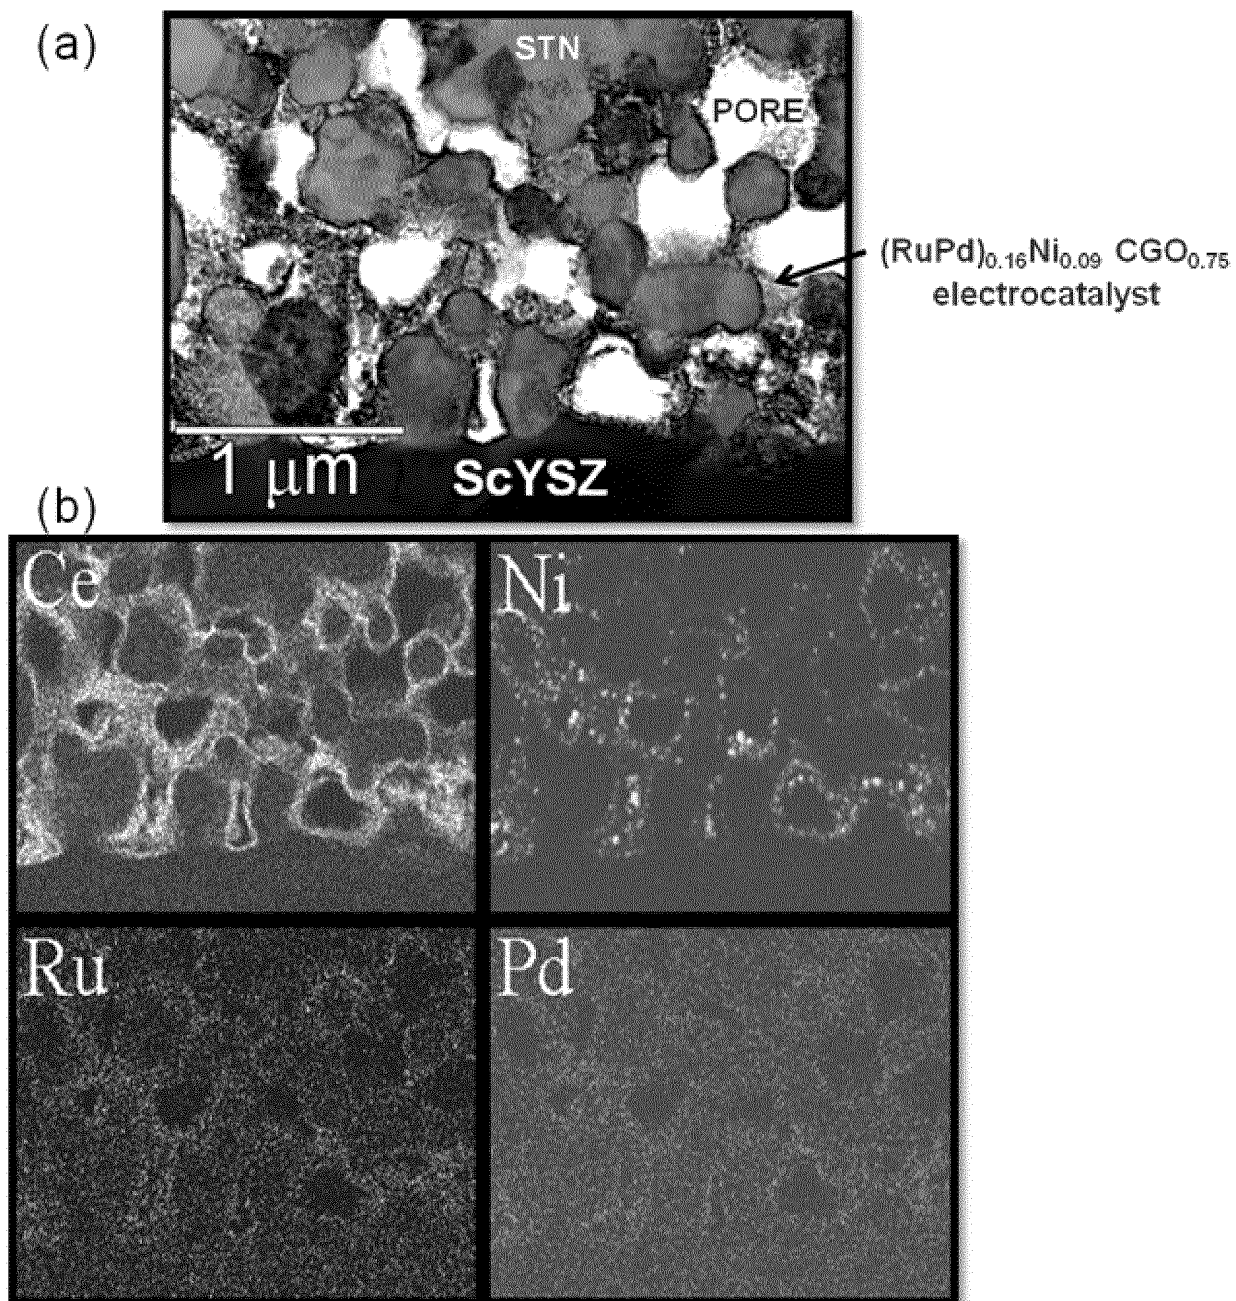


Fig. 7

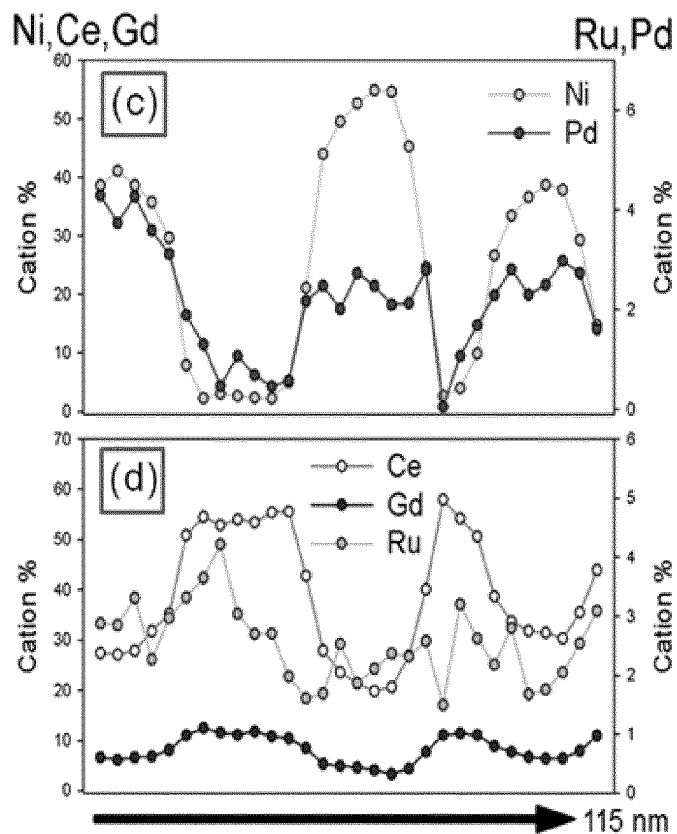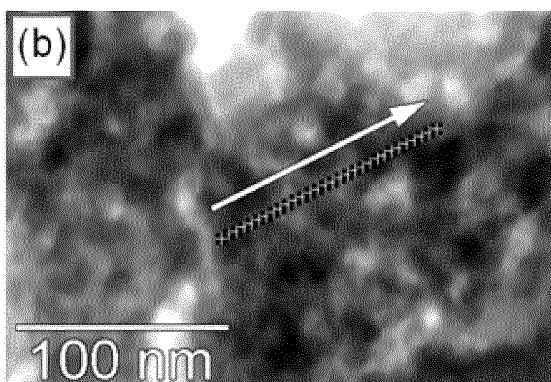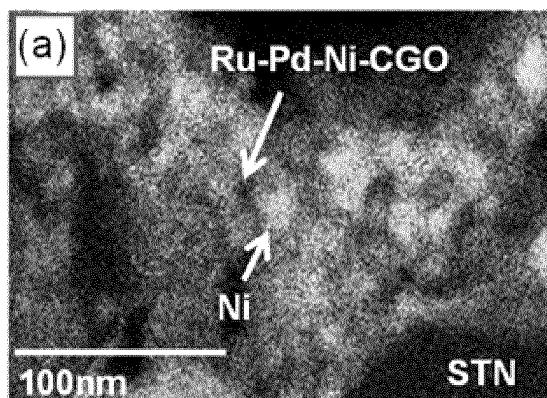

INTERNATIONAL SEARCH REPORT

International application No PCT/EP2012/070951

A. CLASSIFICATION OF SUBJECT MATTER INV. H01M4/86 H01M8/12 H01M4/88 H01M4/90 C04B35/00 ADD.				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) H01M C04B				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 2009/061284 A1 (BLENNOW PETER [SE] ET AL) 5 March 2009 (2009-03-05) cited in the application paragraph [0064] - paragraph [0091]; table 1 -----	1-9		
X	EP 2 031 675 A1 (UNIV DENMARK TECH DTU [DK]) 4 March 2009 (2009-03-04) paragraph [0055] - paragraph [0066] sentence 25, paragraph 24 -----	1-9		
A	WO 03/075383 A2 (US NANOCORP INC [US]) 12 September 2003 (2003-09-12) page 5, line 1 - page 11, line 18 ----- -/--	1-9		
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none;"><input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.</td> <td style="width: 50%; border: none;"><input checked="" type="checkbox"/> See patent family annex.</td> </tr> </table>			<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.	<input checked="" type="checkbox"/> See patent family annex.
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.	<input checked="" type="checkbox"/> See patent family annex.			
* Special categories of cited documents :				
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search	Date of mailing of the international search report			
15 February 2013	25/02/2013			
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Barenbrug-van Druten			

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/070951

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>SAN PING JIANG: "Nanoscale and nano-structured electrodes of solid oxide fuel cells by infiltration: Advances and challenges", INTERNATIONAL JOURNAL OF HYDROGEN ENERGY, ELSEVIER SCIENCE PUBLISHERS B.V., BARKING, GB, vol. 37, no. 1, 13 September 2011 (2011-09-13), pages 449-470, XP028348497, ISSN: 0360-3199, DOI: 10.1016/J.IJHYDENE.2011.09.067 [retrieved on 2011-09-24] page 450, paragraph 2 - page 454, paragraph 2; table 1 -----</p>	1-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/070951

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009061284	A1	05-03-2009	
		AU 2008207642 A1	19-03-2009
		CA 2639193 A1	28-02-2009
		CN 101383417 A	11-03-2009
		EP 2254180 A1	24-11-2010
		JP 2009110933 A	21-05-2009
		KR 20090023256 A	04-03-2009
		US 2009061284 A1	05-03-2009

EP 2031675	A1	04-03-2009	
		AT 519241 T	15-08-2011
		AU 2008207645 A1	19-03-2009
		CA 2639175 A1	28-02-2009
		CN 101383418 A	11-03-2009
		DK 2031675 T3	14-11-2011
		EP 2031675 A1	04-03-2009
		ES 2367885 T3	10-11-2011
		JP 2009110934 A	21-05-2009
		KR 20090023255 A	04-03-2009
		US 2009061272 A1	05-03-2009

WO 03075383	A2	12-09-2003	
		US 2004018409 A1	29-01-2004
		WO 03075383 A2	12-09-2003
