

Meeting abstract

I 106 Normal values for strain calculated from velocity encoded MRI

Einar Heiberg*, Helen Soneson, Erik Bergvall, Katarina Steding and Håkan Arheden

Address: Department of Clinical Physiology, Lund, Sweden

* Corresponding author

from 11th Annual SCMR Scientific Sessions
Los Angeles, CA, USA. 1–3 February 2008

Published: 22 October 2008

Journal of Cardiovascular Magnetic Resonance 2008, **10**(Suppl 1):A231 doi:10.1186/1532-429X-10-S1-A231This abstract is available from: <http://jcmr-online.com/content/10/S1/A231>

© 2008 Heiberg et al; licensee BioMed Central Ltd.

Background


Regional wall function is an important parameter in the diagnosis of heart disease. Qualitative assessment of wall function has limitations in terms of inter-observer variability and reproducibility. Strain is a relatively new way to obtain a quantitative measure of cardiac function and can

be calculated from phase velocity encoded magnetic resonance images.

Methods

Images were acquired from 25 (8 female, 17 men) healthy volunteers without history of cardiac events and with normal blood pressure. Mean age was 40 ± 14 (mean \pm SD)

Total strain [dimensionless]

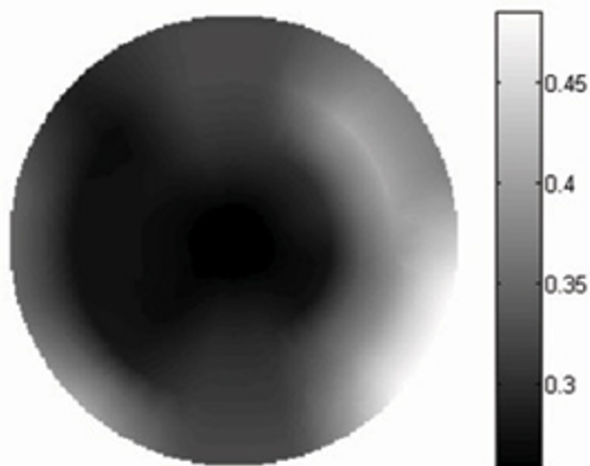

Standard deviation

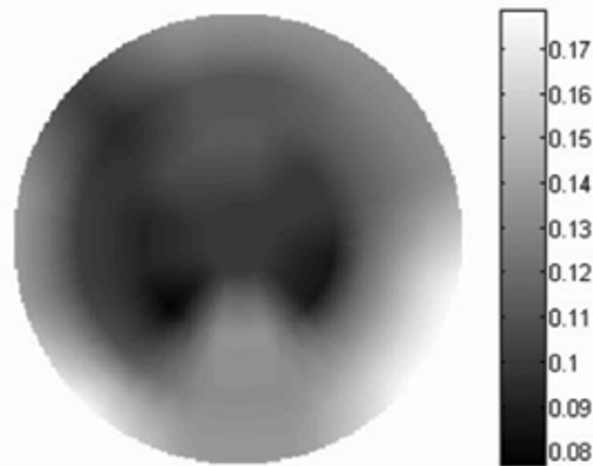


Figure 1

The left panel shows mean strain from 25 healthy volunteers visualized in a bulls eye plot. The right image panel shows the variability expressed as standard deviations for the 25 healthy volunteers.

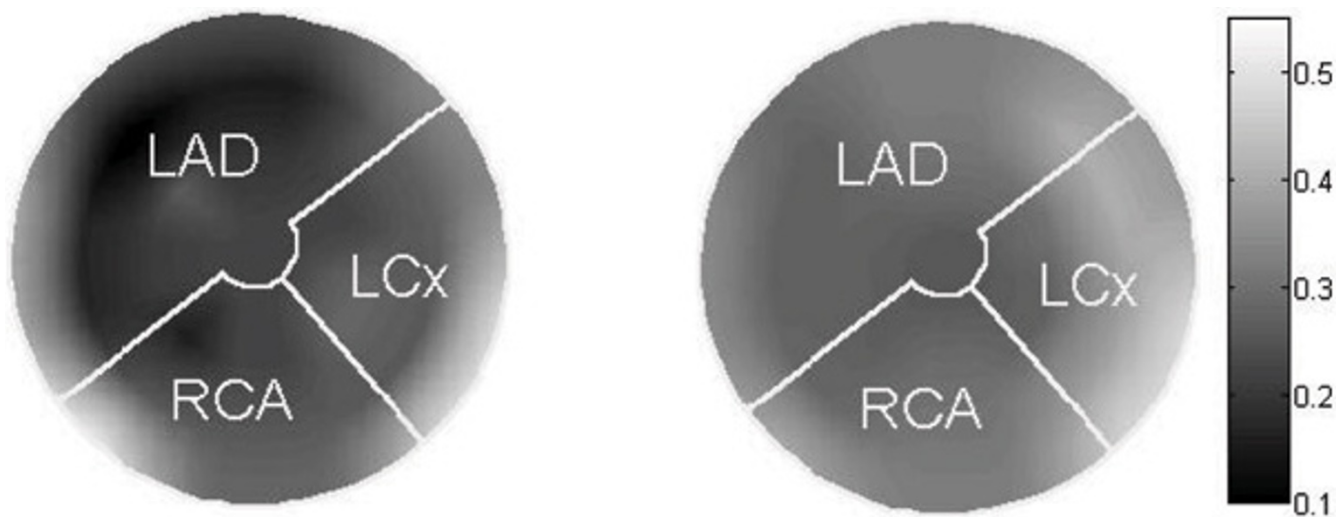


Figure 2
 Left image panel shows an example of a patient with an acute LAD myocardial infarction and the right image panel shows the normal values with the vessel territories overlaid.

years. Phase contrast encoded MR images were acquired in 2CH, 3CH and 4CH projections using a 1.5 T Philips scanner (TE = 4.9 ms, TR = 7.1 ms, flip angle = 15 degrees, and echo train length 5). The myocardium was manually delineated in end diastole. A tracking algorithm based on solving a non linear partial differential equation followed all particles within the myocardium over time. To ensure smoothness, motion was spatially restricted to and described by a third order polynomial. From the displacement, a linear strain tensor was calculated. Total calculation time was a around 3 seconds on an ordinary PC. Data from the three long axis slices were visualized in a bullseye plot (Figure 1). Normal values were calculated for total strain (measured as the Frobenius norm), radial and longitudinal strain. The algorithm was implemented in the software Segment <http://segment.heiberg.se>.

Results

The normal values permits quantitative analysis on how a patient's strain differs from strain in the normal healthy heart. Figure 1 shows normal value of strain (total strain) in the heart. The right image panel shows the variability (SD) across all 25 subjects. Figure 2 shows an example where a patient with an acute LAD myocardial infarction is contrasted to the normal values.

Discussion and conclusion

Normal values are necessary to correctly identify hypo-functioning myocardium and may aid in detection of multi vessel disease as well as to analyse regions with compensatory hyper contraction. In conclusion, strain derived from phase contrast MR images is a highly prom-

ising, fast and simple method to quantify regional wall function.

Publish with **BioMed Central** and every scientist can read your work free of charge

"BioMed Central will be the most significant development for disseminating the results of biomedical research in our lifetime."
 Sir Paul Nurse, Cancer Research UK

Your research papers will be:

- available free of charge to the entire biomedical community
- peer reviewed and published immediately upon acceptance
- cited in PubMed and archived on PubMed Central
- yours — you keep the copyright

Submit your manuscript here:
http://www.biomedcentral.com/info/publishing_adv.asp