



Hawker, Graeme (2018) Assessing the value of competing carriers for domestic heat: analysis paralysis or spoiled for choice? In: 2nd IEEE International Forum on Smart Grids for Smart Cities, 2018-11-26 - 2018-11-28. ,

This version is available at <https://strathprints.strath.ac.uk/66807/>

Strathprints is designed to allow users to access the research output of the University of Strathclyde. Unless otherwise explicitly stated on the manuscript, Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. Please check the manuscript for details of any other licences that may have been applied. You may not engage in further distribution of the material for any profitmaking activities or any commercial gain. You may freely distribute both the url (<https://strathprints.strath.ac.uk/>) and the content of this paper for research or private study, educational, or not-for-profit purposes without prior permission or charge.

Any correspondence concerning this service should be sent to the Strathprints administrator: strathprints@strath.ac.uk



IEEE International Forum
SMART GRIDS
FOR SMART CITIES

NOVEMBER 26-28, 2018 | GENK, BELGIUM

Assessing the value of competing carriers for domestic heat: analysis paralysis or spoiled for choice?

UKERC

Graeme Hawker, Research Associate
Institute for Energy and Environment
University of Strathclyde, Glasgow, UK




The UK Context

- Spatially heterogeneous population
 - 33% urban, 39% suburban, 28% rural by household
- Large volume of ageing housing stock
 - Limited progress in improving efficiency
- Ageing T&D network
 - Particularly constrained at local scales
- Plentiful renewable resources
 - Large volumes of curtailed energy
- High natural gas penetration
 - 79.8% of domestic heat demand in 2012






Rural

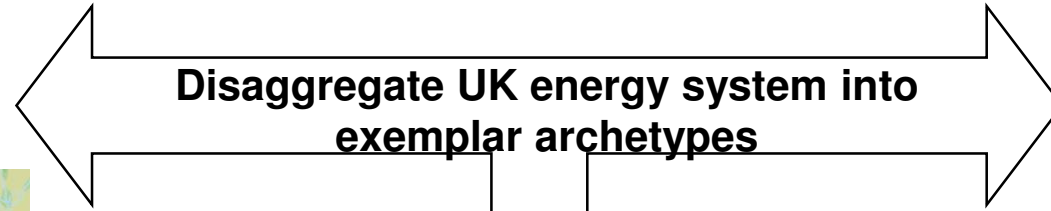

Urban

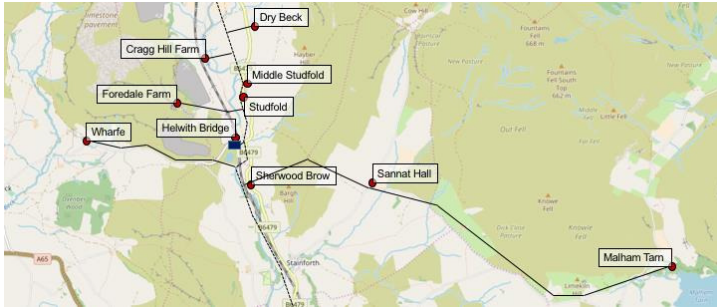

Highly spatially diverse system
 Off gas grid, high fuel costs, high emissions intensity and low building efficiency
 Strong potential to utilize curtailed wind energy

Suburban




Mixed semi-detached/terraced, 1930s stock, low energy efficiency

Electricity network:

- 500kVA transformer
- 4 LV feeders


Mixture of ageing and renewed low pressure gas network

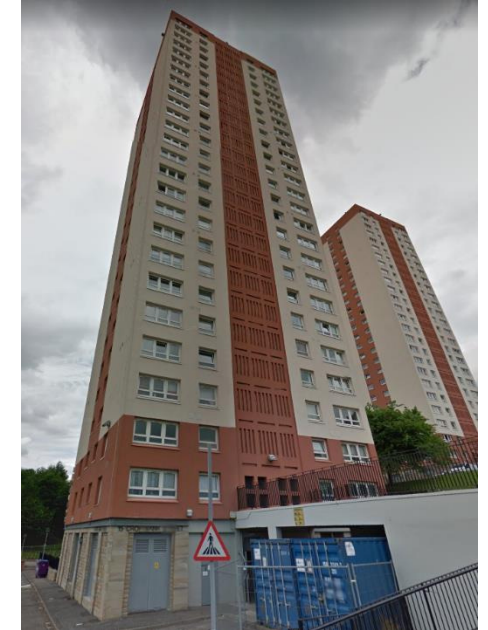


High density housing
 Gas supplied domestic boilers for space and hot water
 Opportunities for heat networks and high efficiency, but low availability of space



Demand and technology modelling

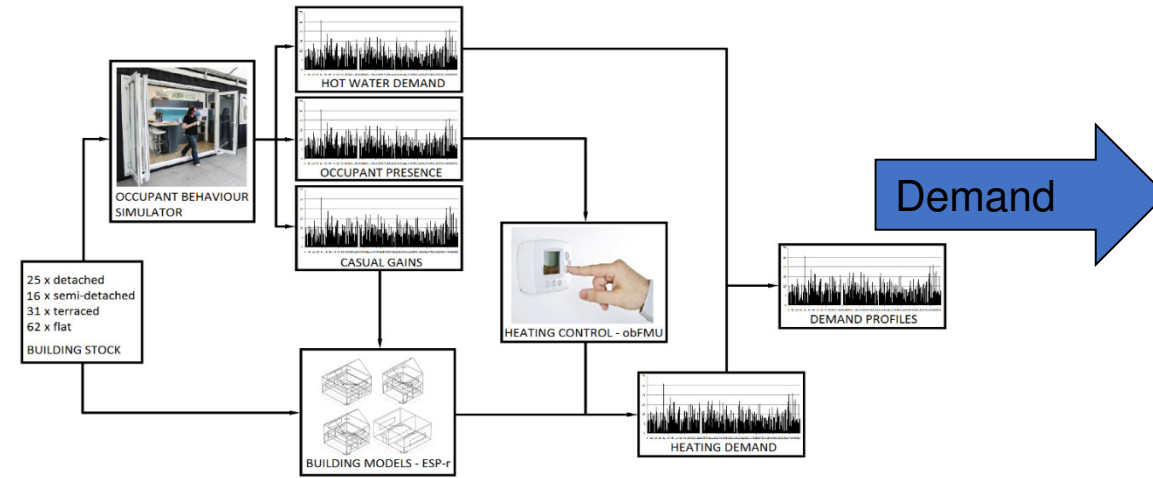


Demand

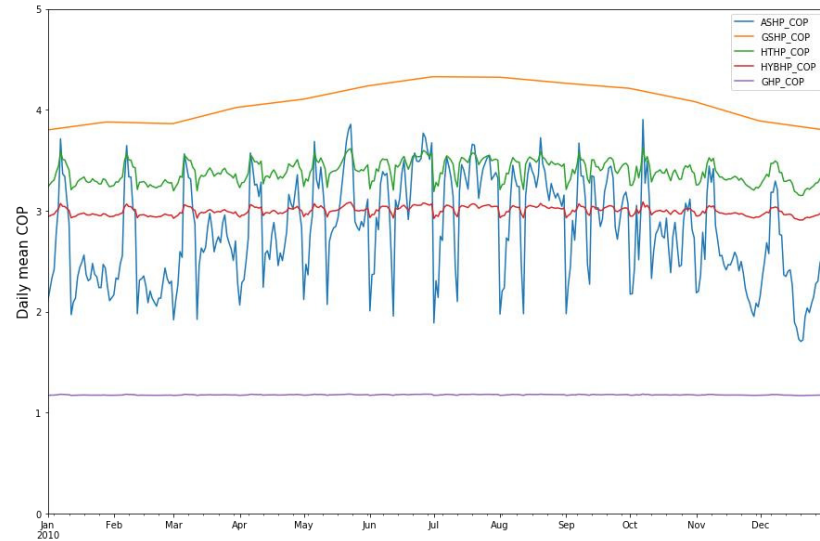

Supply




Heat load does not follow existing diversity patterns

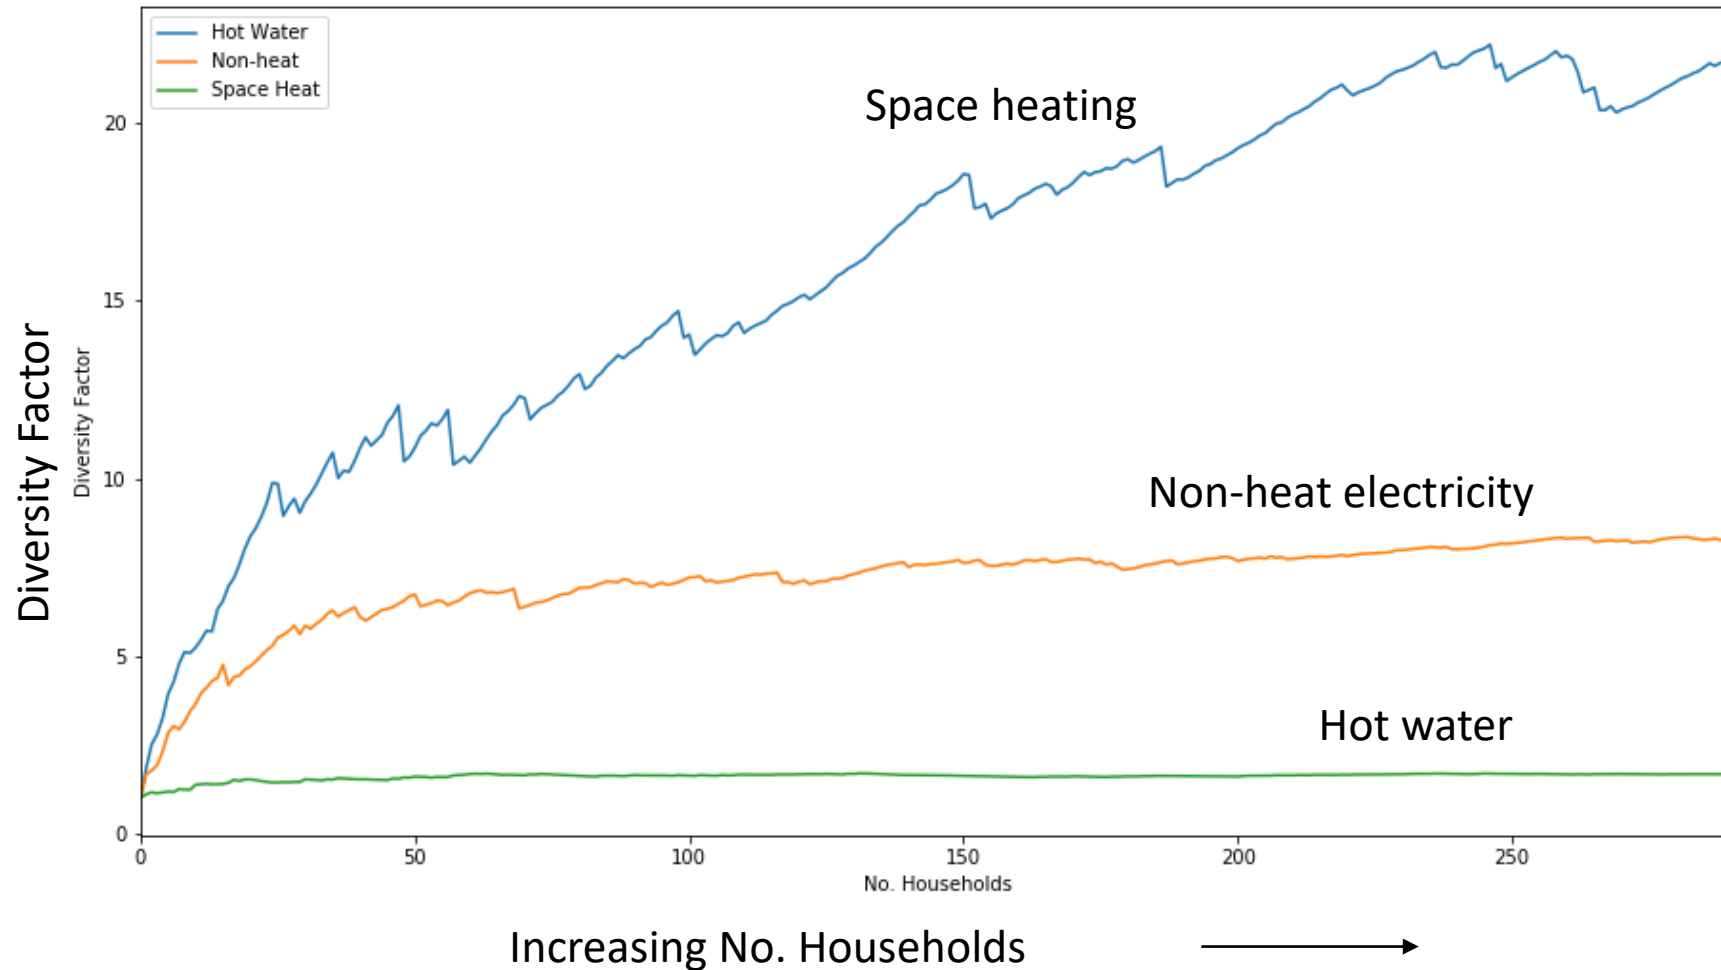

Dispatching thermal storage



Net space heat demand: building efficiency reduces total energy and provides temporal buffering

Heat pumps utilise decarbonised electricity (local and grid) to limit of network capacity (minus other electrical demand)

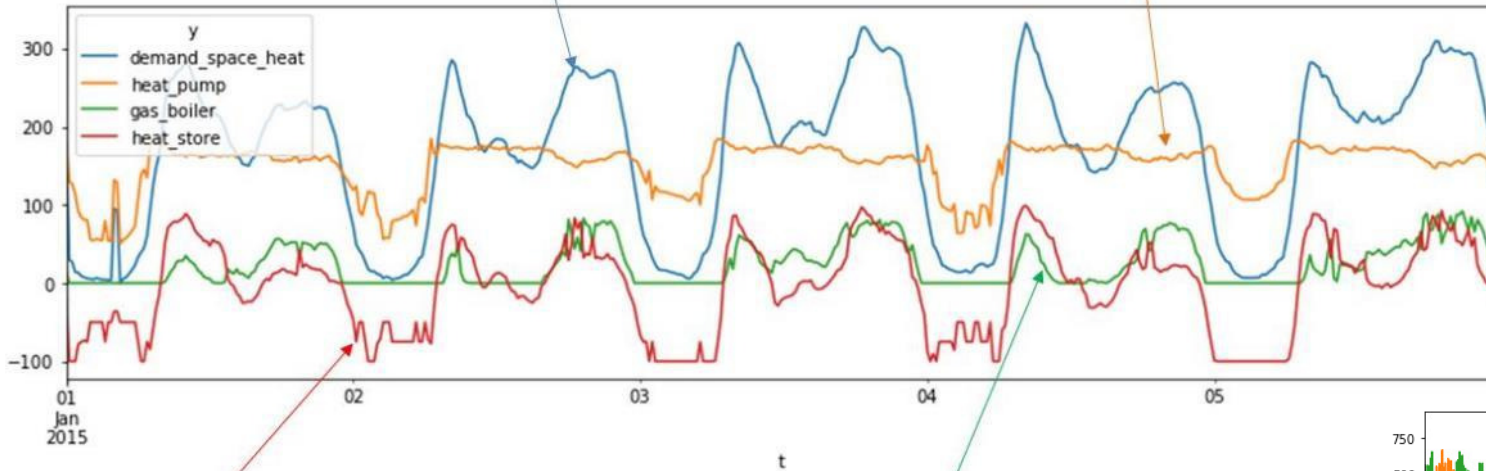

Heat storage increases utilization of heat pump capacity

Existing gas network and boilers provide remainder of space heating

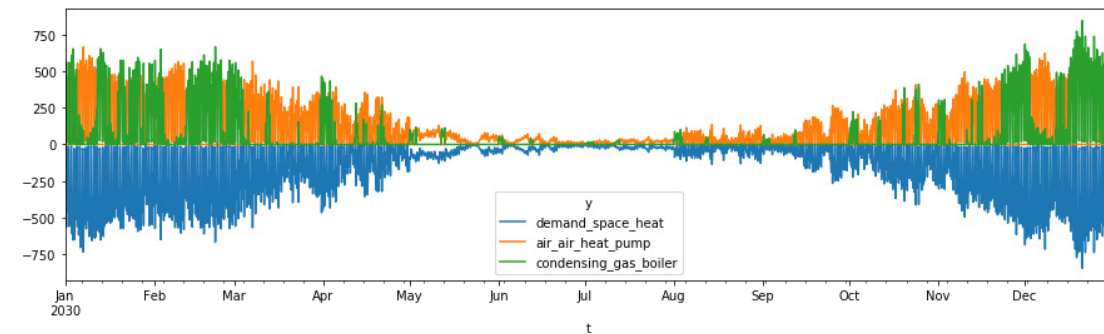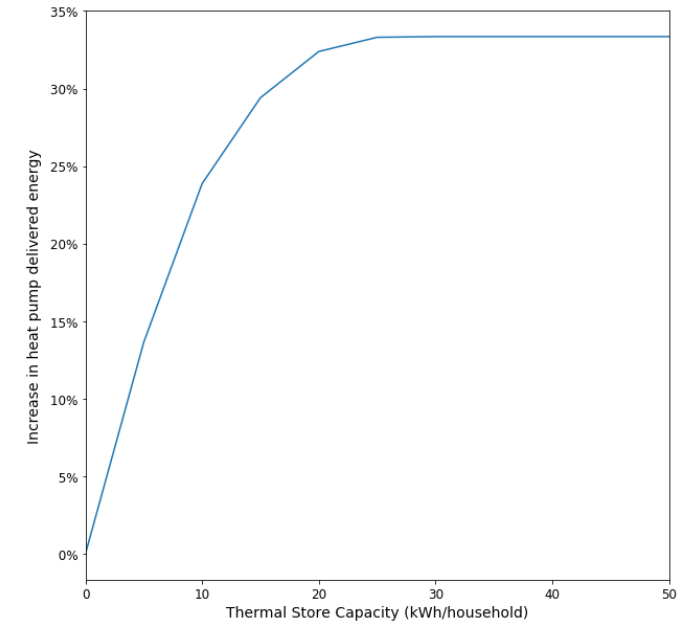


Where has all the hot water storage gone?

- UK domestic new-build properties are shrinking
- Combi boiler installations have 'freed up' additional space in many houses which is now being used as living space
- Many new-builds may not have sufficient supportive infrastructure (or space) to retrofit
- BEIS 'Future Framework For Heat in Buildings' call for evidence is considering futureproofing for storage in new build requirements




Suburban heat pump scenarios...

Total cost per unit energy delivered (CAPEX + OPEX)

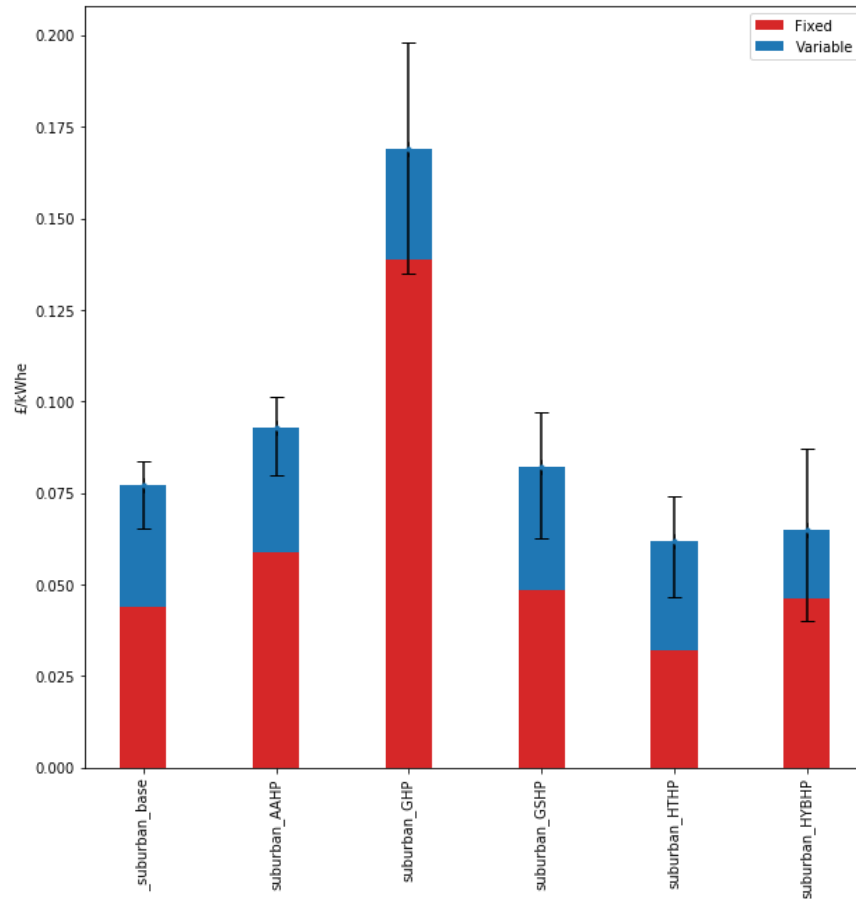



Average carbon emissions per unit energy

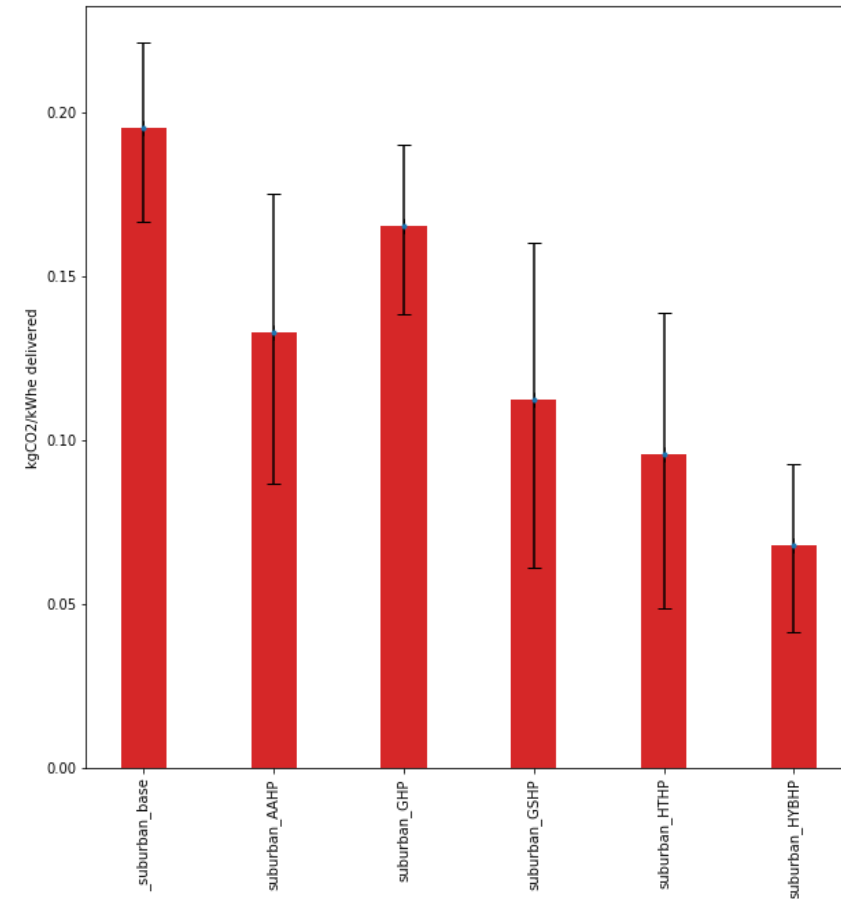




Uncertainties in costs and emissions

Total cost per unit energy delivered (CAPEX + OPEX)

Average carbon emissions per unit energy

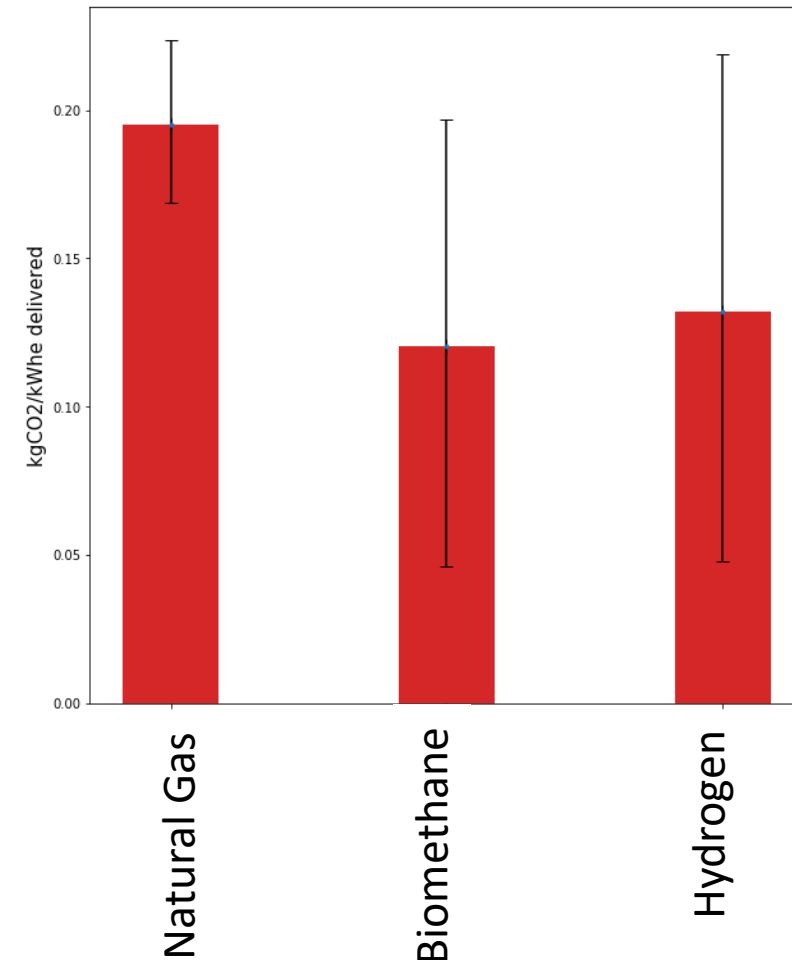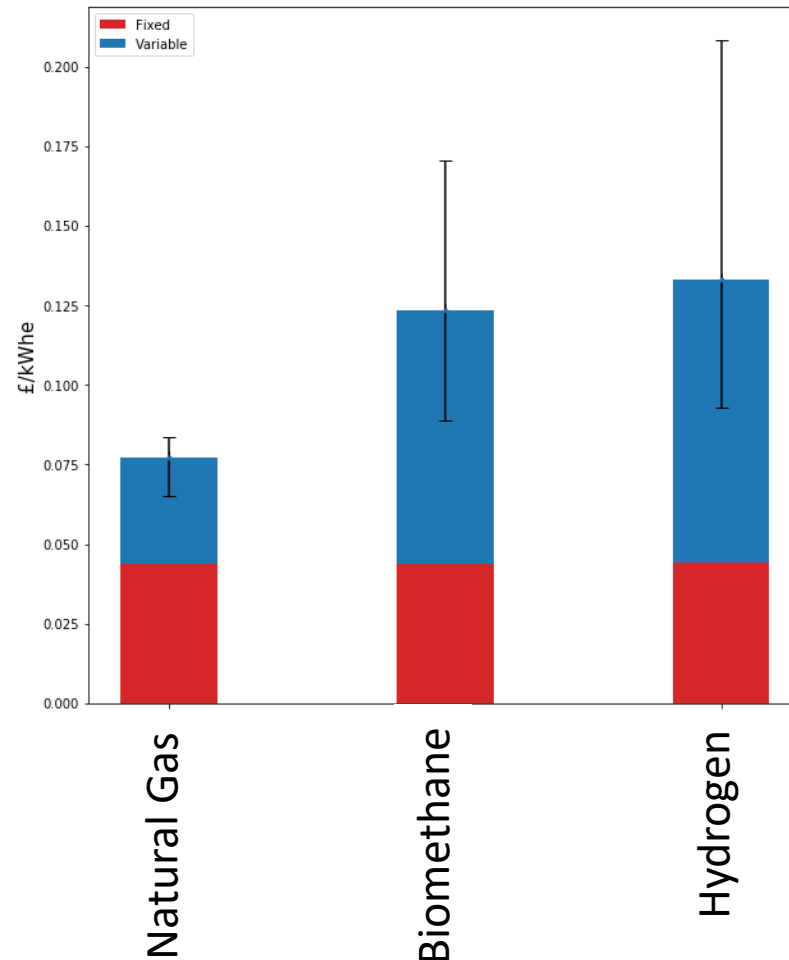




Opportunities from curtailed renewables

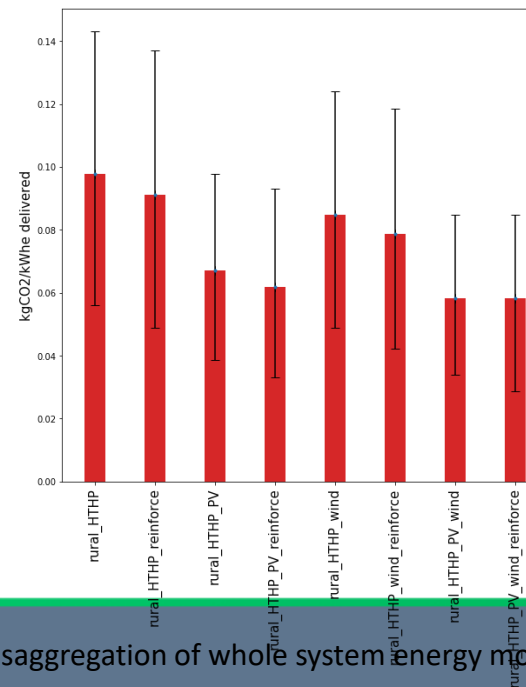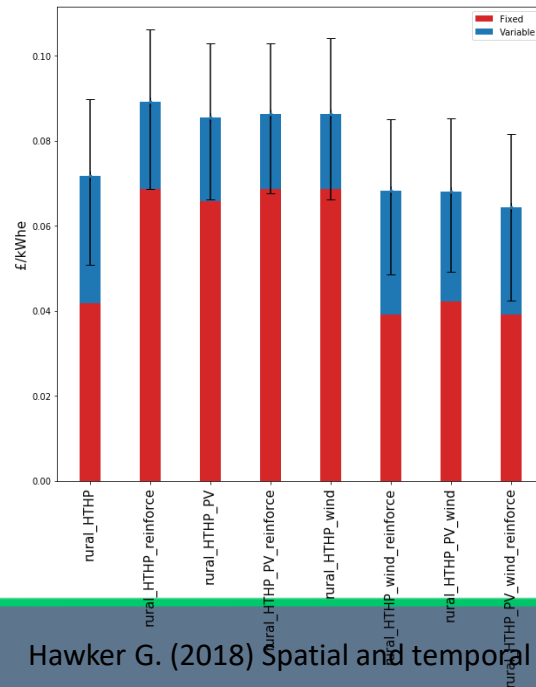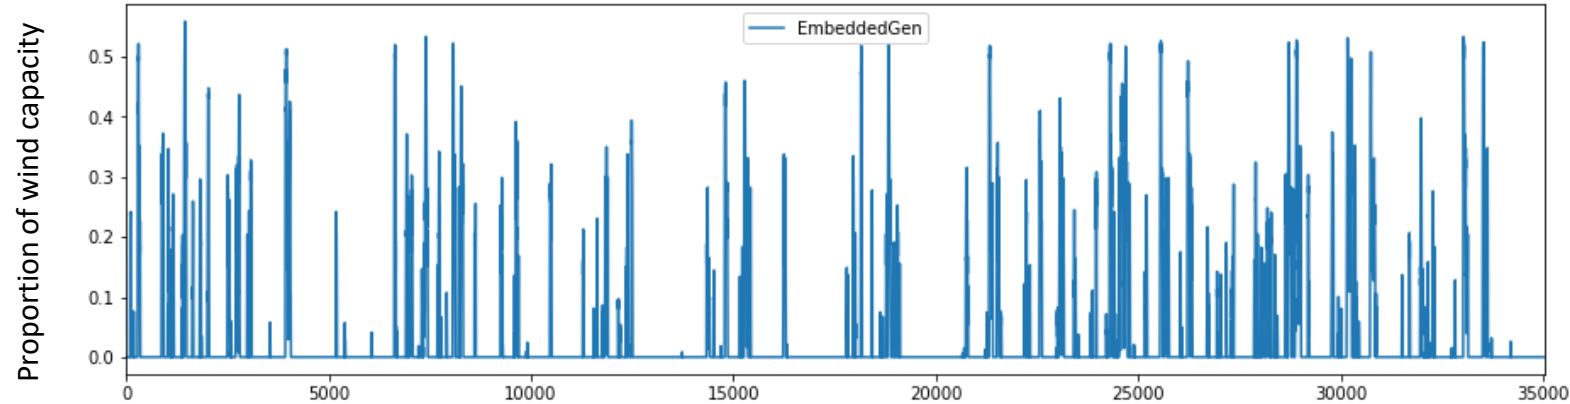

| End Use Technology | Scenario | | | Average Abatement Cost compared to Base Scenario (£/kgCO ₂) |
|----------------------------|----------|------|---------------|---|
| | PV | Wind | Reinforcement | |
| High Temperature Heat Pump | - | Yes | Yes | -0.203 |
| High Temperature Heat Pump | - | - | Yes | -0.195 |
| High Temperature Heat Pump | - | Yes | - | -0.190 |
| High Temperature Heat Pump | - | - | - | -0.183 |
| High Temperature Heat Pump | Yes | - | Yes | -0.091 |
| High Temperature Heat Pump | Yes | Yes | - | -0.086 |
| High Temperature Heat Pump | Yes | Yes | Yes | -0.086 |
| High Temperature Heat Pump | Yes | - | - | -0.077 |
| Ground-to-water Heat Pump | - | - | - | -0.052 |
| Air-air Heat Pump | - | - | - | 0.054 |

Abatement costs for high temperature heat pump scenarios compared to fuel oil condensing boilers, central assumptions

Targeting the right technologies at the right people

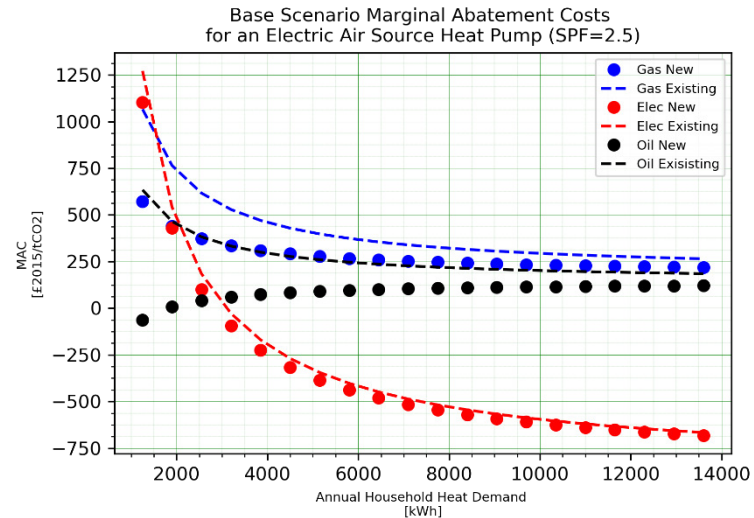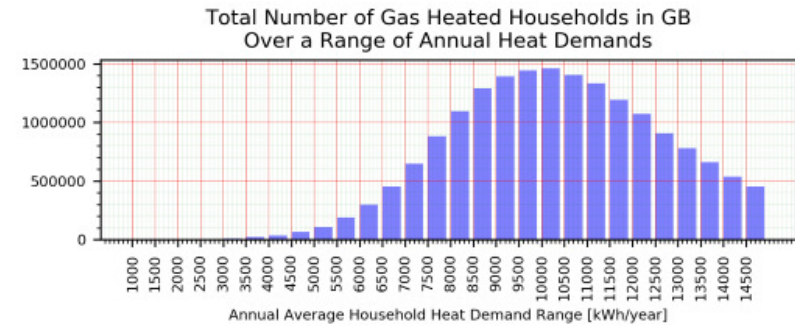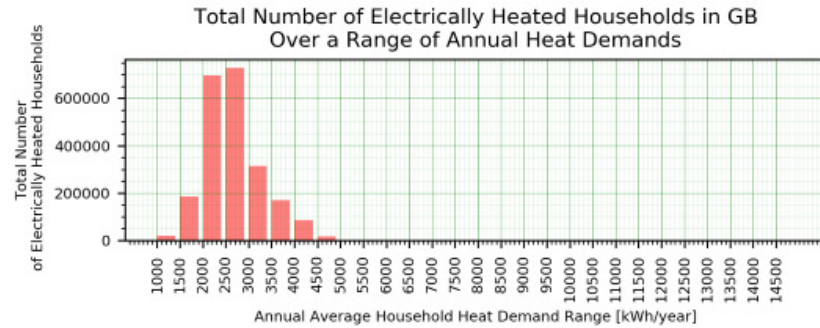


Sources: [1] England, Northern Ireland, Scotland and Wales 2011 Census: Office for National Statistics ; National Records of Scotland ; Northern Ireland Statistics and Research Agency (2017): 2011 Census aggregate data. UK Data Service (Edition: February 2017). DOI: <http://dx.doi.org/10.5257/census/aggregate-2011-2>; [2] UK GOV, Sub-national electricity and gas consumption data 2015

University of Strathclyde IPPI blog October 2018 - Reducing emissions from heating our homes – does one size fit all?

<https://www.strath.ac.uk/research/internationalpublicpolicyinstitute/ourblog/october2018/reducingemissionsfromheatingourhomesdoesonesizefitall/>


The Whole System View

Before spatial disaggregation

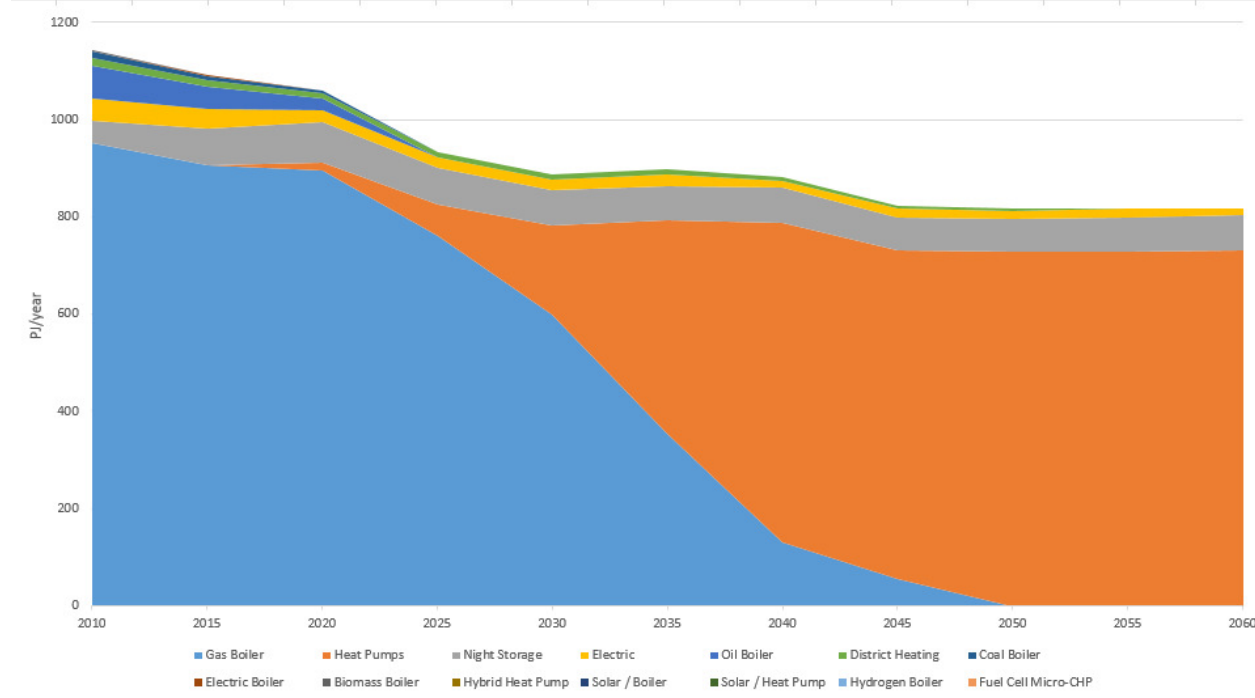

Heat pumps are the solution to all of our problems!

After spatial disaggregation

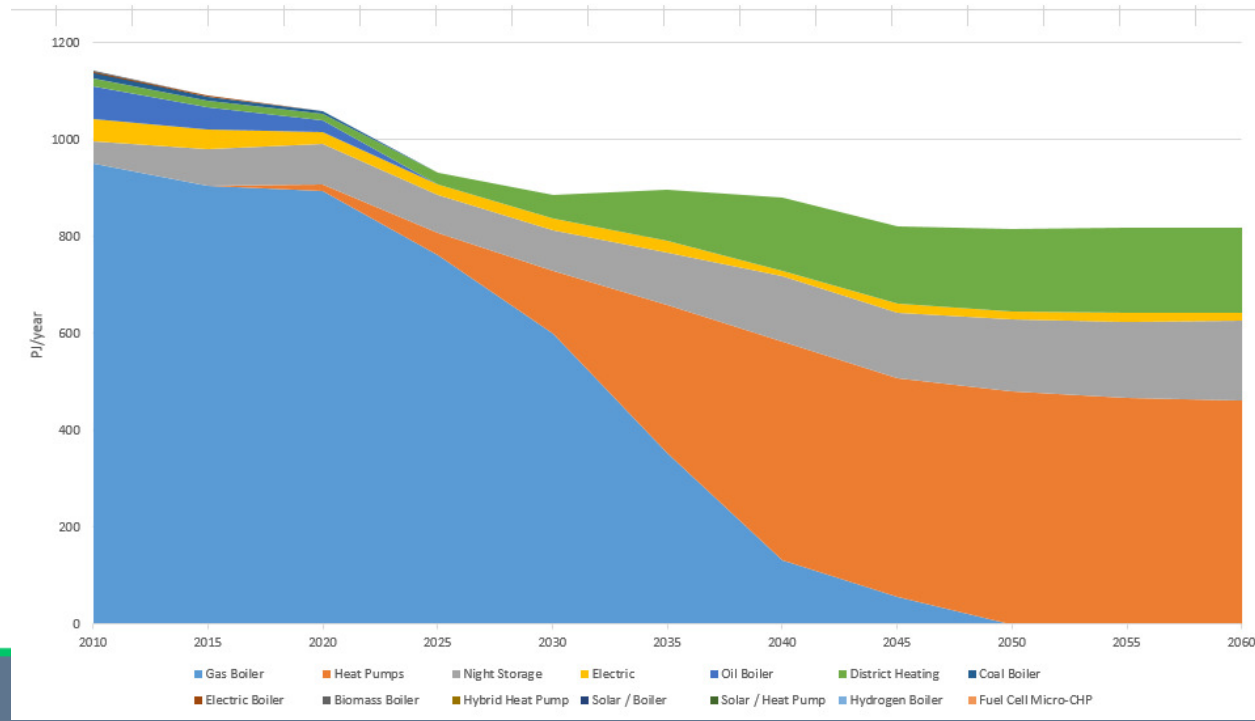

Economic heat network opportunities in densely populated urban areas

Increased value of heat storage in rural areas

Heat pumps remain as key technology displacing natural gas boilers over time

A False Dichotomy?

- The narrative is of total electrification vs decarbonisation of the gas grid
 - But the national energy system is a reflection of local designs
- An individualist approach to heat provision creates significant overcapacity
- There is a strong co-dependency between local renewable generation capacity and the value of decentralised heat storage / thermal buffering
- **The least-cost optimal solution is subject to high uncertainty due to the wide range of future technology cost estimates**