

NOTICE: this is the author's version of a work that was accepted for publication in *Systems and Control Letters*. Changes resulting from the publishing process, such as peer review, editing, corrections, structural formatting, and other quality control mechanisms may not be reflected in this document. Changes may have been made to this work since it was submitted for publication. A definitive version was subsequently published in *Systems and Control Letters*, Vol. 61, no.1 (2012). DOI: 10.1016/j.sysconle.2011.10.018

Coordination Control of Multiple Ellipsoidal Agents with Collision Avoidance and Limited Sensing Ranges

K.D. Do

Abstract—This paper contributes a design of cooperative controllers that force N mobile agents with an ellipsoidal shape and a limited sensing range to track desired trajectories and to avoid collision between them. A separation condition for ellipsoidal agents is first derived. Smooth step functions are then introduced. These functions and the separation condition between the ellipsoidal agents are embedded in novel pairwise collision avoidance functions to design coordination controllers. The proposed control design guarantees: 1) smooth coordination controllers despite the agents' limited sensing ranges, 2) no collision between any agents, 3) asymptotical stability of desired equilibrium set, and 4) instability of all other undesired critical sets of the closed loop system.

Index Terms—Coordination control, ellipsoidal agents, collision avoidance, potential functions.

I. INTRODUCTION

Coordination control of multiple agents finds various applications to search, rescue, coverage, surveillance, reconnaissance and cooperative transportation. Therefore, a number of approaches has been available for coordination control of networked agents. Here, three popular methods are briefly mentioned. The leader-follower method (e.g., [1], [2], [3], [4]) uses several agents as leaders and others as followers. This method is easy to understand and ensures coordination maintenance if the leaders are disturbed. However, the desired coordination shape cannot be maintained if followers are perturbed unless a feedback is implemented, [5]. The behavioral method (e.g., [6], [7]), where each agent locally reacts to actions of its neighbors, is suitable for decentralized control but is difficult in control design and stability analysis since group behavior cannot explicitly be defined. The virtual structure method (e.g., [8], [9], [10]) treats all agents as a single entity. This method is amenable to mathematical analysis but is difficult to deal with a time-varying structure.

Research works on coordination control usually utilize one or more of the above methods in a centralized or a decentralized manner. Centralized strategies (e.g., [5], [11]) use a single controller that generates collision free trajectories in the workspace. These strategies guarantee a complete solution but require high computational power and are not robust. Decentralized schemes (e.g., [10], [12], [13], [14], [15], [16], [17], [18]) require less computational effort but have difficulties in controlling critical points, especially when collision avoidance

between the agents is a must. In all the above cited references, the shape of all the agents is considered as a single point or a circular disk or a sphere.

In practice, many agents such as submarines and rockets have a non-spherical, especially long and narrow, shape. If these agents are fitted to spheres, there is a problem with the large conservative volume. To illustrate this problem, we look at an example of fitting a cylindrical agent with a radius of r_c and a length of $2l_c$ to an ellipsoid with semi-axes of a , b and c , and a sphere with a radius of r_s as shown in Fig.1. By shrinking the space along the direction of the major axis of the ellipsoid, we can find $a = \sqrt{2}l_c$, $b = c = \sqrt{2}r_c$, and $r_s = \sqrt{r_c^2 + l_c^2}$. Therefore, the conservative volume, V_{con} , defined as the difference between the volumes enclosed by the sphere and the ellipsoid, is given by $V_{con} = \frac{4\pi r_c^3}{3} \left[\left(\frac{l_c^2}{r_c^2} + 1 \right) \sqrt{\frac{l_c^2}{r_c^2} + 1} - 2\sqrt{2} \frac{l_c}{r_c} \right]$. This means that the conservative volume is always nonnegative and is proportional to *cubic* of the half length l_c over the radius r_c of an agent.

A spherical approximation of the shape of long and narrow agents can adversely affect performance of a coordination control algorithm. An example is the case where it is a must to force a group of long and narrow agents through a long and narrow passageway. In some cases, a spherical approximation




Fig. 1. Fitting a cylindrical agent to an ellipsoid and a sphere.

result in failure of a coordination control algorithm. As an illustration, we consider two cylindrical agents with lengths of $2l_1$ and $2l_2$, and radii of r_1 and r_2 , respectively. Assuming that r_1 and r_2 are much less than l_1 and l_2 , respectively, i.e., the two agents have a long and narrow shape. We now require these two agents to move cooperatively in a way that they do not collide with each other and the distance d_{12} between them is such that $(r_1 + r_2) + \epsilon_{12} < d_{12} < (l_1 + l_2) - \epsilon_{12}$ with ϵ_{12} being a feasible positive constant. Clearly, a spherical approximation of the agents' shape is not applicable in this case for a coordination control algorithm. On the other hand, an ellipsoidal approximation can be applicable. In addition, an ellipsoidal approximation of the agents' shape for collision avoidance between the agents in a coordination control algorithm covers a spherical approximation of the agents' shape by setting the

semi-axes of the ellipsoid equal, but not vice versa. The above discussion indicates that it is much more efficient to use an ellipsoidal approximation of the agents with a long and narrow shape for collision avoidance in designing coordination control algorithms.

Despite of the above advantages of an ellipsoidal approximation of the agents' shape, coordination control for ellipsoidal agents has not been addressed in the literature. This is partially due to difficulties in determining a separation condition between two ellipsoids. There have been two main methods to determine a separation condition between ellipsoids. The first method found in [19], [20] consists of determining the intersection of the ellipsoids with the plane containing the line joining their centers and rotating the plane. The distance of the closest approach [21] of the two ellipses formed by the intersection is a periodic function of the plane orientation, of which the maximum value corresponds to the closest distance between the two ellipsoids. The second method [22] found the condition for separation between two ellipsoids is based on the discriminant of their characteristic polynomial. Both methods are too complicated for an application in coordination control. If these methods are applied for collision avoidance, the condition, for which the minimum distance between two disks or the discriminant of their characteristic polynomial is positive, is extremely complicated to be embedded in a proper potential function for designing a coordination control algorithm.

The aforementioned observations motivate contributions of this paper on a design of coordination controllers for ellipsoidal agents with limited sensing ranges. The objective is to design controllers to force the agents to track desired trajectories and to guarantee no collision between them. It is noted that the objective of the present work is different from those on formation control of multiple agents in [23], [24], [25], [26], [27]. In these papers, a set of agents, a graph topology specifying what agents sense each other and what parameter they sense, and a graph topology specifying what parameter (e.g., distance) agents want to control with respect to the what other agents are first given. Using this information only, a distributed controller is then designed for each agent to achieve its own constraints. The formation objective is to force the entire group to achieve a desired shape.

Our proposed design provides smooth coordination controllers despite the agents' limited sensing ranges, no collision between any agents, asymptotic stability of desired equilibrium set, and instability of all other undesired critical sets of the closed loop system. The paper's contributions include: 1) a new condition for separation between two ellipsoids, see Section II-A; 2) new smooth step functions; 3) new pairwise collision avoidance functions for two ellipsoidal agents, see Section II-A; and 4) a derivation of coordination controllers based on the pairwise potential functions, see Section IV-C.

II. PRELIMINARIES

A. Separation condition between two ellipsoids

This section presents a condition for separation of two ellipsoids applicable for collision avoidance in the coordination

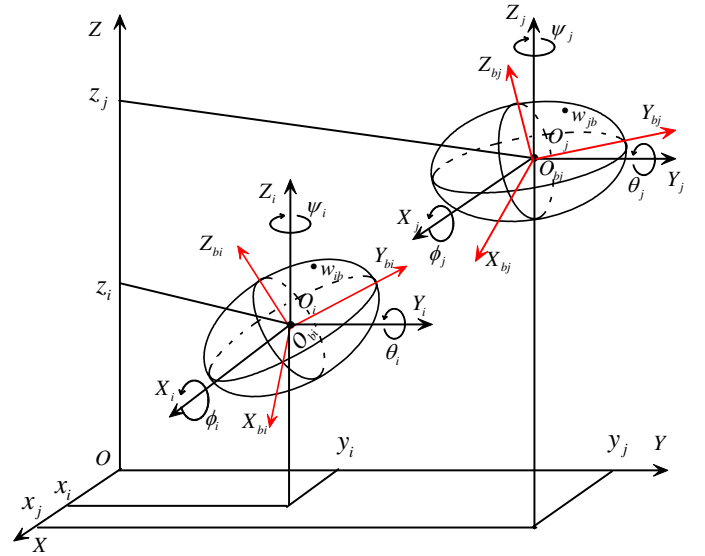


Fig. 2. Two ellipsoids and their coordinates.

control design later. As such, we consider two ellipsoids i and j shown in Fig. 2. In this figure, $OXYZ$ is the earth-fixed frame, $O_i X_i Y_i Z_i$ is the body-fixed frame attached to ellipsoid i , $\mathbf{q}_i = [x_i y_i z_i]^T$ denotes the position of the center O_i , and $\boldsymbol{\eta}_i = [\phi_i \theta_i \psi_i]^T$ denotes the orientation (roll, pitch and yaw angles) of the ellipsoid i . Moreover, (a_i, b_i, c_i) denote the semi-axes of the ellipsoid i . These notations are similar for the ellipsoid j .

Lemma 2.1: Consider two ellipsoids i and j , which have semi-axes of (a_i, b_i, c_i) and (a_j, b_j, c_j) , and orientation vectors $\boldsymbol{\eta}_i = [\phi_i \theta_i \psi_i]^T$ and $\boldsymbol{\eta}_j = [\phi_j \theta_j \psi_j]^T$, and are centered at $\mathbf{q}_i = [x_i y_i z_i]^T$ and $\mathbf{q}_j = [x_j y_j z_j]^T$, respectively, see Fig. 2. Define the *transformed distance* Δ_{ij} between the ellipsoids i and j as

$$\Delta_{ij} = \|\mathbf{Q}_{ij} \bar{\mathbf{q}}_{ij}\| - 1, \quad (1)$$

where

$$\begin{aligned} \mathbf{Q}_{ij} &= \mathbf{I}_{3 \times 3} - (\mathbf{I}_{3 \times 3} + \kappa_{ij} \mathbf{T}_j)^{-1}, \\ \bar{\mathbf{q}}_{ij} &= \mathbf{P}_i \mathbf{q}_{ij}, \end{aligned} \quad (2)$$

with $\mathbf{I}_{3 \times 3}$ being a 3×3 identity matrix. The vector \mathbf{q}_{ij} denotes the relative position vector between the ellipsoids i and j . The matrix \mathbf{P}_i represents the so-called *negative inverse* of the rotational matrix of the ellipsoid i by the angular vector $\boldsymbol{\eta}_i$ around its axes. The vector \mathbf{q}_{ij} and the matrix \mathbf{P}_i are given by

$$\begin{aligned} \mathbf{q}_{ij} &= \mathbf{q}_i - \mathbf{q}_j, \\ \mathbf{P}_i &= -\mathbf{A}_i^{-1} \mathbf{R}^{-1}(\boldsymbol{\eta}_i), \\ \mathbf{A}_i &= \text{diag}(a_i, b_i, c_i). \end{aligned} \quad (3)$$

The matrix $\mathbf{R}(\bullet)$ represents the three dimensional rotational matrix with respect to the vector \bullet . The matrix \mathbf{T}_j is the system matrix of the ellipsoid j when the ellipsoids i and j are transformed to the spherical-ellipsoidal coordinates detailed in

Appendix A. It is given by

$$\mathbf{T}_j = \begin{bmatrix} T_{j11} & T_{j12} & T_{j13} \\ T_{j12} & T_{j22} & T_{j23} \\ T_{j13} & T_{j23} & T_{j33} \end{bmatrix}, \quad (4)$$

where

$$\begin{aligned} T_{j11} &= \varepsilon_{11}^2 + \varepsilon_{21}^2 + \varepsilon_{31}^2, & T_{j12} &= \varepsilon_{11}\varepsilon_{12} + \varepsilon_{21}\varepsilon_{22} + \varepsilon_{31}\varepsilon_{32}, \\ T_{j22} &= \varepsilon_{12}^2 + \varepsilon_{22}^2 + \varepsilon_{32}^2, & T_{j13} &= \varepsilon_{11}\varepsilon_{13} + \varepsilon_{21}\varepsilon_{23} + \varepsilon_{31}\varepsilon_{33}, \\ T_{j33} &= \varepsilon_{13}^2 + \varepsilon_{23}^2 + \varepsilon_{33}^2, & T_{j23} &= \varepsilon_{12}\varepsilon_{13} + \varepsilon_{22}\varepsilon_{23} + \varepsilon_{32}\varepsilon_{33}, \end{aligned} \quad (5)$$

with ε_{mn} for $m = 1, 2, 3$ and $n = 1, 2, 3$ being the element (m, n) of the matrix $(\mathbf{A}_i^{-1} \mathbf{R}(\boldsymbol{\eta}_{ij}) \mathbf{A}_j)^{-1}$ with

$$\begin{aligned} \boldsymbol{\eta}_{ij} &= \boldsymbol{\eta}_i - \boldsymbol{\eta}_j, \\ \mathbf{A}_j &= \text{diag}(a_j, b_j, c_j). \end{aligned} \quad (6)$$

The variable κ_{ij} is the largest root (the right most root) of the *shortest distance* equation

$$\bar{\mathbf{q}}_{ij}^T (\mathbf{I}_{3 \times 3} + \kappa_{ij} \mathbf{T}_j)^{-T} \mathbf{T}_j (\mathbf{I}_{3 \times 3} + \kappa_{ij} \mathbf{T}_j)^{-1} \bar{\mathbf{q}}_{ij} - 1 = 0, \quad (7)$$

where $(\mathbf{I}_{3 \times 3} + \kappa_{ij} \mathbf{T}_j)^{-T}$ denotes the transpose of $(\mathbf{I}_{3 \times 3} + \kappa_{ij} \mathbf{T}_j)^{-1}$.

The two ellipsoids are externally separated, i.e., the ellipsoids are outside of each other and do not contact with each other like Fig. 2, if

$$\Delta_{ij} > 0. \quad (8)$$

Remark 2.1: The transformed distance Δ_{ij} is a smooth function of \mathbf{q}_{ij} , $\boldsymbol{\eta}_i$, and $\boldsymbol{\eta}_{ij}$. Alternatively, Δ_{ij} is a smooth function of $\bar{\mathbf{q}}_{ij}$ and $\boldsymbol{\eta}_{ij}$.

Proof. See Appendix A.

B. Smooth step function

This section gives a definition of the smooth step function followed by a construction of this function. The smooth step function is to be embedded in a pairwise potential function to avoid discontinuities in the control law due to the agents' limited sensing ranges in solving the collision avoidance problem.

Definition 2.1: A scalar function $h(x, \alpha, \beta, \gamma)$ is said to be a smooth step function if it possesses the following properties

- 1) $h(x, \alpha, \beta, \gamma) = 0, \forall x \in (-\infty, \alpha]$,
- 2) $h(x, \alpha, \beta, \gamma) = 1, \forall x \in [\beta, \infty)$,
- 3) $0 < h(x, \alpha, \beta, \gamma) < 1, \forall x \in (\alpha, \beta)$,
- 4) $h(x, \alpha, \beta, \gamma)$ is smooth, (9)
- 5) $h'(x, \alpha, \beta, \gamma) > 0, \forall x \in (\alpha, \beta)$,
- 6) $h''(x, \alpha, \beta, \gamma) = 0$ at $x = x^* \in (\alpha, \beta)$,

where $x \in \mathbb{R}$, $h'(x, \alpha, \beta, \gamma) = \frac{\partial h(x, \alpha, \beta, \gamma)}{\partial x}$, $h''(x, \alpha, \beta, \gamma) = \frac{\partial^2 h(x, \alpha, \beta, \gamma)}{\partial x^2}$, α and β are constants such that $\alpha < \beta$, and γ is a positive constant.

Lemma 2.2: Let the scalar function $h(x, \alpha, \beta, \gamma)$ be defined as

$$h(x, \alpha, \beta, \gamma) = \frac{f(\tau)}{f(\tau) + \gamma f(1 - \tau)} \quad \text{with } \tau = \frac{x - \alpha}{\beta - \alpha}, \quad (10)$$

where

$$f(\tau) = 0 \text{ if } \tau \leq 0, \text{ and } f(\tau) = e^{-\frac{1}{\tau}} \text{ if } \tau > 0, \quad (11)$$

with α and β constants such that $\alpha < \beta$, and γ a positive constant. Then $h(x, \alpha, \beta, \gamma)$ is a smooth step function.

Proof. See Appendix B. An alternative ‘‘symmetric’’ (i.e., $\gamma = 1$) smooth step function is available in [28] but it requires a numerical integration. The introduction of the positive constant

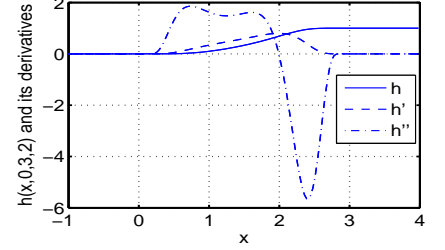


Fig. 3. A smooth step function and its first and second derivatives.

2.2 is to shift the location at which $h'(x, \alpha, \beta, \gamma)$ attains its extremum value. An illustration of a smooth step function ($\alpha = 0, \beta = 3, \gamma = 2$) is given in Fig. 3

C. Barbalat-like lemma

The following Barbalat-like lemma is to be used in stability analysis of the closed loop system in Appendix C.

Lemma 2.3: Assume that a nonnegative scalar differentiable function $f(t)$ satisfies the following conditions

$$1) \left| \frac{d}{dt} f(t) \right| \leq k_1 f(t), \forall t \geq 0, \quad 2) \int_0^\infty f(t) dt \leq k_2, \quad (12)$$

where k_1 and k_2 are positive constants, then $\lim_{t \rightarrow \infty} f(t) = 0$.

Proof. See [10]. Lemma 2.3 differs from Barbalat's lemma found in [29]. While Barbalat's lemma assumes that $f(t)$ is uniformly continuous, Lemma 2.3 assumes that $|\frac{d}{dt} f(t)|$ is bounded by $k_1 f(t)$. Lemma 2.3 is useful in proving convergence of $f(t)$ when it is difficult to prove uniform continuity of $f(t)$.

III. PROBLEM STATEMENT

A. Agent dynamics

As mentioned before this paper mainly focuses on difficulties caused by the ellipsoidal shape of the agents in the coordination control design, we therefore assume that each ellipsoidal agent i has the following dynamics:

$$\begin{aligned} \dot{\mathbf{q}}_i &= \mathbf{u}_i, \\ \dot{\boldsymbol{\eta}}_i &= \boldsymbol{\omega}_i, \quad i \in \mathbb{N}, \end{aligned} \quad (13)$$

where \mathbb{N} is the set of all agents in the group, $\mathbf{u}_i = [u_{xi} \ u_{yi} \ u_{zi}]^T$ and $\boldsymbol{\omega}_i = [\omega_{\phi_i} \ \omega_{\theta_i} \ \omega_{\psi_i}]^T$ are the control input vectors of the agent i . It is recalled that $\mathbf{q}_i = [x_i \ y_i \ z_i]^T$ with (x_i, y_i, z_i) being the position coordinates of the center of the agent i and $\boldsymbol{\eta}_i = [\phi_i \ \theta_i \ \psi_i]^T$ with $(\phi_i, \theta_i, \psi_i)$ being the orientation angles of the agent i , see Fig. 2. For agents with higher order dynamics, the backstepping technique [30] can be used because we will design the control input vectors \mathbf{u}_i and $\boldsymbol{\omega}_i$ such that they are smooth.

B. Coordination control objective

In order to design a coordination control system for a group of ellipsoidal agents, there is a need of specifying a common goal for the group, sensing capacity of the agents, and initial position and orientation of the agents. We therefore impose the following assumption on the reference trajectory, sensing capacity of each agent, and initial conditions between the agents.

Assumption 3.1:

1) The reference position and orientation vectors $\mathbf{q}_{id}(t)$ and $\boldsymbol{\eta}_{id}(t)$ for the agent i to track satisfy the condition:

$$\Delta_{ijd}(t) \geq \delta_{ijd}, \quad \forall (i, j) \in \mathbb{N}, j \neq i, t \geq 0, \quad (14)$$

where δ_{ijd} is a positive constant. The term $\Delta_{ijd}(t)$ is $\Delta_{ij}(t)$ given in (1) with $\mathbf{q}_i(t)$, $\mathbf{q}_j(t)$, $\boldsymbol{\eta}_i(t)$, and $\boldsymbol{\eta}_j(t)$ replaced by $\mathbf{q}_{id}(t)$, $\mathbf{q}_{jd}(t)$, $\boldsymbol{\eta}_{id}(t)$, and $\boldsymbol{\eta}_{jd}(t)$, respectively. Moreover, $\|\dot{\mathbf{q}}_{id}(t)\|$, $\|\dot{\boldsymbol{\eta}}_{id}(t)\|$, and $\|\mathbf{q}_{ijd}(t)\|$ with $\mathbf{q}_{ijd}(t) = \mathbf{q}_{id}(t) - \mathbf{q}_{jd}(t)$ are bounded for all $(i, j) \in \mathbb{N}$, $j \neq i$, and $t \geq 0$.

2) The agents i and j have spherical sensing spaces, which are centered at the points O_i and O_j , and have radii of R_i and R_j , respectively. The radii R_i and R_j are sufficiently large in the sense that

$$\Delta_{ijR}^m > 0, \quad (15)$$

where Δ_{ijR}^m is the greatest lower bound of Δ_{ij} when the agents i and j are within their sensing ranges, i.e.,

$$\Delta_{ijR}^m = \inf(\Delta_{ij}) \text{ s.t. } \begin{cases} \boldsymbol{\eta}_{ij} \in \mathbb{R}^3, \\ \|\mathbf{q}_{ij}\| = \min(R_i, R_j), \end{cases} \quad (16)$$

for all $(i, j) \in \mathbb{N}$ and $j \neq i$.

3) The agent i can sense the states, \mathbf{q}_j and $\boldsymbol{\eta}_j$, of the agent j if the agent j is inside the sensing space of the agent i .

4) At the initial time $t_0 \geq 0$, all the agents in the group are sufficiently far away from each other in the sense that the following condition holds:

$$\Delta_{ij}(t_0) > 0, \quad (17)$$

where $\Delta_{ij}(t_0)$ is given in (1) evaluated at $(\mathbf{q}_i = \mathbf{q}_i(t_0), \boldsymbol{\eta}_i = \boldsymbol{\eta}_i(t_0))$ and $(\mathbf{q}_j = \mathbf{q}_j(t_0), \boldsymbol{\eta}_j = \boldsymbol{\eta}_j(t_0))$, and we have abused the notation of $\Delta_{ij}(\mathbf{q}_{ij}(t_0), \boldsymbol{\eta}_i(t_0), \boldsymbol{\eta}_j(t_0))$ as $\Delta_{ij}(t_0)$ for simplicity of presentation.

Remark 3.1: 1) Assumption 3.1.1 specifies feasible reference trajectories $\mathbf{q}_{id}(t)$ and $\boldsymbol{\eta}_{id}(t)$ for the agent i in the group to track since they have to satisfy the condition (14). A desired coordination shape can be specified by the reference trajectories $\mathbf{q}_{id}(t)$ and $\boldsymbol{\eta}_{id}(t)$ with $i = 1, \dots, N$. Let us consider the virtual structure approach in [8], [9], [10] to generate the reference trajectories $\mathbf{q}_{id}(t)$ and $\boldsymbol{\eta}_{id}(t)$ for the agent i to track. First, a virtual structure consisting of N vertices is designed as a desired coordination shape. Second, we let the center of the virtual structure move along a predefined trajectory (often called the common reference trajectory). Third, as the virtual structure moves, its vertex i generates the reference trajectories $\mathbf{q}_{id}(t)$ and $\boldsymbol{\eta}_{id}(t)$ for the agent i to track. Several examples can be found in [10].

2) In Assumption 3.1.2, the condition (15) holds if there exists a positive constant ϱ_i such that $R_i \geq \varrho_i + \sup(a_i +$

$a_j, a_i + b_j, a_i + c_j, b_i + a_j, b_i + b_j, b_i + c_j, c_i + a_j, c_i + b_j, c_i + c_j)$, for all $(i, j) \in \mathbb{N}$ and $j \neq i$.

Coordination Control Objective 3.1: Under Assumption 3.1, for each agent i design the control input vectors \mathbf{u}_i and $\boldsymbol{\omega}_i$ such that the position and orientation vectors $(\mathbf{q}_i, \boldsymbol{\eta}_i)$ of the agent i track its reference position and orientation vectors $(\mathbf{q}_{id}, \boldsymbol{\eta}_{id})$ while avoiding collision with all other agents in the group. Specifically, we will design \mathbf{u}_i and $\boldsymbol{\omega}_i$ such that

$$\begin{aligned} \lim_{t \rightarrow \infty} \chi_{ie}(t) &= 0, \\ \Delta_{ij}(t) &\geq \delta_{ij}, \quad \forall t \geq t_0 \geq 0, \end{aligned} \quad (18)$$

where $\chi_{ie}(t) = ((\mathbf{q}_i(t) - \mathbf{q}_{id}(t)), (\boldsymbol{\eta}_i(t) - \boldsymbol{\eta}_{id}(t)))$, for all $(i, j) \in \mathbb{N}$, $i \neq j$, and $t \geq t_0 \geq 0$, where δ_{ij} is a positive constant.

IV. COORDINATION CONTROL DESIGN

A. Pairwise Collision Avoidance Functions

1) *Construction of Pairwise Collision Avoidance Functions:* This section defines and constructs pairwise collision avoidance functions that will be used in a potential function for the coordination control design.

Definition 4.1: Let φ_{ij} be a scalar function of the transformed distance Δ_{ij} given in (1) of the ellipsoidal agents i and j . The function φ_{ij} is said to be a pairwise collision avoidance function if it has the following properties:

- 1) $\varphi_{ij} = 0$, $\varphi'_{ij} = 0$, $\varphi''_{ij} = 0$, $\forall \Delta_{ij} \in [\Delta_{ij}^*, \infty)$,
- 2) $\varphi_{ij} > 0$, $\forall \Delta_{ij} \in (0, \Delta_{ij}^*)$,
- 3) $\lim_{\Delta_{ij} \rightarrow 0} \varphi_{ij} = \infty$, $\lim_{\Delta_{ij} \rightarrow 0} \varphi'_{ij} = -\infty$,
- 4) φ_{ij} is smooth, $\forall \Delta_{ij} \in (0, \infty)$,

where $\varphi'_{ij} = \frac{\partial \varphi_{ij}}{\partial \Delta_{ij}}$ and $\varphi''_{ij} = \frac{\partial^2 \varphi_{ij}}{\partial \Delta_{ij}^2}$. The positive constant Δ_{ij}^* is referred to as the *effective collision avoidance transformed distance* between the agents i and j , and satisfies the condition

$$0 < \Delta_{ij}^* < \min(\Delta_{ijR}^m, \delta_{ijd}), \quad (20)$$

with Δ_{ijR}^m defined in (16).

Remark 4.1: Property 1) implies that the function φ_{ij} is zero when the agents i and j are outside of their communication ranges since the constant Δ_{ij}^* satisfies the condition (20). Property 2) implies that the function φ_{ij} is positive definite when the agents i and j are inside of their communication ranges. By Lemma 2.1, Property 3) means that the function φ_{ij} is equal to infinity when a collision between the agents i and j occurs. Property 4) allows us to use control design and stability analysis methods found in [29] for continuous systems instead of techniques for switched and discontinuous systems found in [31] to handle the collision avoidance problem under the agents' limited communication ranges.

Lemma 4.1: Let the scalar function φ_{ij} be defined as

$$\varphi_{ij} = \frac{1 - h(\Delta_{ij}, \alpha_{ij}, \beta_{ij}, \gamma_{ij})}{\Delta_{ij}}, \quad (21)$$

where the positive constants α_{ij} and β_{ij} satisfy the condition

$$0 < \alpha_{ij} < \beta_{ij} \leq \Delta_{ij}^*, \quad (22)$$

and γ_{ij} is a positive constant. The function $h(\Delta_{ij}, \alpha_{ij}, \beta_{ij}, \gamma_{ij})$ is a smooth step function defined in Definition 2.1.

Then the function φ_{ij} is a pairwise collision avoidance function.

Proof. From (21), we have

$$\begin{aligned}\varphi'_{ij} &= -\frac{h'(\bullet)}{\Delta_{ij}} - \frac{1-h(\bullet)}{\Delta_{ij}^2}, \\ \varphi''_{ij} &= -\frac{h''(\bullet)}{\Delta_{ij}} + \frac{2h'(\bullet)}{\Delta_{ij}^2} + \frac{2(1-h(\bullet))}{\Delta_{ij}^3},\end{aligned}\quad (23)$$

where \bullet stands for $(\Delta_{ij}, \alpha_{ij}, \beta_{ij}, \gamma_{ij})$. From (21) and (23), it is trivial to show that the function φ_{ij} holds all properties listed in (19) by using properties of the smooth step function $h(\Delta_{ij}, \alpha_{ij}, \beta_{ij}, \gamma_{ij})$ listed in (9) with a note that the constants α_{ij} and β_{ij} satisfy the condition (22). A pairwise collision avoidance function φ_{ij} with $\alpha_{ij} = 0.5$, $\beta_{ij} = 2$, and $\gamma_{ij} = 1$ is plotted in Fig. 4.

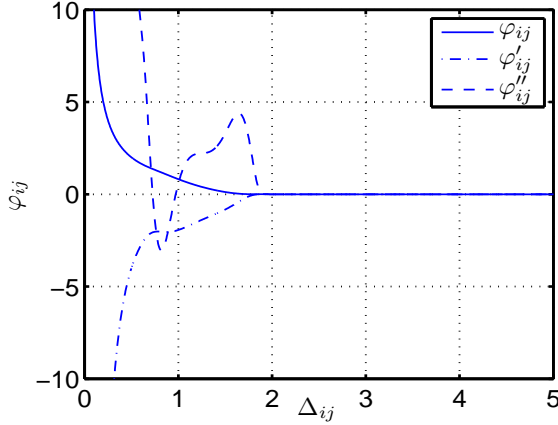


Fig. 4. A pairwise collision avoidance function and its derivatives.

2) Derivative of Pairwise Collision Avoidance Functions:

To prepare for the control design later, we calculate the derivative of the pairwise collision avoidance function φ_{ij} . As such, it is noted Δ_{ij} is a smooth function of \mathbf{q}_{ij} , $\boldsymbol{\eta}_i$, and $\boldsymbol{\eta}_{ij}$, see Remark 2.1. However, there is a difficulty in determining an explicit dependence of Δ_{ij} on \mathbf{q}_{ij} , $\boldsymbol{\eta}_i$, and $\boldsymbol{\eta}_{ij}$ via the matrix \mathbf{Q}_{ij} , see (1) and (2), because κ_{ij} cannot be solved explicitly. To avoid this difficulty, we treat Δ_{ij} as a smooth function of κ_{ij} , $\bar{\mathbf{q}}_{ij}$, and $\boldsymbol{\eta}_{ij}$.

We first calculate the first time derivative of κ_{ij} . From (7), we have

$$\dot{\kappa}_{ij} = -\left(\frac{\partial F_{ij}}{\partial \kappa_{ij}}\right)^{-1} \left(\left(\frac{\partial F_{ij}}{\partial \bar{\mathbf{q}}_{ij}}\right)^T \dot{\bar{\mathbf{q}}}_{ij} + \left(\frac{\partial F_{ij}}{\partial \boldsymbol{\eta}_{ij}}\right)^T \dot{\boldsymbol{\eta}}_{ij} \right), \quad (24)$$

where

$$F_{ij}(\kappa_{ij}) = \bar{\mathbf{q}}_{ij}^T (\mathbf{I}_{3 \times 3} + \kappa_{ij} \mathbf{T}_j)^{-T} \mathbf{T}_j (\mathbf{I}_{3 \times 3} + \kappa_{ij} \mathbf{T}_j)^{-1} \bar{\mathbf{q}}_{ij} - 1. \quad (25)$$

It is noted that $\frac{\partial F_{ij}}{\partial \kappa_{ij}}$ is always nonzero, see Subsection A-3. Hence, the first time derivative of Δ_{ij} is

$$\dot{\Delta}_{ij} = \mathbf{G}_{ij} \dot{\bar{\mathbf{q}}}_{ij} + \mathbf{H}_{ij} \dot{\boldsymbol{\eta}}_{ij}, \quad (26)$$

where

$$\begin{aligned}\mathbf{G}_{ij} &= \left[\frac{\partial \Delta_{ij}}{\partial \bar{\mathbf{q}}_{ij}} - \frac{\partial \Delta_{ij}}{\partial \kappa_{ij}} \left(\frac{\partial F_{ij}}{\partial \kappa_{ij}} \right)^{-1} \frac{\partial F_{ij}}{\partial \bar{\mathbf{q}}_{ij}} \right]^T, \\ \mathbf{H}_{ij} &= \left[\frac{\partial \Delta_{ij}}{\partial \boldsymbol{\eta}_{ij}} - \frac{\partial \Delta_{ij}}{\partial \kappa_{ij}} \left(\frac{\partial F_{ij}}{\partial \kappa_{ij}} \right)^{-1} \frac{\partial F_{ij}}{\partial \boldsymbol{\eta}_{ij}} \right]^T.\end{aligned}\quad (27)$$

From definition of $\bar{\mathbf{q}}_{ij}$ in (2), we have

$$\dot{\bar{\mathbf{q}}}_{ij} = \mathbf{P}_i \dot{\mathbf{q}}_{ij} + \mathbf{S}_i \dot{\boldsymbol{\eta}}_i, \quad (28)$$

where the matrix \mathbf{S}_i is defined by

$$\dot{\mathbf{P}}_i \mathbf{q}_{ij} = \mathbf{S}_i \dot{\boldsymbol{\eta}}_i. \quad (29)$$

Substituting (28) into (26) results in

$$\dot{\Delta}_{ij} = \mathbf{G}_{ij} \mathbf{P}_i \dot{\mathbf{q}}_{ij} + \mathbf{G}_{ij} \mathbf{S}_i \dot{\boldsymbol{\eta}}_i + \mathbf{H}_{ij} \dot{\boldsymbol{\eta}}_{ij}. \quad (30)$$

Remark 4.2: The transformed distance Δ_{ij} depends not only on the relative distance vector \mathbf{q}_{ij} and the relative orientation vector $\boldsymbol{\eta}_{ij}$ but also on the individual orientation vector $\boldsymbol{\eta}_i$ of the ellipsoidal agent i . This dependence creates a difficulty in designing control algorithms using a gradient based approach in the sense that it is hard to write the derivative of the pairwise collision avoidance function φ_{ij} as a product of the gradient of individual agents i and j and their state derivatives. Later, this difficulty will be overcome by a special design of the virtual reference trajectories with the use of a smooth step function.

With (30), the derivative of the pairwise collision avoidance function φ_{ij} is given by

$$\dot{\varphi}_{ij} = \varphi'_{ij} \left(\mathbf{G}_{ij} \mathbf{P}_i \dot{\mathbf{q}}_{ij} + \mathbf{G}_{ij} \mathbf{S}_i \dot{\boldsymbol{\eta}}_i + \mathbf{H}_{ij} \dot{\boldsymbol{\eta}}_{ij} \right), \quad \forall \Delta_{ij} > 0. \quad (31)$$

The condition $\Delta_{ij} > 0$ will be guaranteed by our control design later.

B. Lyapunov Function

Since the derivative of the pairwise collision avoidance function φ_{ij} is the summation of the term $\varphi'_{ij} \mathbf{G}_{ij} \mathbf{P}_i \dot{\mathbf{q}}_{ij}$, $\varphi'_{ij} \mathbf{G}_{ij} \mathbf{S}_i \dot{\boldsymbol{\eta}}_i$, and $\varphi'_{ij} \mathbf{H}_{ij} \dot{\boldsymbol{\eta}}_{ij}$ instead of the summation of $\varphi'_{ij} \mathbf{G}_{ij} \mathbf{P}_i (\dot{\mathbf{q}}_{ij} - \dot{\mathbf{q}}_{ijd})$, $\varphi'_{ij} \mathbf{G}_{ij} \mathbf{S}_i (\dot{\boldsymbol{\eta}}_i - \dot{\boldsymbol{\eta}}_{id})$, and $\varphi'_{ij} \mathbf{H}_{ij} (\dot{\boldsymbol{\eta}}_{ij} - \dot{\boldsymbol{\eta}}_{ijd})$ with $\dot{\boldsymbol{\eta}}_{ijd} = \dot{\boldsymbol{\eta}}_{id} - \dot{\boldsymbol{\eta}}_{jd}$, it is not possible to use a Lyapunov function candidate as a summation of all the pairwise collision functions and the square of all the errors $\mathbf{q}_i - \mathbf{q}_{id}$ and $\boldsymbol{\eta}_i - \boldsymbol{\eta}_{id}$ for the coordination control design, see also Remark 4.2.

To overcome the aforementioned impossibilities, we will construct a Lyapunov function candidate as a sum of all the pairwise collision avoidance functions φ_{ij} in (21) and the square of all the errors $(\mathbf{q}_i - \mathbf{q}_{id}^*)$ and $(\boldsymbol{\eta}_i - \boldsymbol{\eta}_{id}^*)$. The vectors \mathbf{q}_{id}^* and $\boldsymbol{\eta}_{id}^*$ are considered as the virtual reference trajectories to be designed such that $\lim_{t \rightarrow \infty} \mathbf{q}_{id}^*(t) = \mathbf{q}_{id}(t)$ and $\lim_{t \rightarrow \infty} \boldsymbol{\eta}_{id}^*(t) = \boldsymbol{\eta}_{id}(t)$. As such, the Lyapunov function candidate for the coordination control design in the next section is constructed as follows

$$\begin{aligned}V &= \sum_{i=1}^{N-1} \sum_{j=i+1}^N \varphi_{ij} + \frac{1}{2} \sum_{i=1}^N \left((\mathbf{q}_i - \mathbf{q}_{id}^*)^T \mathbf{C}_1 (\mathbf{q}_i - \mathbf{q}_{id}^*) + \right. \\ &\quad \left. (\boldsymbol{\eta}_i - \boldsymbol{\eta}_{id}^*)^T \mathbf{C}_2 (\boldsymbol{\eta}_i - \boldsymbol{\eta}_{id}^*) \right),\end{aligned}\quad (32)$$

where C_1 and C_2 are symmetric positive definite matrices. Differentiating both sides of (32) along the solutions of (31) and recalling from (13) that $\dot{\mathbf{q}}_i = \mathbf{u}_i$ and $\dot{\boldsymbol{\eta}}_i = \boldsymbol{\omega}_i$ result in

$$\dot{V} = \sum_{i=1}^N \left(\left[\boldsymbol{\Omega}_i^T (\mathbf{u}_i - \dot{\mathbf{q}}_{id}^*) + \boldsymbol{\Xi}_i^T (\boldsymbol{\omega}_i - \dot{\boldsymbol{\eta}}_{id}^*) \right] + \left[\boldsymbol{\Psi}_{1i}^T \dot{\mathbf{q}}_{id}^* + \boldsymbol{\Psi}_{2i}^T \dot{\boldsymbol{\eta}}_{id}^* \right] \right), \quad (33)$$

where we added and subtracted $\varphi'_{ij} \mathbf{G}_{ij} \mathbf{P}_i \dot{\mathbf{q}}_{ijd}$, $\varphi'_{ij} (\mathbf{G}_{ij} \mathbf{S}_i + \mathbf{H}_{ij}) \dot{\boldsymbol{\eta}}_{id}^*$, and $-\varphi'_{ij} \mathbf{H}_{ij} \dot{\boldsymbol{\eta}}_{jd}^*$ to the right hand side of the equation (31) before substituting this equation into the derivative of V . In (33), we have defined

$$\begin{aligned} \boldsymbol{\Omega}_i &= \left[\boldsymbol{\Psi}_{1i}^T + C_1 (\mathbf{q}_i - \mathbf{q}_{id}^*) \right]^T, \\ \boldsymbol{\Xi}_i &= \left[\boldsymbol{\Psi}_{2i}^T + C_2 (\boldsymbol{\eta}_i - \boldsymbol{\eta}_{id}^*) \right]^T, \\ \boldsymbol{\Psi}_{1i} &= \left[-\sum_{j=1}^{i-1} \varphi'_{ji} \mathbf{G}_{ji} \mathbf{P}_j + \sum_{j=i+1}^N \varphi'_{ij} \mathbf{G}_{ij} \mathbf{P}_i \right]^T, \\ \boldsymbol{\Psi}_{2i} &= \left[-\sum_{j=1}^{i-1} \varphi'_{ji} \mathbf{H}_{ji} + \sum_{j=i+1}^N \varphi'_{ij} (\mathbf{G}_{ij} \mathbf{S}_i + \mathbf{H}_{ij}) \right]^T. \end{aligned} \quad (34)$$

C. Control law

We first deal with the terms inside the first square bracket in the right hand side of (33). As such, to avoid a large control effort when an agent in the group is close to the agent i due to Property 3) of the function φ_{ij} , see (19), for collision avoidance, we design a control law for \mathbf{u}_i and $\boldsymbol{\omega}_i$ as follows:

$$\begin{aligned} \mathbf{u}_i &= -\mathbf{K}_1 \mathbf{W}(\boldsymbol{\Omega}_i) + \dot{\mathbf{q}}_{id}^*, \\ \boldsymbol{\omega}_i &= -\mathbf{K}_2 \mathbf{W}(\boldsymbol{\Xi}_i) + \dot{\boldsymbol{\eta}}_{id}^*, \end{aligned} \quad (35)$$

where \mathbf{K}_1 and \mathbf{K}_2 are symmetric positive definite matrices. The vector $\mathbf{W}(\boldsymbol{\chi})$ denotes a vector of bounded functions of elements of $\boldsymbol{\chi}$ in the sense that $\mathbf{W}(\boldsymbol{\chi}) = [w(\chi_1) \dots, w(\chi_l), \dots, w(\chi_n)]^T$ with χ_l the l^{th} element of $\boldsymbol{\chi}$, i.e., $\boldsymbol{\chi} = [\chi_1 \dots, \chi_l, \dots, \chi_n]^T$. The function $w(\chi)$ is a scalar, differentiable and bounded function, and satisfies

- 1) $|w(\chi)| \leq M_1$,
- 2) $w(\chi) = 0$ if $\chi = 0$, $\chi w(\chi) > 0$ if $\chi \neq 0$,
- 3) $w(-\chi) = -w(\chi)$, $(\chi - \omega)[w(\chi) - w(\omega)] \geq 0$,
- 4) $\left| \frac{w(\chi)}{\chi} \right| \leq M_2$, $\left| \frac{\partial w(\chi)}{\partial \chi} \right| \leq M_3$, $\frac{\partial w(\chi)}{\partial \chi} \Big|_{\chi=0} = 1$,

for all $\chi \in \mathbb{R}$, $\omega \in \mathbb{R}$, where M_1, M_2, M_3 are positive constants. Some functions that satisfy the above properties are $\arctan(\chi)$ and $\tanh(\chi)$.

We now deal with the second square bracket in the right hand side of (33). The terms inside this square bracket seem to be troublesome because $\dot{\mathbf{q}}_{id}^*$ and $\dot{\boldsymbol{\eta}}_{id}^*$ are nonzero in general since we are solving the coordination tracking control problem. Moreover, we require that $\boldsymbol{\eta}_{id}^*$ and $\boldsymbol{\eta}_{id}$ asymptotically tend to the reference trajectories \mathbf{q}_{id} and $\boldsymbol{\eta}_{id}$, respectively. To get around these problems, we will design update laws $\dot{\mathbf{q}}_{id}^*$ and $\dot{\boldsymbol{\eta}}_{id}^*$ such that

$$\boldsymbol{\Psi}_{1i}^T \dot{\mathbf{q}}_{id}^* = 0, \quad \boldsymbol{\Psi}_{2i}^T \dot{\boldsymbol{\eta}}_{id}^* = 0, \quad (37)$$

hold for all time and such that $\boldsymbol{\eta}_{id}^*$ and $\boldsymbol{\eta}_{id}$ asymptotically tend to \mathbf{q}_{id} and $\boldsymbol{\eta}_{id}$, respectively. As such, we utilize smooth step functions to design update laws $\dot{\mathbf{q}}_{id}^*$ and $\dot{\boldsymbol{\eta}}_{id}^*$ as follows:

$$\begin{aligned} \dot{\mathbf{q}}_{id}^* &= \left[\prod_{j \neq i} h(\Delta_{ij}, \alpha_{ijd}, \beta_{ijd}, \gamma_{ijd}) \right] (-\mathbf{K}_{1d} (\mathbf{q}_{id}^* - \mathbf{q}_{id}) + \dot{\mathbf{q}}_{id}), \\ \mathbf{q}_{id}^*(t_0) &= \mathbf{q}_{id}(t_0), \\ \dot{\boldsymbol{\eta}}_{id}^* &= \left[\prod_{j \neq i} h(\Delta_{ij}, \alpha_{ijd}, \beta_{ijd}, \gamma_{ijd}) \right] (-\mathbf{K}_{2d} (\boldsymbol{\eta}_{id}^* - \boldsymbol{\eta}_{id}) + \dot{\boldsymbol{\eta}}_{id}), \\ \boldsymbol{\eta}_{id}^*(t_0) &= \boldsymbol{\eta}_{id}(t_0), \end{aligned} \quad (38)$$

where \mathbf{K}_{1d} and \mathbf{K}_{2d} are symmetric positive definite matrices. The function $h(\Delta_{ij}, \alpha_{ijd}, \beta_{ijd}, \gamma_{ijd})$ is a smooth step function with the constants α_{ijd} , β_{ijd} , and γ_{ijd} chosen as:

$$\alpha_{ijd} = \beta_{ij}, \quad \alpha_{ijd} < \beta_{ijd} \leq \Delta_{ij}^*, \quad \gamma_{ijd} > 0, \quad (39)$$

where b_{ij} is chosen as in (22), and Δ_{ij}^* satisfies the condition (20). Using properties of the smooth step function, the choice of the constants α_{ij} , β_{ij} , α_{ijd} and β_{ijd} in (22) and (39) results in $h'(\Delta_{ij}, \alpha_{ij}, \beta_{ij}, \gamma_{ij}) h(\Delta_{ij}, \alpha_{ijd}, \beta_{ijd}, \gamma_{ijd}) = 0$ and $(1 - h(\Delta_{ij}, \alpha_{ij}, \beta_{ij}, \gamma_{ij})) h(\Delta_{ij}, \alpha_{ijd}, \beta_{ijd}, \gamma_{ijd}) = 0$. These equalities imply that (37) holds as long as $\Delta_{ij} > 0$, which is to be guaranteed by our control design. Moreover, the choice of the constants α_{ijd} and β_{ijd} in (39) ensures that the function $h(\Delta_{ij}, \alpha_{ijd}, \beta_{ijd}, \gamma_{ijd})$ approaches 1 whenever Δ_{ij} approaches a value less than β_{ij} . Also, it is recalled from (22) that $\beta_{ij} < \min(\Delta_{ijR}^m, \delta_{ijd})$. Therefore, the choice of update laws in (38) achieves our purpose: $\boldsymbol{\eta}_{id}^*$ and $\boldsymbol{\eta}_{id}$ asymptotically tend to the reference trajectories \mathbf{q}_{id} and $\boldsymbol{\eta}_{id}$, respectively, as long as $\lim_{t \rightarrow \infty} \Delta_{ij}(t) < \beta_{ij}$. This limit and the inequality $\Delta_{ij} > 0$ will be guaranteed by our designed control input vectors \mathbf{u}_i and $\boldsymbol{\omega}_i$ in (35). This will be shown in the proof of the main result.

Remark 4.3: 1) The control vectors \mathbf{u}_i and $\boldsymbol{\omega}_i$ in (35) of the agent i are smooth and depend on only its own state and the reference trajectory, and the states of other agents j in the communication range of the agent i due to Property 1) of the pairwise collision avoidance function φ_{ij} in (19).

2) The update laws $\dot{\mathbf{q}}_{id}^*$ and $\dot{\boldsymbol{\eta}}_{id}^*$ in (38) ensure that when the collision avoidance is active, the virtual reference trajectories \mathbf{q}_{id}^* and $\boldsymbol{\eta}_{id}^*$ are not updated. This implies that the control vectors \mathbf{u}_i and $\boldsymbol{\omega}_i$ give priority to the collision avoidance mission or the reference trajectory tracking mission whenever which mission is more important.

Substituting the control vectors \mathbf{u}_i and $\boldsymbol{\omega}_i$ in (35) and the update laws $\dot{\mathbf{q}}_{id}^*$ and $\dot{\boldsymbol{\eta}}_{id}^*$ in (38) into (33) results in

$$\dot{V} = -\sum_{i=1}^N \vartheta_i, \quad (40)$$

where

$$\vartheta_i = \boldsymbol{\Omega}_i^T \mathbf{K}_1 \mathbf{W}(\boldsymbol{\Omega}_i) + \boldsymbol{\Xi}_i^T \mathbf{K}_2 \mathbf{W}(\boldsymbol{\Xi}_i). \quad (41)$$

On the other hand, substituting the control vectors \mathbf{u}_i and $\boldsymbol{\omega}_i$ in (35) and the update laws $\dot{\mathbf{q}}_{id}^*$ and $\dot{\boldsymbol{\eta}}_{id}^*$ in (38) into (13) results

in the closed loop system:

$$\begin{aligned}\dot{\mathbf{q}}_i &= -\mathbf{K}_1 \mathbf{W}(\boldsymbol{\Omega}_i) + \dot{\mathbf{q}}_{id}^*, \\ \dot{\boldsymbol{\eta}}_i &= -\mathbf{K}_2 \mathbf{W}(\boldsymbol{\Xi}_i) + \dot{\boldsymbol{\eta}}_{id}^*,\end{aligned}\quad (42)$$

for all $i \in \mathbb{N}$. We now present the main result of our paper in the following theorem.

Theorem 4.1: Under Assumption 3.1, the smooth control vectors \mathbf{u}_i and $\boldsymbol{\omega}_i$ in (35) and the update laws $\dot{\mathbf{q}}_{id}^*$ and $\dot{\boldsymbol{\eta}}_{id}^*$ in (38) for the agent i solve the coordination control objective as long as the control design parameters \mathbf{K}_1 , \mathbf{K}_2 , \mathbf{K}_{1d} , \mathbf{K}_{2d} , \mathbf{C}_1 , \mathbf{C}_2 , α_{ij} , β_{ij} , α_{ijd} , and β_{ijd} are chosen such that the conditions (14), (15), (17), (22) and (39) hold. In particular, no collisions between any agents can occur for all $t \geq t_0 \geq 0$, the closed loop system (42) is forward complete, and the trajectories \mathbf{q}_i and $\boldsymbol{\eta}_i$ of the agent i asymptotically track its reference trajectories \mathbf{q}_{id} and $\boldsymbol{\eta}_{id}$, respectively, for all $i = 1, \dots, N$.

Proof. See Appendix C.

V. SIMULATION RESULTS

In this section, we provide a numerical simulation to illustrate the effectiveness of the proposed coordination control design stated in Theorem 4.1. We use $N = 6$ ellipsoidal agents with the geometric parameters as $a_i = 3$ and $b_i = c_i = 1$ for all $i = 1, \dots, N$. The initial position and orientation of these agents are chosen as follows:

$$\begin{aligned}\mathbf{q}_i(0) &= -R_0 \mathbf{L}_i, \\ \boldsymbol{\eta}_i(0) &= [0 \ 0 \ 0], \quad \forall i \in \mathbb{N},\end{aligned}\quad (43)$$

where $R_0 = 9$, and

$$\begin{aligned}\mathbf{L}_1 &= [1 \ 0 \ 0], \quad \mathbf{L}_2 = [0 \ 1 \ 0], \quad \mathbf{L}_3 = [-1 \ 0 \ 0], \\ \mathbf{L}_4 &= [0 \ -1 \ 0], \quad \mathbf{L}_5 = [0 \ 0 \ 1], \quad \mathbf{L}_6 = [0 \ 0 \ -1].\end{aligned}\quad (44)$$

The above choice of initial conditions means that all the agents are uniformly distributed on a sphere, which is centered at the origin and has a radius of R_0 . All the agents have the same sensing range with $R_i = 25$.

The reference trajectories are chosen as

$$\begin{aligned}\mathbf{q}_{id} &= R_0 \mathbf{L}_i + \mathbf{q}_{od}, \\ \boldsymbol{\eta}_{id} &= [0 \ \pi/4 \ \pi/4], \quad \forall i \in \mathbb{N},\end{aligned}\quad (45)$$

where the *common reference trajectory* \mathbf{q}_{od} is generated by $\dot{\mathbf{q}}_{od} = [1 \ 1 \ 1]^T$ with $\mathbf{q}_{od}(0) = [0, 0, 0]^T$. This choice implies that the reference trajectories are angled straight lines, and that the agents are to be uniformly distributed on a sphere, which is centered at the common reference trajectory \mathbf{q}_{od} and has a radius of R_0 .

The control design parameters are chosen as follows: $\mathbf{K}_1 = \mathbf{K}_2 = \text{diag}(20, 20, 20)$, $\mathbf{K}_{1d} = \mathbf{K}_{2d} = \text{diag}(2, 2, 2)$, $\mathbf{C}_1 = \mathbf{C}_2 = \text{diag}(50, 50, 50)$, $\alpha_{ij} = 5$, $\beta_{ij} = 1.5\alpha_{ij}$, $\alpha_{ijd} = \beta_{ij}$, $\beta_{ijd} = 1.2\alpha_{ijd}$. The function $w(\cdot)$ is chosen as $\arctan(\cdot)$.

A calculation shows that the above initial conditions and the above choice of control design parameters satisfy all the conditions (14), (15), (17), (22), (39).

Simulation results are plotted in Fig.5, Fig. 6, and Fig. 7. In Fig.5, several snapshots of the position and orientation of all agents are plotted. The representative $\Delta_{ij}^* = (\prod_{j \in \mathbb{N}, j \neq i} \Delta_{ij})^{1/5}$

is plotted in the first sub-figure of Fig.6. The control inputs $\mathbf{u} = [\mathbf{u}_1, \dots, \mathbf{u}_i, \dots, \mathbf{u}_N]^T$ and $\boldsymbol{\omega} = [\boldsymbol{\omega}_1, \dots, \boldsymbol{\omega}_i, \dots, \boldsymbol{\omega}_N]^T$ are plotted in the second and third sub-figures of Fig.6. It is clearly seen from Fig.5 and Fig.6 that there is no collision between any agents as indicated by $\Delta_{ij}^* > 0$ for all $i \in \mathbb{N}$ even though the above choice of initial conditions and reference trajectories makes the space around the origin ‘‘crowded’’ since all the agents need to cross this space to track their reference trajectories. Moreover, all the agents manage to track their reference trajectories asymptotically as seen from the tracking errors $\mathbf{q} - \mathbf{q}_d = [\mathbf{q}_1 - \mathbf{q}_{1d}, \dots, \mathbf{q}_i - \mathbf{q}_{id}, \dots, \mathbf{q}_N - \mathbf{q}_{Nd}]^T$ and $\boldsymbol{\eta} - \boldsymbol{\eta}_d = [\boldsymbol{\eta}_1 - \boldsymbol{\eta}_{1d}, \dots, \boldsymbol{\eta}_i - \boldsymbol{\eta}_{id}, \dots, \boldsymbol{\eta}_N - \boldsymbol{\eta}_{Nd}]^T$ in Fig.7.

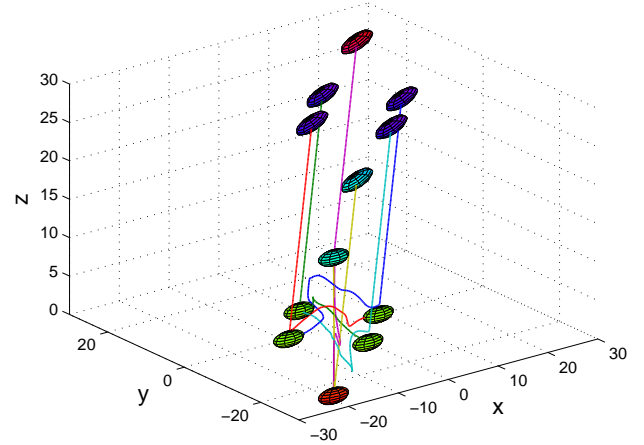


Fig. 5. Snapshots of the agents’ position and orientation.

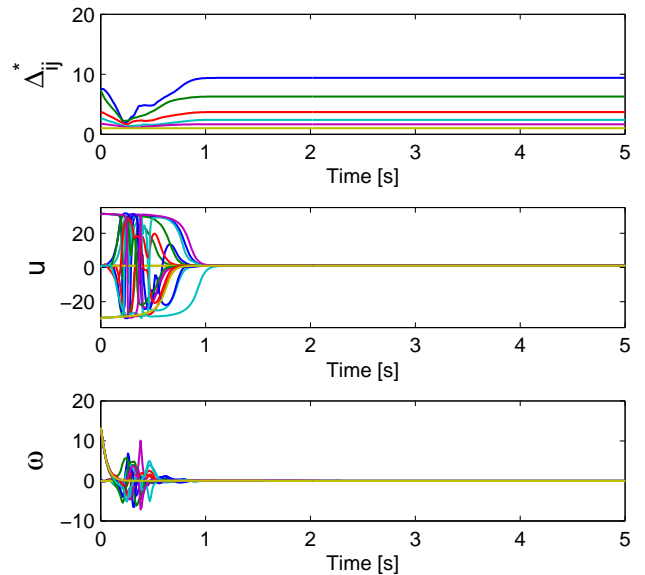


Fig. 6. Representative Δ_{ij}^* and control inputs.

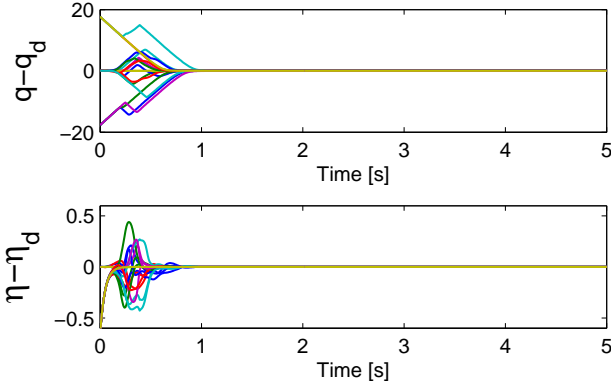


Fig. 7. Tracking errors.

VI. CONCLUSIONS

This paper has presented a constructive method to design a coordination control system for ellipsoidal agents. The tools used for the success of the coordination control design included a separation condition between two ellipsoids, smooth step functions, and novel pairwise collision avoidance functions. An extension of the proposed coordination control design in this paper and those controllers designed for single underactuated underwater vehicles in [32] to provide to a coordination control system for a group of underactuated underwater vehicles is under consideration.

APPENDIX A PROOF OF LEMMA 2.1

From Fig. 2, the boundaries of the ellipsoids i and j (equations of the points w_{ib} and w_{jb}) coordinated in the $O_{bi}X_{bi}Y_{bi}Z_{bi}$ frame attached to the ellipsoid i can be described by

$$\begin{aligned} E_i : \mathbf{q}_{ib}^T \mathbf{A}_i^{-2} \mathbf{q}_{ib} &= 1, \\ E_j : \mathbf{q}_{jb} &= -\mathbf{R}^{-1}(\boldsymbol{\eta}_i) \mathbf{q}_{ij} + \mathbf{R}^{-1}(\boldsymbol{\eta}_{ij}) \mathbf{A}_j \boldsymbol{\rho}_j, \end{aligned} \quad (46)$$

where \mathbf{A}_i , \mathbf{A}_j , \mathbf{q}_{ij} , and $\boldsymbol{\eta}_{ij}$ are defined in (3) and (6); and $\boldsymbol{\rho}_j = [\cos(\alpha_j) \cos(\beta_j) \cos(\alpha_j) \sin(\beta_j) \sin(\alpha_j)]^T$ with $\alpha_j \in [-\frac{\pi}{2}, \frac{\pi}{2}]$ and $\beta_j \in [-\pi, \pi]$ are auxiliary angles; and \mathbf{q}_{ib} and \mathbf{q}_{jb} are vectors denoting positions of the points w_{ib} and w_{jb} , respectively. The idea to prove Lemma 2.1 consists of two steps: 1) transforming the ellipsoids i and j to a unit sphere and an ellipsoid; 2) calculating the distance between the transformed sphere and the transformed ellipsoid.

1) *Transformation*: We transform the ellipsoids i and j to a unit sphere and an ellipsoid by the following coordinate transformation:

$$\begin{aligned} \bar{\mathbf{q}}_{ib} &= \mathbf{A}_i^{-1}(\mathbf{q}_{ib} + \mathbf{R}^{-1}(\boldsymbol{\eta}_i) \mathbf{q}_{ij}), \\ \bar{\mathbf{q}}_{jb} &= \mathbf{A}_i^{-1}(\mathbf{q}_{jb} + \mathbf{R}^{-1}(\boldsymbol{\eta}_i) \mathbf{q}_{ij}). \end{aligned} \quad (47)$$

With the above coordinate transformation, the ellipsoids (46) are transformed to a unit sphere and an ellipsoid as follows:

$$\begin{aligned} \bar{E}_i : (\bar{\mathbf{q}}_{ib} + \bar{\mathbf{q}}_{ij})^T (\bar{\mathbf{q}}_{ib} + \bar{\mathbf{q}}_{ij}) &= 1, \\ \bar{E}_j : \bar{\mathbf{q}}_{jb} &= \mathbf{A}_i^{-1} \mathbf{R}(\boldsymbol{\eta}_{ij}) \mathbf{A}_j \boldsymbol{\rho}_j. \end{aligned} \quad (48)$$

Now, the ellipsoid E_i has become the unit sphere \bar{E}_i centered at the point O_{usi} whose coordinates are described by the first equation in (48). The ellipsoid E_j has become another ellipsoid \bar{E}_j centered at the origin of the $O_{bi}X_{bi}Y_{bi}Z_{bi}$ frame, i.e., the point O_{bi} .

For convenience of calculating the distance between the unit sphere \bar{E}_i and the ellipsoid \bar{E}_j , we will rewrite the ellipsoid \bar{E}_j in an implicit form instead of parametric form given in the second equation of (48). By squaring both sides of each row of $\bar{\mathbf{q}}_{jb} = \mathbf{A}_i^{-1} \mathbf{R}(\boldsymbol{\eta}_{ij}) \mathbf{A}_j \boldsymbol{\rho}_j$ then adding the results together, we have $\bar{\mathbf{q}}_{jb}^T \mathbf{T}_j \bar{\mathbf{q}}_{jb} = 1$ where \mathbf{T}_j is defined in (4). Hence, the unit sphere and the ellipsoid defined in (48) can be rewritten as

$$\begin{aligned} \bar{E}_i : (\bar{\mathbf{q}}_{ib} + \bar{\mathbf{q}}_{ij})^T (\bar{\mathbf{q}}_{ib} + \bar{\mathbf{q}}_{ij}) &= 1, \\ \bar{E}_j : \bar{\mathbf{q}}_{jb}^T \mathbf{T}_j \bar{\mathbf{q}}_{jb} &= 1. \end{aligned} \quad (49)$$

2) *Distance Δ_{ij}* : We now calculate the distance from the center of the unit sphere \bar{E}_i described by the first equation in (49), i.e., from the point O_{usi} to the ellipsoid \bar{E}_j described by the second equation in (49). A necessary condition for a point $\bar{\mathbf{q}}_{jb}$ to be the closest point to the point O_{usi} is that $\bar{\mathbf{q}}_{ij} - \bar{\mathbf{q}}_{jb}$ is perpendicular to the tangent plane to the ellipsoid \bar{E}_j at $\bar{\mathbf{q}}_{jb}$. Since the surface gradient $\frac{\partial f(\bar{\mathbf{q}}_{jb})}{\partial \bar{\mathbf{q}}_{jb}}$ with $f(\bar{\mathbf{q}}_{jb}) := \frac{1}{2}(\bar{\mathbf{q}}_{jb}^T \mathbf{T}_j \bar{\mathbf{q}}_{jb} - 1)$ is normal to the ellipsoid's surface, the algebraic condition for the closest point $\bar{\mathbf{q}}_{jb}$ is

$$\bar{\mathbf{q}}_{ij} - \bar{\mathbf{q}}_{jb} = \kappa_{ij} \frac{\partial f(\bar{\mathbf{q}}_{jb})}{\partial \bar{\mathbf{q}}_{jb}}. \quad (50)$$

For the point O_{usi} outside the ellipsoid \bar{E}_j , there is only one point on the ellipsoid whose normal points toward the point O_{usi} . However, there can be as many as five other points whose surface normals point directly away from O_{usi} . The point on the ellipsoid whose normal points toward the point O_{usi} corresponds to the largest root κ_{ij} of the equation (50). Moreover, $\bar{\mathbf{q}}_{jb}$ must satisfy the ellipsoid equation, i.e., the second equation of (49).

From (50), we have

$$\bar{\mathbf{q}}_{jb} = (\mathbf{I}_{3 \times 3} + \kappa_{ij} \mathbf{T}_j)^{-1} \bar{\mathbf{q}}_{ij}, \quad (51)$$

which is substituted into the second equation in (49) results in the equation (7).

Now the distance from the point O_{usi} to the closest point $\bar{\mathbf{q}}_{jb}$ on the ellipsoid \bar{E}_j described by the second equation in (49) is given by

$$\Delta_{ij} = \|\bar{\mathbf{q}}_{ij} - \bar{\mathbf{q}}_{jb}\| - 1, \quad (52)$$

where $\bar{\mathbf{q}}_{jb}$ is the solution of (50) and the second equation of (49) with κ_{ij} being the largest root. Substituting $\bar{\mathbf{q}}_{jb}$ in (51) and $\bar{\mathbf{q}}_{ij}$ in (2) into (52) results in (1).

It is noted that after $\bar{\mathbf{q}}_{jb}$ is found, we can determine the intersection point with coordinates $\bar{\mathbf{q}}_{ib}$ on the unit sphere \bar{E}_i between the line from the point O_{usi} to the point with coordinates $\bar{\mathbf{q}}_{jb}$ and the unit sphere \bar{E}_i . Once we obtain the coordinates $\bar{\mathbf{q}}_{ib}$ and $\bar{\mathbf{q}}_{jb}$ with respect to the closest distance between the unit sphere \bar{E}_i and the transformed ellipsoid \bar{E}_j , the corresponding coordinates \mathbf{q}_{ib} and \mathbf{q}_{jb} with respect to the shortest distance between the original ellipsoids E_i

and E_j on the original ellipsoids E_i and E_j can be directly determined from (47). The actual distance between the original ellipsoids E_i and E_j is $\|\mathbf{q}_{ib} - \mathbf{q}_{jb}\|$. For a coordination control application, the transformed distance Δ_{ij} is sufficient because from the transformation (47) we can see that $\Delta_{ij} > 0$ implies that $\|\mathbf{q}_{ib} - \mathbf{q}_{jb}\| > 0$ and vice versa.

Therefore, two ellipsoids i and j are separated if $\Delta_{ij} > 0$, i.e., the condition (8) must hold.

3) *Solution of equations (7)*: We first show that the equation (7) has a unique root on the domain of interest. Let us define κ_{ij}^L be the largest root of the equation $\det(\mathbf{I}_{3 \times 3} + \kappa_{ij}^L \mathbf{T}_j) = 0$. This is a cubic equation and can be solved for its roots explicitly. We now observe that for any nonzero $\bar{\mathbf{q}}_{ij}$, i.e., $\|\bar{\mathbf{q}}_{ij}\| > 0$, the following inequalities and limits hold:

$$\begin{aligned} \frac{\partial F(\kappa_{ij})}{\partial \kappa_{ij}} < 0, \quad \frac{\partial^2 F(\kappa_{ij})}{\partial \kappa_{ij}^2} > 0, \quad \forall \kappa_{ij} \in (\kappa_{ij}^L, \infty), \\ \lim_{\kappa_{ij} \rightarrow \kappa_{ij}^L} F_{ij}(\kappa_{ij}) = \infty, \quad \lim_{\kappa_{ij} \rightarrow \infty} F_{ij}(\kappa_{ij}) = -1, \end{aligned} \quad (53)$$

because the matrix \mathbf{T}_j is symmetric and positive definite with its elements given in (5). Properties of $F_{ij}(\kappa_{ij})$ in (53) imply that the function $F_{ij}(\kappa_{ij})$ is strictly decreasing from ∞ to -1 on the domain $\kappa_{ij} \in (\kappa_{ij}^L, \infty)$. Therefore, the equation (7) has a unique root on the domain of interest. Moreover, this root is also the largest root of (7).

Given an initial value $\kappa_{ij}(0) = \kappa_{ij}^L + \epsilon$ where ϵ is a positive constant such that $F_{ij}(\kappa_{ij}^L + \epsilon) > 0$, a numerical procedure using the Newton method to calculate the largest root κ_{ij} is given as follows [33]:

$$\kappa_{ij}(n+1) = \kappa_{ij}(n) - \frac{F'_{ij}(\kappa_{ij}(n))}{F_{ij}(\kappa_{ij}(n))}, \quad (54)$$

where $F'_{ij}(\kappa_{ij}(n)) = \left. \frac{\partial F_{ij}(\kappa_{ij})}{\partial \kappa_{ij}} \right|_{\kappa_{ij}=\kappa_{ij}(n)}$ and $F_{ij}(\kappa_{ij}(n)) = F_{ij}(\kappa_{ij}) \big|_{\kappa_{ij}=\kappa_{ij}(n)}$ with $F_{ij}(\kappa_{ij})$ given in (7). The algorithm (54) provides a quadratic convergence of $\kappa_{ij}(n)$ to the largest root κ_{ij} of the equation (7), since $\frac{\partial F(\kappa_{ij})}{\partial \kappa_{ij}}$ is nonzero and $\frac{\partial^2 F(\kappa_{ij})}{\partial \kappa_{ij}^2}$ is bounded in the domain of interest, see Theorem 1.1 in [33] for a proof. Indeed, after the largest root κ_{ij} is found, $\bar{\mathbf{q}}_{jb}$ is obtained from (51). Proof of Lemma 2.1 is completed. \square

APPENDIX B PROOF OF LEMMA 2.2

We need to verify that the function $h(x, \alpha, \beta, \gamma)$ given in (10) satisfies all properties defined in (9). To prove Property 1), we note from (10) that for all $-\infty < x \leq \alpha$, we have $\tau \leq 0$ and $1 - \tau > 0$. Hence by (11), we have $f(\tau) = 0$ and $f(1 - \tau) > 0$, which are substituted into (10) to yield Property 1). Similarly, proof of Property 2) follows by noting from (10) that for all $\beta \leq x < \infty$, we have $\tau > 0$ and $1 - \tau \leq 0$. Hence by (11), we have $f(\tau) > 0$ and $f(1 - \tau) = 0$, which are substituted into (10) to yield Property 2). Property 3) holds since for all $\alpha < x < \beta$ we have from (10) that $0 < \tau < 1$. Hence $f(\tau) > 0$ and $f(1 - \tau) > 0$ by (11). Therefore, we have $0 < \frac{f(\tau)}{f(\tau) + \gamma f(1 - \tau)} < 1$ for all $\alpha < x < \beta$ and $\gamma > 0$. To prove Property 4), it is first noted that by definition of the

function $f(\tau)$, see (11), $f(\tau) + \gamma f(1 - \tau) > 0$ for all $\tau \in \mathbb{R}$ since $\gamma > 0$. In addition, the interval $\alpha < x < \beta$ is equivalent to the interval $0 < \tau < 1$, see (10). Therefore, the function $h(x, \alpha, \beta, \gamma)$ or $h(\tau, 0, 1, \gamma)$ is infinite times differentiable for all $x \in \mathbb{R}$ or $\tau \in \mathbb{R}$. Next, we need to show that $\frac{\partial^k h(\tau, 0, 1, \gamma)}{\partial \tau^k}$ tends to zero when τ tends to 0^- or 1^+ for an arbitrary positive integer k , since $\frac{\partial^k h(\tau, 0, 1, \gamma)}{\partial \tau^k} = 0$ for all $\tau \leq 0$ or $1 \leq \tau$. For $0 < \tau < 1$, we can write the function $h(\tau, 0, 1, \gamma)$ as

$$h(\tau, 0, 1, \gamma) = \frac{1}{1 + \gamma e^\xi}, \quad (55)$$

where $\xi = \frac{1-2\tau}{\tau(1-\tau)}$. From (55), we have

$$\begin{aligned} \frac{\partial h(\tau, 0, 1, \gamma)}{\partial \xi} &= -\frac{\gamma e^\xi}{(1 + \gamma e^\xi)^2} = -\frac{1}{1 + \gamma e^\xi} + \frac{1}{(1 + \gamma e^\xi)^2} \\ &= -h(\tau, 0, 1, \gamma) + h^2(\tau, 0, 1, \gamma). \end{aligned} \quad (56)$$

Using (56), a calculation shows that

$$\begin{aligned} \frac{\partial^k h(\tau, 0, 1, \gamma)}{\partial \tau^k} &= \left(P_1 \left(\frac{1}{\tau}, \frac{1}{\tau-1} \right) + P_2 \left(\frac{1}{\tau}, \frac{1}{\tau-1} \right) \times \right. \\ &\quad \left. Q(h(\tau, 0, 1, \gamma)) \right) \left(-h(\tau, 0, 1, \gamma) + h^2(\tau, 0, 1, \gamma) \right), \end{aligned} \quad (57)$$

where $P_i \left(\frac{1}{\tau}, \frac{1}{\tau-1} \right)$, $i = 1, 2$ are $2k$ -order polynomials of $\frac{1}{\tau}$ and $\frac{1}{\tau-1}$, and $Q(h(\tau, 0, 1, \gamma))$ is a $k-1$ -order polynomial of $h(\tau, 0, 1, \gamma)$. Since $\lim_{x \rightarrow 0^-} \frac{e^{-\frac{1}{x}}}{x^m} = 0$ for any positive integer m and $Q(h(\tau, 0, 1, \gamma))$ is bounded by some constant (since $0 < h(\tau, 0, 1, \gamma) < 1$), it can be directly deduce from (57) the limits $\lim_{\tau \rightarrow 0^-} \frac{\partial^k h(\tau, 0, 1, \gamma)}{\partial \tau^k} = 0$ and $\lim_{\tau \rightarrow 1^+} \frac{\partial^k h(\tau, 0, 1, \gamma)}{\partial \tau^k} = 0$. Property 5) holds since $\frac{\partial h(x, \alpha, \beta, \gamma)}{\partial x} = \frac{\partial h(\tau, 0, 1, \gamma)}{\partial \tau} \frac{\partial \tau}{\partial x} = \left(-h(\tau, 0, 1, \gamma) + h^2(\tau, 0, 1, \gamma) \right) \frac{\partial \xi}{\partial \tau} \frac{\partial \tau}{\partial x}$ with $\frac{\partial \tau}{\partial x} = \frac{1}{\beta - \alpha}$, $\frac{\partial \xi}{\partial \tau} = -\frac{1}{\tau^2} - \frac{1}{(\tau-1)^2}$, and $\left(-h(\tau, 0, 1, \gamma) + h^2(\tau, 0, 1, \gamma) \right) < 0$ for all $\tau \in (0, 1)$. To prove Property 6), using (57) we calculate $\frac{\partial^2 h(x, \alpha, \beta, \gamma)}{\partial x^2}$ as follows

$$\begin{aligned} \frac{\partial^2 h(x, \alpha, \beta, \gamma)}{\partial x^2} &= \left(-h(x, \alpha, \beta, \gamma) + h^2(x, \alpha, \beta, \gamma) \right) \times \\ &\quad \left(\xi'' + (1 - 2h(x, \alpha, \beta, \gamma)) \xi'^2 \right) \frac{\partial \tau}{\partial x}, \end{aligned} \quad (58)$$

where $\xi' = \frac{\partial \xi}{\partial \tau} = -\frac{1}{\tau^2} - \frac{1}{(\tau-1)^2}$, and $\xi'' = \frac{\partial^2 \xi}{\partial \tau^2} = \frac{2}{\tau^3} + \frac{2}{(\tau-1)^3}$. For a $x^* \in (a, b)$, we have $\left(-h(x^*, \alpha, \beta, \gamma) + h^2(x^*, \alpha, \beta, \gamma) \right) < 0$. Using this information and setting $\frac{\partial^2 h(x, \alpha, \beta, \gamma)}{\partial x^2} \big|_{x=x^*} = 0$, we have from (58) that

$$\gamma = e^{-\xi} \frac{\xi'^2 + \xi''}{\xi'^2 - \xi''} \bigg|_{x=x^*}. \quad (59)$$

We now need to show that γ is always positive for all $x^* \in (\alpha, \beta)$. This is sufficient to to prove that $\xi'^2 + \xi'' > 0$ and $\xi'^2 - \xi'' > 0$ for all $\tau \in (0, 1)$. As such, after an algebraic

calculation from expressions of ξ'' and ξ' we have

$$\begin{aligned}\xi'^2 + \xi'' &= \frac{1}{\tau^4} + \frac{2}{\tau^3} + \frac{2}{\tau^2(\tau-1)^2} + \frac{\tau}{(\tau-1)^4}, \\ \xi'^2 - \xi'' &= \frac{1}{\tau^4(\tau-1)^2} \left(2\tau^2(1-\tau) + (2\tau-1)^2 \right) + \\ &\quad \frac{1}{\tau^2(\tau-1)^4} \left(2\tau^2(1-\tau) + \tau^2 + (\tau-1)^2 \right),\end{aligned}\quad (60)$$

which clearly imply that $\xi'^2 + \xi'' > 0$ and $\xi'^2 - \xi'' > 0$ for all $\tau \in (0, 1)$. \square

APPENDIX C

PROOF OF THEOREM 4.1

A. Proof of no collisions and complete forwardness of the closed loop system

It is seen from (40) that $\dot{V} \leq 0$. Integrating $\dot{V} \leq 0$ from t_0 to t and using the definition of V in (32) with φ_{ij} in (21) result in

$$V(t) \leq V(t_0), \quad (61)$$

where

$$\begin{aligned}V(t) &= \sum_{i=1}^{N-1} \sum_{j=i+1}^N \varphi_{ij}(t) + \frac{1}{2} \sum_{i=1}^N \left((\mathbf{q}_i(t) - \mathbf{q}_{id}^*(t))^T \mathbf{C}_1 \times \right. \\ &\quad \left. (\mathbf{q}_i(t) - \mathbf{q}_{id}^*(t)) + (\boldsymbol{\eta}_i(t) - \boldsymbol{\eta}_{id}^*(t))^T \mathbf{C}_2 (\boldsymbol{\eta}_i(t) - \boldsymbol{\eta}_{id}^*(t)) \right),\end{aligned}\quad (62)$$

and $V(t_0)$ is $V(t)$ with t replaced by t_0 , for all $t \geq t_0 \geq 0$. From the condition specified in item 4) of Assumption 3.1, Property 3) of φ_{ij} , and the initial values $\mathbf{q}_{id}^*(t_0)$ and $\boldsymbol{\eta}_{id}^*(t_0)$ in (38), we have the right hand side of (61) is bounded by a positive constant depending on the initial conditions. Boundedness of the right hand side of (61) implies that the left hand side of (61) must be also bounded. As a result, $\varphi_{ij}(\Delta_{ij}(t))$ must be smaller than some positive constant depending on the initial conditions for all $t \geq t_0 \geq 0$. From properties of φ_{ij} , see (19), $\Delta_{ij}(t)$, for all $(i, j) \in \mathbb{N}$ and $i \neq j$, must be larger than 0 for all $t \geq t_0 \geq 0$. This in turn implies from Lemma 2.1 that there are no collisions between any agents for all $t \geq t_0 \geq 0$. Boundedness of the left hand side of (61) also implies that of $(\mathbf{q}_i(t) - \mathbf{q}_{id}^*(t))$ and $(\boldsymbol{\eta}_i(t) - \boldsymbol{\eta}_{id}^*(t))$ for all $t \geq t_0 \geq 0$. Since we have already proved that $\Delta_{ij}(t) > 0$, the update laws $\dot{\mathbf{q}}_{id}^*$ and $\dot{\boldsymbol{\eta}}_{id}^*$ in (38) imply that $(\mathbf{q}_{id}(t) - \mathbf{q}_{id}^*(t))$ and $(\boldsymbol{\eta}_{id}(t) - \boldsymbol{\eta}_{id}^*(t))$ are also bounded. Therefore, the closed loop system (42) with the update laws (38) is forward complete.

B. Equilibrium set

We use Lemma 2.3 to find the equilibrium set, which the trajectories of the closed loop system (42) tend to. Integrating both sides of (40) gives $\int_0^\infty \vartheta(t) dt \leq V(t_0)$, where $\vartheta = \sum_{i=1}^N \vartheta_i$ with ϑ_i defined in (41). The function $\vartheta(t)$ is scalar, nonnegative and differentiable. The derivative of $\vartheta(t)$ along the solutions of the closed loop system (42) using Properties 1), 2) and 4) of the function φ_{ij} in (19) satisfies $|\frac{d\vartheta(t)}{dt}| \leq M\vartheta(t)$ with M a positive constant. Therefore Lemma 2.3 results

in $\lim_{t \rightarrow \infty} \vartheta(t) = 0$, which means that $\lim_{t \rightarrow \infty} \vartheta_i(t) = 0$. Therefore, from the expression of $\vartheta_i(t)$ in (41) and properties of the bounded function $\mathbf{W}(\bullet)$ in (36), we have

$$\lim_{t \rightarrow \infty} (\boldsymbol{\Omega}_i(t), \boldsymbol{\Xi}_i(t)) = 0. \quad (63)$$

Hence the trajectory $(\mathbf{q}_i, \boldsymbol{\eta}_i)$ of the agent i asymptotically converges to the equilibrium set \mathbf{E} , in which $\boldsymbol{\Omega}_i(t) = 0$ and $\boldsymbol{\Xi}_i(t) = 0$.

From the expression of $\boldsymbol{\Omega}_i$ and $\boldsymbol{\Xi}_i$, using properties of the pairwise collision avoidance function φ_{ij} in (19) and the smooth step function $h(\Delta_{ij}, \alpha_{ij}, \beta_{ij}, \gamma_{ij})$ in (9) with a note that the constants α_{ij} and β_{ij} are chosen as in (22) and that the constants α_{ijd} and β_{ijd} are chosen as in (39), the limits (63) imply that $\boldsymbol{\xi} = (\mathbf{q}, \boldsymbol{\eta})$, with $\mathbf{q}(t) = [\mathbf{q}_1^T(t) \mathbf{q}_2^T(t), \dots, \mathbf{q}_N^T(t)]^T$ and $\boldsymbol{\eta}(t) = [\boldsymbol{\eta}_1^T(t) \boldsymbol{\eta}_2^T(t), \dots, \boldsymbol{\eta}_N^T(t)]^T$, can tend to $\boldsymbol{\xi}_d = (\mathbf{q}_d, \boldsymbol{\eta}_d)$, with $\mathbf{q}_d = [\mathbf{q}_{1d}^T \mathbf{q}_{2d}^T, \dots, \mathbf{q}_{Nd}^T]^T$ and $\boldsymbol{\eta}_d = [\boldsymbol{\eta}_{1d}^T \boldsymbol{\eta}_{2d}^T, \dots, \boldsymbol{\eta}_{Nd}^T]^T$, since $\varphi'_{ij}(t) = 0$ at $\mathbf{q}_i = \mathbf{q}_{id}$, $\mathbf{q}_j = \mathbf{q}_{jd}$, $\boldsymbol{\eta}_i = \boldsymbol{\eta}_{id}$, and $\boldsymbol{\eta}_j = \boldsymbol{\eta}_{jd}$, for all $(i, j) \in \mathbb{N}$ and $i \neq j$, (see Property 1) of φ_{ij}), or tend to a vector denoted by $\boldsymbol{\xi}_c = (\mathbf{q}_c, \boldsymbol{\eta}_c)$, with $\mathbf{q}_c = [\mathbf{q}_{1c}^T \mathbf{q}_{2c}^T, \dots, \mathbf{q}_{Nc}^T]^T$ and $\boldsymbol{\eta}_c = [\boldsymbol{\eta}_{1c}^T \boldsymbol{\eta}_{2c}^T, \dots, \boldsymbol{\eta}_{Nc}^T]^T$, as the time goes to infinity, i.e., the equilibrium sets can be \mathbf{E}_d containing $\boldsymbol{\xi}_d$ or \mathbf{E}_c containing $\boldsymbol{\xi}_c$. The vector $\boldsymbol{\xi}_c$ is such that

$$\boldsymbol{\Omega}_{ic} = 0, \boldsymbol{\Xi}_{ic} = 0, \quad (64)$$

where $\boldsymbol{\Omega}_{ic} = \boldsymbol{\Omega}_i|_{\boldsymbol{\xi}=\boldsymbol{\xi}_c}$ and $\boldsymbol{\Xi}_{ic} = \boldsymbol{\Xi}_i|_{\boldsymbol{\xi}=\boldsymbol{\xi}_c}$ for all $i \in \mathbb{N}$. Since we have already proved that the trajectory $\boldsymbol{\xi}$ can approach either the desired set $\boldsymbol{\Xi}_d$ of desired equilibrium points $\boldsymbol{\xi}_d$ or the undesired set $\boldsymbol{\Xi}_c$ of undesired equilibrium points $\boldsymbol{\xi}_c$ 'almost globally'. The term 'almost globally' refers to the fact that the agents start from a set that includes the condition (17) and that does not coincide at any point with the undesired set $\boldsymbol{\Xi}_c$. Hence, we need to prove that $\boldsymbol{\Xi}_d$ is locally asymptotically stable and that $\boldsymbol{\Xi}_c$ is locally unstable.

C. Proof of \mathbf{E}_d being asymptotically stable

Linearizing the closed loop system (42) near $\boldsymbol{\xi}_d$ gives

$$\begin{aligned}\dot{\mathbf{q}}_i &= -\mathbf{K}_1 \mathbf{C}_1 (\mathbf{q}_i - \mathbf{q}_{id}^*) + \dot{\mathbf{q}}_{id}^*, \\ \dot{\boldsymbol{\eta}}_i &= -\mathbf{K}_2 \mathbf{C}_2 (\boldsymbol{\eta}_i - \boldsymbol{\eta}_{id}^*) + \dot{\boldsymbol{\eta}}_{id}^*,\end{aligned}\quad (65)$$

for all $i \in \mathbb{N}$, where we have used $\varphi'_{ij}|_{\boldsymbol{\xi}=\boldsymbol{\xi}_d} = 0$ and $\varphi''_{ij}|_{\boldsymbol{\xi}=\boldsymbol{\xi}_d} = 0$, see Property 1) of the function φ_{ij} in (19), with a note that the constants α_{ij} and β_{ij} are chosen as in (22) and that the constants α_{ijd} and β_{ijd} are chosen as in (39). Moreover, linearizing the update laws (38) near $\boldsymbol{\xi}_d$ results in

$$\begin{aligned}\dot{\mathbf{q}}_{id}^* &= -\mathbf{K}_{1d} (\mathbf{q}_{id}^* - \mathbf{q}_{id}) + \dot{\mathbf{q}}_{id}, \\ \mathbf{q}_{id}^*(t_0) &= \mathbf{q}_{id}(t_0), \\ \dot{\boldsymbol{\eta}}_{id}^* &= -\mathbf{K}_{2d} (\boldsymbol{\eta}_{id}^* - \boldsymbol{\eta}_{id}) + \dot{\boldsymbol{\eta}}_{id}, \\ \boldsymbol{\eta}_{id}^*(t_0) &= \boldsymbol{\eta}_{id}(t_0),\end{aligned}\quad (66)$$

Local asymptotic stability of the equilibrium set \mathbf{E}_d containing $\boldsymbol{\xi}_d$ follows from (65) and (66) because the first time derivative of the function $V_d = \frac{1}{2} \sum_{i=1}^N [\|\boldsymbol{\xi}_i - \boldsymbol{\xi}_{id}^*\|^2 + \|\boldsymbol{\xi}_{id} - \boldsymbol{\xi}_{id}^*\|^2]$ with $\boldsymbol{\xi}_{id} = (\mathbf{q}_{id}, \boldsymbol{\eta}_{id})$ and $\boldsymbol{\xi}_{id}^* = (\mathbf{q}_{id}^*, \boldsymbol{\eta}_{id}^*)$ along the solutions of (65) and (66) satisfies $\dot{V}_d \leq -2 \min(\lambda_{\min}(\mathbf{K}_1 \mathbf{C}_1), \lambda_{\min}(\mathbf{K}_2 \mathbf{C}_2), \lambda_{\min}(\mathbf{K}_{1d}), \lambda_{\min}(\mathbf{K}_{2d})) V_d$ with $\lambda_{\min}(\bullet)$ being the minimum eigenvalue of the matrix \bullet .

D. Proof of E_c being unstable

Substituting (64) into the closed loop system (42) gives

$$\begin{aligned}\dot{\mathbf{q}}_i &= -\mathbf{K}_1 (\mathbf{W}(\boldsymbol{\Omega}_i) - \mathbf{W}(\boldsymbol{\Omega}_{ic})) + \dot{\mathbf{q}}_{id}^*, \\ \dot{\boldsymbol{\eta}}_i &= -\mathbf{K}_2 (\mathbf{W}(\boldsymbol{\Xi}_i) - \mathbf{W}(\boldsymbol{\Xi}_{ic})) + \dot{\boldsymbol{\eta}}_{id}^*,\end{aligned}\quad (67)$$

for all $i \in \mathbb{N}$, where we have used properties of $\mathbf{W}(\bullet)$ in (36) to have $\mathbf{W}(\boldsymbol{\Omega}_{ic}) = 0$ and $\mathbf{W}(\boldsymbol{\Xi}_{ic}) = 0$ from the equalities in (64). Since $\boldsymbol{\Omega}_{ic} = 0$ and $\boldsymbol{\Xi}_{ic} = 0$ at $\boldsymbol{\xi}_c$, using properties of $\mathbf{W}(\bullet)$ in (36) shows that local stability of (67) at $\boldsymbol{\xi}_c$ is equivalent to local stability of

$$\begin{aligned}\dot{\mathbf{q}}_i &= -\mathbf{K}_1 (\boldsymbol{\Omega}_i - \boldsymbol{\Omega}_{ic}) + \dot{\mathbf{q}}_{id}^*, \\ \dot{\boldsymbol{\eta}}_i &= -\mathbf{K}_2 (\boldsymbol{\Xi}_i - \boldsymbol{\Xi}_{ic}) + \dot{\boldsymbol{\eta}}_{id}^*,\end{aligned}\quad (68)$$

at $\boldsymbol{\xi}_c$. We now investigate stability of (68) at $\boldsymbol{\xi}_c$.

Let \mathbb{N}^* be the set of the agents such that if the agents i and j belong to the set \mathbb{N}^* then $\Delta_{ij}(\mathbf{q}_{ij}, \boldsymbol{\eta}_i, \boldsymbol{\eta}_j) < b_{ij}$ where it is recalled that b_{ij} is chosen as in (22). Also let N^* be the size of the set \mathbb{N}^* . For those agents in the set \mathbb{N}^* , the collision avoidance is active. Therefore, $\boldsymbol{\xi}_{id}^* = 0$, for all $i \in \mathbb{N}^*$, see Item 2) in Remark 4.3. Let $\mathbf{q}_{ijc} = \mathbf{q}_{ic} - \mathbf{q}_{jc}$, $\boldsymbol{\eta}_{ijc} = \boldsymbol{\eta}_{ic} - \boldsymbol{\eta}_{jc}$, and φ'_{ijc} be φ'_{ij} evaluated at $\mathbf{q}_{ij} = \mathbf{q}_{ijc}$, $\boldsymbol{\eta}_i = \boldsymbol{\eta}_{ic}$, and $\boldsymbol{\eta}_j = \boldsymbol{\eta}_{jc}$. Now, from (64) we have

$$\sum_{(i,j) \in \mathbb{N}^*} \mathbf{q}_{ijc}^T \boldsymbol{\Omega}_{ic} = 0, \quad (69)$$

which can be expanded using (64) and (34) as follows:

$$\sum_{(i,j) \in \mathbb{N}^*} \mathbf{q}_{ijc}^T (\mathbf{C}_1 + N^* \varphi'_{ijc} \boldsymbol{\Phi}_{ijc}) \mathbf{q}_{ijc} = \sum_{(i,j) \in \mathbb{N}^*} \mathbf{q}_{ijc}^T \mathbf{C}_1 \mathbf{q}_{ijc}^*, \quad (70)$$

where the positive definite matrix $\boldsymbol{\Phi}_{ijc}$ depending on \mathbf{q}_{ijc} , $\boldsymbol{\eta}_{ic}$, and $\boldsymbol{\eta}_{jc}$ is derived from (34), (27), and (1) such that (69) is equivalent to (70).

Since we have proved that $\|\mathbf{q}_{ijc}\|$ is bounded and $\|\mathbf{q}_{ijc}^*\|$ is bounded by the choice of update laws in (38) due to boundedness of $\|\mathbf{q}_{ijc}\|$ and $\|\dot{\mathbf{q}}_{ijc}\|$ by assumption, the equation (70) indicates that $\lim_{\lambda_{\max}(\mathbf{C}_1) \rightarrow 0} (\|\mathbf{Q}_{ijc} \mathbf{P}_{ic} \mathbf{q}_{ijc}\|) = \infty$ with $\mathbf{P}_{ic} = \mathbf{P}_i|_{\boldsymbol{\eta}_i = \boldsymbol{\eta}_{ic}}$ and $\lambda_{\max}(\mathbf{C}_1)$ the maximum eigenvalue of \mathbf{C}_1 . This means that we can choose a control gain matrix \mathbf{C}_1 such that the matrix $\mathbf{C}_1 + N^* \varphi'_{ijc} \boldsymbol{\Phi}_{ijc}$ is negative definite for some (i, j) with $i \neq j$.

Let $\mathbb{N}^{**} \subset \mathbb{N}^*$ be a nonempty set such that for all $(i, j) \in \mathbb{N}^{**}$, $i \neq j$, the matrix $\mathbf{C}_1 + N^* \varphi'_{ijc} \boldsymbol{\Phi}_{ijc}$ is negative definite. Since $\mathbb{N}^{**} \subset \mathbb{N}^*$, we have $\dot{\mathbf{q}}_{id}^* = 0$, for all $i \in \mathbb{N}^{**}$.

To investigate stability of (68) at $\boldsymbol{\xi}_c$, we consider the following function for the agents belonging to the set \mathbb{N}^{**} :

$$\begin{aligned}\bar{V}_c^{**} &= \frac{1}{2} \sum_{(i,j) \in \mathbb{N}^{**}} (\mathbf{q}_{ij} - \mathbf{q}_{ijc})^T \mathbf{K}_1^{-1} (\mathbf{q}_{ij} - \mathbf{q}_{ijc}) + \\ &\quad \frac{1}{2} \sum_{i=1}^{N^{**}} \|\boldsymbol{\eta}_i - \boldsymbol{\eta}_{ic}\|^2,\end{aligned}\quad (71)$$

whose derivative along the solutions of (68) is

$$\dot{\bar{V}}_c^{**} = - \sum_{(i,j) \in \mathbb{N}^{**}} W_{ijc} - \sum_{i=1}^{N^{**}} U_{1i} - N^{**} \sum_{(i,j) \in \mathbb{N}^{**}} U_{2ij}, \quad (72)$$

where

$$\begin{aligned}W_{ijc} &= (\mathbf{q}_{ij} - \mathbf{q}_{ijc})^T (\mathbf{C}_1 + N^{**} \varphi'_{ijc} \boldsymbol{\Phi}_{ijc}) (\mathbf{q}_{ij} - \mathbf{q}_{ijc}), \\ U_{1i} &= (\boldsymbol{\eta}_i - \boldsymbol{\eta}_{ic})^T \mathbf{K}_2 (\boldsymbol{\Xi}_i - \boldsymbol{\Xi}_{ic}), \\ U_{2ij} &= (\mathbf{q}_{ij} - \mathbf{q}_{ijc})^T (\varphi'_{ij} \boldsymbol{\Phi}_{ij} - \varphi'_{ijc} \boldsymbol{\Phi}_{ijc}) \mathbf{q}_{ij}.\end{aligned}$$

We now define a set Ψ such that

$$\Psi = \left\{ (\mathbf{q}_{ij}, \boldsymbol{\eta}_i) \in B_r \mid U_1 \leq 0, U_2 \leq 0, \forall (i, j) \in \mathbb{N}^{**}, i \neq j, \right. \quad (73)$$

where $U_1 = \sum_{i=1}^{N^{**}} U_{1i}$ and $U_2 = \sum_{(i,j) \in \mathbb{N}^{**}} U_{2ij}$. Since the matrix $\mathbf{C}_1 + N^* \varphi'_{ijc} \boldsymbol{\Phi}_{ijc}$ is negative definite, there exists a positive constant ρ_{ij} such that

$$\dot{\bar{V}}_c^{**} \geq - \sum_{(i,j) \in \mathbb{N}^{**}} \rho_{ij} W_{ijc}, \quad (74)$$

in the set Ψ defined in (73). We need to show that the set Ψ is nonempty.

For the condition $U_{1i} \leq 0$, we can always find $\boldsymbol{\eta}_i$ as a vector function of \mathbf{q}_{ijc} , \mathbf{q}_{ij} , $\boldsymbol{\eta}_{ijc}$, $\boldsymbol{\eta}_{ij}$, and $\boldsymbol{\eta}_{ic}$ for all $(i, j) \in \mathbb{N}^{**}$ and $i \neq j$ such that $U_{1i} \leq 0$. An example is $\boldsymbol{\eta}_i = \boldsymbol{\eta}_{ic}$ for all $i \in \mathbb{N}^{**}$.

For the condition $U_{2ij} \leq 0$, we first note that the matrix $\boldsymbol{\Phi}_{ij}$ is positive definite for all $\mathbf{q}_{ij} \in \mathbb{R}^3$, $\boldsymbol{\eta}_{ij} \in \mathbb{R}^3$, and $\boldsymbol{\eta}_i \in \mathbb{R}^3$ such that $\Delta_{ij} > 0$, for all $(i, j) \in \mathbb{N}^{**}$ and $i \neq j$. Second, we note from Property 2) of the function φ_{ij} in (19) that φ'_{ij} is negative and equals infinity when $\Delta_{ij} = 0$.

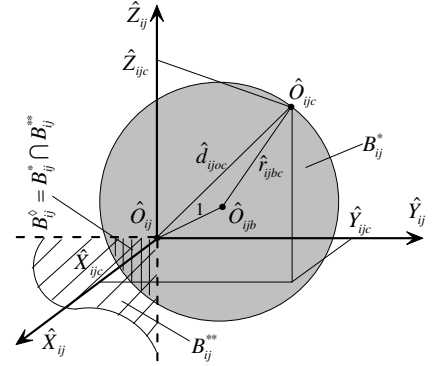


Fig. 8. An unstable set.

Now, let us choose a contact point \hat{O}_{ijb} , see Fig. 8, between the agent i and the agent j belonging to the set \mathbb{N}^{**} , i.e., the point where $\Delta_{ij} = 0$ such that the distance from \hat{O}_{ijb} to the point \hat{O}_{ijc} at $(\hat{X}_{ijc}, \hat{Y}_{ijc}, \hat{Z}_{ijc})$ where $(\hat{X}_{ijc}, \hat{Y}_{ijc}, \hat{Z}_{ijc}) := \mathbf{Q}_{ijc} \mathbf{q}_{ijc}$ is smallest. In Fig. 8, the $\hat{O}_{ij} \hat{X}_{ij}$, $\hat{O}_{ij} \hat{Y}_{ij}$, $\hat{O}_{ij} \hat{Z}_{ij}$ axes represents the first, second, and third elements of $\mathbf{Q}_{ij} \mathbf{q}_{ij}$, respectively.

Let the ball B_{ij}^* be centered at \hat{O}_{ijb} and have the radius \hat{r}_{ijbc} of the distance from the center \hat{O}_{ijb} to the point \hat{O}_{ijc} . By construction, if $(\mathbf{q}_{ij}, \boldsymbol{\eta}_i) \in B_{ij}^*$ with $\boldsymbol{\eta}_i$ being satisfied the condition $U_{1i} \leq 0$, the matrix $\mathbf{S}_{ij} := (\mathbf{Q}_{ij}^{-T} (\varphi'_{ij} \boldsymbol{\Phi}_{ij} - \varphi'_{ijc} \boldsymbol{\Phi}_{ijc}) \mathbf{Q}_{ij}^{-1})$ is negative definite.

On the other hand, let B_{ij}^{**} be the set such that if $(\mathbf{q}_{ij}, \boldsymbol{\eta}_i) \in B_{ij}^{**}$ then $[\mathbf{Q}_{ij} (\mathbf{P}_i \mathbf{q}_{ij} - \mathbf{P}_{ic} \mathbf{q}_{ijc})]^T \mathbf{Q}_{ij} \mathbf{P}_i \mathbf{q}_{ij}$ is positive, see Fig. 8 for an illustration. Let $B_{ij}^\diamond = B_{ij}^* \cap B_{ij}^{**}$. We can see that B_{ij}^\diamond is nonempty if the radius \hat{r}_{ijbc} is greater than 1 because the distance between the point \hat{O}_{ij} and the point \hat{O}_{ijb} equals 1. In order to have the radius $\hat{r}_{ijbc} > 1$, we need the distance \hat{d}_{ijoc} from the point \hat{O}_{ij} and the point \hat{O}_{ijc} larger than 2.

We now show that $\hat{d}_{ijoc} > 2$ by choosing C_1 with $\lambda_{\max}(C_1)$ sufficiently small. As such, from (64) we can again see that $\lim_{\lambda_{\max}(C_1) \rightarrow 0} (\|Q_{ijc} P_{ic} Q_{ijc}\|) = \infty$. This means that the set B_{ij}^{\diamond} is nonempty for an appropriate C_1 . Since the matrix S_{ij} is negative definite for $(q_{ij}, \eta_i) \in B_{ij}^*$ with η_i being satisfied the condition $U_{1i} \leq 0$, there exists a nonempty subset $B_{ij}^{\diamond\diamond}$ of B_{ij}^{\diamond} such that if $(q_{ij}, \eta_i) \in B_{ij}^{\diamond\diamond}$ with ϕ_i being satisfied the condition $U_{1i} \leq 0$ the condition $U_{2ij} \leq 0$ holds. Hence, the set Ψ is nonempty and given by $\Psi = \bigcap_{(i,j) \in \mathbb{N}^{**}} B_{ij}^{\diamond\diamond}$. Since we have already proved that the matrix $C_1 + N^* \varphi'_{ijc} \Phi_{ijc}$ is negative definite, the function \bar{V}_c^{**} in (71), its derivative \bar{V}_c^{**} in (74) together with the nonempty set Ψ imply that the undesired equilibrium set E_c is unstable by Chetaev's Theorem (Theorem 4.3 in [29]). \square

REFERENCES

- [1] P. Wang, "Navigation strategies for multiple autonomous mobile robots moving in formation," *Journal of Robotic Systems*, vol. 8, no. 2, pp. 177–195, 1991.
- [2] A. Das, R. Fierro, V. Kumar, J. Ostrowski, J. Spletzer, and C. Taylor, "A vision based formation control framework," *IEEE Transactions on Robotics and Automation*, vol. 18, no. 5, pp. 813–825, 2002.
- [3] D. Gu and Z. Wang, "Leaderfollower flocking: Algorithms and experiments," *IEEE Transactions on Control Systems Technology*, vol. 17, no. 5, pp. 1211–1219, 2009.
- [4] J. Hu and G. Feng, "Distributed tracking control of leaderfollower multi-agent systems under noisy measurement," *Automatica*, vol. 46, no. 8, pp. 1382–1387, 2010.
- [5] M. Egerstedt and X. Hu, "Formation constrained multiagent control," *IEEE Transactions on Robotics and Automation*, vol. 17, no. 6, pp. 947–951, 2001.
- [6] T. Balch and R. C. Arkin, "Behavior-based formation control for multirobot teams," *IEEE Transactions on Robotics and Automation*, vol. 14, no. 6, pp. 926–939, 1998.
- [7] R. T. Jonathan, R. W. Beard, and B. Young, "A decentralized approach to formation maneuvers," *IEEE Transactions on Robotics and Automation*, vol. 19, no. 6, pp. 933–941, 2003.
- [8] P. Ogren, E. Fiorelli, and N. E. Leonard, "Cooperative control of mobile sensor networks: Adaptive gradient climbing in a distributed environment," *IEEE Transactions on Automatic Control*, vol. 49, no. 8, pp. 1292–1302, 2004.
- [9] H. G. Tanner and A. Kumar, "Towards decentralization of multi-robot navigation functions," in *Proceedings of the 2005 IEEE International Conference on Robotics and Automation*, (Barcelona, Spain), pp. 4132–4137, 2005.
- [10] K. D. Do, "Bounded controllers for formation stabilization of mobile agents with limited sensing ranges," *IEEE Transactions on Automatic Control*, vol. 52, no. 3, pp. 569–576, 2007.
- [11] E. Rimon and D. E. Koditschek, "Exact robot navigation using artificial potential functions," *IEEE Trans. Robot. and Automat.*, vol. 8, no. 5, pp. 501–518, 1992.
- [12] D. M. Stipanovic, G. Inalhan, R. Teo, and C. J. Tomlin, "Decentralized overlapping control of a formation of unmanned aerial vehicles," *Automatica*, vol. 40, no. 8, pp. 1285–1296, 2004.
- [13] R. Olfati-Saber, "Flocking for multi-agent dynamic systems: algorithms and theory," *IEEE Transactions on Automatic Control*, vol. 51, no. 3, pp. 401–420, 2006.
- [14] D. V. Dimarogonas, S. G. Loizou, K. J. Kyriakopoulos, and M. M. Zavlanos, "A feedback stabilization and collision avoidance scheme for multiple independent non-point agents," *Automatica*, vol. 42, no. 2, pp. 229–243, 2006.
- [15] I. Hussein and D. Stipanovic, "Effective coverage control for mobile sensor networks with guaranteed collision avoidance," *IEEE Transactions on Control Systems Technology*, vol. 15, no. 4, pp. 642–657, 2007.
- [16] I. Hussein and A. Bloch, "Optimal control of underactuated nonholonomic mechanical systems," *IEEE Transactions on Automatic Control*, vol. 53, no. 3, pp. 668–681, 2008.
- [17] F. Cucker and J. G. Dong, "Avoiding collisions in flocks," *IEEE Transactions on Automatic Control*, vol. 55, no. 5, pp. 1238–1243, 2010.
- [18] A. Abdessameuda and A. Tayebi, "On consensus algorithms for double-integrator dynamics without velocity measurements and with input constraints," *Systems and Control Letters*, vol. 59, no. 5, pp. 812–821, 2010.
- [19] X. Zheng, W. Iglesias, and P. Palfy-Muhoray, "Distance of closest approach of two arbitrary hard ellipsoids," *Physical Review*, vol. 79, p. 057702, 2009.
- [20] W. Wang, Y. Choi, B. Chan, M. Kim, and J. Wang, "Efficient collision detection for moving ellipsoids using separating planes," *Computing*, vol. 72, pp. 235–246, 2004.
- [21] X. Zheng and P. Palfy-Muhoray, "Distance of closest approach of two arbitrary hard ellipsoids in two dimensions," *Physical Review E*, vol. 75, pp. 0617091–0617096, 2007.
- [22] Y. Choi, J. Chang, W. Wang, M. Kim, and G. Elber, "Continuous collision detection for ellipsoids," *IEEE Transactions on Visualization and Computer Graphics*, vol. 15, no. 2, pp. 311–325, 2004.
- [23] B. Anderson, C. Yu, B. Fidan, and J. Hendrickx, "Rigid graph control architectures for autonomous formations," *IEEE Control Systems Magazine*, vol. 28, no. 6, pp. 48–63, 2008.
- [24] L. Krick, M. Broucke, and B. Francis, "Stabilization of infinitesimally rigid formations of multi-robot networks," *International Journal of Control*, vol. 82, no. 3, pp. 423–439, 2009.
- [25] M. Basiri, A. Bishop, and P. Jensfelt, "Distributed control of triangular formations with angle-only constraints," *Systems and Control Letters*, vol. 59, no. 2, pp. 147–154, 2010.
- [26] D. Dimarogonas and K. Johansson, "Stability analysis for multi-agent systems using the incidence matrix: quantized communication and formation control," *Automatica*, vol. 46, no. 4, pp. 695–700, 2010.
- [27] M. Cao, C. Yu, and B. Anderson, "Formation control using range-only measurements," *Automatica*, vol. 47, no. 4, pp. 776–781, 2011.
- [28] K. D. Do, "Output-feedback formation tracking control of unicycle-type mobile robots with limited sensing ranges," *Robotics and Autonomous Systems*, vol. 57, pp. 34–47, 2009.
- [29] H. Khalil, *Nonlinear Systems*. Prentice Hall, 2002.
- [30] M. Krstic, I. Kanellakopoulos, and P. Kokotovic, *Nonlinear and Adaptive Control Design*. New York: Wiley, 1995.
- [31] D. Liberzon, *Switching in Systems and Control*. Birkhauser, 2003.
- [32] K. D. Do and J. Pan, *Control of Ships and Underwater Vehicles: Design for Underactuated and Nonlinear Marine Systems*. Springer, 2009.
- [33] C. T. Kelley, *Solving Nonlinear Equations with Newton's Method*. SIAM, 2003.