

# ICCC 2003

**IEEE International Conference on  
Computational Cybernetics**

**Siófok, Hungary**  
August 29-31, 2003



HFA BMF



IEEE EUROFUSE





# Fractional-Order Position/Force Control of Two Cooperating Manipulators

N. M. Fonseca Ferreira

Institute of Engineering of Coimbra  
Coimbra Polytechnic

Dept. of Electrical Engineering, Rua Pedro Nunes - Quinta  
da Nora 3030-199 COIMBRA

Portugal

nunomig@isec.pt

J. A. Tenreiro Machado

Institute of Engineering of Porto  
Porto Polytechnic

Dept. of Electrical Engineering, Rua Dr. António  
Bernardino de Almeida 431 4200-072 PORTO

Portugal

jtm@dee.isep.ipp.pt

**Abstract** – In this paper it is studied the implementation of fractional-order algorithms in the position/force control of two cooperating robotic manipulators. The system performance is analyzed in terms of time and frequency response for different operating conditions.

## I. INTRODUCTION

Two robots carrying a common object are a logical alternative for the case in which a single robot is not able to handle the load [1 - 2]. Nevertheless, with two cooperative robots the resulting interaction forces have to be accommodated rather than rejected. Consequently, in addition to position feedback, force control is also required to accomplish the task [3 - 4].

There are two basic methods for force control, namely the hybrid position/force and the impedance schemes. The first algorithm was proposed by Raibert [4] and separates the task into two orthogonal subspaces corresponding to the force and the position subspaces. Once established the subspace decomposition two independent controllers are designed. The second algorithm was first proposed by Hogan [1]. In this method, by a proper choice of the arm impedance the interaction forces can be controlled to obtain an adequate response.

This paper studies the position/force control of two cooperative manipulators, carrying a common load, using fractional-order (*FO*) controllers [6 - 8].

In this line of thought the paper is organized as follows. Section two develops a *FO* algorithm for the position/force control of two robotic arms. Section three presents several experiments for the system performance evaluation. Finally, section four outlines the main conclusions.

## II. POSITION FORCE CONTROL OF TWO ARMS

When two robots grasp an object (Fig. 1), and move it from one location to another, a coordinated motion is required. In order to get good performances it is necessary to specify not only the desired motion of each robot but also the corresponding handling force.

In the system under study the contact of the robot gripper with the load is modeled through a linear system with a mass  $M$ , a damping  $B$  and a stiffness  $K$ .

On the other hand, the dynamics of a robot with  $n$  links interacting with the environment is modeled as:

$$\boldsymbol{\tau} = \mathbf{H}(\mathbf{q})\ddot{\mathbf{q}} + \mathbf{C}(\mathbf{q}, \dot{\mathbf{q}}) + \mathbf{G}(\mathbf{q}) - \mathbf{J}^T(\mathbf{q})\mathbf{F} \quad (1)$$

where  $\boldsymbol{\tau}$  is the  $n \times 1$  vector of actuator torques,  $\mathbf{q}$  is the  $n \times 1$  vector of joint coordinates,  $\mathbf{H}(\mathbf{q})$  is the  $n \times n$  inertia matrix,  $\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})$  is the  $n \times 1$  vector of centrifugal/Coriolis terms and  $\mathbf{G}(\mathbf{q})$  is the  $n \times 1$  vector of gravitational effects. The  $n \times m$  matrix  $\mathbf{J}^T(\mathbf{q})$  is the transpose of the Jacobian matrix of the robot and  $\mathbf{F}$  is the  $m \times 1$  vector of the force that the ( $m$ -dimensional) environment exerts in the robot gripper.

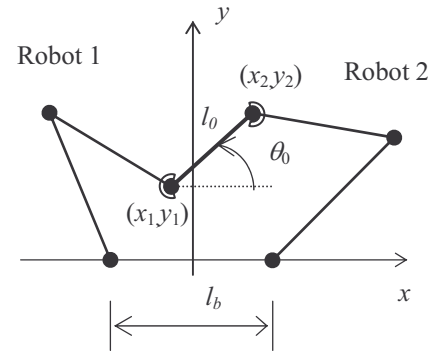


Fig. 1. Two 2R cooperating robots for the manipulation of an object with length  $l_0$  and orientation  $\theta_0$ .

We consider 2R manipulators with dynamics given by:

$$\mathbf{H}(\mathbf{q}) = \begin{bmatrix} (m_1 + m_2)r_1^2 + m_2r_2^2 + & m_2r_2^2 + \\ 2m_2r_1r_2C_2 + J_{1m} + J_{1g} & m_2r_1r_2C_2 \\ m_2r_2^2 + m_2r_1r_2C_2 & m_2r_2^2 + \\ & J_{2m} + J_{2g} \end{bmatrix} \quad (2a)$$

$$\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}}) = \begin{bmatrix} -m_2r_1r_2S_2\dot{q}_2^2 - 2m_2r_1r_2S_2\dot{q}_1\dot{q}_2 \\ m_2r_1r_2S_2\dot{q}_1^2 \end{bmatrix} \quad (2b)$$

$$\mathbf{G}(\mathbf{q}) = \begin{bmatrix} g(m_1r_1C_1 + m_2r_1C_1 + m_2r_2C_{12}) \\ gm_2r_2C_{12} \end{bmatrix} \quad (2c)$$

$$\mathbf{J}^T(\mathbf{q}) = \begin{bmatrix} -r_1S_1 - r_2S_{12} & r_1C_{11} + r_2C_{12} \\ -r_2S_{12} & r_2C_{12} \end{bmatrix} \quad (2d)$$

where  $C_{ij} = \cos(q_i + q_j)$  and  $S_{ij} = \sin(q_i + q_j)$ .

The numerical values adopted for the 2R robots and the object are  $m_1 = 0.5 \text{ kg}$ ,  $m_2 = 6.25 \text{ kg}$ ,  $r_1 = 1.0 \text{ m}$ ,  $r_2 = 0.8 \text{ m}$ ,  $J_{1m} = J_{2m} = 1.0 \text{ kgm}^2$ ,  $J_{1m} = J_{2m} = 4.0 \text{ kgm}^2$ ,  $l_b = l_0 = 1.0 \text{ m}$  and  $\theta_0 = 0 \text{ deg}$ ,  $B_1 = B_2 = 1 \text{ Ns/m}$  and  $K_1 = K_2 = 10^4 \text{ N/m}$ .

The controller architecture (Fig. 3) is inspired on the impedance and compliance schemes. Therefore, we establish a cascade of force and position algorithms as internal an external feedback loops, respectively, where  $x_d$  and  $F_d$  are the payload desired position coordinates and contact forces.

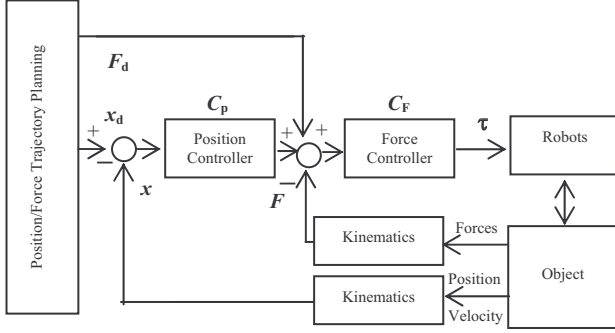


Fig. 2. The position/force controller.

We adopt *FO* algorithms, both at the position and force control loops, namely of the type  $C(s) = K_0 s^\alpha$  with gain  $K_0$  and fractional order  $-1 < \alpha < 1$ . The corresponding discrete-time approximations  $C(z)$  are implemented through the 4<sup>th</sup>-order Pade equations:

$$C_P(z) = K_{P0} s^{\alpha_P} \Rightarrow C_P z \approx K_P \frac{a_0 z^n + \dots + a_n}{b_0 z^n + \dots + b_n} \quad (3a)$$

$$C_F(z) = K_{F0} s^{\alpha_F} \Rightarrow C_F z \approx K_F \frac{c_0 z^n + \dots + c_n}{d_0 z^n + \dots + d_n} \quad (3b)$$

where  $K_P$  and  $K_F$  are the position/force loop gains and  $a_i, b_i, c_i, d_i, \in \mathcal{R}$ .

The *FO* controllers were tuned by trial and error, establishing a compromise between fast transients and large overshoots leading to the parameters  $K_{P_i} = 10^4$ ,  $K_{F_i} = 10^4$ ,  $\alpha_{P_i} = 1/2$ ,  $\alpha_{F_i} = -1/2$ , ( $i = 1, 2$ ).

### III. CONTROLLER PERFORMANCES

This section analyses the system performance both in the time and the frequency domains.

#### A) TIME RESPONSE

We consider different working situations in order to study the effect of changing the payload mass and the contact surface between the gripper and the object. Therefore, the parameters  $M$ ,  $B_i$  and  $K_i$  ( $i = 1, 2$ ) are varied shown in Table I.

In all experiments the controller sampling frequency is  $f_c = 10 \text{ kHz}$  for the operating point  $A \equiv \{x, y\} \equiv \{1, 1\}$  of the object and a contact force of each gripper of  $\{F_{x_i}, F_{y_i}\} \equiv \{0.5, 5\} \text{ Nm}$ .

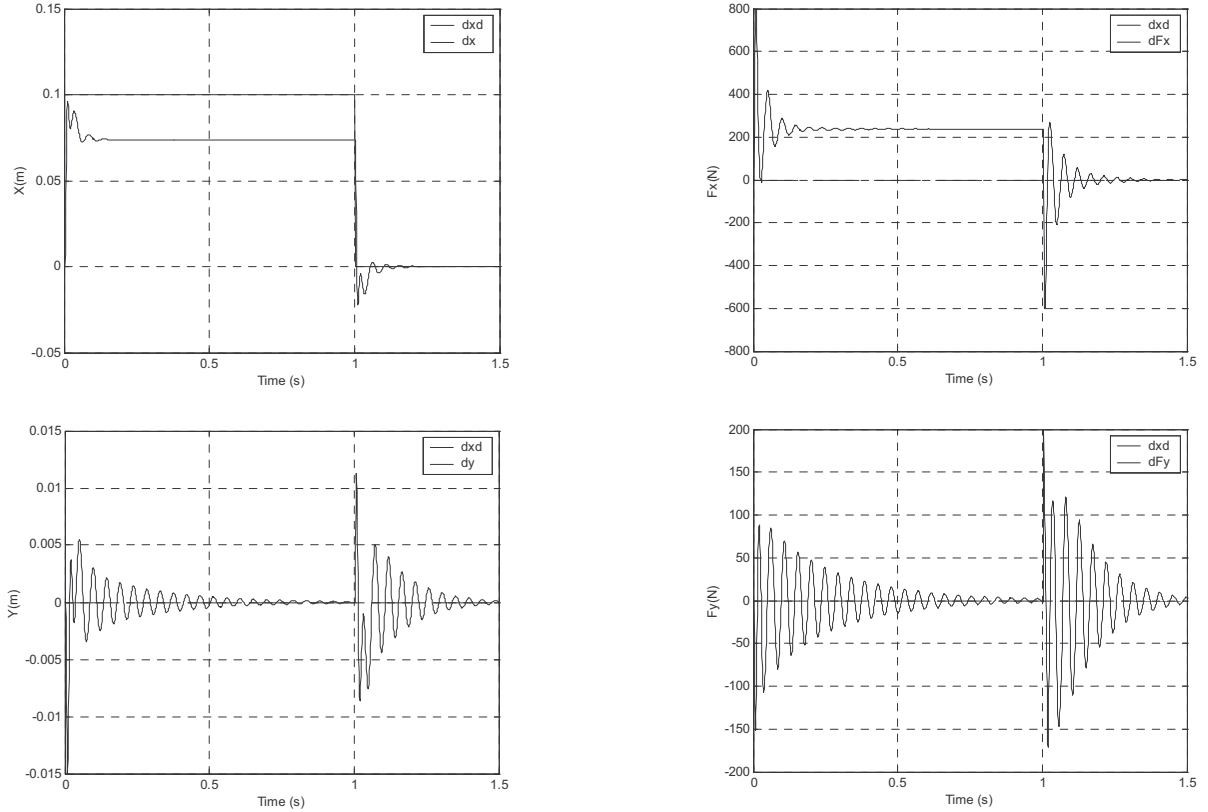


Fig. 3. Time response  $\delta x(t)$ ,  $\delta y(t)$ ,  $\delta F_x(t)$ ,  $\delta F_y(t)$  for a reference position perturbation  $\delta x_d = 0.1 \text{ m}$  and a payload with the parameters of case S2.

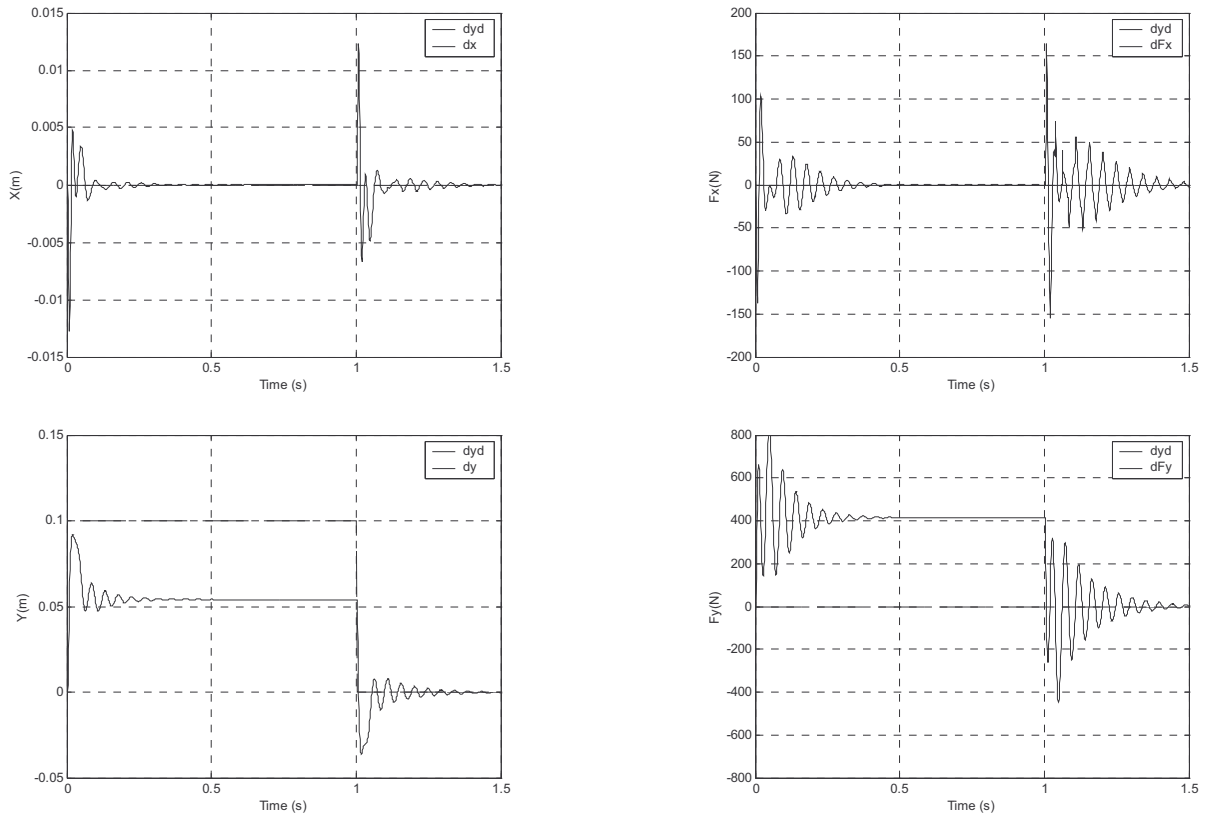


Fig. 4. Time response  $\delta x(t)$ ,  $\delta y(t)$ ,  $\delta F_x(t)$ ,  $\delta F_y(t)$  for a reference position perturbation  $\delta y_d = 0.1$  m and a payload the parameters of case S2.

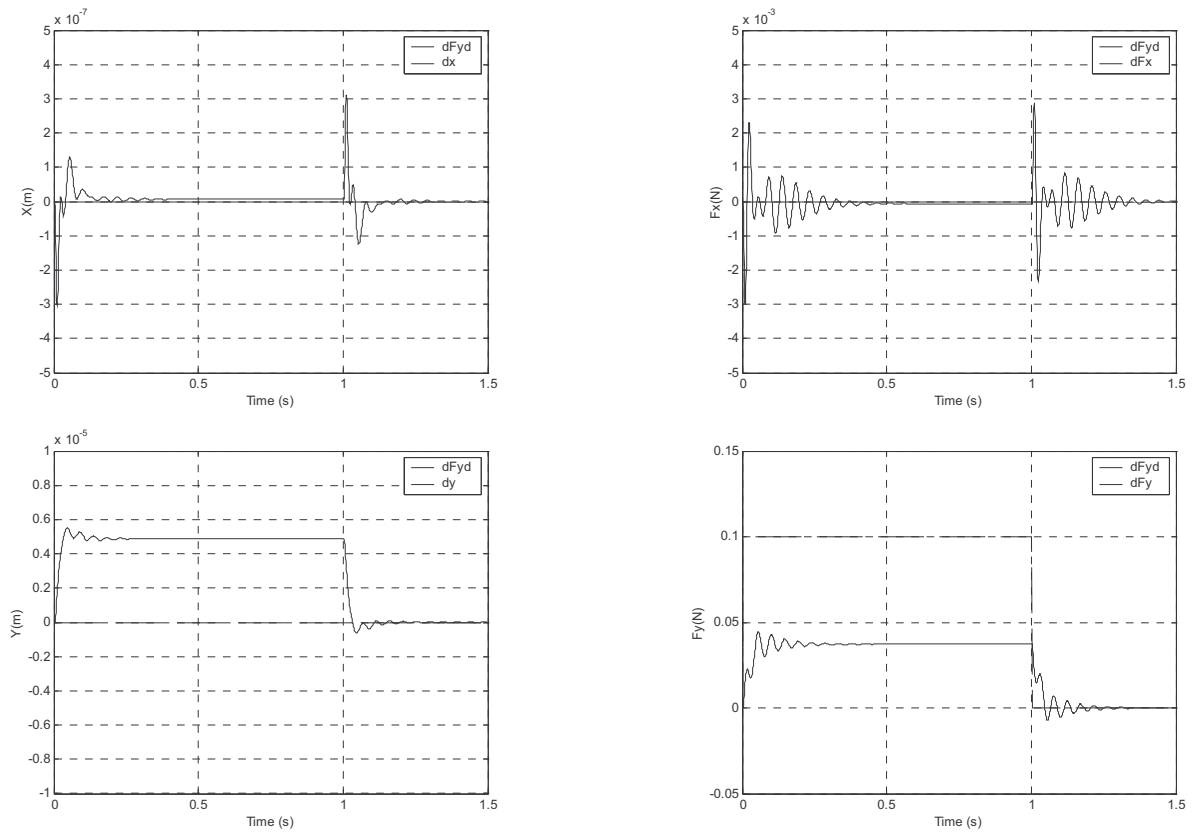


Fig. 5. Time response  $\delta x(t)$ ,  $\delta y(t)$ ,  $\delta F_x(t)$ ,  $\delta F_y(t)$  for a reference force perturbation  $\delta F_{y_d} = 0.1$  N and a payload with the parameters of case S2

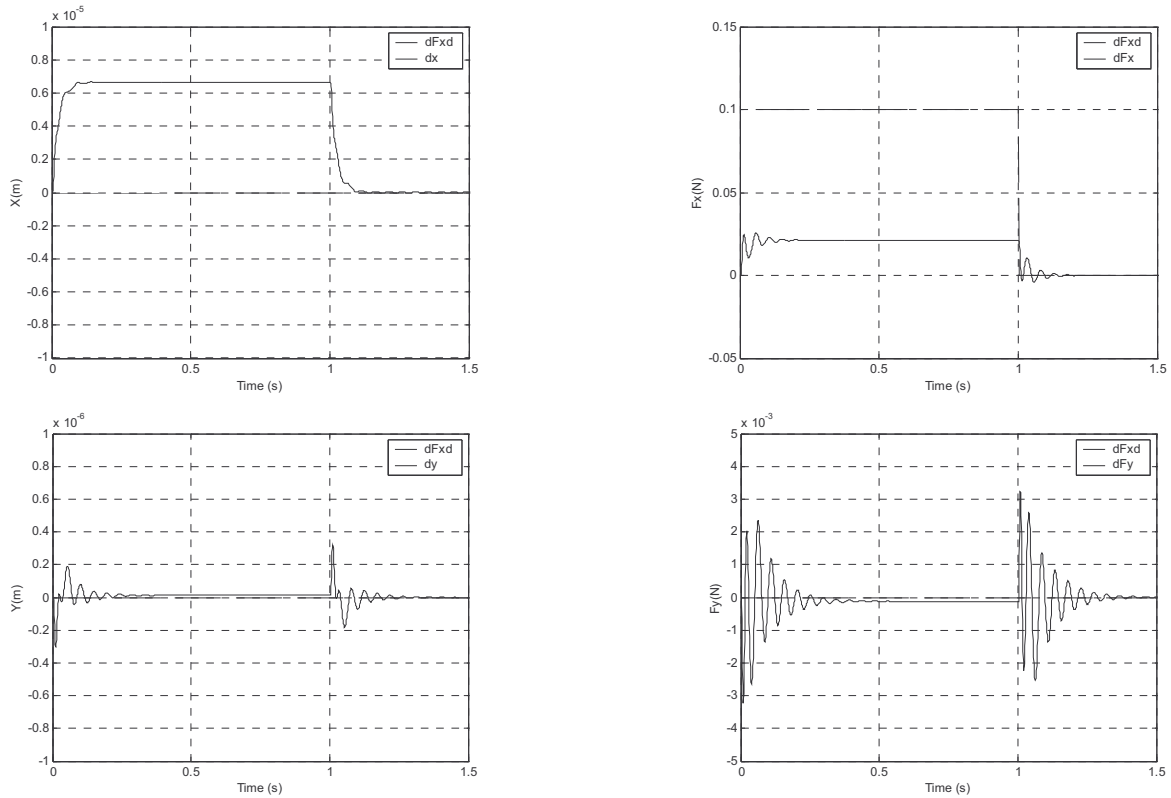


Fig. 6. Time response  $\delta x(t)$ ,  $\delta y(t)$ ,  $\delta F_x(t)$ ,  $\delta F_y(t)$  for a reference force perturbation  $\delta F_{x_d} = 0.1$  N and a payload with the parameters of case S2.

Bearing this fact in mind, we introduce, separately, stepwise perturbations in the position and force references of the robot 1, namely  $\delta x_d = 0.1$  m,  $\delta y_d = 0.1$  m,  $\delta F_{x_d} = 0.1$  N and  $\delta F_{y_d} = 0.1$  N, at  $t = 1$  sec with a duration  $\delta t = 1$  sec.

Figures 3-6 shows the resulting perturbations at the different outputs for the case S2 and Figure 7 shows the time responses for the different load parameters of Table 1.

It is clear that positioning errors increase with the contact friction  $B_i$ . Furthermore, the larger the contact stiffness  $K_i$  the smaller the position overshoot. On the other hand, the force response presents a large peak for high values of  $K_i/B_i$ , revealing differential-like behaviors.

TABLE I – The 2R robot parameters.

Simulation	$M$ (kg)	$B_i$ (Ns/m)	$K_i$ (N/m)
S1	1	10	$10^3$
S2	1	10	$10^4$
S3	1	$10^2$	$10^3$
S4	1	$10^2$	$10^4$
S5	2	10	$10^3$
S6	2	10	$10^4$
S7	2	$10^2$	$10^3$
S8	2	$10^2$	$10^4$

## B) FREQUENCY RESPONSE

Based on the time response to small perturbations at the position and force references we can establish the frequency response, corresponding to linearized transfer functions around the operating point A.

Figure 8 show the frequency response of the robot 1 position and force, namely  $|X(\omega)/X_d(\omega)|$ ,  $|Y(\omega)/Y_d(\omega)|$ ,

$|F_x(\omega)/F_{x_d}(\omega)|$  and  $|F_y(\omega)/F_{y_d}(\omega)|$ . Furthermore, the charts reveal that we have a limited variation for a dramatic change on the load parameters. Therefore, we conclude that the *FO* algorithms reveal an adequate stability and a good robustness.

## IV. CONCLUSIONS

This paper studied the position/force control of two robots working in cooperation using a fractional-order control algorithm. The dynamic performance of two arms holding an object was analyzed both in the time and the frequency domains. The results revealed that the fractional-order algorithm has a good performance and a high robustness.

## V. REFERENCES

- [1] N. Hogan, "Impedance control: An Approach to Manipulation, Parts I-Theory, II-Implementation, III-Applications", ASME J. of Dynamic Systems, Measurement and Control, vol. 107, No. 1, pp. 1-24, 1985.
- [2] E. Whitney, "Historical Perspective and State of the Art in Robot Force Control", IEEE Conf. on Robotics and Automation, St Louis, 1985.
- [3] B. Siciliano and L. Villani, "Robot Force Control", Kluwer Academic Publishers, 1999.
- [4] M. H. Raibert and J. J. Craig, "Hybrid Position/Force Control of Manipulators", ASME J. of Dynamic Systems, Measurement, and Control" vol. 2, No. 2, pp.126-133, vol. 1, 1981.
- [5] N. M. Fonseca Ferreira and J. A. Tenreiro

Machado, "Manipulation Analysis of Two Cooperating Arms", 10th IEEE Int. Conf. on Advanced Robotics, Budapest, Hungary, 2001.

- [6] A. Oustaloup, La Commande CRONE: Commande Robuste d'Ordre Non Entier, Editions Hermes, 1991.  
 [7] J. Tenreiro Machado, "Analysis and Design of

Fractional-Order Digital Control Systems", *J. of Systems Analysis, Modelling and Simulation*, vol. 27, pp. 107–122, 1997.

- [8] I. Podlubny, "Fractional-Order Systems and PI<sup>λ</sup>D<sup>μ</sup>-Controllers", *IEEE Trans. on Automatic Control*, vol. 44, No. 1, pp. 208–213, 1999.

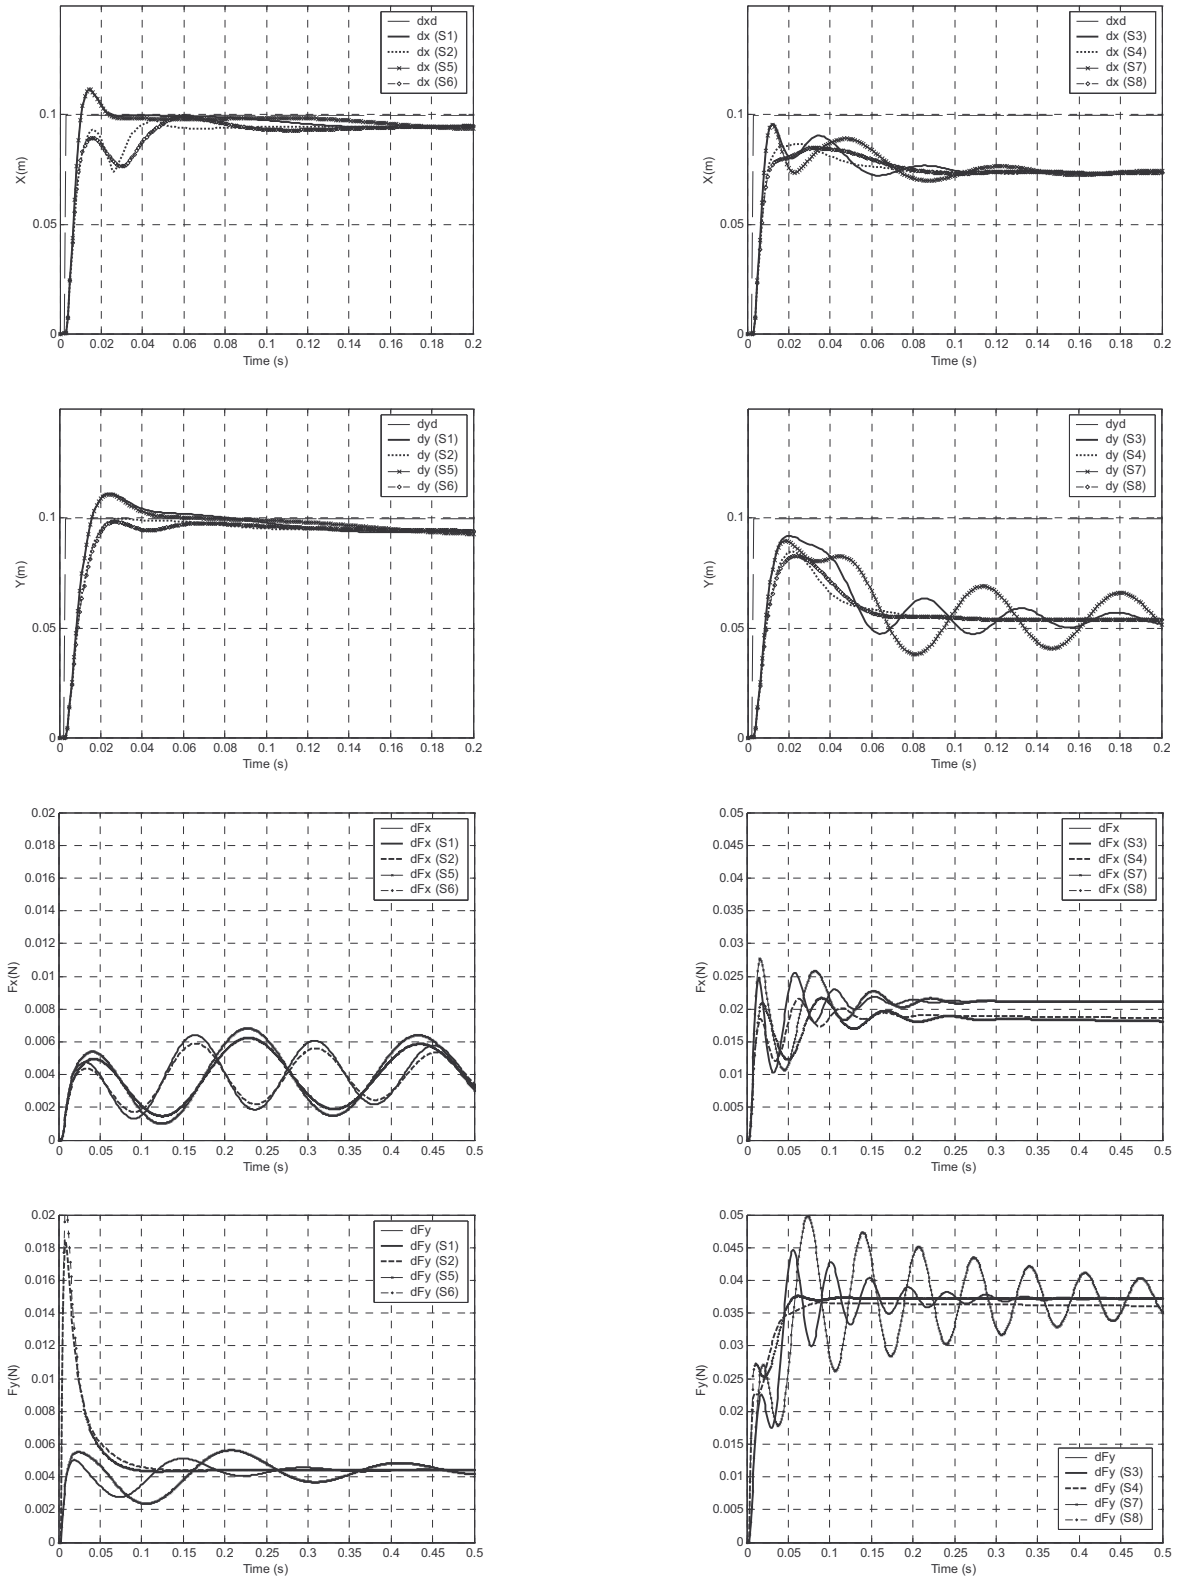


Fig. 7. Time response  $\delta x(t)$ ,  $\delta y(t)$ ,  $\delta F_x(t)$  and  $\delta F_y(t)$  for reference position perturbations  $\delta x_d = 0.1$  m,  $\delta y_d = 0.1$  m,  $\delta F_{x_d} = 0.1$  N,  $\delta F_{y_d} = 0.1$  N, and a payload with the different parameters of cases S1 to S8.

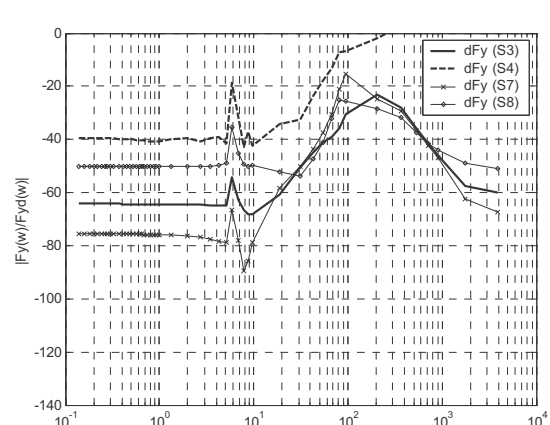
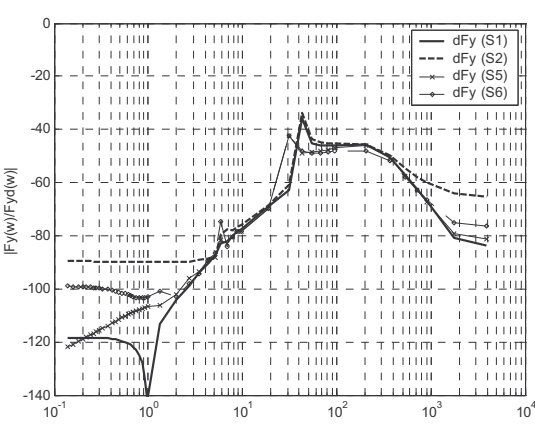
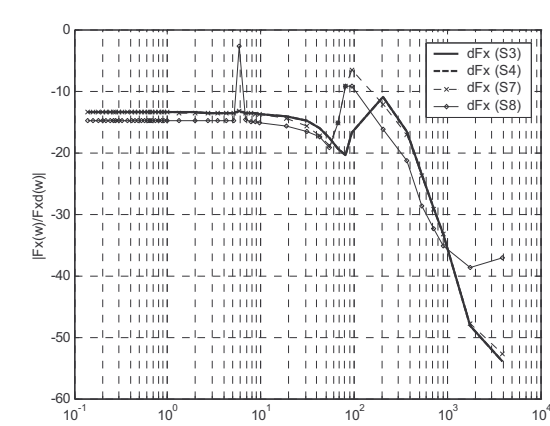
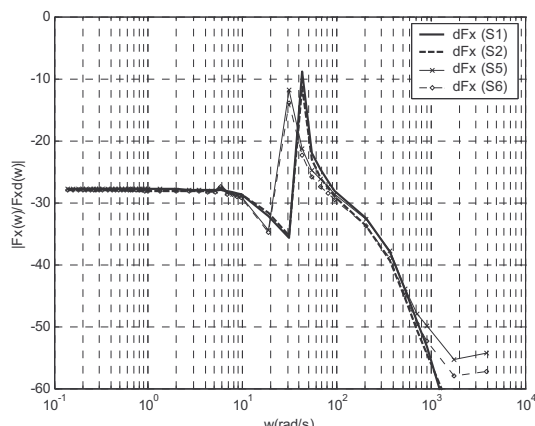
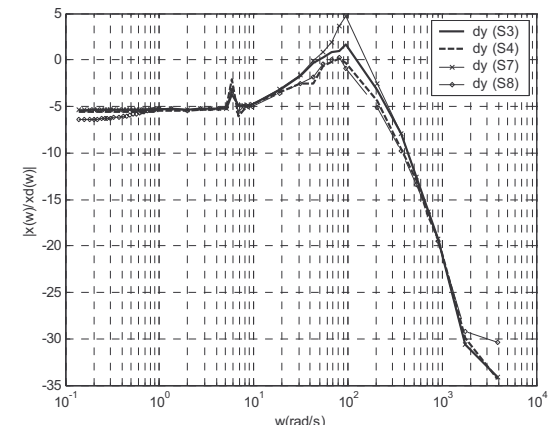
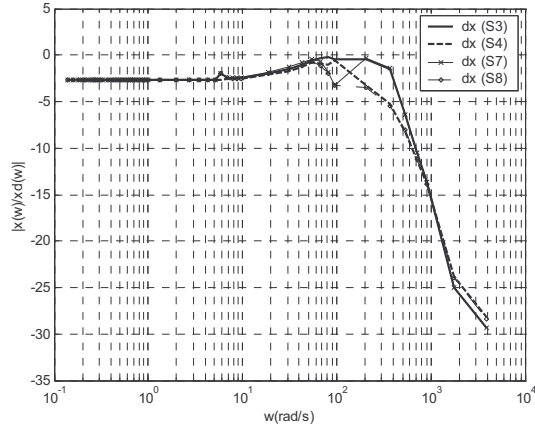
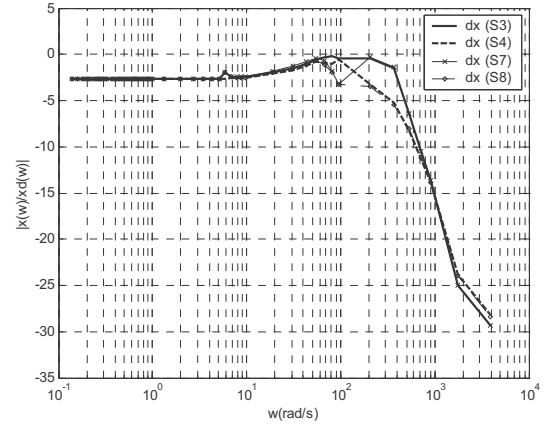
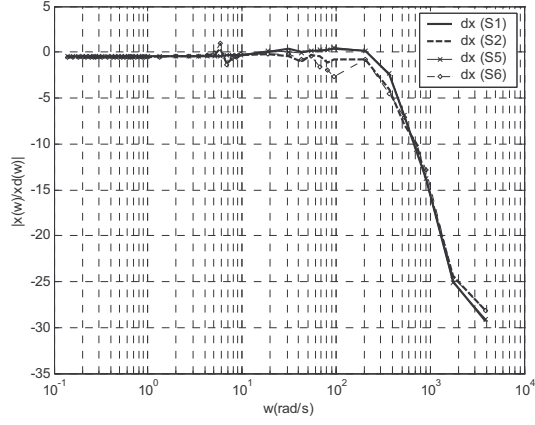


Fig. 8. Frequency response  $|X(\omega)/X_d(\omega)|$ ,  $|Y(\omega)/Y_d(\omega)|$ ,  $|F_x(\omega)/F_{x_d}(\omega)|$  and  $|F_y(\omega)/F_{y_d}(\omega)|$  for reference perturbations  $\delta x_d = 0.1$  m,  $\delta y_d = 0.1$  m,  $\delta F_{x_d} = 0.1$  N,  $\delta F_{y_d} = 0.1$  N and a payload with the different parameters of cases S1 to S8.