



UNIVERSITI PUTRA MALAYSIA

***SUPERCONDUCTING PROPERTIES OF MULTILAYERED THIN FILM
STRUCTURE OF YBCO WITH NiO AND CoO FABRICATED BY PULSED
LASER DEPOSITION***

FASIH UD DIN

FS 2015 76



**SUPERCONDUCTING PROPERTIES OF MULTILAYERED THIN FILM
STRUCTURE OF YBCO WITH NiO AND CoO FABRICATED BY
PULSED LASER DEPOSITION**

By

FASIH UD DIN

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia, in
Fulfillment of the Requirements for the Degree of Doctor of Philosophy**

January 2015

COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



Abstract of the thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Doctor of Philosophy

**SUPERCONDUCTING PROPERTIES OF MULTILAYERED THIN
FILM STRUCTURE OF YBCO WITH NiO AND CoO FABRICATED BY
PULSED LASER DEPOSITION**

By

FASIH UD DIN

January 2015

Chairman: Professor Dr. Abdul Halim Shaari, PhD
Faculty: Science

This thesis attempts to investigate theoretical aspect of transport properties and experimental preparation of Yttrium Barium Copper Oxide (YBCO) single layer and multilayer thin films. Theoretical discussion on possible electrical transport properties on the basis of important experimental facts to satisfy the requirements of practical YBCO devices applications have not been addressed. The Pulsed Laser Deposition (PLD) is one of the techniques that is used to develop fine quality epitaxial thin films. In this research the bulk YBCO and NiO doped YBCO are prepared by different methods namely solid state reaction method and co precipitation method. The simulation modeling of laser plasma dynamics has been done in Matlab 2012 and different parameters have been proposed under the light of theoretical modeling. The theoretical transport properties have also been modeled which may provide some important utilization in electronic devices.

The doping of NiO at Yttrium sites of the six samples with ratio from 0 - 0.1 exhibited tetragonal structure in pure while the orthorhombic structure in doped samples. The same orthorhombic structure has been found with decreased T_c values when the NiO has been added. AC susceptibility results indicate that the introduction of NiO during the final processing of YBCO bulk targets can decrease the T_c from 78-88K. Then PLD experiments were carried out on two different setups with different ranges of substrate heating systems, the former has 0-500°C while other has 0-800°C under oxygen and nitrogen ambient.

The undertaken work involves two distinct studies, firstly, the YBCO epitaxial films and buffer layers have been probed numerically with the help of computer simulations. The simulations revealed the transport properties of the deposited YBCO thin films and analyzed the laser plasma dynamics and transport properties like resistive versus

magnetic field and temperature, susceptibility measurements, the activation energy versus current density and high temperature thermal factor.

The electrical transport properties of YBCO thin film have been investigated using different physical techniques. The physical transport properties were also estimated with temperature and magnetic fields limits using thermally-activated flux flow model with some modifications. The results of present simulation modelling have indicated that the magnitude of activation energy depends on temperature and magnetic field. The simulations revealed thickness dependent physical transport properties including electrical and magnetic properties of deposited YBCO thin films. The results have indicated that the temperature depends on the pinning energy and can be used to improve the superconducting properties (T_c) of the YBCO single layers thin films.

The YBCO thin film have been experimentally fabricated in PLD system with substrate heater ($> 750^\circ\text{C}$) annealed in-situ for the 30 minutes after the deposition under oxygen ambient. The heating and cooling rate for annealing the deposited sample was $3^\circ\text{C}/\text{min}$, and $2^\circ\text{C}/\text{min}$, respectively to improve the quality of film layer. The YBCO target used in those experiment were prepared by amorphous phase epitaxy method. The same procedure for the YBCO/NiO(CoO) double layer and YBCO/NiO(CoO)/YBCO triple layer have been adopted.

The results produce in the other PLD system with lower substrate heating system and ex-situ annealing via tubular furnace has not improved the quality of the layers either used by increasing heating rate and decreasing cooling rate. All the XRD diffraction peaks observed in bulk samples are also seen in the films.

The XRD patterns have indicated that the crystalline quality of the thin film samples prepared by Amorphous phase epitaxy was better than those with co-precipitation method. Furthermore, based on FESEM images, it has proven that thicker and high substrate heating can absorb more oxygen and improve the surface layer.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

**SIFAT KESUPERKONDUKSIAN STRUKTUR FILEM NIPIS MULTILAPISAN
YBCO DENGAN NiO DAN CoO DIFABRIKASI DENGAN PEMENDAPAN
LASER DENYUT**

Oleh

FASIH UD DIN

Januari 2015

Chairman: Professor Dr. Abdul Halim Shaari, PhD

Faculty: Sains

Tesis ini bertujuan untuk menyelidik sifat angkutan teori secara dan penyediaan eksperimen Yttrium Barrium Copper oksida (YBCO) lapisan tunggal dan filem nipis multilapisan. Perbincangan secara teori tentang sifat angkutan elektrik yang mungkin berdasarkan fakta eksperimen yang penting untuk memenuhi ciri penggunaan peranti ybco tidak dibincangkan. Pemendapan Laser Denyut (PLD) adalah diantara teknik yang digunakan untuk membangunkan filem nipis epitaksi yang berkualiti. Aspek aplikasi peranti daripada PLD pada superkonduktor suhu tinggi filem epitaksi mempunyai peranan penting dalam bidang fizik keadaan pepejal dan kesuperkonduksian. Dalam kajian ini, YBCO pukal dan YBCO didopan NiO telah disediakan dengan kaedah berbeza iaitu; tindakbalas keadaan pepejal dan kaedah ko-pemendapan. Pemodelan simulasi laser dinamik plasma telah dilakukan dalam Matlab 2012 dan parameter yang berbeza telah dicadangkan di bawah kaedah pemodelan teori. Sifat pengangkutan teori juga dimodelkan untuk menyediakan beberapa penggunaan penting dalam peranti elektronik.

Pendopan NiO pada tapak Yttrium untuk enam sampel dengan nisbah 0-0.1 mempamirkan struktur tetragonal untuk sampel tulen manakala struktur ortorombik dipamirkan untuk sampel yang didop. T_c ini berkurangan apabila pendopan meningkat seperti yang ditunjukkan dalam keputusan susceptibiliti. Struktur ortorombik juga dicerap dengan penurunan nilai T_c apabila NiO telah ditambah. Keputusan menunjukkan bahawa pengisian jumlah NiO yang sesuai semasa pemprosesan akhir sasaran pukal YBCO dapat menurun T_c dari 78-88K.

Kemudian ujikaji PLD telah dijalankan ke atas dua pemasangan yang berbeza dengan julat sistem pemanasan substrat yang berbeza iaitu pemasangan pertama berjulat 0-500°C manakala yang lain mempunyai 0-800°C dengan persekitaran oksigen dan nitrogen.

Tugas yang dijalankan melibatkan dua kajian yang berbeza, pertama, filem epitaksi YBCO dan lapisan penampan telah disiasat secara berangka dengan bantuan simulasi komputer. Simulasi mendedahkan sifat pengangkutan YBCO didepositkan filem nipis dan menganalisis struktur laser dinamik plasma dan filem, seperti rintangan lawan medan magnet dan suhu dan, pengukuran susceptibility tenaga teraktifan lawan ketumpatan arus dan factor terma suhu tinggi.

Sifat pengangkutan elektrik YBCO filem nipis telah dikaji dengan menggunakan teknik fizikal yang berbeza. Sifat fizikal pengangkutan juga dianggarkan dalam had suhu dan medan magnet menggunakan model aliran haba diaktifkan dengan sedikit pengubahsuaian. Keputusan pemodelan simulasi yang dilaksanakan telah menyatakan bahawa magnitud tenaga pengaktifan bergantung kepada suhu dan medan magnet. Simulasi mendedahkan ketebalan sifat fizikal bergantung kepada sifat pengangkutan termasuk sifat elektrik dan magnet untuk filem YBCO yang dimendapkan. Keputusan telah menunjukkan bahawa suhu bergantung kepada tenaga terpin dan boleh digunakan untuk memperbaiki sifat superkonduktor (T_c) untuk lapisan tunggal filem nipis YBCO.

Filem nipis YBCO telah difabrikasi dalam sistem PLD dengan pemanas substrat ($> 750^\circ\text{C}$) disepuhlandap in-situ untuk 30 minit selepas pemendapan dalam oksigen ambien. Pemanasan dan kadar penyejukan bagi penyepuhlandapan sampel yang dimendap adalah $3^\circ\text{C} / \text{min}$, dan $2^\circ\text{C} / \text{min}$, masing-masing untuk meningkatkan kualiti lapisan filem. Sasaran YBCO yang digunakan dalam eksperimen yang telah disediakan oleh kaedah epitaksi faser amorfus. Prosedur yang sama untuk YBCO / NiO (CoO) dua lapis dan YBCO / NiO (CoO) / YBCO tiga lapisan telah digunapakai.

Keputusan mengemukakan dalam sistem PLD yang lain dengan sistem pemanasan substrat yang lebih rendah dan melalui penyepuhlandapan eks-situ dalam relau tiub tidak meningkatkan kualiti filem sama ada digunakan dengan meningkatkan kadar pemanasan dan mengurangkan kadar penyejukan. Semua puncak belauan sinar-x dikesan dalam sampel pukal juga dicerap pada filem.

Corak XRD menunjukkan bahawa kualiti kristal sampel filem nipis yang disediakan oleh fasa amorfus epitaksi adalah lebih baik daripada filem yang disediakan dengan kaedah ko-pemendakan. Tambahan pula, berdasarkan imej FESEM, ia telah membuktikan bahawa substrat yang lebih tebal dan pemanasan substrat yang tinggi boleh menyerap lebih banyak oksigen dan meningkatkan lapisan permukaan.

ACKNOWLEDGEMENTS

I am ever grateful to almighty ALLAH for being my guiding light throughout this PhD. I am thankful to all those who have helped me during the course of PhD studies. I am grateful to the chairman of the supervisory committee, Professor Dr. Abdul Halim Shaari for his very kind and excellent guidance, support and encouragement. I am thankful to members of my supervisory committee, Prof Zainal Abidin Talib, Dr. Lim Kean Pah and Dr. Chen Soo Kien. I am also pay thank to staff of the Department of Physics, Universiti Putra Malaysia. I also would like to acknowledge that the research was supported by Higher Education Commission of Pakistan (HEC) for the Partial Support Program.

Thanks to my wife children Wajih Ud Din, Azka Fatima, Wania Fatima, grandmother, mother, father, and sisters who have always encouraged and helped me and also looked after my children especially in my absence. I would never have been able even to start my PhD without the sincere and effective advice of my uncles Zahoor Ud Din, Moin Ud Din Salah Ud Din, Moez Ud Din and Hamza Salah Ud Din . I am also thankful to Mr Ammad Ud Din, Mr Muhammad Shoab, Asif Mahmood, Syed Qaisar Shah, Shahid Kamal Tipu who always helped me during my stay in Malaysia.

I certify that a Thesis Examination Committee has met on 16 January 2015 to conduct the final examination of Fasih Ud Din on his thesis entitled "Superconducting Properties of Multilayered thin Film Structure of YBCO with NiO and CoO Fabricated by Pulsed Laser Deposition" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Doctor of Philosophy.

Members of the Thesis Examination Committee were as follows:

Wan Mahmood b Mat Yunus, PhD

Professor
Faculty of Science
Universiti Putra Malaysia
(Chairman)

Halimah bt Mohamed Kamari, PhD

Associate Professor
Faculty of Science
Universiti Putra Malaysia
(Internal Examiner)

Azmi b Zakaria, PhD

Professor
Faculty of Science
Universiti Putra Malaysia
(Internal Examiner)

Mitra Djamal, PhD

Professor
Institute of Technology
Indonesia
(External Examiner)



ZULKARNAIN ZAINAL, PhD

Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 15 April 2015

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfillment of the requirement for the degree of Doctor of Philosophy. The members of the Supervisory Committee were as follows:

Abdul Halim Shaari, PhD
Professor
Faculty of Science,
Universiti Putra Malaysia,
(Chairman)

Zainal Abidin Talib, PhD
Professor
Faculty of Science,
Universiti Putra Malaysia,
(Member)

Chen Soo Kien, PhD
Associate Professor, Dr
Faculty of Science,
Universiti Putra Malaysia,
(Member)

Lim Kean Pah, PhD
Associate Professor, Dr
Faculty of Science,
Universiti Putra Malaysia,
(Member)

BUJANG BIN KIM HUAT, PhD
Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by graduate student

I hereby confirm that:

- this thesis is my original work
- quotations, illustrations and citations have been duly referenced
- the thesis has not been submitted previously or concurrently for any other degree at any institutions
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be owned from supervisor and deputy vice –chancellor (Research and innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software

Signature: _____

Date: _____

Name and Matric No.: _____

Declaration by Members of Supervisory Committee

This is to confirm that:

- The research conducted and the writing of this thesis was under our supervision;
- Supervision responsibilities as stated in Rule 41 in Rules 2003 (Revision 2012-2013) are adhered to.

Signature: _____ Signature: _____
Name of Name of
Chairman of Member of
Supervisory Supervisory
Committee: _____ Committee: _____

Signature: _____ Signature: _____
Name of Name of
Member of Member of
Supervisory Supervisory
Committee: _____ Committee: _____

TABLE OF CONTENTS

ABSTRACT	Page
ABSTRAK	i
ACKNOWLEDGEMENTS	iii
APPROVAL	v
DECLARATION	vi
LIST OF TABLES	vii
LIST OF FIGURES	xiii
LIST OF ABBREVIATIONS	xiv
	xviii
CHAPTER	
1 INTRODUCTION	1
1.1 Generations of HTS Materials	1
1.1.1 YBCO cuprates and other Systems	3
1.1.2 YBCO Multilayer	3
1.1.3 Performance Requirement of HTS Deposited Materials	3
1.1.4 Scientific Challenges of HTS Sandwiches	4
1.1.5 Weak Superconducting Coupling Across Grain Boundaries	4
1.2 Magnetization Models of HTS	5
1.2.1 Bean Model	5
1.2.2 Kim Model	6
1.2.3 Power Law Model	6
1.2.4 Yin Model	7
1.2.5 Dew-Hughes Model of Mechanism in Flux Pinning YBCO	7
1.3 Problem statement	9
1.4 Research Objectives	9
1.5 Scopes of Research	9
1.6 Thesis organization	10
2 LITERATURE REVIEW	11
2.1 History and Background of Superconductivity	11
2.2 Types of Superconductors	12
2.3 Theoretical Laser Ablation	14
2.4 The pinning Mechanism in High Temperature superconductors	15
2.4.1 Vortex Structure	16
2.4.2 Vortex Line Energy	18
2.4.3 Types of Pinning Sites	19
2.4.4 Vortex Phase Diagram of HTS	19

2.5	Cuprate Superconductors	20
2.5.1	The Superconducting Properties of YBCO	21
2.5.2	Vortex Pinning in YBCO Multilayer	22
2.5.3	Thickness of a Multilayer	23
2.6	Production and Properties of Epitaxial Films	23
2.7	Film Growth Techniques	24
2.7.1	Co-Evaporation and Molecular Beam Epitaxy	25
2.7.2	Pulsed Laser Deposition	26
2.7.3	Sputtering	27
2.7.4	Chemical methods	28
2.7.4.1	Metal Organic Che Vapour Deposition	28
2.7.4.2	MOD - Solution Methods	29
2.7.4.3	Liquid Phase Epitaxy	29
2.8	laser Interaction with HTS Target Material	30
2.8.1	Energy transfer through interaction	30
2.9	Theory of Nucleation	31
2.9.1	Growth Modes	32
2.10	Substrates Choice for HTS Multilayer	33
3	EXPERIMENTAL DETAILS	36
3.1	Introduction	36
3.2	Substrate Preparation	36
3.3	Target Preparation	36
3.3.1	Beaker A	37
3.3.2	Beaker B	38
3.3.3	Beaker A+B = Pure YBCO	38
3.4	Pulsed Laser Deposition System	38
3.4.1	Standard Deposition parameter using Pulse Laser Deposition	35
3.5	The Physical Transport Properties	39
3.6	Microstructure Characterization	40
3.6.1	Scanning Electron Microscopy Observations	40
3.6.2	Energy Dispersive Spectroscopy	41
3.6.3	Electron Backscattered Diffraction	42
3.6.4	X-Ray Diffraction	42
3.6.5	Surface Topography by AFM	43
4	RESULTS AND DISCUSSIONS	44
4.1	Laser Plasma Dynamics	44
4.2	The Laser Absorption Mechanism	45
4.3	Background Oxygen Gas Effect	46
4.4	Thickness of the YBCO film	48
4.5	The Electrical Transport Properties	49
4.6	Magnetic Properties	57
4.7	Doping Experiments with YBCO	58
4.7.1	YBCO Doping Experiments	58

4.7.2	Susceptibility Measurements of NiO doped YBCO	60
4.7.3	Addition of NiO with YBCO pellet	61
4.7.4	Susceptibility Measurements of NiO Addition in YBCO	63
4.8	Pulsed Laser Deposition Trials Using Bulk	64
	Target Prepared by Solid State Reaction Method	
4.8.1	Preparing YBCO single layer on MgO	64
4.8.2	Multilayer (YBCO + CoO) on MgO	66
4.8.3	Multilayer (YBCO + CoO + YBCO) on MgO	69
4.8.4	Preparing Multilayer (YBCO + NiO) on MgO	71
4.8.5	Preparing Multilayer (YBCO + NiO + YBCO) on MgO	72
4.9	Pulsed Laser Deposition Experiments Using bulk	74
	Target Prepared by Co-precipitation Method	
4.9.1	Preparing YBCO single layer on MgO	74
4.9.2	Preparing Multilayer (YBCO + NiO) on MgO	78
4.9.3	Preparing Multilayer (YBCO + CoO) on MgO	80
5.	CONCLUSION	82
	REFERENCES	84
	APPENDICES	97
	BIODATA OF STUDENT	103
	LIST OF PUBLICATIONS	104

LIST OF TABLES

Table		Page
3.1	The total percentage of the compounds per pellet.	35



LIST OF FIGURES

Figure		Page
1.1	(a) YBCO Unit Cell consisting of (a) CuO chain in the ‘b’ direction; (b) a pair of CuO ₂ planes with a single CuO chain along ab planes.	2
1.2	Pulse Laser Deposition of (a) Single layer YBCO; (b) Double layer YBCO multilayer; (c) Tripple layer YBCO multilayer.	3
1.3	(a) Grain Boundary with low angle showing insulation because dislocation cores are highly distorted and strained. (b) HRTEM image of 8° (001) tilted grain boundary in HTS (Foltyn <i>et al.</i> , 1999) (c) Grain boundary carrying vortices structure. A schematic illustration of Abrikosov vortices, designated within the grain boundaries, but with cores extended at GB (Abrikosov-Josephson vortices), containing compact J _c of the Grain Boundary.	4
1.4	J _c transport of [001], tilted grain boundaries as a function of tilted angle in YBCO at 4.1 K (Eom <i>et al.</i> , 1992).	5
2.1	The flux is expelled from the interior of a low temperature supercondtor when B=0 (Meissner effect).	12
2.2	Elemental superconductivity (a) Penetration of magnetic field into elemental superconductor above the normal state H _c ; (b) The behaviour of an applied versus internal magnetic field (Innes <i>et al.</i> , 1978).	12
2.3	Compound superconductivity: (a) The additional state of compound superconductivity for H _{c1} and H _{c2} which allows the partial penetration of magnetic flux lines; (b) The applied field vs. internal field until H _{c1} where there is no penetration, after which the superconductor becomes normal at H _{c2} (Anderson, 1997).	13
2.4	Cores and encircling supercurrent vortices are shown where the flux threading core (vertical line) is inside and the surface current maintain the diamagnetism in mixed state (Gapud <i>et al.</i> , 2005).	14
2.5	Phases of plume dynamics during laser irradiation of target: (A) Target in original position; (B) Evaporation occur when laser light strike the YBCO target; (C) Laser radiation absorbed by Plasma; (D) Expanding plasma during ablation (Singh, 1994).	15
2.6	$F = J \times B$, when current interact with flux with a density of J .	16
2.7	The impurities and defects operate as a pinning centres: (a) impurities pinning the flux; (b) pinning flux and vortex free energy; (c) vortex in current flow streaming (Abd-shukor, 2004).	16

2.8	The isolated vortex when $\kappa \sim 5$, $\psi(r)$ order parameter is zero value producing core of radius ξ . The magnetic field decays $h(r)$ over the distance λ (Tinkham, 1996).	18
2.9	Artificial pinning centers of different dimensionality: 1D-artificial pinning centers; 2D artificial pinning centers; 3D artificial pinning centers (Matsumoto and Mele, 2010).	19
2.10	The Meissner region below the critical value of field $H_{c1}(T)$, the flux melting line separates the flux solid and thin liquid line outside of the upper critical field value is $H_{c2}(T)$ (Owens, 2002).	20
2.11	The cuprate schematic diagram (Abd-shukor, 2004).	21
2.12	Schematic diagram of atom by atom placement during ablation.	24
2.13	Atomic absorption spectroscopy in-situ flux monitoring system during multilayer ablation.	25
2.14	Schematic diagram of reactive evaporation system(Bozovic <i>et al.</i> , 1995, Dijkkamp <i>et al.</i> , 1987).	26
2.15	Schematic diagram of Pulse Laser Deposition.	27
2.16	Schematic diagram of Sputtering deposition system.	28
2.17	Diagram of a UV-assisted MOCVD system used for deposition of the YBCO multilayer (Zhong at al., 1995, Ignatiev et al., 1997).	28
2.18	Bauer at al. proposed three modes of nucleation: (a) Frank-Van der Merwe; (b)Volmer-Weber; (c) Stranski-Krastanow.	33
3.1	(a) Barium acetate into the beaker; (b) Acetic acid mixing into the beaker; (c) Stirring; (d) Stirring process by glass rod; (e) The beaker in ice bath; (f) Crystallization.	37
3.2	(a) 200 milliliter distilled water; (b) 300 milliliter of 2-propanol; (c) The crystallization process.	38
3.3	(a) Mixing of solution from keaker A and B (b) Filtration.	38
3.4	Apparatus for measuring (a) Four point probes resistivity; (b)AC susceptibility.	40
3.5	Schematic diagram of FESEM showing a beam interaction with a speciman generating a number of signals.	41
3.6	Schematic diagram of X-ray Diffraction showing the primary beam and diffracted beam.	43
4.1	The velocity distribution function vs. effective temperature.	44
4.2	The velocity distribution function vs. stream velocity and effective temperature .	45

4.3	The plot of distance, explosion energy and time as per the ‘free expansion’ model when (a): $s = 1$ (b): $s=0.4$.	47
4.4	Thickness curve as function of (a) relative intensity; (b) relative intensity and incident angle.	49
4.5	a) Plot of ρ vs $1/B$ at 77K, 83K, and 91K; b) $U = 2$; (c) 5; (d) 7; (e) 10.	52
4.6	a) Activation barrier as a product of B versus high temperature thermal factor at 90°K; (b) Temperature dependent component of the activation barrier \dot{U} , plotted as the product of U' with B and current J at 80°K (c) 81°K (d) 86°K (e) 91°K.	53
4.7	a) E vs. J with different magnetic fields values; (b) Electric field E vs. current J , varies with temperature at 1T; (c) 2T; (d) 3T; (e) 4T.	55
4.8	The activation barrier vs. magnetic fields.	56
4.9	Transition between $\ln\rho$ vs $1/T$ with different magnetic fields values.	57
4.10	(a) Magnetization vs. Temperature (b) High Temperature (thermal factor vs. Applied Field.	58
4.11	(a) XRD spectra for the $Y_{(1-x)}Ni_xBa_2Cu_3O_{7-\delta}$ superconductor under different doping concentrations; (b) Variations of lattice parameters.	59
4.12	(a) real part of susceptibility for $Y_{(1-x)}Ni_xBa_2Cu_3O_{7-\delta}$; (b) Imaginary part of susceptibility for $Y_{(1-x)}Ni_xBa_2Cu_3O_{7-\delta}$.	60
4.13	(a) XRD of $(YBCO)_{1-x}(NiO)_x$ superconductor; (b) Variation of lattice parameters.	62
4.14	(a) The real part of susceptibility for $(YBCO)_{1-x}(NiO)_x$; (b) Imaginary part of susceptibility for $(YBCO)_{1-x}(NiO)_x$.	63
4.15	XRD pattren (a) Pure YBCO pellet; (b) Pure YBCO on MgO substrate.	64
4.16	FESEM images of bulk pellet at different magnifications (a) 5,000X; (b) 10,000X; (c) 20,000X.	65
4.17	FESEM images of thin film (a) 5,000X; (b) 10,000X; (c) 20,000X.	66
4.18	XRD pattren for $(YBCO + CoO)$ multilayer.	67
4.19	FESEM micrograph of $(YBCO + CoO)$ multilayer; (a) 5, 000X; (b) 20,000X (c) 50,000X (d) 100,000X (e) 200, 000.	68
4.20	(a) XRD of multilayer $(YBCO + CoO + YBCO)$ on MgO.	69
4.21	FESEM micrograph of the $(YBCO + CoO + YBCO)$ multilayer with different magnifications (a) 5, 000X; (b) 10,000X; (c) 20,000X; (c) 50,000X; (d) 100,000.	70
4.22	XRD pattren of $(YBCO + NiO)$ multilayer.	71

4.23	FESEM photograph of (YBCO + NiO) multilayer; (a) 5, 000X (b) 10,000X (c) 20,000X.	72
4.24	(a) XRD pattren of (YBCO + NiO + YBCO) multilayer.	73
4.25	FESEM photograph of (YBCO + NiO + YBCO) multilayer; (a) 5, 000X; (b) 10,000X; (c) 20,000.	74
4.26	XRD pattren: (a) bulk pellet prepared by co-precipitation method; (b) (b) Sigle layer thin film deposited by using pellet prepared by co-precipitation method.	75
4.27	FESEM photograph of bulk pellet prepared by co-precipitation; (a) 5, 000X; (b) 20,000X; (c) 100,000X; (d) 200,000X.	76
4.28	FESEM micrograph of single layer thin film deposited by pellet (prepared by via co-precipitation): (a) 5, 000X; (b) 20,000X; (c) 50,000X; (d) 100, 000X; (e) 200,000X.	77
4.29	XRD pattren (YBCO + NiO) on MgO.	78
4.30	FESEM photograph of multilayer (YBCO + NiO) deposited by co-precipitated pellet (a) 5, 000X ; (b) 10,000X; (c) 20,000X; (d) 50, 000X; (e) 100,000X.	79
4.31	XRD pattren for (YBCO + CoO) on MgO.	80
4.32	FESEM photograph of multilayer (YBCO + CoO) deposited by (pellet prepared by via co-precipitation method) with different magnifications (a) 5, 000X; (b) (c) 20,000X; (d) 100, 000X: (e) 200,000X.	81

LIST OF ABBREVIATIONS

HTS	High Temperature Superconductor
YBCO	$\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$
BSCCO	$\text{Bi}_2\text{Sr}_2\text{Ca}_2\text{Cu}_3\text{O}_{10-\delta}$
O-Ba-O	Barium Oxide
J_c	Critical current density
I_c	Critical current
H_{irr}	Irreversibility field
GBs	Grain boundaries
ϑ_c	Critical angle
BCS	Bardeen-Cooper-Schrieffer
λ_L	London penetration depth
H_c	Critical field
H_{c1}	Critical field 1
H_{c2}	Upper critical field 2
h	Plank's constant
e	Electron charge
GL	Ginzburg-Landau

CHAPTER 1

INTRODUCTION

The discovery of superconductivity generated a completely new field of study in condensed matter physics. Great efforts were made to understand physical transport properties while exploring mechanisms that prompted the microscopic theory of superconductivity, first elaborated in 1957. Thirty years later, new high temperature superconductors (HTS) were discovered which prompted even more research as vendors looked for better superconducting materials with higher T_c values, as well as innovative applications and optimized cost efficiency.

1.1 Generations of HTS Materials

High current density HTS flexible conducting wires have been the main focus of research since their discovery in the late 1980's (Foltyn *et al.*, 1993). Researchers seek to produce affordable high density HTS wires to improve various technologies and applications, particularly in magnetic motors and transformers for high speed levitation trains, high speed water boats, electronics for SQUIDs construction, transistors, sensor microchips, detectors, filters, resonators and filters, etc (Foltyn *et al.*, 1999). The first generation HTS wire, BSCCO, has been synthesized and used in many applications but has very limited critical current density at ~ 77.2 °K (-346 °F / -320.44 °F; temperature of liquid nitrogen) in magnetic fields of higher value (Wu *et al.*, 1995, Kang *et al.*, 2002). YBCO wire-second generation HTS-overcomes such drawbacks due to high J_c potential in higher magnetic fields at 77K. Extensive research on YBCO based materials is directed towards the development of reliable products amenable to practical applications in electric power.

1.1.1 YBCO cuprates and other Systems

Copper oxide based complexes such as BSCCO, Hg compounds, YBCO (Grove *et al.*, 2001) and TI compounds have the advantage of a higher critical temperature ($T_c > 77$ K) which makes them ideal for many industrial and commercial applications. But there remains a need to understand their complicated structure and physics to enhance potential applications. Among these, YBCO cuprates are considered best due to their irreversibility field, higher T_c , and superior pinning force.

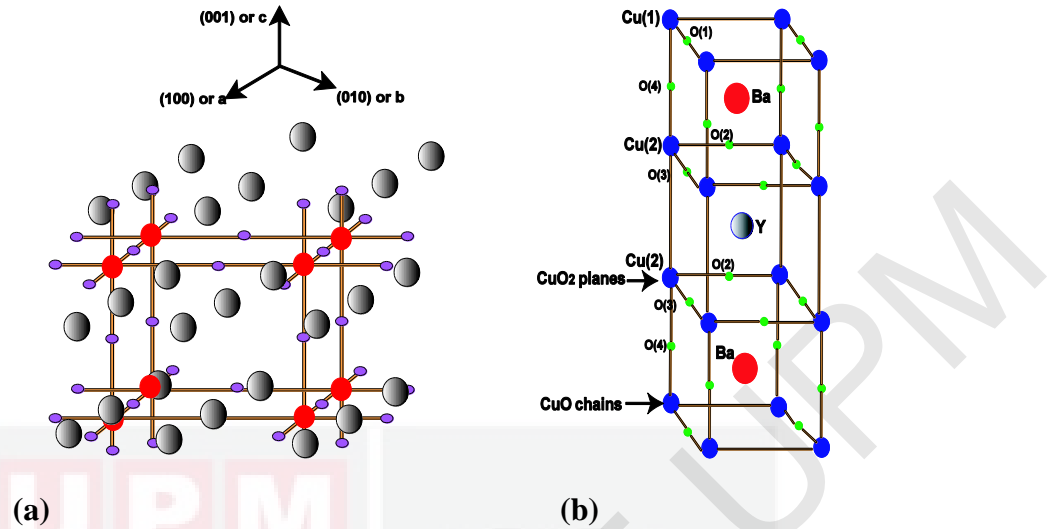


Figure 1.1: YBCO Unit Cell consisting of (a) CuO chain in the ‘b’ direction; (b) a pair of CuO₂ planes with a single CuO chain along ab planes.

Larger anisotropies were observed in cuprate superconductors which led to changes in physical properties such as bidimensionality. A complex layered perovskite crystalline structure leads to larger anisotropy (see Figure 1.1.) which is considered necessary for higher T_c . CuO₂ planes result in layers and planes of various oxides while rare earths separate different planes into charge reservoirs (insulating planes). It is now well established that superconductivity and charge transport are mostly restrained to CuO₂ planes, both theoretically and experimentally. Figure 1.1 depicts CuO₂ superconductive planes and multiple layers of a charge-reservoir (O-Ba-O and O-Cu) stacked around YBCO, which is a layered perovskite structure centered on the Y-layer. Furthermore, mechanically hard, extremely brittle, and very poor ductile properties are also exhibited by cuprate superconductors.

Cuprate superconductors show bidimensionality in physical properties caused by large anisotropies. Its complex crystalline structure comprises CuO₂ planes that are isolated from each other by rare earths and sundry oxides that probably accounts for their greater anisotropy. Charge transport and superconductivity are theoretically and experimentally established properties of CuO₂ planes along with a relatively low anisotropy for YBCO (electron mass anisotropy $\gamma = (m_c/m_{ab})^{0.5} \sim 5-7$) compared to HTS materials. Hence, HTS materials are used for commercial applications due to their metallicly charged reservoirs. BSCCO has a very large ' γ ' value of at least 30. Sufficiently textured YBCO thin films have shown a high J_c (> a few MA/cm² for self-field at ~77K), and relatively high in-field performance (irreversibility field at 77K ~ 6-7 T). It is also known that by establishing many kinds of pinning-force centers, the J_c and irreversibility field can be increased. Moreover, greatly improved in-field performance in the temperatures ranging from 30 to 65 K has been exhibited by YBCO where a closed cycle cooling system based on mechanical cryocoolers may be utilized. The lattice structure becomes tetragonal and non-superconducting possessing lattice parameters where $a = 3.820 \text{ \AA}$, $b = 3.890 \text{ \AA}$, and $c = 11.680 \text{ \AA}$ when x value (YBa₂Cu₃O_{7-x}) is ~ 0 or very small.

1.1.2 YBCO Multilayer

Oxides have an electron single-particle transport property with very high mobility and complex oxide material can be utilized as insulating metal or semiconductors that exhibit interesting properties in solid-state systems with rich phenomenology compared to comparable classes of material.

The behavior of oxides strongly correlates with the Mott-Hubbard transition. A third type of oxide shows collective states such as magnetism that can be coupled to form ferromagnetic and anti-ferromagnetic phases at high temperatures. The layer-by-layer growth design, with one metal sandwiched between two similar YBCO layers with analogous crystalline structures but very different physical properties, obtains benefits of the naturally layered YBCO structure. With two layers, one YBCO and the other metallic deposited one after the other, comprise multilayers that can be grown by supplying materials sequentially from different atomic constituents. The layer-by-layer approach achieves characteristics of thermodynamically stable compounds as shown in Figure 1.2. The main difficulty in layer-by-layer deposition is to accurately control the quantity of deposited material within an error rate of 1%. Additionally, a suitable temperature-oxygen pressure window permits the required lateral surface mobility that supports excellent crystallinity. Essentially, it is a quest to discover optimal conditions for kinetically controlled deposition (Kes and Tsuei, 1983, Civale *et al.*, 2004).

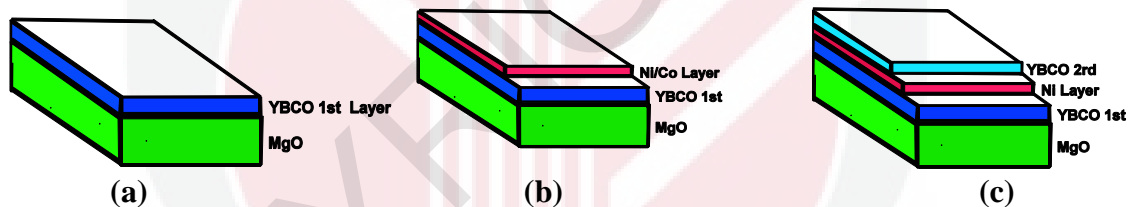


Figure 1.2: Pulse Laser Deposition of (a) Single layer YBCO; (b) Double layer YBCO multilayer; (c) Triple layer YBCO multilayer.

1.1.3 Performance Requirements of HTS Deposited Material

Practically, layer-by-layer deposition is characterized by three important parameters: critical current density (J_c); critical current per unit width (I_c); and irreversibility field H_{irr} (or H). Another important parameter for practically coated conductors is high J_c (4-7 MA/cm²) which is routinely achieved by many deposition techniques for thin YBCO films (a few hundred nanometers thick). However, high J_c for thin films yields I_c of only ~ 200–300 A/cm-width. Hence, a major challenge is to achieve adequately thick films with high J_c of over 500–1000 A/cm-width at 77K.

The practical limitation of a magnetic field applied to superconductors is defined by (H_{irr}) where critical current and flux pinning is no longer effective (i.e., no effective J_c).

However, for high field applications, the higher value of H_{irr} is essential. In-field J_c should attain 10^4 - 10^6 A/cm² in fields of 1-10 T at temperatures ranging from 20-77K (Foltyn *et al.*, 1999) for applications. Moreover, longer length (typically km) is also required.

1.1.4 Scientific Challenges of HTS Sandwiches

Much effort is concentrated on the manufacture of YBCO sandwiches. However, important scientific issues are not yet fully satisfied or even stated. This section highlights critical scientific challenges to YBCO multilayer research, including weak coupling across grain boundaries, flux pinning, and J_c reduction with increased film thickness.

1.1.5 Weak Superconducting Coupling Across Grain Boundaries

Grain Boundaries (GBs) in YBCO have an heterogeneous structure on a scale of 1-5 nm which is comparable to the coherence length ξ of HTS YBCO. Coherence length (ξ) is a measure of distance within planes in which electron concentration cannot drastically change in a spatially-varying applied magnetic field; simply interpreted as the pairing length of a superconducting electron pair. Low angle GBs consist of a grain boundary, dislocation cores, and conductive grain-like channels (Ohnishi *et al.*, 2004), as shown in Figure 1.3(a). Atomic disruptions at the dislocation cores as well as in strain fields surrounding the cores depress the superconducting order parameter and disrupt the supercurrent within a region of 1–2 nm near grain boundary cores. Wider depleted regions have been observed for longer misorientations which result in weaker coupling across GBs (Wong-Ng *et al.*, 2004, Wong-Ng *et al.*, 2005).

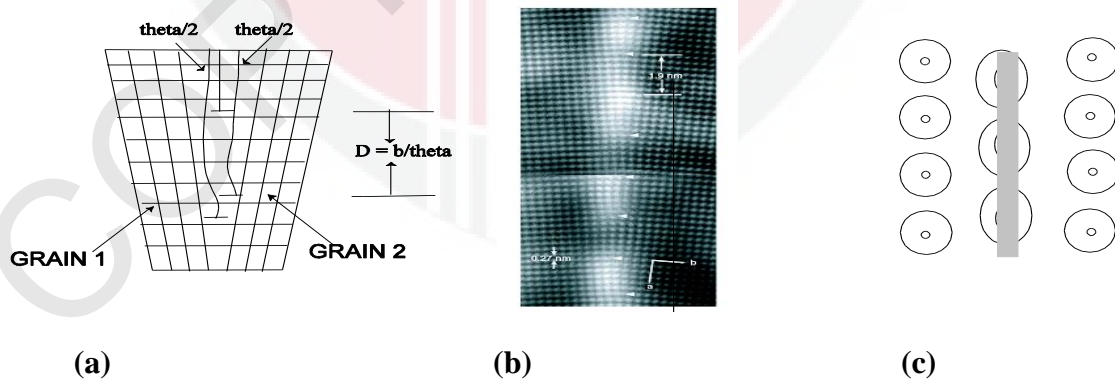


Figure 1.3: (a) Grain Boundary with low angle showing insulation because dislocation cores are highly distorted and strained. (b) HRTEM image of 8° (001) tilted grain boundary in HTS (Foltyn *et al.*, 1999) (c) Grain boundary carrying vortices structure. A schematic illustration of Abrikosov vortices, designated within the grain boundaries, but with cores extended at GB (Abrikosov-Josephson vortices), containing compact J_c of the Grain Boundary.

GBs reduce critical current density (J_c). An initial experiment by Dimos *et al.* (Feldmann *et al.*, 2003) established that J_c across GBs was highly dependent on the misorientation angle. This has since been well established so that J_c at GBs decrease exponentially with a rising misorientation angle beyond a given critical angle (θ_c), as derived by tilted bicrystal experiments as well as micro-bridge experiments on coated conductors [100] (Holesinger *et al.*, 2005, Foltyn *et al.*, 2005). The critical angle (θ_c) (Wang *et al.*, 2002) occurs at about 3–4° at self-field and 77K when J_c at GBs is below that of the grain. Figure 1.4 shows an exponential J_c dependence on the GB misorientation angle at 4.2K. It is, therefore, very important to reduce GB misorientation angles in conductor development and thus, maximize current carrying capability for J_c and I_c .

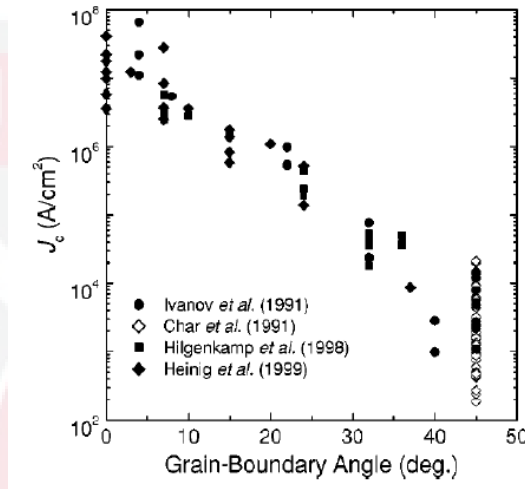


Figure 1.4: J_c transport of [001], tilted grain boundaries as a function of tilted angle in YBCO at 4.1 K (Eom *et al.*, 1992).

1.2 Magnetization Models of HTS

The critical current density, J_c , strongly depends on the value of the magnetic field in consideration of the following factors:

- 1) The characteristic response to an applied field value.
- 2) The historical background of the applied field.
- 3) The initial and final states, and boundary conditions of the system.

Theoretical models for magnetization are given below.

1.2.1 Bean Model

Bean proposed a critical-state model in 1964 which stated that the hysteresis loop is plugged in a macroscopic critical current density parameter, J_c (Bean, 1964).

According to the Bean model, critical current density, J_C , is considered a constant given by

$$J_{C0}(H_i, T) = J_{C0}(T) \quad (1.1)$$

H_i and T represents local magnetic field and the temperature, respectively. It was found that the J_{C0} was directly determined by the microstructure of the superconductors.

The relationship of J_{C0} vs. temperature can be expressed as $J_{C0}(T) = J_{C00} (T_C - T) / (T_C - T_0)$ (Berger *et al.*, 2007).

where T_C represents the critical temperature, J_{C0} the critical current density with reference temperature (T_0) respectively.

1.2.2 Kim Model

In 1964 Anderson and Kim modified Bean's proposed a model (Anderson & Kim, 1964; Kim, *et al.*, 1962) and claim that J_{C0} varied with local magnetic field as

$$J_{C0}(H_i, T) = \frac{J_{C0}(T)}{1 + H_i / H_0} \quad (1.2)$$

The macroscopic material parameter, H_0 is within the field's dimension. For conventional solid cylinder shaped superconductor, the model was then fit to experimental values.

J_{C0} depends on the term H_i/H_0 , as different materials may vary. Watson observed that in some material the condition $H_i \gg H_0$ was satisfied. Later, Hindley and Watson (1969) verified field dependence (J_{C0}) as $J_{C0}(H_i) = A - CH_i$ (Hindley & Watson, 1969).

1.2.3 Power Law Model

In 1967 Irie and Yamafuji worked on some specific pinning mechanisms and suggested a power-law for the field dependence of J_{C0} (Irie & Yamafuji, 1967).

$$J_{C0}(H_i, T) = \frac{K(T)}{H_i^n} \quad (1.3)$$

Where n is the pinning strength and K represents the material parameter. Fietz and co-worker developed a formula based on the experimental data given as (Fietz *et al.*, 1964)

$$J_{C0}(H_i, T) = J_{C0}(T) \exp(-H_i / H_0) \quad (1.4)$$

The critical state model for the critical current density has been obtained from all the equations from Eq. (2.1 - 2.4), as

$$J_{C0}(H_i, T) = \frac{J_{C0}(T)}{[1 + H_i / H_0]^\beta} \quad (1.5)$$

By using Eq. (2.1 and 2.2), Eq. (2.5) may be converted to Bean and Kim models when the dimensionless constant, β , equals 0 and 1. When $-H_i / H_0 \gg 1$ is satisfied for Eq. (2.5), Eq. (2.3) is formed where K and n are set to $J_{C0}(T) = H_0^\beta$ and β . When $-H_i / H_0 \ll 1$ and $\beta \gg 1$ with $-H_0 / \beta_0 \ll H_i$, H_i is finite within the field dimension; and when taking the limit of $J_C(H_i)$ while letting $-H_i / H_0 = x$, then

$$\lim_{x \rightarrow 0} J_{C0}(H_i, T) = \frac{J_{C0}(T)}{\lim_{x \rightarrow 0} [1+x]^\beta} = \frac{J_{C0}(T)}{\lim_{x \rightarrow 0} [1+x]^{(U/x)(H_0/H_0)}} = J_{C0}(T) \exp(-H_i / H_0) \quad (1.6)$$

The physical meaning of the Eq. (2.4 are Eq. 2.6) are identical.

1.2.4 Yin Model

In 1994, the Yin develop the following equation (Yin *et al.*, 1994)

$$E(j) = 2\nu_0 H \exp\left[-\left(\frac{U_0 + W_v}{kT}\right)\right] \sinh\left[\frac{W_L}{kT}\right] \quad (1.7)$$

where factors ν_0 , U_0 , $W_v = \eta\nu P = E(j)HP/\rho_f$, $W_L = JHP$ and P have dimensions of velocity, pinning potential, viscosity coefficient, respectively, where the viscous dissipative flux motion $\eta = HH_{C2}/\rho_n = H^2/\rho_f$, as a product of the 'volume of a moving flux bundle' and the 'range of force' was said to be energy due to the Lorentz driving force. The term (ν) within W_L corresponds to $\nu_0 \exp[-U(j)/kT]$. Yin's model added the terms 'pinning barrier' and 'viscous dissipation' in addition to a direction dependent, while (U) is the activation barrier. The entire framework provided a unified description that included all regimes for flux such as thermally activated flux flow, critical state, flux creep, and flux flow for the model, and also for Anderson-Kim, Bardeen-Steven and critical state ($F_p = J_C \times H$) models.

1.2.5 Dew-Hughes Model of Mechanism in Flux Pinning YBCO

The vortex line in HTS normally has a core diameter of 2ξ with a coherence length of ξ . The calculated coherence length of pure YBCO is 2 nm at 0K. Hence, nano precipitates smaller than 2ξ are the most important pinning centers in YBCO films (Yamasaki *et al.*, 2008). Dew-Hughes developed a model to more accurately study flux pinning in HTS. Elementary pinning forces according to this model are effected by

magnetic field influences or core interactions. Higher κ values in HTS permit core pinning to dominate from two sources:

- 1) Normal particles encircle the superconducting matrix leading toward the scattering of the mean free path (δl pinning).
- 2) Spatial variations in the Ginzburg parameter coupled with fluctuations in critical temperature T_c (δT_c or $\Delta \kappa$ pinning) (Pu *et al.*, 2003).

Hence, the total pinning force becomes

$$F_{pp} = \sum f_{pp} \quad (1.8)$$

where f_{pin} , is the force's pinned flux line per unit length. Hence, the normalized pinning force density which Dew-Hughes proposed is expressed as follows:

$$F_{pp}(b) = \frac{F_{pp}}{F_{pp}^{max}} \propto b^{pp} (1-b)^{qq} \quad (1.9)$$

In HTS, pp and qq depend on specific characteristics of the pinning flux while b is a reduced magnetic field (B / B_{c2} or B / B_{irr}). These pp and qq values explain different types of pinning centers while different pinning functions describing core pinning are defined by an equation derived from the Dew- Hughes model. Here, $k = \lambda/\xi$ (Hughes 1974).

- 1) $pp = 0, qq = 2$: normal pinning of core, volume pins;
- 2) $pp = 1, qq = 1$: $\Delta \kappa$ -pinning of core, volume pins;
- 3) $pp = 1/2, qq = 2$: normal pinning of core, surface pins;
- 4) $pp = 3/2, qq = 1$: $\Delta \kappa$ -pinning of core, surface pins;
- 5) $pp = 1, qq = 2$: normal pinning of core, point pins;
- 6) $pp = 2, qq = 1$: $\Delta \kappa$ -pinning of core, point pins;

This model is helpful for YBCO single and multilayer studied in this research when analyzing the pinning mechanism. The pinning force is calculated by the cross product of B , the applied magnetic field and J_c , the critical current density.

$$F_{pp}(b) = J_c \times B \quad (1.10)$$

In order to obtain specific fitting parameters p and q used to describe the pinning type for the above $F_{pp}(b)$ curves were fitted by equation.

1.3 Problem Statement

Researchers race towards achieving higher and higher T_c with a focus on practical applications. On the basis of the nearly unlimited potential offered by superconductors, proactive thinkers and researchers seek to optimize the potential applicability of these materials and many groups characterize their available properties with a view on new and untested properties while seeking to understand the underlying mechanism of HTS. Although various theories signify the abilities of superconductors, there remains no clear consensus on the underlying mechanism(s) of superconductivity, although many physical transport properties are well known as are the effective metrics that measure the properties of HTS materials. The important question that attracts much research is the 'symmetry of order' parameter that characterizes metallic behavior, since it places serious constraints that pose various challenges to unclear aspects of reigning theories. The matter of material quality and the experimental accuracy of the apparatus has also generated a new series of the experiments concerning accuracy. This thesis concerns the fabrication of YBCO from single to multilayer and intends to explore all possible electrical transport properties based on theoretical ideas and significant experimental data to satisfy requirements for practical HTS YBCO device applications.

1.4 Research Objectives

- 1) To study the nucleation and growth of multilayer YBCO theoretically as well as experimentally and predict all related parameters.
- 2) To study the YBCO single and multilayer samples fabricated by using PLD.
- 3) To determine optimal experimental conditions for the fabrication of Multilayer samples.
- 4) To analyze and interpret the results obtained from theoretical and experimental metrics.

1.5 Scope of Research

The homogeneous growth of mobile particles in a YBCO multilayer involves the precise optimization of the synthesis process to attain optimal superconducting properties during that phase. As YBCO is a multi-cation oxide with a rather complex crystalline structure, the specific requirement for the formation of a YBCO multilayer with very little or no impurity includes strict control of the composition during the entire process. Similarly, for precise cation composition, the formation of the YBCO magnetic layer requires the optimization of both temperature and partial pressure for a chosen oxidizing species, and represents significantly important quality considerations for phase stability of the compounds.

Certainly, most interest is in homogeneous YBCO films which require equilibrium of the specific crystallographic orientation between the film and crystalline substrate. During layer-by-layer synthesis of different compounds, control of film surface morphology is the most important factor. Ambient gases or the mixture of two gases play a dynamic role on microstructure during the deposition process and thus, affect the quality of the multilayer end product.

Current work discusses the preparation of single and multilayers of YBCO under different experimental conditions and different electrical transport modeling for multilayers using Matlab on the basis of important experimental facts to satisfy requirements for practical high- T_c device applications.

The following set of parameters has been identified: preparation times for YBCO pure targets via the Solid State Reaction Method and Co-precipitation Method Deposition; different substrate heating times; and annealing, both in-situ and ex-situ. Characterization measurements are performed using the Atomic Force Microscope (AFM), X-Ray Diffraction (XRD), and Scanning Electron Microscopy (SEM).

1.6 Thesis Organization

This thesis comprises five chapters. The first chapter contains research background and specific aims, a problem statement, research objectives, scope, and thesis organization. Chapter Two discusses previous studies in the field focused on the theory of growth mechanisms, nucleation and fabrication techniques. Chapter Three covers experimental protocols, the preparation of YBCO targets, systems set ups, metrics and characterization. Chapter Four presents simulation and experimental results with a detailed discussion. Chapter Five concludes the study with a summary and recommendations for future work.

REFERENCES

- Anderson, P. W. and Kim, Y. B. "Hard superconductivity: theory of the motion of abrikosov flux lines", Revised Modern Physics, (Bell Telephone Laboratories, Inc., Murray Hill, New Jersey), (1964) 36-39.
- Anderson, P. W. "Theory of superconductivity in high T_c cuprates" (New Jersey, Princeton University Press), (1997) 1-50.
- Abd-Shukor, R. "Introduction to Superconductivity in Metals, Alloys & Cuprates" (UPSI Publisher, Malaysia), (2004) 197.
- Aytug, T., Paranthaman, M., Gapud, A. A., Kang, S., Christen, H. M., Leonard, K. J., Martin, P. M., Thompson, J. R., Christen, D. K., Meng, R., Rusakova, I., Chu, C. W. and Johansen, T. H. (2005). "Enhancement of Flux Pinning and Critical Currents in $YBa_2Cu_3O_{7-\delta}$ Films by Nanoscale Iridium Pretreatment of Substrate Surfaces" Journal of Applied Physics, **98**, 114309(1-5).
- Aloysius, R. P., Guruswamy, P. and Syamaprasad, U. (2005) "Highly Enhanced Critical Current Density in Pr-Added (Bi, Pb)-2212 Superconductor" Journal of Superconductor Science and Technology, **18**, L23-L28.
- Alexander, U., Herbert, F., Alexander, I., Juergen, D., Juergen, K., Marijn, O., Martino, L. and Heinz-W, N. (2003). "Large area YBCO-coated stainless steel tapes with high critical currents" Journal of IEEE Transactions on Applied Superconductivity, **13(2)**, 3385-3388.
- Bednorz, J. G. and Muller, K. A. (1986). "Possible High T_c Superconductivity in the Ba-La-Cu-O System" Journal of Zeitschrift for Physik B Condensed Matter **64**, 189-193.
- Bean, C. P. (1964). "Magnetization of high-field superconductors" Journal of Physical Review Letters, **36(1)**, 31-39.
- Berger, K., Leveque, J., Netter, D., Douine, B., and Rezzoug, A. (2007). "Influence of temperature and/or field dependences of the E-J power law on trapped magnetic field in bulk YBaCuO" Journal of IEEE Transactions on Applied Superconductivity **17(2)**, 3028-3031.
- Brandt, E. H. (1995). "The Flux-Line-Lattice in Superconductors" Reports on Progress in Physics, **58(11)**, 1465-1594.
- Blatter, G., Feigel'man, M. V., Gershkenbein, V. B., Larkin, A. I. and Vinokur, V. M. (1994). "Vortices in High-Temperature Superconductors" Journal of Review in Modern Physics, **66**, 1125-1388.

- Blatter, G. (1997). “*Vortex Matter*” Journal of Physica C, **282-287**, 19-26.
- Berberich, P., Utz, B., Prusseit, W. and H. Kinder. (1994). “Homogeneous high quality YBCO films on 3” and 4” substrates”, Journal of *Physica C*, **219**, 497–504.
- Benerofe, S. J., Ahn, C. H., Wang, M. M., Kihlstrom, K. E., Do, K. B., Arnason, S. B., Fejer, M. M., Geballe, T. H., Beasley, M. R. and Hammond, R. H. (1994). “Dual beam atomic absorption spectroscopy for controlling thin film deposition rates” Journal of Vacuum Science and Technology B **12**, 1217–20.
- Bozovic. I., Eckstein, J.N. and Virshup, G.F. (1994). “Superconducting Oxide Multilayers and Superlattices: Physics, Chemistry, and Nanoengineering” journal of Physics C **235-240**, 178-181.
- Bozovic, I. and Eckstein. J. N. (1995). “MRS Bulletin” **20**, 32-38.
- Berry, A. D., Gaskill, D. K., Holm, R. T., Cukauskas, E. J., Kaplan, R. and Henry, R. L. (1988). “Formation of High-Tc Superconducting Films by Organometallic Chemical Vapor-Deposition” Journal of Applied Physics Letters, **52(20)**, 1743-1745.
- Bishop, D. J., Gammel, P. L. and Huse D.A. (1993). “Resistance in High-Temperature Superconductors” Scientific American, **268(2)**, 48-55.
- Bhattacharya, D., Singh, R. K. and Holloway, P. H. (1991). “Laser-target interactions during pulsed laser deposition of superconducting thin-film” Journal of Applied Physics, **70(10)**, 5433-5439.
- Cherpak, Y. V., Moskaliuk, V. O., Semenov, A. V., Svetchnikov, V. L., Tretiatchenko, C. G. and Pan, V. M. (2007). “Thickness Dependence Mechanisms of the Critical Current Density in High-Tc Cuprate Superconductor Films” Journal of Superconductor Science & Technology, **20(12)**, 1159-1164.
- Civale, L., Maiorov, B., Serquis, A., Willis, J. O., Coulter, J. Y., Wang, H., Jia, Q. X., Arendt, N., MacManus-Driscoll, J. L., Maley, M. P. and Foltyn, R. (2004) “Angular-dependent vortex pinning mechanisms in YBa₂Cu₃O₇ coated conductors and thin films”, Journal of Applied Physics Letters **84**, 2121-2123.
- Campbell, A. M. and Evetts, J. E. (1972). “Flux vortices and transport current in Type-II superconductors” Journal of Advance Physics, **21**, 194–428.
- Crisan, A., Fujiwara, S., Nie, J. C., Sundaresan, A. and Ihara, H. (2001). “Sputtered nanodots: A costless method for inducing effective pinning centers in superconducting thin films” Journal of Applied Physics Letters, **79(27)**, 4547-4549.
- Crisan, A., Badica, P., Fujiwara, S., Nie, J. C., Sundaresan, A., Tanaka, Y. And Ihara, H. (2002). “Strong reduction of thermally activated flux jump rate in superconducting thin

- films by nanodot-induced pinning centers” Journal of Applied Physics Letters, **80(19)**, 3566-3568.
- Crisan, A., Badica, P., Fujiwara, S., Nie, J.C., Sundaresan, A., Iyo, A. and Tanaka, Y. (2003). “Nanodots-Induced Pinning Centers in Thin Films: Effects on Critical Current Density, Activation Energy and Flux Jump Rate” Journal of IEEE Transactions on Applied Superconductivity, **13(2)**, 3726-3729.
- Crabtree, G. W. and Nelson, D. R. (1997). “Vortex Physics in High-Temperature Superconductors” Physics Today, **50(4)**, 38-45.
- Cheung, J.T., Sankur, H. (1988). “Growth of thin films by laser-induced evaporation” Journal of Critical Reviews in Solid State and Materials Sciences, **15(1)**, 63–109.
- Cohen, A., Allenspacher, P., Brieger, M. M., Jeuck, I. and Opower, H. (1991). “Beam Target Interaction During Growth of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ by the Laser Ablation Technique” Journal of Applied Physics Letters, 59(17), 2186-2188.
- Campbell, T. A., Haugan, T. J., Maartense, I., Murphy, J., Brunke, L. and Barnes, P. N. (2005). “Flux pinning effects of Y_2O_3 nanoparticulate dispersions in multilayered YBCO thin film” Journal of Physica C-Superconductivity and Its Applications, 423(1-2), 1-8.
- Dijkkamp, D., Venkatesan, T., Wu, X. D., Shaheen, S. A., Jisrawi, N., Minlee, Y. H., Mclean, W. L. and Croft, M. (1987). “Preparation of Y-Ba-Cu Oxide Superconductor Thin-Films Using Pulsed Laser Evaporation from High-Tc Bulk Material” Journal of Applied Physics Letters, **51(8)**, 619-621.
- Du, J., Gnanarajan, S. and Bendavid, A. (2005). “Characterization of MgO substrates for growth of epitaxial YBCO thin films” Journal of Superconductor Science & Technology, 18(8), 1035-1041.
- Eom, C. B., Sun, J. Z., Yamamoto, K., Marshall, A. F., Luther, K. E., T. H. Geballe and S. S. Laderman. (1989) “*In situ* grown $\text{YBa}_2\text{Cu}_3\text{O}_{7-d}$ thin films from single-target magnetron sputtering” Journal of Applied Physics Letters, **55**, 595–597.
- Eom, C. B., Marshall, A.F., Suzuki, Y., Geballe, T. H., Boyer, B., Pease, R. F. W., Vandover, R. B. and Phillips, J. M. (1992) “Growth mechanisms and properties of 90 grain boundaries in $\text{YBa}_2\text{Cu}_3\text{O}_7$ thin films” Journal of Physical Rev B **46**, 11902-11913.
- Emergo, R. L. S., Wu, J. Z., Aytug, T. and Christen, D. K. (2004). “Thickness Dependence of Superconducting Critical Current Density in Vicinal $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Thick Films” Journal of Applied Physics Letters, **85(4)**, 618-620.

- Frank, F. C. and Van der Merwe, J. H. (1949). "One-dimensional dislocations. II. Misfitting monolayers and oriented overgrowth" *Journal of Proceeding Royal Society of London A*, **198**, 216-241.
- Foltyn, S.R., Tiwari, P., Dye, R. C., Le, M. Q. and Wu, X. D. (1993). " Pulsed laser deposition of thick $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ films with $J_c \geq 1 \text{ MA/cm}^2$." *Journal of Applied Physics Letters* **63**, 1848-1850.
- Foltyn, S. R., Jia, Q. X., Arendt, P. N., Kinder, L., Fan., Y. and Smith, J. F. (1999) "Relationship between film thickness and the critical current of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ - coated conductors." *Journal of Applied Physics Letters* **75**, 3692-3694.
- Feldmann, D. M., Larbalestier, D. C., Feenstra, R., Gapud, A. A., Budai, J. D., Holesinger, T. G. and Arendt, P. N. (2003). "Through-thickness superconducting and normal-state transport properties revealed by thinning of thick film ex situ $\text{YBa}_2\text{Cu}_3\text{O}_{7-x}$ coated conductors." *Applied Physics Letters* **83**, 3951-3953.
- Fietz, W. A., Beasley, M. R., Silcox, J. and Webb, W. W. (1964). "Magnetization of superconducting Nb-25%Zr wire" *Physics Revised*, **136(2A)**, A355-A345.
- Fuchs, G., Schatzle, P., Krabbes, G., Gruss, S., Verges, P., Muller, K. H., Fink, J. and Schultz, L. (2000). "Trapped Magnetic Fields Larger Than 14 T in Bulk $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ " *Journal of Applied Physics Letters*, **76(15)**, 2107-2109.
- Felner, I. and Y. Kopelevich. (2009). "Magnetization measurement of a possible high-temperature superconducting state in amorphous carbon doped with sulfur" *Journal of Physical Review B*, **79**, 233409-233413.
- Faley, M. I., Mi, S. B., Petraru, A., Jia, C. L., Poppe, U. and Urban, K. (2006). "Multilayer Buffer for High-Temperature Superconductor Devices on MgO" *Journal of Applied Physics Letters*, **89(8)**, 082507-3.
- Foltyn, S. R., Dye, R. C., Ott, K. C., Peterson, E., Hubbard, K. M., Hutchinson, W., Muenchausen, R. E., Estler, R. C. and Wu, X. D. (1991). "Target modification in the excimer laser deposition of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ thin-films" *Journal of Applied Physics Letters*, **59(5)**, 594-596.
- Frohlich, K., Souc, J., Rosova, A., Machajdik, D., Graboy, I. E., Svetchnikov, V. L., Figueras, A. and Weiss, F. (1997). "Superconducting $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Films Prepared by Aerosol Metal Organic Chemical Vapour Deposition on Al_2O_3 Substrate with CeO_2 Buffer Layer" *Journal of Superconductor Science & Technology*, **10(9)**, 657-662.
- Grove, J. R., Arendt, P. N., Foltyn, S. R., Jia, Q. X., Holesinger, T. G., Kung, H., Peterson, E. J., Depaula, R. F., Dowden, P. C., Stan, L. and Emmert, L. A. (2001). "High critical current density $\text{YBa}_2\text{Cu}_3\text{O}_{7-d}$ thick films using ion beam assisted

- deposition MgO bi-axially oriented template layers on nickel-based superalloy substrates" *Journal of Material Reseach* **16**, 2175-2178.
- Gerber, C., Anselmetti, D., Bednorz, J. G., Mannhart, J. and Schlom, D. G. (1991). "Screw Dislocations in High-Tc Films" *Nature*, **350(6316)**, 279-280.
- Gapud, A. A., Kumar, D., Viswanathan, S. K., Cantoni, C., Varela, M., Abiade, J., Pennycook, S. J. and Christen, D. K. (2005). "Enhancement of flux pinning in $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ thin films embedded with epitaxially grown Y_2O_3 nanostructures using a multi-layering process" *Journal of Superconductor & Science Technology*, **18**, 1502-1505.
- Gibbs, J. W. "The Scientific Papers of J. W. Gibbs"(Vol. I, Thermodynamics. Dover, New York), (1961) 219-258.
- Gupta, A., Jagannathan, R., Cooper, E. I., Giess, E. A., Landman, J. I. and Hussey, B. W. (1988). "Superconducting Oxide-Films with High Transition-Temperature Prepared from Metal Trifluoroacetate Precursor" *Journal of Applied Physics Letters*, **52(24)**, 2077-2079.
- Goyal, A., Norton, D. P., Budai, J. D., Paranthaman, M., Specht, E. D., Kroeger, D. M., Christen, D. K., He, Q., Saffian, B. List, F. A., Lee, D. F., Martin, P. M., Klabunde, C. E., Hartfield, E. and Sikka, V. K. (1996). " High Critical Current Density Superconducting Tapes by Epitaxial Deposition of $\text{YBa}_2\text{Cu}_3\text{O}_x$ Thick Films on Biaxially Textured Metals" *Applied Physics Letter*, **69(12)**, 1795-1797.
- Gross, M. E., Hong, M., Liou, S. H., Gallagher, P. K. and Kwo, J. (1988). "Versatile New Metalorganic Process for Preparing Superconducting Thin-Films" *Journal of Applied Physics Letters*, **52(2)**, 160-162.
- Gutierrez, J., Llordes, A., Gazquez, J., Gibert, M. Roma, N., Ricart, S., Pomar, A., Sandiumenge, F., Mestres, N., Puig, T. and Obradors, X. (2007). " Strong isotropic flux pinning in solution-derived $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ nanocomposite superconductor films" *Nature, Materials*, **6(5)**, 367-373.
- Harshavardhan, K. S., Rajeswari, M., Hwang, D. M., Chen, C. Y., Sands, T., Venkatesan, T., Tkaczyk, J. E., Lay, K. W. and Safari, A. (1992). "Dominant Pinning Mechanisms in $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Films on Single and Polycrystalline Yttria Stabilized Zirconia Substrates" *Journal of Applied Physics Letters*, **60(15)**, 1902-1904.
- Holesinger, T.G., Arendt, P.N., Feenstra, R., Gapud, A.A., Specht, E.D., Feldmann, D. M. and Larbalestier, D.C. (2005). "Liquid Mediated Growth and the Bi-modal Microstructure of $\text{YBa}_2\text{Cu}_3\text{O}_x$ Films Made by the ex situ Conversion of PVD- BaF_2 Precursors." *Journal of Materials Research*, **20**, 1216-1233.

- Hindley, N. K. and Watson, J. H. "Superconducting metals in porous glass as granular superconductors" (Physics Revised), (1969) 525528.
- Hughes, D. D. (1974). "Flux pinning mechanisms in type II superconductors". *Philosophical Magazine*, **302**, 293-305.
- Hylton T. L. and Beasley, M.R. (1990). "Flux-Pinning Mechanisms in Thin Films of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ " *Physical Review B*, **41**, 11669-11672.
- Haage, T., Zegenhagen, J., Li, J. Q., Habermeier, H. U., Cardona, M., Jooss, C., Warthmann, R., Forkl, A. and Kronmuller, H. (1997). "Transport Properties and Flux Pinning by Self-Organization in $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Films on Vicinal $\text{SrTiO}_3(001)$ " *Physical Review B*, **56(13)**, 8404-8418.
- Haugan, T., Barnes, P. N., Wheeler, R., Meisenkothen, F. and Sumption, M. (2004). "Addition of Nanoparticle Dispersions to Enhance Flux Pinning of the $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Superconductor" *Journal of Nature*, **430(7002)**, 867-870.
- Hanisch, J., Cai, C., Huhne, R., Schultz, L. and Holzapfel, B. (2005). "Formation of Nanosized BaIrO_3 Precipitates and Their Contribution to Flux Pinning in Ir-Doped $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Quasi-Multilayers" *Journal of Applied Physics Letters*, **86(12)**, 122508.1-3.
- Haugan, P. N. B T., Maartense, I. and Cobb, C., B. (2003). "Island growth of Y_2BaCuO_5 nanoparticles in $(211\sim 1.5\text{ nm}/123\sim 10\text{ nm})\times N$ composite multilayer structures to enhance flux pinning of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ films" *Journal of Material Research*, **18(11)**, 2618-2623.
- Ityn, S. R., Civale, L., Macmanus-Driscoll, J. L., Jia, Q. X., Maiorov, B., Wang, H. and Maley, M. (2007). "Materials Science Challenges for High-Temperature Superconducting Wire" *Journal of Nature Materials*, **6(9)**, 631-642.
- Istvan, D. and Albert-Laszlo, B. (1997). "Dislocation-Free Island Formation in Heteroepitaxial Growth: A Study at Equilibrium" *Journal of Physical Review Letters*, **79(19)**, 3708-3711.
- Innes, R., Christopher, A. and Rhoderick. E. H., (1978). "Introduction to superconductivity" (Pergamon Press), 1978.
- Irie, F. and Yamafuji, K. (1967). "Theory of flux motion in non-ideal type-II superconductors" *Journal of the Physical Society of Japan*, **23**, 255-268.
- Ionescu, M., Li, A. H., Zhao, Y., Liu, H. K. and Crisan, A. (2004). "Enhancement of Critical Current Density in $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Thin Films Grown Using PLD on YSZ (001) Surface Modified with Ag Nano-Dots" *Journal of Physics D-Applied Physics*, **37(13)**, 1824-1828.

- Itoh, M., Sudoh, K., Ichino, Y., Yoshida, Y. and Takai, Y. (2003). "Influence of Surface Morphology on the Thickness Dependence of High-Jc $\text{Sm}_{1+x}\text{Ba}_{2-x}\text{Cu}_3\text{O}_6$ Films" *Journal of Physica C-Superconductivity and Its Applications*, **392**, 1265-1269.
- Ignatiev, A., Zhong, Q., Chou, P. C., Zhang, X., Liu, J. R. and Chu, W. K. (1997). "Large Jc Enhancement for Thick YBCO Films Prepared by Photo-Assisted MOCVD" *Journal of Applied Physics Letters*, **70**, 1474-1476.
- Iijima, Y., Kimura, M., Saitoh, T. and Takeda, K. (2000). "Development of Y-123-Coated Conductors by Ibad Process" *Journal of Physica C-Superconductivity and Its Applications*, **335(1-4)**, 15-19.
- Iijima, Y., Kaneko, N., Hanyu, S., Sutoh, Y., Kakimoto, K., Ajimura, S. and Saitoh, T. (2006). "Development of Ibad/PLD process for long length Y-123 conductors in fujikura" *Journal of Physica C Superconductivity and Its Applications*, **445**, 509-514.
- Jooss, C., Warthmann, R., Kronmuller, H., Haage, T., Habermeier, H. U and Zegenhagen, J. (1999) "Vortex Pinning Due to Strong Quasiparticle Scattering at Antiphase Boundaries in $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ " *Journal of Physical Review Letters*, **82(3)**, 632-635.
- Jooss, C., Warthmann, R. and Kronmuller, H. (2000) "Pinning Mechanism of Vortices at Antiphase Boundaries in $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ " *Journal of Physical Review B*, **61(18)**, 12433-12446.
- Klee, M., Brand, W. and Devries, J. W. C. (1988). "Superconducting Films in the Y-Ba-Cu-O System Made by Thermal-Decomposition of Metal Carboxylates" *Journal of Crystal Growth*, **91(3)**, 346-351.
- Kim, Y. B., Hempstead, C. F. and Strnad, A. R. (1962). "Critical persistent currents in hard superconductors" *Journal of Physical Review letters*, **9(7)**, 306-309.
- Kes, P. H., and Tsuei, C. C. (1983) "Two-dimensional collective flux pinning, defects, and structural relaxation in amorphous superconducting films" *Journal of Physical review B*, **28**, 5126-5139.
- Kovachev, V. (2003). "Application problems of high current superconducting Material" *Journal of Materials Science: Materials in Electronics*, **14(10-12)**, 665-669.
- Klausmeier-Brown, M. E., Eckstein, J. N., Bozovic, I., Virshup, G. F. (1992). "Accurate measurement of atomic beam flux by pseudo-double-beam atomic absorption spectroscopy for growth of thin-film oxide superconductors" *Journal of applied physics letters*, **60**, 657-59.
- Kruger, U., Kutzner, R. and Wordenweber, R. (1993). "Improved on-axis DC magnetron sputtering for large-area deposition of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ films" *IEEE Transactions on Applied Superconductivity*, **3(1)**, 1687-1690.

- Kang, B. W., Goyal, A., Lee, D. R., Mathis, J.E., Specht, E. D., Martin, P. M., Kroeger D. M., Paranthaman, M. and Sathyamurthy, S. (2002). "Comparative study of thickness dependence of critical current density of $\text{YBa}_2\text{Cu}_3\text{O}_7$ – on (100) SrTiO_3 and on rolling-assisted biaxially textured substrates." *Journal of Material Research* **17**, 1750 - 1757.
- Kim, B. J., Lim, S. W., Kim, H. J., Hong, G. W. and Lee, H. G. (2006). "New MOD Solution for the Preparation of High J(C) Rebcu Superconducting Films" *Journal of Physica C Superconductivity and Its Applications*, **445**, 582-586.
- Khare, N. "Handbook of high temperature superconductor electronic" (Marcel Dekker: New York), (2003), 16-24.
- Lichtenwalner, D. J., Soble, C. N II, Woolcott, RR. Jr., Auciello, O., Kingon, A. I. (1991). "Uniform deposition of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ films over large areas using ion-beam sputtering" *Journal of Applied Physics Letters*, **70**, 6952–6957.
- Lewis, B. and Anderson, J. C. "Nucleation and growth of thin films" (Academic Press, New York), (1978) 73.
- Lin, D. L., Li, X., Liu, Z. D. and George, T. F. (1992). "Internal explosion in laser ablation of superconducting targets" *Journal of Applied Physics*, **72(9)**, 4227-4231.
- Larkin, A. I. and Ovchinnikov, Y. N. (1979). "Pinning in Type II Superconductors" *Journal of Low Temperature Physics*, **34**, 409-428.
- Maeda, H., Tanaka, Y., Fukutomi, M. and Asano, T. A. (1988). "new high-r. oxide superconductor without a rare earth element" *Japan journal of Applied Physics*, **27**, 209-210.
- Mannhart, J., Anselmetti, D., Bednorz, J. G., Catana, A., Gerber, C., Muller, K. A. and Schlom, D.G. (1992). "Correlation between J_c and Screw Dislocation Density in Sputtered $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Films" *Journal of Zeitschrift für Physik B Condensed Matter*, **86(2)**, 177-181.
- Macmanus-Driscoll, J.L., Foltyn, S.R., Jia, Q. X., Wang, H., Serquis, A., Civale, L., Maiorov, B., Hawley, M.E., Maley, M. P. and Peterson, D. E. (2004). "Strongly Enhanced Current Densities in Superconducting Coated Conductors of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta} + \text{BaZrO}$ " *Nature Materials*, **3(7)**, 439-443.
- Mcintyre, P. C., Cima, M. J., Smith, J. A., Hallock, R. B., Siegal, M. P. and J.M. Phillips. (1992). "Effect of Growth-Conditions on the Properties and Morphology of Chemically Derived Epitaxial Thin-Films of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ on (001) LaAlO_3 " *Journal of Applied Physics*, **71(4)**, 1868-1877.

- Matsumoto, K. and Mele, P. (2010). "Artificial Pinning Center Technology to Enhance Vortex Pinning in YBCO Coated Conductors" *Superconductor Science and Technology*, **23(1)**, 014001-014013.
- Moshchalkov, V.V., Baert, M., Metlushko, V. V., Rosseel, E., VanBael, M. J., Temst, K., Jonckheere, R. and Bruynseraede, Y. (1996). "Magnetization of Multiple-Quanta Vortex Lattices" *Journal of Physical Review B*, **54(10)**, 7385-7393.
- Mele, P., Matsumoto, K., Horide, T., Miura, O., Ichinose, I., Mukaida, M., Yoshida, Y. and Horii, S. (2006) "Tuning of the Critical Current in YBa₂Cu₃O_{7-δ} Thin Films by Controlling the Size and Density of Y₂O₃ Nanoislands on Annealed SrTiO₃ Substrates" *Journal of Superconductor Science & Technology*, **19(1)**, 44-50.
- Mele, P., Matsumoto, K., Horide, T., Ichinose, A., Mukaida, M., Yoshida, Y. and Horii, S. (2007). "Insertion of Nanoparticulate Artificial Pinning Centres in YBa₂Cu₃O_{7-δ} Films by Laser Ablation of a Y₂O₃-Surface Modified Target" *Journal of Superconductor & Science Technology*, **20(7)**, 616-620.
- Ma, Y. W. and Xiao, L. Y. (2004). "Second Generation YBCO Coated Conductors: A Review" *Journal of Chinese Science Bulletin*, 49(23), 2435-2439.
- Norton, D. P. (1998). "Science and technology of high-temperature superconducting films" *Journal of annual review of materials science*, **28**, 299-347.
- Nie, J. C., Yamasaki, H., Yamada, H., Nakagawa, Y., Develos-Bagarinao, K. and Mawatari, Y. (2004). "Evidence for c-Axis Correlated Vortex Pinning in YBa₂Cu₃O_{7-δ} films on sapphire buffered with an atomically flat CeO₂ layer having a high density of nanodots" *Journal of Superconductor Science & Technology*, **17(7)**, 845-852.
- Neifeld, R. A., Gunapala, S., Liang, C., Shaheen, S. A., Croft, M., Price, J., Simons, D. and Hill, W. T. (1988). "Systematics of Thin-Films Formed by Excimer Laser Ablation - Results on SmBa₂Cu₃O₇" *Journal of Applied Physics Letters*, **53(8)**, 703-704.
- Narayan, J., Biunno, N., Singh, R., Holland, O. W. and Auciello, O. (1987). "Formation of thin superconducting films by the laser processing method" *Journal of Applied Physics Letters*, **51(22)**, 1845-1847.
- Natterman, T. (1990), "Topological order in the vortex-glass phase of high-temperature superconductors" *Journal of Physical Review B*, **64**, 626-629.
- Owens, F. J. and Poole, J. C. P. "The New superconductors" Kluwer Academic Publishers, 2002, 216.
- Ohnishi, T., Hammond, R. H. and Jo, W. (2004). "High rate in situ YBa₂Cu₃O₇ film growth assisted by liquid phase" *Journal of Material Research* **19**, 977-981.

- Ohmatsu, K., Muranaka, K., Hahakura, S., Taneda, T., Fujino, K., Takei, H., Sato, Y., Matsuo, K. and Takahashi, Y. (2001). "Development of in-plane aligned YBCO tapes fabricated by inclined substrate deposition" *Journal of Physica C-Superconductivity and Its Applications*, 357, 946-951.
- Pu, M. H., Feng, Y., Zhang, P. X., Zhou, L. and Wang, J.X. (2003). "Investigating the Flux Pinning in High Temperature Superconductors More Accurately". *Physica C Superconductivity and Its Applications*, **386**, 47-51.
- Park, J. H., Jeong, Y. S. and Lee, S. Y. (1998). "Investigation on the Relation between the Thickness and the Orientation of Epitaxially Grown YBCO Thin Films by Laser Ablation" *Journal of Thin Solid Films*, **318**, 243-246.
- Phillips, J. M. (1996). "Substrate Selection for High-Temperature Superconducting Thin Films" *Journal of Applied Physics*, **79(4)**, 1829-1848.
- Paranthaman, M., Bhuiyan, M. S., Sathyamurthy, S., Zhai, H. Y., Goyal, A. and Salama, K. (2005). "Epitaxial Growth of Solution-Based Rare-Earth Niobate, Re_3NbO_7 , Films on Biaxially Textured Ni-W Substrate" *Journal of Materials Research*, **20(1)**, 6-9.
- Rijnders, G. J. H. M., Koster, G., Blank, D. H. A., Rogalla, H. (1997). "In situ monitoring during pulsed laser deposition of complex oxides using reflection high energy electron diffraction under high oxygen pressure" *Journal of Applied Physics Letters*, **70**, 1988-1990.
- Siegrist, T., Mixon, D. A., Coleman, E., Tiefel, T. H. (1992). "Growth of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ in pure ozone irradiated with ultraviolet light" *Journal of Applied Physics Letters*, **60**, 2489-2490.
- Sawa, A., Obara, H. and Kosaka, S. (1994). "Effect of using pure ozone on *in situ* molecular beam epitaxy of $\text{YBa}_2\text{Cu}_3\text{O}_{7-x}$ thin films at low pressure" *Journal of Applied physics Letters*, **64**, 649-651.
- Shimizu, T., Nonaka, H., Hosokawa, S., Ichimura, S. and Arai, K. (1991). "Preparation of oxide superconducting film in MBE using NO_2 and O_3 gases", *Journal of Physics C*, **185-189**, 2003-2004.
- Silhanek, A., Van Look, L., Jonckheere, R., Zhu, Raedts, S. and Moshchalkov, V. V. (2007). "Enhanced Vortex Trapping by a Composite Antidot Lattice in a Superconducting Pb Film" *Journal of Physica C-Superconductivity and Its Applications*, **460**, 1434-1435.
- Solovyov, V. F., Wiesmann, H. J., Wu, L., Li, Q., Cooley, L. D., Suenaga, M., Maiorov, B. and Civale, L. (2007). "High Critical Currents by Isotropic Magnetic-Flux-Pinning Centers in a 3 μm -Thick $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Superconducting Coated Conductor" *Journal of Superconductor Science & Technology*, **20(4)**, L20-L23.

- Safar, H., Gammel, P. L., Huse, D. A., Bishop, D. J., Rice, J. P. and Ginsberg, D: M. (1992). "Experimental-Evidence for a 1st-Order Vortex-Lattice-Melting Transition in Untwinned, Single-Crystal $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ " *Journal of Physical Review Letters*, **69(5)**, 824-827.
- Schrieffer, J. R., "Handbook of High-Temperature Superconductivity: Theory and Experiment" Edited by J.S. Brooks (Springer Science, New York), (2007) 496.
- Sawh, R. P., Ren, Y., Weinstein, R., Hennig, W. and Nemoto, T. (1998). "Uranium Chemistry and Pinning Centers in High Temperature Superconductor" *Journal of Physica C Superconductivity and Its Applications*, **305(3-4)**, 159-166.
- Sheth, A., Schmidt, A. and Lasrado, V. (1998). "Review and Evaluation of Methods for Application of Epitaxial Buffer and Superconductor Layer" *Journal of Applied Superconductivity*, **6(10-12)**, 855-873.
- Sathyamurthy, S. and Salama, K. (2000). "Application of Metal-Organic Decomposition Techniques for the Deposition of Buffer Layers and Y123 for Coated-Conductor 215 Fabrication" *Journal of Physica C-Superconductivity and Its Applications*, **329(1)**, 58-68.
- Stranski, I. N. and Krastanov, L. (1938). "Zur Theorie der orientierten Ausscheidung von Ionenkristallen aufeinander" *Sitzungs-bericht Akademie der Wissenschaften Wien, Math.-naturwiss. Kl. IIB*, **146**, 797-1607.
- Singh, R. K. (1994). "Target ablation characteristics during pulsed-laser deposition of thin-films" *Journal of Non-Crystalline Solids*, 178, 199-209.
- Singh, R. K., Bhattacharya, D. and Narayan, J. (1990). "Subsurface heating effects during pulsed laser evaporation of materials" *Journal of Applied Physics Letters*, **57(19)**, 2022-2024.
- Singh, R. K., Holland, O.W. and Narayan, J. (1990). "Theoretical model for deposition of superconducting thin films using pulsed laser evaporation technique" *Journal of Applied Physics*, **68(1)**, 234-247.
- Sato, Y., Matsuo, K., Takahashi, Y., Muranaka, K., Fujino, K., Hahakura, S., Ohmatsu, K. and Takei, H. (2001). "Development of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ tape by using inclined substrate method" *IEEE Transactions on Applied Superconductivity*, 11(1), 3365-3370.
- Soltan, S., Albrecht, J. and Habermeier, H. U. (2007). "Spin-Polarized Quasiparticles Injection Effects in the Normal State of YBCO Thin Films", *Journal of Physica C Superconductivity and Its Applications*, **460**, 1088-1089.

Tallon, C., Bertrand, O., Bouchet, P., Pernier, J. (1995). "Gamma-range activity evoked by coherent visual stimuli in humans" *European Journal of Neuroscience*, **7**, 1285–1291.

Tomita, M. and Murakami, M. (2003). "High-Temperature Superconductor Bulk Magnets That Can Trap Magnetic Fields of over 17 Tesla at 29 K" *Nature*, **421(6922)**, 517-520. Tinkham, M. "Introduction to Superconductivity", Second edition, McGraw Hill, New York, (1996), 472.

Venables, J. A., Spiller, G. D. T. and Hanbucken, M. (1984). "Nucleation and Growth of Thin-Films", *Reports on Progress in Physics*, **47(4)**, 399-459.

Varma, C. F. (2006). "Theory of the pseudogap state of the cuprates" *Journal of Physical Review B*, **73**, 15513-17.

Witanachchi, S., Ahmed, K., Sakthivel, P and Mukherjee, P (1993) "Dynamics of Ionic Enhancement in the Plasma-Assisted Laser Deposition of High Tc Superconductors", in *Superconductivity and Applications*, H.S. Kwok, D.T. Shaw and M.J. Naughton. eds., AIP Conference proceedings, **273**, 102-111.

Wu, X. D., Foltyn, S. R., Arendt, P., Townsend, J., Campbell, I. H., Tiwari, P., Jia, Q.X., Willis, J. O., Maley, M. P., Coulter, J. Y. and Peterson, D.E. (1995). "Preparation of high quality YBa₂Cu₃O_{7-δ} thick films on flexible Ni-based alloy substrates with textured buffer layers" *IEEE Transactions on Applied Superconductivity* **5(2)**, 2001-2006.

Wong-Ng, W., Levin, I., Feenstra, R., Cook, L. P. and Vaudin, M. (2004). "Phase evolution of Ba₂YCu₃O_{6+x} films during the BaF₂ process" *Journal of Superconductor Science and Technology* **17**, S548 - S556.

Wong-Ng, W., Cook, L. P., Suh, J., Levin, I., Feenstra, R. (2005). "Melting Investigation in the System BaF₂-BaO-Y₂O₃-CuO_x - H₂O," *Journal of Superconductor Science and Technology* **18**, 442-453.

Wang, T. S., Duan, X. F., Hu, W.F., Liu, W., Li, L., Peng, W. and Chen, Y. F. (2002). "Electron microscopy of step-flow grown c-axis YBa₂Cu₃O_{7-δ} thin films on vicinal substrates" *Journal of Superconductor Science and Technology* **15**, 1199.

Wu, M. K., Ashburn, J. R., Tong, C. J., Hor, P. H., Meng, R. L., Gao, L., Huang, Z. J., Wang, Y. Q. and Chu, C. W. (1987). "Superconductivity at 93K in a new mixed-phase Y-Ba-Cu-O compound system at ambient pressure" *Physical Review Letters* **58(9)**, 908-910.

Watauchi, S., Ikuta, H., Shimoyama, J. and Kishio, K. (1996). "Observation of Resistivity Drops and the Vortex Phase Diagram in Bi₂Sr₂CaCu₂O_y" *Journal of Physica C*, **259 (3-4)**, 373-378.

- Wu, X. D., Foltyn, S. R., Arendt, P. N., Blumenthal, W. R., Campbell, I. H., Cotton, J. D., Coulter, J. Y., Hulst, W. L., Maley, M. P., Safar, H. F. and Smith, J. L. (1995). "Properties of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Thick-Films on Flexible Buffered Metallic Substrates" *Journal of Applied Physics Letters*, **67(16)**, 2397-2399.
- Wee, S. H., Goyal, A., Li, J., Zuev, Y. L., Cook, S. and Heatherly, L. (2007). "The incorporation of nanoscale columnar defects comprised of self-assembled BaZrO_3 nanodots to improve the flux pinning and critical current density of $\text{NdBa}_2\text{Cu}_3\text{O}_{7-\delta}$ films grown on rabbits" *Journal of Superconductor Science & Technology*, **20(8)**, 789-793.
- Xi, X. X., Venkatesan, T., Li, Q., Wu, X. D., Inam, A., Chang, C. C., Ramesh, R., Hwang, D. M., Ravi, T. S., Findikoglu, A., Hemmick, D., Etemad, S., Martinez, J. A., Wilkens, B. (1991). "Preparation of thin film high temperature superconductors", *IEEE Transactions on Applied Superconductivity*, **27**, 982-989.
- Yin, D., Schauer, W., Windte, V., Kuepfer, H., Zhang, S., and Chen, J. (1994). "A new understanding of the resistive state and the V-I characteristic of High-Tc Superconductors" *Journal of Zeitschrift für Physik B Condensed Matter*, **94**, 249-254.
- Yamasaki, H., Ohki, K., Yamada, H., Nakagawa, Y., and Mawatari, Y. (2008). "Strong Flux Pinning in $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Thin Films Due to Nanometer-Sized Precipitates" *Superconductor Science and Technology*, **21(12)**, 1-8.
- Yamada, K. T. Y., Kobayashi, H., Konishi, M., Watanabe, T., Ibi, A. Muroga, T. and Miyata, S., Kato, T., and Hirayama, T., Shiohara, Y., (2005). "Epitaxial Nanostructure and Defects Effective for Pinning in $\text{Y}(\text{Re})\text{Ba}_2\text{Cu}_3\text{O}_{7-x}$ Coated Conductors" *Journal of Applied Physics Letters*, **87(13)**, 132502-132504.
- Yuh Shiohara, Y. K. a. T. I. (2006). "Highlights in R&D for coated conductors in Japan" *Journal of Physica C-Superconductivity and Its Applications*, **445-448**, 496-500.
- Zhong, Q., Chou, P. C., Li, Q. L., Taraldsen, G. S., Ignatiev, A. (1995). "High-rate growth of purely a-axis oriented YBCO high-Tc thin films by photo-assisted MOCVD," *Journal of Physica C*, **246**, 288-296.
- Zhu, S., Chirsten, D. K., Klabunde, C. E., Thompson, J. R., Jones, C. E., Feenstra, E., Lowndes, D. H. and Norton, D. P. (1992). "Superconducting transport properties of epitaxial $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ thin films: A consistent description based on thermally-activated flux motion" *Journal of Physical Review B*, **46**, 5576-5580.
- Zeldov, E., Amer, N. M., Koren, G., Gupta, A., McElfresh, M. W. and Gambino, R. J. (1990). "Flux creep characteristics in high-temperature superconductors", *Journal of Applied Physics Letter*, **56**, 680-682.

LIST OF PUBLICATIONS

Fasih Ud Din, Abdul Halim Shaari, Ahmad Kamalianfer, Manizheh Navasery, Asfand Yar, Zainal Abidin Talib, Lim Kean Pah and Chen Soo Kien "Modeling of Electrical Transport in YBCO Single Layer Thin Films using Flux Motion Model" Journal of Magnetism 19(2), 140-145.

Fasih Ud Din, S. A. Halim, A. Kamalianfar, K. P. Lim, S. K.Chen, Z. A. Talib, M.Shahid, M. G.Bahar "Modeling of Superconducting Ybco thin films by short pulse laser deposition" Journal of Ovonic Research, 8(1): 9-15.





UNIVERSITI PUTRA MALAYSIA

STATUS CONFIRMATION FOR THESIS / PROJECT REPORT AND COPYRIGHT

ACADEMIC SESSION : _____

TITLE OF THESIS / PROJECT REPORT :

NAME OF STUDENT : _____

I acknowledge that the copyright and other intellectual property in the thesis/project report belonged to Universiti Putra Malaysia and I agree to allow this thesis/project report to be placed at the library under the following terms:

1. This thesis/project report is the property of Universiti Putra Malaysia.
2. The library of Universiti Putra Malaysia has the right to make copies for educational purposes only.
3. The library of Universiti Putra Malaysia is allowed to make copies of this thesis for academic exchange.

I declare that this thesis is classified as :

*Please tick (✓)

CONFIDENTIAL

(Contain confidential information under Official Secret Act 1972).

RESTRICTED

(Contains restricted information as specified by the organization/institution where research was done).

OPEN ACCESS

I agree that my thesis/project report to be published as hard copy or online open access.

This thesis is submitted for :

PATENT

Embargo from _____ until _____
(date) (date)

Approved by:

(Signature of Student)
New IC No/ Passport No.:

(Signature of Chairman of Supervisory Committee)
Name:

Date :

Date :

[Note : If the thesis is CONFIDENTIAL or RESTRICTED, please attach with the letter from the organization/institution with period and reasons for confidentially or restricted.]