

# Enhanced Hydrolysis of Lignocellulosic Biomass Assisted by a Combination of Acidic Ionic Liquids and Microwave Heating

著者	Kuroda Kosuke, Inoue Ken, Miyamura Kyohei, Takada Kenji, Ninomiya Kazuaki, Takahashi Kenji
journal or publication title	Journal of chemical engineering of Japan
volume	49
number	8
page range	809-813
year	2016-08-20
URL	<a href="http://hdl.handle.net/2297/46341">http://hdl.handle.net/2297/46341</a>

doi: 10.1252/jcej.15we292

# Enhanced Hydrolysis of Lignocellulosic Biomass Assisted by a Combination of Acidic Ionic Liquids and Microwave Heating

Kosuke Kuroda<sup>1</sup>, Ken Inoue<sup>1</sup>, Kyohei Miyamura<sup>1</sup>, Kenji Takada<sup>1</sup>, Kazuaki Ninomiya<sup>2</sup>, and Kenji Takahashi\*<sup>1</sup>

<sup>1</sup> Division of Natural System, Graduate School of Natural Science and Technology, Kanazawa University, Kakuma-machi, Kanazawa 920-1192, Japan

<sup>2</sup> Institute for Frontier Science Initiative, Kanazawa University, Kakuma-machi, Kanazawa 920-1192, Japan

Correspondence concerning this article should be addressed to K. Takahashi  
E-mail address: ktkenji@staff.kanazawa-u.ac.jp, Phone & FAX: +81-76-234-4828

**Keywords:** acidic ionic liquid, biomass, cellulose, hydrolysis, microwave heating

Lignocellulosic biomass was hydrolyzed by combining an acidic ionic liquid, 1-(1-butylsulfonic)-3-methylimidazolium hydrogen sulfate, and microwave heating, resulting in high glucose yields and short reaction times. This new approach achieved 40% glucose yield from bagasse within 12 min at 160 °C, whereas almost no glucose was yielded with a well-known method involving H<sub>2</sub>SO<sub>4</sub> and conventional heating within 30 min at the same temperature. It was confirmed that the reaction temperature significantly affected glucose yield and reaction rate, whereas the concentration of the acidic ionic liquid only affected the reaction rate. Three kinds of lignocellulosic biomass, including bagasse (herbaceous biomass), eucalyptus (hardwood), and Japanese cedar (softwood), were examined. Glucose yield was in the range of 33%–50%, indicating that the present method effectively hydrolyzes various kinds of lignocellulosic biomasses.

## Introduction

Producing glucose from cellulose is a key reaction because glucose can be converted to important building blocks such as succinic acid, 2,5-furandicarboxylic acid, and glucanic acid (Song *et al.*, 2013; Werpy and Petersen, 2004). Hydrolysis of lignocellulosic biomass is typically achieved using acids or enzymes. The simplest hydrolytic method involves dilute aqueous H<sub>2</sub>SO<sub>4</sub> without pretreatment. However, the dilute acid hydrolysis method encounters several problems such as poor sugar yields and a long reaction time, prompting a strong demand for efficient catalysts to improve this reaction.

Ionic liquids (ILs), which are salt having melting point below 100°C, have recently attracted a lot of interest in the field of biorefinery (Armand *et al.*, 2009; Brandt *et al.*, 2013; Fukaya *et al.*, 2008; Swatloski *et al.*, 2002). In 2002, acidic ILs have reported (Cole *et al.*, 2002). They have acidic part such as sulfo group in cation and/or anion structures and exhibit catalytic activity in chemical reactions such as hydrolysis of cellulose (Amarasekara and Owereh, 2009; Amarasekara and Wiredu, 2011). The acidic IL aqueous solution showed relatively higher catalytic activity on cellulose hydrolysis compared that the same concentration of H<sub>2</sub>SO<sub>4</sub> solution, but the glucose yields were still low in the previous studies.


Microwave heating has been widely accepted as a nonconventional energy input source for chemical reactions (Nüchter *et al.*, 2003; Varma, 1999), often obtaining higher yields with shorter reaction times and

milder conditions (de la Hoz *et al.*, 2005). It has been suggested ILs can be suitable solvents for microwave heating because they are heated by ion conduction and dipole relaxation mechanisms (Leadbeater and Torenium, 2002). Many chemical reactions in ILs have been accelerated using microwave heating (Palou, 2007, 2010). As for the combined use of ILs and microwave in the field of biomass refinery, it was previously reported that microwave could facilitate the solubilization of cellulose in ILs (Swatloski *et al.*, 2002) and the relaxation of cellulose crystallinity in ILs (Ha *et al.*, 2011; Ninomiya *et al.*, 2014). However, as far as we know, there has been no report on the application of microwave irradiation to acidic ILs-based hydrolysis of cellulose in lignocellulosic biomass.

Therefore, in the present study, the efficacy of the combination of acidic ILs aqueous solution and microwave heating is verified in the hydrolysis of cellulose in the lignocellulosic biomass. We evaluated the efficacy with the glucose yield since hydrolysis of cellulose is considerably difficult compared to hemicellulose. The present study also investigates effects of acidic IL concentration and reaction temperature on performance of the acidic ILs/microwave-assisted hydrolysis. Moreover, the acidic ILs/microwave-assisted hydrolysis method suggested in this study is applicable to the various types of lignocellulosic biomass.

## 1. Experimental

### 1.1 Biomass and acidic IL



**Fig. 1** Structure of an acidic ionic liquid used in this study.

Bagasse, eucalyptus, and Japanese cedar powder (approximately 3 mm in particle diameter) was purchased from Sanwa ceruciron (Yokkaichi, Japan) as the lignocellulosic material. The biomass powder was ground by a mill and then sieved to obtain a powder with 250 to 500  $\mu\text{m}$  in particle diameter. 1-(1-butylsulfonic)-3-methylimidazolium hydrogen sulfate ([Sbmim]HSO<sub>4</sub>, shown in **Figure 1**) was purchased from Solvionic (Toulouse, France) and used as received.

### 1.2 Microwave-assisted hydrolysis of biomass in acidic IL aqueous solution

Biomass (0.30 g) was suspended in the prescribed concentration of [Sbmim]HSO<sub>4</sub> or H<sub>2</sub>SO<sub>4</sub> solution (15 mL), and then the mixture was added in a 100 mL vessel (HPR-1000/10, Milestone S.r.l., Sorisole, Italia). The vessel was heated with using microwave synthesizer (StartSYNTH, 2.45 GHz multi mode, Milestone S.r.l.) to the desired temperature for a specified period. The temperature was controlled with a thermocouple inserted into the acidic solution. Control experiment with conventional heating was performed using a rotary oven (RDV-TM2, 1300 W, SAN-AI Kagaku Co.Ltd., Nagoya, Japan) with 100 mL vessels (HU-100, SAN-AI Kagaku Co.Ltd.).

For sampling, the vessel was removed from the microwave system or rotary oven, and immediately cooled in an ice bath to quench the reaction. An aliquot of sample solution (500  $\mu\text{L}$ ) was transferred into a centrifuge tube and centrifuged at 15,000 rpm for 2 min to precipitate the solids. The supernatant was filtrated and then subjected to glucose analysis described below.

### 1.3 Analysis of glucose yield

Glucose concentration in the hydrolysate was determined by high performance liquid chromatography (HPLC) equipped with a refractive index (RI) detector (Shimadzu Co., Kyoto, Japan). A sugar KS-801 column (Showa Denko K.K., Tokyo, Japan) was used in tandem with a sugar KS-G guard column (Showa Denko K.K.). The injected sample volume was 10  $\mu\text{L}$ , and the column was run at 80°C with an ultrapure water mobile phase and a flow rate of 1.0 mL/min.

Glucose yield was evaluated as the percentage of glucose in the hydrolysate to cellulose in the original lignocellulosic biomass divided by the anhydro correction factors of 162/180. Cellulose content in original lignocellulosic biomass was determined according to the method reported elsewhere (Sluiter *et al.*, 2012).

### 1.4 Determination of reaction rate constants

During acid hydrolysis reaction, cellulose was hydrolyzed to glucose followed by glucose decomposition. The hydrolysis and the decomposition in acid hydrolysis

of cellulose can be expressed by the two pseudo-homogeneous consecutive first-order reactions (Saeman, 1945), as follows



where  $k_1$  and  $k_2$  are the reaction rate constant for the cellulose hydrolysis to glucose and the glucose decomposition, respectively. Here, glucose concentration  $C_{\text{glucose}}$  can be expressed as follows


$$C_{\text{glucose}} = a \frac{k_1}{k_2 - k_1} [e^{-k_1 t} - e^{-k_2 t}] \quad (2)$$

where  $a$  is the initial cellulose concentration given as glucose equivalent. The  $k_1$  and  $k_2$  values were determined by fitting the Eq. (2) to the experimental data based on the non-linear least-squares method using the Igor Pro software (WaveMetrics, Inc., Portland, OR, USA).

## 2. Results and Discussion

### 2.1 Efficient Hydrolysis by Combining Acidic ILs and Microwave Heating

To examine the effect of combined use of acidic IL and microwave on hydrolysis of lignocellulosic material, bagasse was hydrolyzed in 1.00 M [Sbmim]HSO<sub>4</sub> or H<sub>2</sub>SO<sub>4</sub> solution under microwave or conventional heating at 160°C. **Figure 2** shows time courses of glucose yield during the hydrolysis for 30 min under each condition. When conventional heating was used, the glucose yield was just almost 0% and 1% upto 30 min of the reaction in H<sub>2</sub>SO<sub>4</sub> and [Sbmim]HSO<sub>4</sub> solution, respectively. However, when microwave heating was used for the reaction in H<sub>2</sub>SO<sub>4</sub> solution, the glucose yield increased with elapsed time, reaching the peak value of 30% at 12 min. Moreover, when microwave heating was combined with

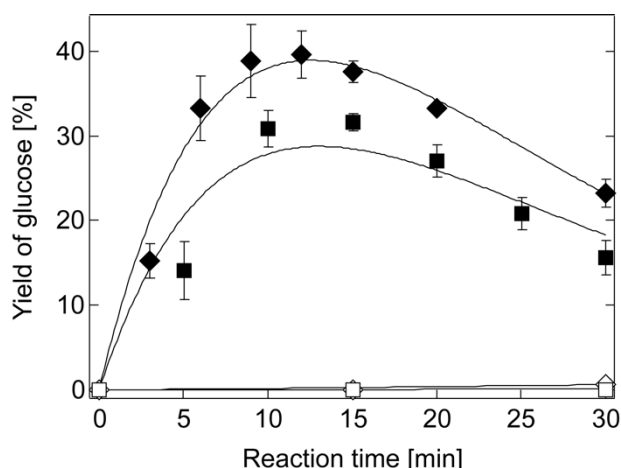

**Fig. 2** Time courses of glucose yield during hydrolysis of bagasse in 1.00 M [Sbmim]HSO<sub>4</sub> or H<sub>2</sub>SO<sub>4</sub> solution under microwave or conventional heating at 160°C. Diamonds: [Sbmim]HSO<sub>4</sub> solution, and squares: H<sub>2</sub>SO<sub>4</sub> solution. Closed symbols: microwave heating, and open symbols: conventional heating. The error bars indicate the

standard error from three independent experiments.


The lines were drawn by fitting Eq. 2 to the data.

[Sbmim]HSO<sub>4</sub> solution, glucose yield increased more rapidly with elapsed time, and the peak value was 40% at 12 min. These results indicate that the combination of [Sbmim]HSO<sub>4</sub> and microwave heating synergistically enhanced the hydrolysis of cellulose in the bagasse.

It was reported that acidic IL can interact with cellulose more strongly than mineral acid such as H<sub>2</sub>SO<sub>4</sub> (Amarasekara and Owereh, 2009). It was also reported that microwave can heat woody biomass more effectively than conventional heating, due to its characteristic of internal and homogeneous heating (Miura *et al.*, 2004). In the present study, as shown in Figure 2, effect of microwave was dominant for the enhanced hydrolysis of cellulose in biomass. On the other hand, the reason for synergistic enhancement of hydrolysis with the combination of acidic IL and microwave might be attributed to efficient absorbance of microwave energy by acidic IL. ILs can efficiently absorb microwave radiation than H<sub>2</sub>SO<sub>4</sub> because ILs absorb microwave energy by both ion conduction and dipole relaxation mechanisms (Leadbeater and Torenius, 2002; Hoffmann *et al.*, 2003). Thus, acidic IL penetrated to internal region of bagasse could be effectively heated by microwave irradiation, and the resultant internal heating may be responsible for the more effective hydrolysis of cellulose in biomass.

## 2.2 Effect of [Sbmim]HSO<sub>4</sub> Concentration

To examine the effect of catalyst concentration on the acidic IL/microwave-assisted hydrolysis, bagasse was hydrolyzed in 0.05, 0.10, and 1.00 M [Sbmim]HSO<sub>4</sub> solution under microwave heating at 160°C. **Figure 3** shows time courses of glucose yield during the acidic IL/microwave-assisted hydrolysis at each acidic IL concentration. In the case of 1.00 M of [Sbmim]HSO<sub>4</sub>, as described in the foregoing section, glucose yield increased with elapsed time, and the peak value was 40% at 12 min. In the case of 0.10 M and 0.05 M of [Sbmim]HSO<sub>4</sub>, the glucose yield increased more slowly, reaching saturated value of approximately 40% at 200 min and 500 min,

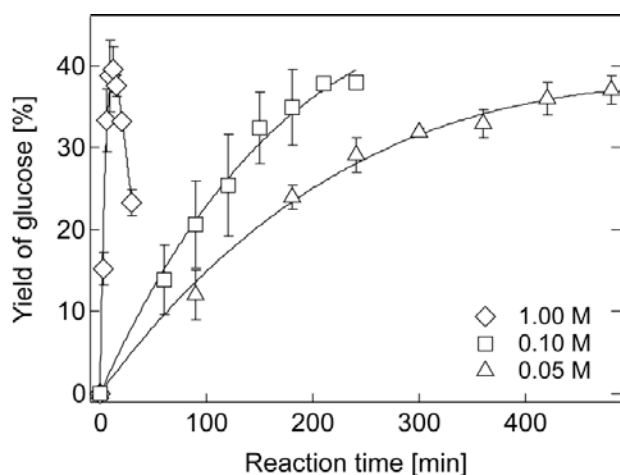

**Fig. 3** Time courses of glucose yield during hydrolysis of bagasse in various concentration of [Sbmim]HSO<sub>4</sub> solution under microwave heating at 160°C. The error bars indicate the standard error from three

independent experiments. The lines were drawn by fitting Eq. 2 to the data.

respectively. These results indicate that the acidic IL concentration positively affected on the hydrolysis rate, and did not significantly influence on the peak value of glucose yield during the acidic IL/microwave-assisted hydrolysis of biomass.


## 2.3 Effect of Temperature

To examine the effect of reaction temperature on the acidic IL/microwave-assisted hydrolysis, bagasse was hydrolyzed in 1.00 M [Sbmim]HSO<sub>4</sub> solution under microwave heating at 140, 160, and 180°C. **Figure 4** shows time courses of glucose yield during the acidic IL/microwave-assisted hydrolysis at each temperature. In the case of 140°C, the glucose yield increased relatively slowly with elapsed time and the value was just 14% even at 60 min. And, no peak value was detected within the reaction time examined. In the case of 160°C, as described in the foregoing section, glucose yield increased with elapsed time, and the peak value was 40% at 12 min. In the case of 180°C, the glucose yield increased more rapidly, reaching the peak value of 30% at about 5 min. It should be noted here, we could not determine the precise peak value at 180°C because of the rapid reaction. The rapid reaction also led large error.

## 2.4 Application to Various Biomass Species


To extend the applicability of the acidic IL/microwave-assisted hydrolysis method to different types of lignocellulosic biomass, eucalyptus (hardwood) and Japanese cedar (softwood) as well as bagasse (herbaceous biomass) were hydrolyzed in 1.00 M [Sbmim]HSO<sub>4</sub> solution under microwave heating at 160°C.

**Figure 5** shows the glucose yield during hydrolysis of each biomass for 30 min. The glucose yield increased with elapsed time, reaching 40% at 12 min, 50% at 20 min, and 33% at 10 min for the case of bagasse, eucalyptus and Japanese cedar, respectively. It is reported that Japanese cedar, one of pine species, displays relatively high

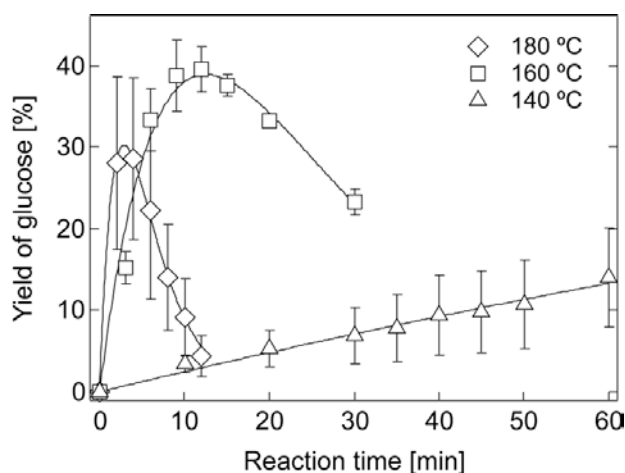

**Fig. 4** Time courses of glucose yield during hydrolysis of bagasse in 1.00 M [Sbmim]HSO<sub>4</sub> solution under microwave heating at various temperatures. The error bars indicate the standard error from three

independent experiments. The lines were drawn by fitting Eq. 2 to the data.

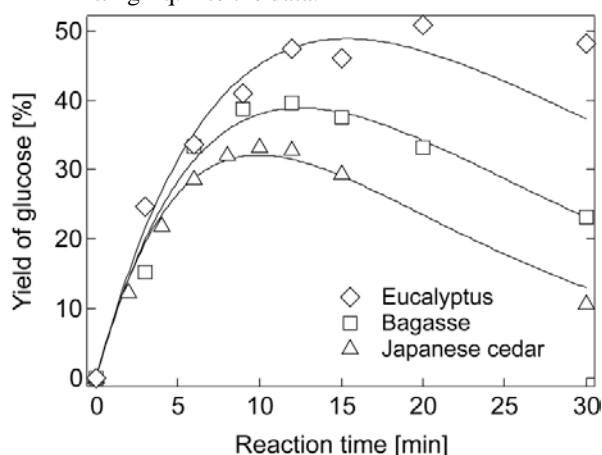

**Fig. 5** Time courses of glucose yield during hydrolysis of various biomasses in 1.00 M [Sbmim]HSO<sub>4</sub> solution under microwave heating at 160°C. The lines were drawn by fitting Eq. 2 to the data.

recalcitrance to acid hydrolysis (Wijaya *et al.*, 2014). These results indicate that this hydrolysis method suggested in this study was applicable to many biomass species, even the mixtures of these biomasses.

## Conclusion

[Sbmim]HSO<sub>4</sub>/microwave heating combination was found to be effective for hydrolysis of cellulose in biomass. The present method significantly increased glucose yields from almost 0% to 40% at 160°C, as compared to the H<sub>2</sub>SO<sub>4</sub>/conventional heating combination. [Sbmim]HSO<sub>4</sub> concentration significantly affected the reaction rates but not the glucose yields, while hydrolysis temperature considerably affected both parameters. This method was applicable to bagasse, eucalyptus, and Japanese cedar, and gave glucose yields in the range of 33%–50%.

## Acknowledgment

This research was partially promoted by COI program "Construction of next-generation infrastructure using innovative materials" supported by MEXT and JST. It was also financed in part by the Advanced Low Carbon Technology Research and Development Program (No. 2100040 to K.T.) and the Cross-ministerial Strategic Innovation Promotion Program (SIP) from the JST.

## Literature cited

Amarasekara, A. S. and O. S. Owereh; "Hydrolysis and Decomposition of Cellulose in Bronsted Acidic Ionic Liquids Under Mild Conditions." *Ind. Eng. Chem. Res.*, **48**, 10152-10155 (2009)  
 Amarasekara, A. S. and B. Wiredu; "Degradation of Cellulose in Dilute Aqueous Solutions of Acidic Ionic Liquid 1-(1-Propylsulfonic)-3-methylimidazolium Chloride, and p-Toluenesulfonic Acid at Moderate

Temperatures and Pressures." *Ind. Eng. Chem. Res.*, **50**, 12276-12280 (2011)

Armand, M., F. Endres, D. R. MacFarlane, H. Ohno and B. Scrosati; "Ionic-liquid materials for the electrochemical challenges of the future." *Nat. Mater.*, **8**, 621-629 (2009)

Brandt, A., J. Gräsvik, J. P. Hallett and T. Welton; "Deconstruction of lignocellulosic biomass with ionic liquids." *Green Chem.*, **15**, 550-583 (2013)

Cole, A. C., J. L. Jensen, I. Ntai, K. L. T. Tran, K. J. Weaver, D. C. Forbes and J. H. Davis; "Novel Brønsted Acidic Ionic Liquids and Their Use as Dual Solvent-Catalysts." *J. Am. Chem. Soc.*, **124**, 5962-5963 (2002)

de la Hoz, A., A. Díaz-Ortiz and A. Moreno; "Microwaves in organic synthesis. Thermal and non-thermal microwave effects." *Chem. Soc. Rev.*, **34**, 164-178 (2005)

Fukaya, Y., K. Hayashi, M. Wada and H. Ohno; "Cellulose dissolution with polar ionic liquids under mild conditions: required factors for anions." *Green Chem.*, **10**, 44-46 (2008)

Ha, S. H., N. L. Mai, G. An and Y. M. Koo; "Microwave-assisted pretreatment of cellulose in ionic liquid for accelerated enzymatic hydrolysis." *Bioresour. Technol.*, **102**, 1214-1219 (2011)

Hoffmann, J., M. Nüchter, B. Ondruschka and P. Wasserscheid; "Ionic liquids and their heating behaviour during microwave irradiation - a state of the art report and challenge to assessment." *Green Chem.*, **5**, 296-299 (2003)

Leadbeater, N. E. and H. M. Torenius; "A study of the ionic liquid mediated microwave heating of organic solvents." *J. Org. Chem.*, **67**, 3145-3148 (2002)

Miura, M., H. Kaga, A. Sakurai, T. Kakuchi and K. Takahashi; "Rapid pyrolysis of wood block by microwave heating." *J. Anal. Appl. Pyrolysis*, **71**, 187-199 (2004)

Ninomiya, K., T. Yamauchi, C. Ogino, N. Shimizu and K. Takahashi; "Microwave pretreatment of lignocellulosic material in cholinium ionic liquid for efficient enzymatic saccharification." *Biochem. Eng. J.*, **90**, 90-95 (2014)

Nüchter, M., U. Müller, B. Ondruschka, A. Tied and W. Lautenschläger; "Microwave-Assisted Chemical Reactions." *Chem. Eng. Technol.*, **26**, 1207-1216 (2003)

Palou, R. M.; "Ionic liquid and Microwave-Assisted Organic Synthesis: A "Green" and synergic couple." *J. Mex. Chem. Soc.*, **51**, 252-264 (2007)

Palou, R. M.; "Microwave-assisted synthesis using ionic liquids." *Mol. Divers.*, **14**, 3-25 (2010)

Song, J., H. Fan, J. Ma and B. Han; "Conversion of glucose and cellulose into value-added products in water and ionic liquids." *Green Chem.*, **15**, 2619-2635 (2013)

Swatloski, R. P., S. K. Spear, J. D. Holbrey and R. D. Rogers; "Dissolution of Cellose with Ionic Liquids." *J. Am. Chem. Soc.*, **124**, 4974-4975 (2002)

Varma, R. S.; "Solvent-free organic syntheses. using supported reagents and microwave irradiation." *Green Chem.*, **1**, 43-55 (1999)

Werpy, T. and G. Petersen. (2004). "*Top Value Added Chemicals From Biomass.*" U.S. Department of Energy, Golden, CO, DOE/GO-102004-1992.

Wijaya, Y. P., R. D. Putra, V. T. Widayaya, J. M. Ha, D. J. Suh and C. S. Kim; "Comparative study on two-step concentrated acid hydrolysis for the extraction of sugars from lignocellulosic biomass." *Bioresour. Technol.*, **164**, 221-231 (2014)