



Formic Acid Formation by *Clostridium ljungdahlii* at Elevated Pressures of Carbon Dioxide and Hydrogen

Florian Oswald^{1*}, I. Katharina Stoll², Michaela Zwick¹, Sophia Herbig², Jörg Sauer², Nikolaos Boukis² and Anke Neumann¹

¹ Technical Biology, Institute of Process Engineering in Life Sciences, Karlsruhe Institute of Technology, Karlsruhe, Germany,

² Institute of Catalysis Research and Technology (IKFT), Karlsruhe Institute of Technology, Eggenstein-Leopoldshafen, Germany

OPEN ACCESS

Edited by:

S. Venkata Mohan,
Indian Institute of Chemical
Technology (CSIR), India

Reviewed by:

Deepti Agrawal,
Indian Institute of Petroleum (CSIR),
India

Gopalakrishnan Kumar,
Daegu University, South Korea

*Correspondence:

Florian Oswald
florian.oswald@kit.edu

Specialty section:

This article was submitted to
Bioenergy and Biofuels,
a section of the journal
Frontiers in Bioengineering and
Biotechnology

Received: 20 November 2017

Accepted: 15 January 2018

Published: 12 February 2018

Citation:

Oswald F, Stoll IK, Zwick M,
Herbig S, Sauer J, Boukis N and
Neumann A (2018) Formic Acid
Formation by *Clostridium ljungdahlii*
at Elevated Pressures of Carbon
Dioxide and Hydrogen.
Front. Bioeng. Biotechnol. 6:6.
doi: 10.3389/fbioe.2018.00006

Low productivities of bioprocesses using gaseous carbon and energy sources are usually caused by the low solubility of those gases (e.g., H₂ and CO). It has been suggested that increasing the partial pressure of those gases will result in higher dissolved concentrations and should, therefore, be helpful to overcome this obstacle. Investigations of the late 1980s with mixtures of hydrogen and carbon monoxide showed inhibitory effects of carbon monoxide partial pressures above 0.8 bar. Avoiding any effects of carbon monoxide, we investigate growth and product formation of *Clostridium ljungdahlii* at absolute process pressures of 1, 4, and 7 bar in batch stirred tank reactor cultivations with carbon dioxide and hydrogen as sole gaseous carbon and energy source. With increasing process pressure, the product spectrum shifts from mainly acetic acid and ethanol to almost only formic acid at a total system pressure of 7 bar. On the other hand, no significant changes in overall product yield can be observed. By keeping the amount of substance flow rate constant instead of the volumetric gas feed rate when increasing the process pressure, we increased the overall product yield of 7.5 times of what has been previously reported in the literature. After 90 h of cultivation at a total pressure of 7 bar a total of 4 g L⁻¹ of products is produced consisting of 82.7 % formic acid, 15.6 % acetic acid, and 1.7 % ethanol.

Keywords: *Clostridium ljungdahlii*, high-pressure fermentation, acetogenic bacteria, acetic acid, formic acid, mass transfer

INTRODUCTION

Nowadays, most bulk chemicals are still based on fossil fuels, such as crude oil and natural gas. It is consensus that, due to dwindling resources and climate change, it is necessary to develop sustainable methods for the production of industrially relevant chemicals. In recent years, industrial exhaust gases, such as steel mill off-gas (Köpke et al., 2011) and synthesis gas (syngas), a mixture of H₂, CO, and CO₂, from gasification of biomass and waste streams, such as sewage sludge and municipal waste (Hammerschmidt et al., 2011; Rokni, 2015), as well as other C₁ molecules came into focus as interesting substrates for biotechnological applications (Daniell et al., 2012; Bengelsdorf et al., 2013). Syngas

fermentation uses acetogenic bacteria, a class of bacteria using a unique pathway (Müller, 2003) to combine two molecules of CO or CO₂ via subsequent reactions into one molecule of acetyl-CoA (Diekert and Wohlfarth, 1994). Further conversion of acetyl-CoA yields acetate, ethanol, butyrate, butanol or 2,3-butandiol as natural products of this pathway. Of these, the formation of C₂ molecules (acetate and ethanol) has the highest energy gain for acetogenic bacteria (Bengelsdorf et al., 2013) which are, therefore, the preferred products with reported concentrations of up to 59.3 g L⁻¹ acetate (Kantzow and Weuster-Botz, 2016). A detailed view of the metabolic reactions of acetogenic bacteria can be found in Schuchmann and Müller (2014) or Bengelsdorf et al. (2013). Formic acid is a main intermediate of this pathway which has multiple industrial and commercial applications, such as feed preservation, textile and leather processing, latex coagulation, deicing of airfields, waste gas treatment and as a substitute for other inorganic and organic acids in cleaner formulations. Being a main product of anaerobic syngas fermentation, acetate can be used as carbon source by various organisms to produce substances of higher value. Interlinking anaerobic acetic acid production with aerobic production of malic acid (Oswald et al., 2016) or diesel fuels (Hu et al., 2016) are already shown feasible.

One parameter that limits productivity and growth of acetogenic microorganisms is the aqueous solubility of the sparingly soluble gases carbon monoxide and hydrogen. To achieve high productivity with those substrates, the mass transfer rate from the gaseous to the liquid phase is one of the limiting steps (Worden et al., 1997). Common approaches to enhance gas-liquid mass transfer are increasing the volumetric power input (PV_L^{-1}) or the volumetric gas feed rate ($\dot{V}_g V_L^{-1}$). Both leads to increased gas-liquid interfacial area due to smaller bubbles and to increased bubble residence times, thus increasing the volumetric gas-liquid mass transfer coefficient ($k_L a$) (Bredwell and Worden, 1998). This approach, however, may not be economically feasible when producing low value products such as fuels (Bredwell et al., 1999). Gas-liquid mass transfer is commonly described by

$$\frac{dc}{dt} = k_L a (c^* - c). \quad (1)$$

with $(c^* - c)$ being the difference of saturation concentration and actual concentration of a compound at process conditions. Therefore, another possibility to increase gas-liquid mass transfer is to increase the solubility of the gaseous compound itself. This can be achieved by increasing the partial pressure of desired substances (Schmidt and Cooney, 1986). Applying Henry's law of solubility of gaseous compounds in liquids to equation (1) results in (Vega et al., 1989a)

$$\frac{dc_i}{dt} = k_L a_i H_i (p_i^G - p_i^L). \quad (2)$$

Where c_i is the liquid concentration of compound i in M, H_i is the Henry's solubility coefficient of i in M bar⁻¹ and $(p_i^G - p_i^L)$ is the driving force expressed as difference in partial pressure of i in bar.

Some work addressing that approach has been done in the 1980s using *Clostridium ljungdahlii* (Vega et al., 1989b), *Blautia producta* (Vega et al., 1989a) and *Clostridium* sp. ATCC 29797,

later described as *Terrisporobacter glycolicus* (Schmidt and Cooney, 1986). Vega et al. (1989b) report prolonged lag-phases in bottle experiments with *C. ljungdahlii* under increasing initial p_{CO} and p_{H_2} up to 2.53 bar absolute pressure and relate this to inhibition caused by increased levels of dissolved carbon monoxide. Comparable findings are reported for bottle experiments with *B. producta* growing on a gas mixture of 80 % CO and 20 % CO₂ (Vega et al., 1989a). In 1993, the Department of Chemical Engineering of the University of Arkansas filed a report to the United States Department of Energy in which they describe continuous running cultivations with *C. ljungdahlii* in a stirred tank reactor (STR) under increased pressure with total system pressures up to 10.34 bar. They find that when the reactor is pressurized stepwise once the biomass starts to grow, no inhibitory effect of increased carbon monoxide partial pressure can be observed. Immediate pressurization of the STR resulted in reduced growth and productivity (Department of Chemical Engineering, University of Arkansas, 1993). For *B. producta*, Ko et al. (1989) calculated an inhibitory p_{CO} of 0.81–1.01 bar employing a modified Monod-Model. Cultivation with only carbon dioxide and hydrogen in the gas stream would circumvent inhibition caused by carbon monoxide. For *Acetobacterium woodii*, studies with gas mixtures devoid of carbon monoxide can be found in Demler (2012) and Kantzow and Weuster-Botz (2016), which investigate the effect of increased p_{H_2} but leave the effect of carbon dioxide partial pressure out of their consideration. Therefore, this work focuses on the effects of increased pressure on growth and product formation of *C. ljungdahlii* with a gas composition devoid of carbon monoxide. The aim of this work is to investigate if mass transfer limitation can be overcome and whether or not complete substrate utilization is possible by applying elevated pressure. Experiments in 1.5 L-scale are used to scale-up process parameters to 2.5 L-scale, where experiments at absolute system pressures of 1, 4, and 7 bar are conducted.

MATERIALS AND METHODS

Culture Medium

If not stated differently, all chemicals are purchased from Carl-Roth (Germany). The organism used for this work is *C. ljungdahlii* DSM13528 which was kindly provided by the group of Peter Dürre, University of Ulm. Medium used for cultivation of *C. ljungdahlii* for both flask and bioreactor cultivation is based on Tanner (2007). It is prepared using strict anaerobic techniques and the detailed composition with 0.33 g ammonium chloride per liter medium can be found elsewhere (Oswald et al., 2016). The pH is adjusted to 5.9 using KOH before bottling. Bottles are anaerobized using a gas mixture containing 20 vol-% carbon dioxide in nitrogen (Air Liquide, France). After autoclaving at 121 °C, 1 g Cystein-HCl monohydrate and 5 g fructose per liter are added.

Cultivations in 1.5 L-Scale

Fermentations are conducted at 37 °C in Minifors bench-top stirred tank reactors (Infors-HT, Switzerland) as described in Oswald et al. (2016) but without a foam probe. Contraspum A


4050 HAC (Zschimmer und Schwarz, Germany) is used as an anti-foaming agent and one drop is added to the cultivation if found necessary. The gas flow rate in this scale is 43 mL min^{-1} (0.029 vvm). Gas composition used in this work is 53.3 vol-% H_2 and 26.7 vol-% CO_2 in nitrogen (Air Liquide, France). The headspace of the bioreactor is at atmospheric pressure. A stirrer set-up of two Rushton-Turbines and baffles inside the vessel ensures gas-liquid mixing at 800 min^{-1} . Medium for bioreactor cultivations is prepared as described in Oswald et al. (2016). Bioreactors are inoculated with 10 % of their final volume of a pre-culture grown for 48 h at 37°C with 5 g L^{-1} fructose as carbon and energy source.

Scale-Up to 2.5 L and Elevated Pressure

To ensure comparability of the results from 1.5 L-scale and 2.5 L-scale, geometric similarity between both scales needs to be given and important dimensionless numbers describing the process are kept constant. Figure 1 shows a schematic drawing of both reactor scales. The bioreactor for experiments in 2.5 L-scale is a stainless steel, double jacket vessel (VEB CLG – Chemieanlagenkombinat Leibzig-Grima, Germany) with an inner diameter $D_{2.5}$ of 126 mm and a total volume of 4 L. It has been formerly used in high-pressure chemical catalysis. The total height of the internal space

is 349 mm with a conical bottom of 54 mm height. For 1.5 L-scale experiments, a glass vessel from Infors with an inner diameter $D_{1.5}$ of 110 mm, a total height of 270 mm, and a hemispherical bottom is used. With the fixed dimensions of the stainless steel vessel, the only possibility to keep d/D constant is by adjusting the stirrer diameter $d_{2.5}$. Using the stirrer diameter from 1.5 L-scale $d_{1.5} = 46 \text{ mm}$ and the inner diameter of the glass vessel, $d_{1.5}/D_{1.5}$ calculates to 0.418. Transferring this to the measures of 2.5 L-scale results in $d_{2.5}$ of 57.5 mm. The stirrer of the 2.5 L-scale is a proportional magnification of the stirrer in 1.5 L-scale.

The geometric similarity representing stirrer positions would be 51.5 and 157 mm above the deepest part of the stainless steel vessel. As Figure 1 shows, the stirrer shaft (BüchiGlasUster, Switzerland) of the bigger scale does not reach into the conical part of the vessel. So a position of 51.5 mm above the deepest part of the reactor is not possible. Hence, the compromise is to calculate the stirrer positions, filling volume, and filling level from the cylindrical part of the vessel neglecting the conical bottom. Resulting stirrer positions are 105.5 mm and 211 mm above the deepest part of the vessel (including the conical part) and total filling level $h_{1,2.5}$ is 234.6 mm. This also affects the filling volume of the reactor without installed equipment, which is the volume of the 1.5 L-scale multiplied with $(D_{2.5}/D_{1.5})^3$ plus the volume of the conical part yielding a volume of 2.51 L.

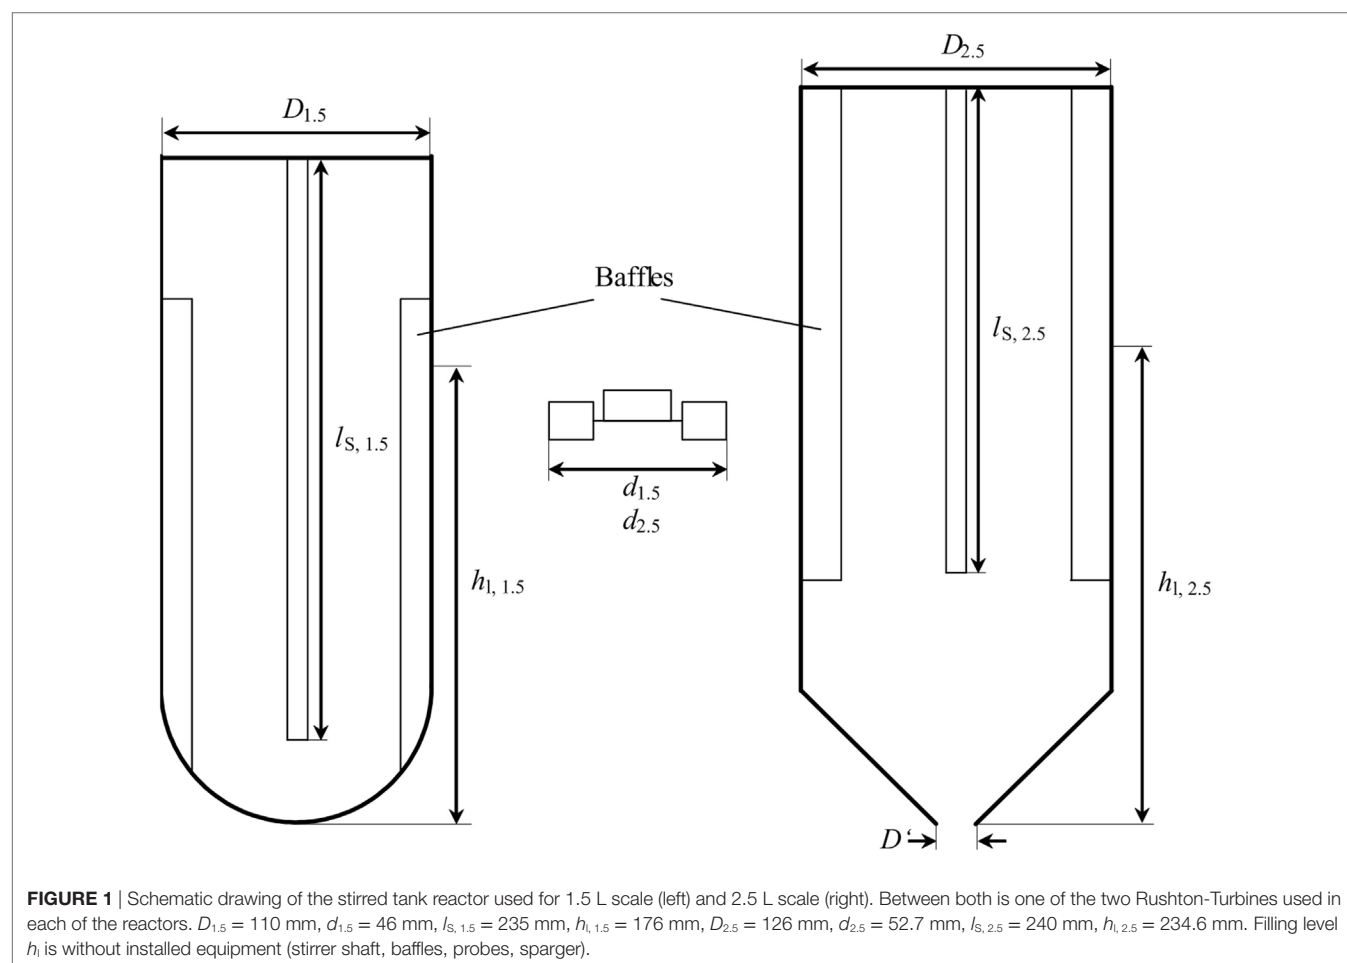

Ju and Chase (1992) summarize different scale-up strategies from literature. Of those, the strategies used here are geometric similarity as well as constant $k_L a$ -value, stirrer speed and Ne number. Schlüter et al. (1992) state that if volumetric power input PV_L^{-1} and volumetric gas feed rate $\dot{V}_g V_L^{-1}$ are of the same value in both scales, then the volumetric mass transfer coefficient has the same value as well. Therefore, power input for 1.5 L-scale is measured as the difference in power uptake of stirring in air and stirring in 1.5 L of water and a gas feed rate of 0.029 vvm. Keeping Ne constant allows calculating the necessary stirrer speed at $PV_L^{-1} = \text{constant}$ to 757 min^{-1} . The gas feed rate of the larger scale at one bar of absolute pressure calculates to 72 mL min^{-1} .

The following pressure stages are investigated (in absolute pressure): 1, 4, and 7 bar at which the volumetric amount of substance flow rate $\dot{n} V_L^{-1}$ is kept constant for all experiments. Gas is dispersed inside the reactor by a sintered metal plate at the end of a $1/4''$ -tube and pressurization of the bioreactor starts immediately after inoculation *via* closing the installed pressure regulator until the desired pressure is achieved. The medium composition is the same as for 1.5 L-scale and cultivation volume is 2.5 L. Each experiment is seeded with 10 % of the final volume of a 48 h, fructose grown culture. Cultivation temperature and pH-value are set to 37°C and 5.9, respectively,

and the stirrer speed and gas feed rate from above are applied. Maximum cultivation time is 90 h. **Figure 2** shows the flow chart of the high-pressure reactor and its installed periphery. Mass flow of feed gas is controlled and regulated by a Coriolis force mass flow controller (Bronkhorst, Netherlands) and mass flow meter (MFM, Bronkhorst, Netherlands). Pressures higher than 1 bar absolute are regulated by a pressure regulator and sensory valve (Bronkhorst, Netherlands) positioned in the off-gas line behind the MFM. Off-gas composition is measured by a gas chromatograph (Shimadzu, Japan). Cultivation temperature is maintained *via* the double jacket and a thermostat (Haake, Germany) and the off-gas is cooled to minimize water loss through evaporation. A HPLC-pump (Bischoff, Germany) is necessary to control the addition of pH adjustment solutions through capillary tubes at pressures above 1 bar absolute. A six-port valve allows switching between 4 M H_3PO_4 and 4 M KOH. Both are kept under a nitrogen atmosphere. A second HPLC-pump (Bischoff, Germany) adds anti-foam agent (Zschimmer und Schwarz, Germany) in case the AF-electrode gives a signal. Gas streams are sterile filtered by a $0.2 \mu\text{m}$ sinter metal filter (Swagelok, Germany) before the feed gas enters the reactor and before the off-gas enters the pressure sensor. A check valve between the reactor and feed gas filter prevents liquid from the

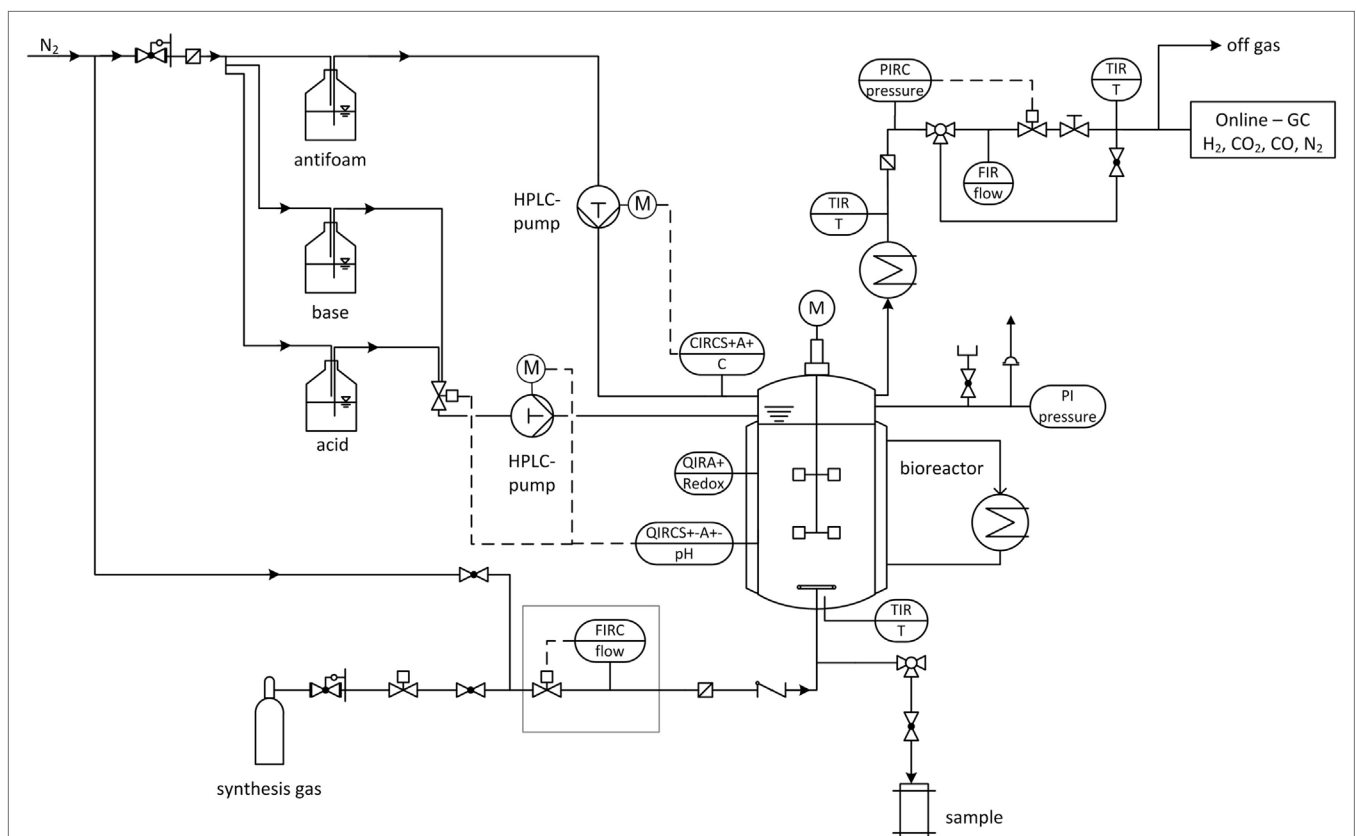


FIGURE 2 | Flow chart of stirred tank reactor (STR) used for elevated pressure cultivations with installed periphery. FIRC, flow indication, recording and control; QIRCS+-A+-, pH indication, recording and control (pH probe); QIRA+, redox potential indication and recording (redox probe); CIRC, current indication, recording and control (AF-electrode); TIR, temperature indication and recording; PIR, pressure indication, recording and control; FIR, flow indication and recording; PI, pressure indicator.

reactor to block the filter. ORP-probe (Corr Instruments, USA) and pH-probe (Corr Instruments, USA) for pressurized applications are mounted horizontally at half height through the sides of the reactor. The pH-probe is disinfected with isopropanol. It is installed after steam sterilizing the reactor at 121°C and before it is filled with medium due to a maximum temperature tolerance of the pH-probe of 80 °C.

Analytics for all experiments with regard to off-gas and offline samples is conducted as described in Oswald et al. (2016). Formic acid concentration is determined using an enzymatic assay from Roche yellow line.

RESULTS

Cultivations in 1.5 L-scale are conducted to establish a baseline for performance at atmospheric pressure with carbon dioxide and hydrogen as carbon end energy sources. The conditions of 1.5 L-scale are then transferred into 2.5 L-scale where experiments at absolute system pressures of 1, 4, and 7 bar are conducted.

Figure 3 shows the volumetric amount of substance flow rates $\dot{n} V_L^{-1}$ in the off-gas of three fermentations in 1.5 L-scale. Initial carbon dioxide and hydrogen flow rates in the off-gas of 0.3 mmol min⁻¹ L⁻¹ (CO₂) and 0.63 mmol min⁻¹ L⁻¹ (H₂) continuously decrease until 60 h (CO₂) and 63 h (H₂), where they reach their local minimum of 0.18 mmol min⁻¹ L⁻¹ (CO₂) and 0.35 mmol min⁻¹ L⁻¹ (H₂), respectively. Here, *C. ljungdahlii* consumes 45 % of the ingoing hydrogen and 38 % of the ingoing carbon dioxide. From that point on, uptake rate of both gases decreases and reaches off-gas flow rates of 0.25 mmol min⁻¹ L⁻¹ for carbon dioxide and 0.49 mmol min⁻¹ L⁻¹ for hydrogen at the end of fermentation. Transferring the 1.5 L-scale to 2.5 L for pressurized experiments while keeping $\dot{n} V_L^{-1}$ constant resulted in

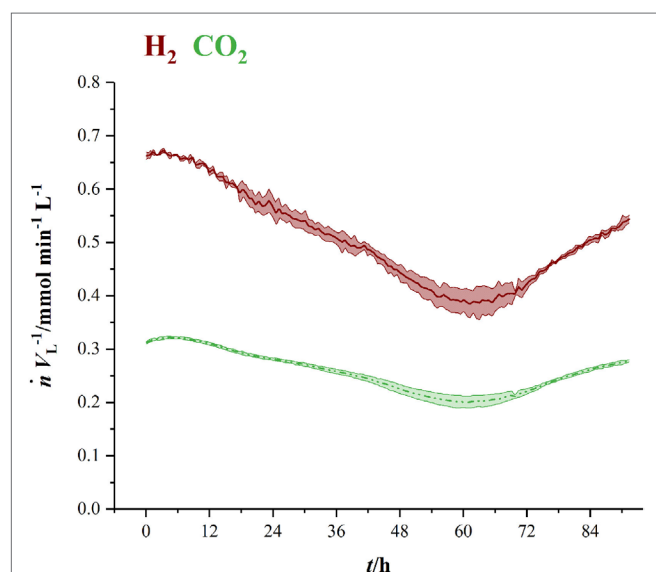


FIGURE 3 | Amount of substance flow rates per liter medium for hydrogen (red, solid) and carbon dioxide (green, dashed) in the off-gas of 1.5 L-scale. Results are average values of three experiments. Standard deviation is indicated by the light colored area around the average lines.

decreasing volumetric flow rates with increasing pressure. The volumetric amount of substance flow rates in off-gases from 2.5 L-scale are shown in **Figure 4**. Off-gas data from high-pressure fermentation at 1 bar of absolute pressure (HPF-1) shows a development comparable to the data of 1.5 L-scale in **Figure 3**. The three experiments summarized in HPF-1 (**Figure 4**) show some degree of variation in the development of hydrogen and carbon dioxide in the off-gas and thus have a higher standard deviation than the data from 1.5 L-scale. Off-gas data from high-pressure fermentations with 4 bar of absolute pressure (HPF-4) show a similar development as at 7 bar of absolute pressure (HPF-7). Hydrogen and carbon dioxide have a sharp decrease once the set pressure is reached and asymptotically increase to the initial flow rate. Pressure build up took 30 min for HPF-4 and 75 min for HPF-7. Complete consumption of substrates could not be achieved in any of the conducted fermentations.

Figure 5 shows the development of product concentrations over the course of the fermentations in 2.5 L-scale while **Table 1** lists resulting product concentrations and consumed amount of substrates per liter reactor volume of experiments in 1.5 L-scale together with the results from HPF-1, HPF-4, and HPF-7. At atmospheric pressure, ethanol and acetic acid are the main products, their concentrations decrease with increasing pressure whereas formic acid concentration increases from final concentrations of 0.09 to 1.34 g L⁻¹ at 4 bar and 3.23 g L⁻¹ at 7 bar absolute pressure. Acetic acid production starts in all experiments immediately after inoculation while formic acid formation has its strongest increase between 12 and 28 h. The consumed amounts of substrates per liter reactor volume at atmospheric pressure in 2.5 L-scale are a third of the amounts in 1.5 L-scale. Whereas the overall consumption ratio *E* (consumed amount of substance divided by the total fed amount of substance in per cent) is about half the value from 1.5 L-scale. Comparing the biomass-specific uptake rates for hydrogen (q_{H_2}) and carbon dioxide (q_{CO_2}) shows only differences in the uptake of hydrogen. Experiments in HPF-1 show about twice the maximum uptake rates for hydrogen than the ones found for 1.5 L-scale. However, the replicates in HPF-1 divert significantly from each other as can be seen in the off-gas data in **Figure 4**. This results in rather high standard deviation. Despite the differences in overall consumption, the product yields based on consumed substrates (H₂ and CO₂) are quite similar with 0.67 g g⁻¹ in 1.5 L-scale and 0.64 g g⁻¹ in HPF-1. For experiments at 4 and 7 bar, no consumption data are available. As can be seen from the off-gas data in **Figure 4**, under pressurized conditions, no reasonable values for consumed substrates can be determined since the data resembles saturation curves for carbon dioxide at elevated pressures. Therefore, yields are additionally calculated based on totally fed substrates (aka overall $Y_{P/S}$). In 1.5 L-scale, an overall $Y_{P/S}$ of 0.15 g g⁻¹ is achieved whereas in 2.5 L-scale for HPF-1, HPF-4, and HPF-7 overall $Y_{P/S}$ values of 0.05 g g⁻¹, 0.04 g g⁻¹, and 0.04 g g⁻¹ are achieved, respectively. No significant increase in OD is observed at elevated pressures (data not shown).

Due to the fact that in 2.5 L-scale the pH-probe is installed after the reactor is sterilized, contamination with *Bacillus cereus* can be found in all HPF cultivations. Blank cultivations without *C. ljungdahlii* inoculum but with the 0.1 g L⁻¹ of fructose carried

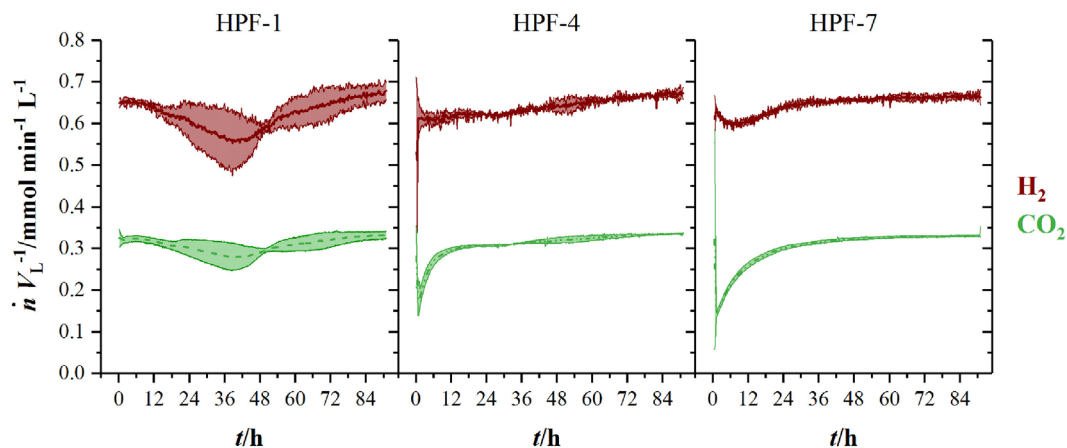


FIGURE 4 | Amount of substance flow rates per liter medium for hydrogen (red, solid) and carbon dioxide (green, dashed) in the off-gas of 2.5 L-scale experiments. Results are average values of three experiments for HPF-1 and HPF-7 and two experiments for HPF-4. Numbers behind HPF indicate the absolute pressure of the fermentation in 2.5 L-scale. Standard deviation is indicated by the light colored area around the average lines.

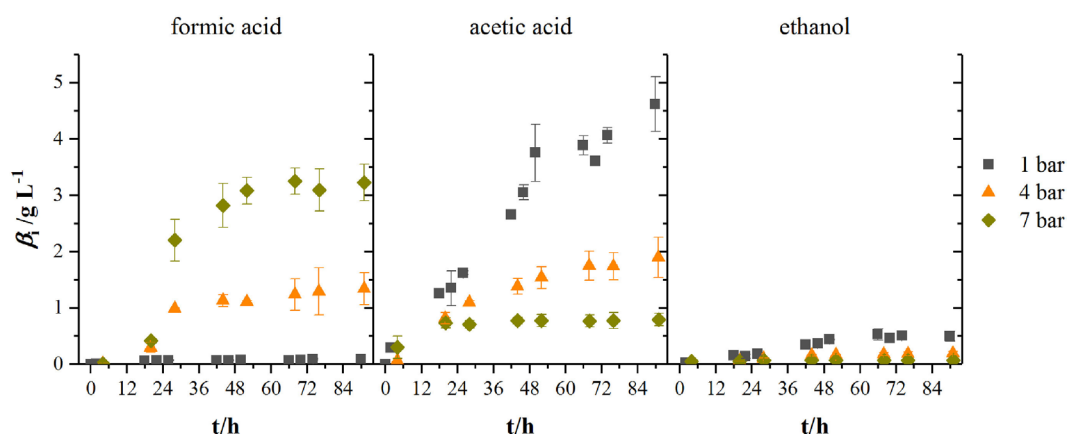


FIGURE 5 | Development of product concentrations for formic acid, acetic acid, and ethanol at different headspace pressures. Results are average values of three experiments for HPF-1 (dark gray squares) and HPF-7 (dark yellow diamonds) and two experiments for HPF-4 (orange triangles). Numbers behind HPF indicate the absolute pressure of the fermentation in 2.5 L-scale.

TABLE 1 | Average values for products and consumed substrates from cultivations of *Clostridium ljungdahlii* with hydrogen and carbon dioxide as sole energy and carbon source at different pressures after 90 h of cultivation.

Set-up	$\beta_{\text{formic acid}}$ (g L ⁻¹)	$\beta_{\text{acetic acid}}$ (g L ⁻¹)	β_{EtOH} (g L ⁻¹)	$C_{\text{H}_2, \text{R}}$ (mol L ⁻¹)	$C_{\text{CO}_2, \text{R}}$ (mol L ⁻¹)	E_{H_2} (%)	E_{CO_2} (%)	$q_{\text{H}_2, \text{max}}$ (mmol min ⁻¹ g ⁻¹)	$q_{\text{CO}_2, \text{max}}$ (mmol min ⁻¹ g ⁻¹)
1.5 L	0.03 ± 0.00	9.30 ± 2.30	2.81 ± 0.13	1.00 ± 0.06	0.40 ± 0.02	25.63 ± 1.32	21.52 ± 0.90	2.40 ± 0.10	1.00 ± 0.05
HPF-1	0.09 ± 0.09	4.29 ± 0.67	0.42 ± 0.15	0.32 ± 0.08	0.14 ± 0.03	12.17 ± 3.07	11.17 ± 2.79	4.56 ± 4.69	1.05 ± 0.61
HPF-4	1.34 ± 0.28	1.90 ± 0.36	0.20 ± 0.03	N/A	N/A	N/A	N/A	N/A	N/A
HPF-7	3.23 ± 0.32	0.79 ± 0.11	0.07 ± 0.01	N/A	N/A	N/A	N/A	N/A	N/A

Numbers behind HPF indicate the absolute pressure of the fermentation in 2.5 L-scale. In 1.5 L-scale, the absolute pressure is 1 bar. $C_{\text{H}_2, \text{R}}$, consumed amount of hydrogen per liter reactor volume; $C_{\text{CO}_2, \text{R}}$, consumed amount of carbon dioxide per liter reactor volume; E_{H_2} , consumption ratio of hydrogen as consumed amount of hydrogen in per cent of total amount of ingoing hydrogen; E_{CO_2} , consumption ratio of carbon dioxide as consumed amount of carbon dioxide in percent of total amount of ingoing carbon dioxide; $q_{\text{H}_2, \text{max}}$, maximum biomass-specific uptake rate of hydrogen; $q_{\text{CO}_2, \text{max}}$, maximum biomass-specific uptake rate of carbon dioxide; N/A, data not available. Average values of three bioreactors per experimental set-up except for HPF-4. For this, values are averages of two bioreactors.

over from the pre-culture yield the same degree of contamination as the samples from experiments with *C. ljungdahlii* cells. Neither growth nor products can be found in these blank cultivations.

DISCUSSION

Experiments in 1.5 L-scale are conducted at a $k_L a$ value of $10.2 \cdot 10^{-3} \text{ s}^{-1}$ (measured for oxygen in medium, data not shown) and since PV_L^{-1} and $\dot{V}_g V_L^{-1}$ are kept constant, the mass transfer coefficient should have the same value in 2.5 L-scale (Schlüter et al., 1992). Nevertheless, both scales do not show complete geometric similarity as outlined in the Section “Materials and Methods.” Those discrepancies from geometric similarity may explain the observed deviations in product concentration and substrate consumption between 1.5 and 2.5 L-scale at 1 bar absolute pressure. Supporting this are the $Y_{P/S}$ values based on consumed substrates. For both scales, this yield is quite similar with the one from HPF-1 being only 4 % lower than the one found in 1.5 L-scale. That means that in both cases metabolic activity is similar since the same ratio of consumed substrates end up in products. Of far more interest in assessing the whole experimental set-up for 2.5 L-scale is the yield based on totally fed substrates during the fermentation. This value shows the overall conversion efficiency of the set-up and one aim of improving every process should be to bring this value as close to the yield based on consumed substrates as possible. For the case at hand, 15 % of gaseous substrates fed in 1.5 L-scale end up in products while in 2.5 L-scale only 5 % and at elevated pressures 4 % can be found in products. We interpret the high conformity of the values for 2.5 L-scale as indication that the found differences in substrate consumption and product concentration between scales at atmospheric conditions are due to incomplete geometric similarity and independent of absolute process pressure.

When looking at the product spectrum of the conducted experiments in **Figure 5**, the main thing that jumps the eye is that with increasing pressure the spectrum is shifted toward formic acid formation. At a total pressure of 7 bar almost no ethanol and only 0.8 g L^{-1} acetic acid are produced over the course of fermentation (see **Figure 5**) while a total of 3.2 g L^{-1} of formic acid is produced. **Figure 6** shows the amount of substance ratios ($x_i = c_i / \sum c_i$) of the products at the end of our cultivations at elevated pressure. It seems that at a p_{H_2} of 2.13 bar (4 bar total pressure) formic acid and acetic acid are produced in equimolar amounts while at a p_{H_2} of 3.73 bar (7 bar total pressure) values of x for formic acid and acetic acid seem to be inverted compared to experiments at atmospheric conditions. The data also suggest that in the range of p_{H_2} from 0.5 to 3.37 bar (corresponding p_{CO_2} from 0.25 to 1.9 bar) there might be a linear relationship between x_i and the substrate partial pressure. Increased formic acid production at elevated pressures with H_2/CO_2 is described by Bleichert and Winter (1994) for pure cultures of *Methanobacterium formicicum* and *Methanobacterium palustre* as well as for mixed cultures from sewage sludge at hydrogen partial pressures of more than 2 bar. Kantzow and Weuster-Botz (2016) and before them Peters et al. (1999) show that formic acid formation is linked to the hydrogen partial pressure in *A. woodii*. By shifting the hydrogen partial pressure from 1.4 to 2.1 bar, they increased final formic acid

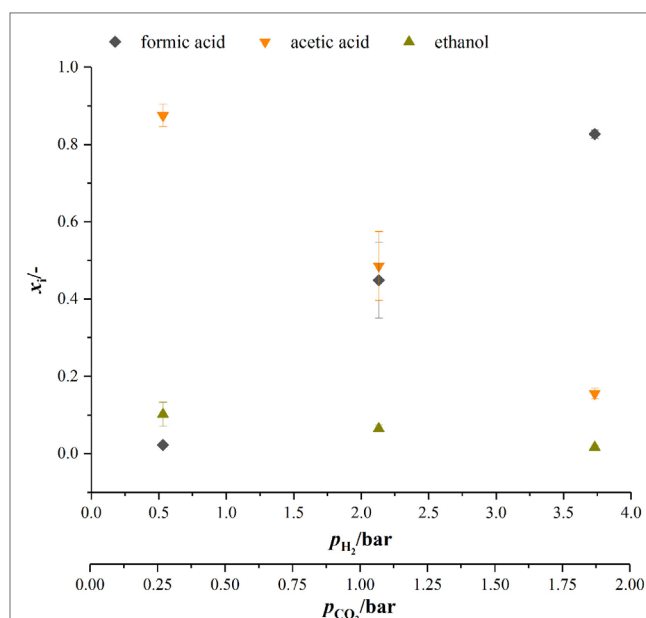


FIGURE 6 | Amount of substance ratio for products at the end of cultivations at elevated pressure. dark gray diamonds, formic acid; orange upturned triangles, acetic acid; dark yellow triangles, ethanol.

concentration after 74.4 h of cultivation from 4.2 to 7.3 g L^{-1} and increased the yield of formic acid per gram substrates fed of about 67 % (Kantzow and Weuster-Botz, 2016). Peters et al. (1999) report an increase in formic acid production for bottle experiments of 0.5 mM per 0.1 bar increase in initial p_{H_2} . In *A. woodii*, the hydrogen dependent carbon dioxide reductase (HDCR) catalyzes the hydrogenation of CO_2 with molecular hydrogen (Schuchmann and Müller, 2013) while in *C. autoethanogenum*, a close relative to *C. ljungdahlii*, the direct hydrogenation of CO_2 with H_2 is one of three possible reactions of the hydrogenase-formate dehydrogenase complex funneling CO_2 into the methyl branch of the Wood–Ljungdahl pathway (Wang et al., 2013). The next reaction links formic acid and tetrahydrofolic acid (THF) in an ATP-consuming reaction. This poses as a bottleneck in the methyl branch since the specific activities of this and the following reactions of the methyl branch are lower than the one of the hydrogenase-formate dehydrogenase complex (Wang et al., 2013). As for the effect of increased substrate partial pressure, dissolved CO_2 is in balance with the concentration of HCO_3^- . Carbon dioxide can freely diffuse through the cellular membrane (Gutknecht et al., 1977) and immediately dissociates into HCO_3^- and H^+ , thus acidifying the cytoplasmic pH. One consequence of that is a reduction in membrane potential (Eigenstetter and Takors, 2017) which results in reduced ATP yield from ATPase activity. Since acetogenic organisms are already at the energetic limit of life (Schuchmann and Müller, 2014) at these conditions, ATP formation is not high enough to provide enough energy for formyl-THF formation (Yang and Drake, 1990; Kantzow and Weuster-Botz, 2016). This yields to an accumulation of formic acid at increased substrate partial pressures and is in accordance with our finding that biomass formation is severely inhibited

at increased partial pressures of carbon dioxide. Supporting this model further is the fact that in the work of Kantzow and Weuster-Botz (2016) with *A. woodii* no such severe effects are reported. The reason for this is that energy conservation is driven by a transmembrane gradient of sodium ions in *A. woodii* instead of a proton gradient (Spruth et al., 1995; Biegel and Müller, 2010). Therefore, a drop in internal pH will not result in immediate reduction of ATP formation.

Unfortunately, the only publications that state results from experiments with *C. ljungdahlii* at elevated substrate pressures so far do not report if formic acid production is increased at higher pressures. This may be because no formic acid is produced when working with CO containing gases at elevated pressures or more likely because the authors did not check for formic acid in their sample analytics. However, since we could not observe significant growth at 4 and 7 bar even without CO in the gas atmosphere growth inhibition at elevated pressures seems not to be linked to inhibitory effects of carbon monoxide alone, as reported by Vega et al. (1989b) and the Department of Chemical Engineering, University of Arkansas (1993).

At biological standard conditions, the formation of formic acid is scratch feasible. Increasing the partial pressure of hydrogen and carbon dioxide makes the reaction more favorable (Daniels, 1982), which in our opinion favors the direct hydrogenation of CO₂ by the hydrogenase–formate–dehydrogenase complex. However, our results give that there is a non-linear relationship between formic acid formation and p_{H_2} . For we get 17 mM bar⁻¹ when increasing p_{H_2} to 2.13 bar (4 bar absolute pressure) and 25.6 mM bar⁻¹ when increasing p_{H_2} further to 3.73 bar which is contrary to what Peters et al. (1999) report. They state a linear relationship of 0.5 mM formic acid produced per 0.1 bar increase in p_{H_2} for *A. woodii* and *A. carbinolicum* (Peters et al., 1999).

In our cultivations at 4 and 7 bar, p_{H_2} is 2.13 and 3.73 bar but volumetric power input and gas feed rate is lower than the ones used by Kantzow and Weuster-Botz (2016). From the data in their publication a yield of formic acid per fed substrates of 0.002 g g⁻¹ can be calculated which is 14 % of what is reported here at similar p_{H_2} with a overall $Y_{P/S}$ for formic acid of 0.015 g g⁻¹. This indicates that, despite the differences between 1.5 L-scale and 2.5 L-scale, working with constant $\dot{n} V_L^{-1}$ yields a more substrate efficient process at elevated pressure than the classical approach of keeping $\dot{V}_g V_L^{-1}$ constant does. While the approach of constant volumetric gas feed rate ensures constant $k_L a$ -values if $P V_L^{-1}$ is kept constant as well (Schlüter et al., 1992) even at elevated pressure (Maier et al., 2001), $\dot{V}_g V_L^{-1}$ decreases with increasing pressure when $\dot{n} V_L^{-1}$ is kept constant. The actual volumetric flow rates for each pressure stage in this work are 0.029 vvm (1 bar), 0.007 vvm (4 bar), and 0.004 vvm (7 bar). Under these conditions, the $k_L a$ -value cannot assumed to be equal in all pressure stages. But since k_L is independent from pressure, an approximation for $k_L a$ at different pressures with $\dot{n} V_L^{-1} = \text{constant}$ can be calculated by

$$k_L a_{(p_2)} = \left(\frac{p_1}{p_2} \right)^{\frac{2}{3}} k_L a_{(p_1)}. \quad (3)$$

The deviation of this equation can be found in the Supplementary Material. This equation has also been used in the work of Linek and Sinkule (1991). Approximation of $k_L a$ -values

for oxygen in medium with equation (3) results in 4.0 10⁻³ s⁻¹ at 4 bar and 2.8 10⁻³ s⁻¹ at 7 bar. $k_L a$ -values for different gases are proportional to each other by the square root of the quotient of their diffusion coefficients (Kodama et al., 1976). However, the formation of formic acid is more substrate efficient at higher pressures when $\dot{n} V_L^{-1}$ is kept constant although the gas–liquid mass transfer coefficient significantly decreases with increasing pressure.

CONCLUSION

Our experiments with *C. ljungdahlii* show that complete consumption of fed substrates could not be achieved by increasing the absolute system pressure although no clear statement about actual substrate consumption at elevated pressures is possible due to the reasons discussed earlier. However, our data show that although the product spectrum changes at increased substrate pressure, the overall product yield from fed substrates is quite similar for all pressure stages examined in 2.5 L-scale.

Increasing the absolute system pressure and, therefore, the partial pressure of hydrogen and carbon dioxide results in a shift of the product spectrum and formic acid becomes a product of significance. On the other hand, biomass formation decreased with increasing substrate pressures. Whether this inhibition of biomass growth is subject to an inhibitory effect of increased hydrogen partial pressures as assumed by Kantzow and Weuster-Botz (2016) or more likely due to inhibitory effects of increased dissolved carbon dioxide (Eigenstetter and Takors, 2017) remains a topic of interest for further investigations. It might be possible that with a stepwise increase in process pressure with a steady built-up of biomass negative effects of increased substrate pressures are avoidable. This has already been shown by the Department of Chemical Engineering, University of Arkansas (1993) with *C. ljungdahlii* and carbon monoxide containing gases to avoid inhibitory effects of increased dissolved carbon monoxide concentrations.

The approach presented here uses constant $\dot{n} V_L^{-1}$ in all pressure stages and, therefore, the mass transfer coefficient decreases with each pressure step. However, yields of formic acid per fed substrate are 7.5 times higher than in processes with constant $\dot{V}_g V_L^{-1}$ as published by Kantzow and Weuster-Botz (2016).

Further investigations on the influence of feed gas flow rate on the fed substrate based yield are necessary to increase substrate efficiency of anaerobic fermentation of gaseous carbon and energy sources. The complete usage of substrates is a crucial point in increasing the overall efficiency of such processes.

NOMENCLATURE

β_i	Mass concentration of <i>i</i>
$(p_i^G - p_i^L)$	Driving force of mass transfer expressed as difference in partial pressure of <i>i</i> (bar)
$(c^* - c)$	Difference of saturation concentration and actual concentration of a compound at process conditions (mol L ⁻¹)
$D_{i,5}$	Inner diameter of reactor vessel in 1.5 L-scale (mm)
$d_{1,5}$	Stirrer diameter in 1.5 L-scale (mm)

(Continued)

$D_{2.5}$	Inner diameter of reactor vessel in 2.5 L-scale (mm)
$d_{2.5}$	Stirrer diameter in 2.5 L-scale (mm)
E	Consumed amount of substance divided by the total fed amount of substance (%)
H_i	Henry's solubility coefficient of i (M bar ⁻¹)
$h_{l,2.5}$	Filling level in 2.5 L-scale (mm)
$k_{l,a}$	Volumetric mass transfer coefficient (s ⁻¹)
$\dot{n} V_L^{-1}$	Volumetric amount of substance flow rate (mmol min ⁻¹ L ⁻¹)
PV_L^{-1}	Volumetric power input (W L ⁻¹)
P_{CO_2}	Partial pressure of carbon dioxide (bar)
P_{H_2}	Partial pressure of hydrogen (bar)
$\dot{V}_g V_L^{-1}$	Volumetric gas flow rate (vvm)
x_i	Amount of substance ratio calculated by $x_i = c_i / \sum c_i$ (-)
$Y_{P/S}$	Mass based product yield per substrate (g g ⁻¹)

AUTHOR CONTRIBUTIONS

FO: first idea and main design of experimental set-up for both scales. Scale-up from 1.5 to 2.5 L-scale. Supervision of experiments in 2.5 L-scale and execution of experiments in 1.5 L-scale. Sample analytics in all scales. Significant analysis and evaluation of results. Writing of the manuscript. IS: substantial performance of experiments and sample analytics in 2.5 L-scale. Critical revision of the manuscript. MZ: significant input on design of experimental set-up and supervision of experiments in 2.5 L-scale. Important input for evaluation of results and critical revision of the manuscript. SH: substantial input on reactor design and set-up of high-pressure vessel. Critical revision of the manuscript. JS: important support on the concept of the project and critical revision of the manuscript. NB: significant input on concept and

REFERENCES

- Bengelsdorf, F., Straub, M., and Dürre, P. (2013). Bacterial synthesis gas (syngas) fermentation. *Environ. Technol.* 34, 1639–1651. doi:10.1080/09593330.2013.827747
- Biegel, E., and Müller, V. (2010). Bacterial Na⁺-translocating ferredoxin:NAD⁺ oxidoreductase. *Proc. Natl. Acad. Sci. U.S.A.* 107, 18138–18142. doi:10.1073/pnas.1010318107
- Bleichert, K., and Winter, J. (1994). Formate production and utilization by methanogens and by sewage sludge consortia – interference with the concept of interspecies formate transfer. *Appl. Microbiol. Biotechnol.* 40, 910–915. doi:10.1007/BF00173998
- Bredwell, M., and Worden, R. (1998). Mass-transfer properties of microbubbles. 1. Experimental studies. *Biotechnol. Prog.* 14, 31–38. doi:10.1021/bp970133x
- Bredwell, M. D., Srivastava, P., and Worden, R. M. (1999). Reactor design issues for synthesis-gas fermentations. *Biotechnol. Prog.* 15, 834–844. doi:10.1021/bp990108m
- Daniell, J., Köpke, M., and Simpson, S. D. (2012). Commercial biomass syngas fermentation. *Energies* 5, 5372–5417. doi:10.3390/en5125372
- Daniels, L. (1982). Comments on enzymatic synthesis of organic acids and alcohols from H₂, CO₂ and CO. Communications to the editor. *Biotechnol. Bioeng.* 24, 2099–2102. doi:10.1002/bit.260240916
- Demler, M. (2012). *Reaktionstechnische Untersuchung zur autotrophen Herstellung von Acetat mit Acetobacterium woodii*. Dissertation, TU München.
- Department of Chemical Engineering, University of Arkansas. (1993). *High Pressure Synthesis Gas Conversion*. Final Report. United States: Department of Energy.
- Diekert, G., and Wohlfarth, G. (1994). Metabolism of homoacetogens. *Antonie Van Leeuwenhoek* 66, 209–221. doi:10.1007/BF00871640
- Eigenstetter, G., and Takors, R. (2017). Dynamic modeling reveals a three-step response of *Saccharomyces cerevisiae* to high CO₂ levels accompanied by increasing ATP demands. *FEMS Yeast Res.* 17:1–11. doi:10.1093/femsyr/fox008

experimental design in 2.5 L-scale. Critical revision of the manuscript. AN: substantial input on concept, experimental design, and evaluation of results. Critical revision of the manuscript.

ACKNOWLEDGMENTS

We kindly thank Prof. Dr. Christoph Syldatk for his administrative and scientific support of this project. We also want to thank Stefan Henecka and Karl Weiss for their help with installing the high-pressure vessel and its periphery and Elena Hauer for her help during cultivations. The authors acknowledge the support by Deutsche Forschungsgemeinschaft and Open Access Publishing Fund of Karlsruhe Institute of Technology.

FUNDING

The work of FO was supported by a grant from the Ministry of Science, Research and the Arts of the State of Baden-Württemberg Az.: 33-7533-6-195/7/1 and Az. 33-7533-6-195/7/9 as part of the BW² Graduate Program. We would like to thank the BMBF (Förderkennzeichen 03SFK2K0) and the Helmholtz-Gemeinschaft Deutscher Forschungszentren e.V for financing the main part of the R&D program.

SUPPLEMENTARY MATERIAL

The Supplementary Material for this article can be found online at <http://www.frontiersin.org/articles/10.3389/fbioe.2018.00006/full#supplementary-material>.

- Gutknecht, J., Bisson, M. A., and Tosteson, F. C. (1977). Diffusion of carbon dioxide through lipid bilayer membranes: effects of carbonic anhydrase, bicarbonate, and unstirred layers. *J. Gen. Physiol.* 69, 779–794. doi:10.1085/jgp.69.6.779
- Hammerschmidt, A., Boukis, N., Hauer, E., Galla, U., Dinjus, E., Hitzmann, B., et al. (2011). Catalytic conversion of waste biomass by hydrothermal treatment. *Fuel* 90, 555–562. doi:10.1016/j.fuel.2011.06.052
- Hu, O., Chakraborty, S., Kumar, A., Woolston, B., Liu, H., Emerson, D., et al. (2016). Integrated bioprocess for conversion of gaseous substrates to liquids. *Proc. Natl. Acad. Sci. U.S.A.* 113, 3773–3778. doi:10.1073/pnas.1516867113
- Ju, L.-K., and Chase, G. G. (1992). Improved scale-up strategies of bioreactors. *Bioprocess Eng.* 8, 49–53. doi:10.1007/BF00369263
- Kantzow, C., and Weuster-Botz, D. (2016). Effects of hydrogen partial pressure on autotrophic growth and product formation of *Acetobacterium woodii*. *Bioprocess Biosyst. Eng.* 39, 1325–1330. doi:10.1007/s00449-016-1600-2
- Ko, C. W., Vega, J. L., Clausen, E. C., and Gaddy, J. L. (1989). Effect of high pressure on a co-culture for the production of methane from coal synthesis gas. *Chem. Eng. Commun.* 77, 155–169. doi:10.1080/00986448908940178
- Kodama, T., Goto, E., and Minoda, Y. (1976). Determination of dissolved hydrogen concentration and [K_la] in submerged culture vessels. *Agric. Biol. Chem.* 40, 2373–2377. doi:10.1271/bbb1961.40.2373
- Köpke, M., Mihalcea, C., Liew, F., Tizard, J. H., Ali, M. S., Conolly, J. J., et al. (2011). 2,3-Butanediol production by acetogenic bacteria, an alternative route to chemical synthesis, using industrial waste gas. *Appl. Environ. Microbiol.* 77, 5467–5475. doi:10.1128/AEM.00355-11
- Linek, V., and Sinkule, J. (1991). The influence of gas and liquid axial dispersion on determination of $k_{l,a}$ by dynamic method. *Trans. Inst. Chem. Eng.* 69, 308–312.
- Maier, B., Dietrich, C., and Büchs, J. (2001). Correct application of the sulphite oxidation methodology of measuring the volumetric mass transfer coefficient $k_{l,a}$ under non-pressurized and pressurized conditions. *Food Bioprod. Process.* 79, 107–113. doi:10.1205/096030801750286267
- Müller, V. (2003). Energy conservation in acetogenic bacteria. *Appl. Environ. Microbiol.* 69, 6345–6353. doi:10.1128/AEM.69.11.6345-6353.2003

- Oswald, F., Dörsam, S., Veith, N., Zwick, M., Neumann, A., Ochsenreither, K., et al. (2016). Sequential mixed cultures: from syngas to malic acid. *Front. Microbiol.* 7:891. doi:10.3389/fmicb.2016.00891
- Peters, V., Janssen, P. H., and Conrad, R. (1999). Transient production of formate during chemolithotrophic growth of anaerobic microorganisms on hydrogen. *Curr. Microbiol.* 38, 285–289. doi:10.1007/PL00006803
- Rokni, M. (2015). Thermodynamic analyses of municipal solid waste gasification plant integrated with solid oxide fuel cell and stirling hybrid system. *Int. J. Hydrogen Energy* 40, 7855–7869. doi:10.1016/j.ijhydene.2014.11.046
- Schlüter, V., Yonsel, S., and Deckwer, W.-D. (1992). Korrelation der O₂-Stoffübergangskoeffizienten ($k_{l,a}$) in Rührreaktoren mit niederviskosen Fermentationsmedien. *Chemie Ingenieur Technik* 64, 474–475.
- Schmidt, R. L., and Cooney, C. L. (1986). Production of acetic acid from hydrogen and carbon dioxide by *Clostridium* species ATCC 29797. *Chem. Eng. Commun.* 45, 61–73. doi:10.1080/00986448608911372
- Schuchmann, K., and Müller, V. (2013). Direct and reversible hydrogenation of CO₂ to formate by a bacterial carbon dioxide reductase. *Science* 342, 1382–1385. doi:10.1126/science.1244758
- Schuchmann, K., and Müller, V. (2014). Autotrophy at the thermodynamic limit of life: a model for energy conservation in acetogenic bacteria. *Nat. Rev. Microbiol.* 12, 809–821. doi:10.1038/nrmicro3365
- Spruth, M., Reidlinger, J., and Müller, V. (1995). Sodium ion dependence of inhibition of the Na⁺-translocating F₁F₀-ATPase from *Acetobacterium woodii*. Probing the site(s) involved in ion transport. *Biochim. Biophys. Acta* 1229, 96–102. doi:10.1016/0005-2728(94)00192-8
- Tanner, R. (2007). "Cultivation of bacteria and fungi," in *Manual of Environmental Microbiology*, 3rd Edn, eds C. J. Hurst, R. L. Crawford, J. L. Garland, D. A. Lipson, A. L. Mills, and L. D. Stetzenbach (Washington, DC: ASM Press), 69–78.
- Vega, J. L., Clausen, E. C., and Gaddy, J. L. (1989a). Study of gaseous substrate fermentations: carbon monoxide conversion to acetate. 1. Batch culture. *Biotechnol. Bioeng.* 34, 774–784. doi:10.1002/bit.260340607
- Vega, J. L., Prieto, S., Elmore, B. B., Clausen, E. C., and Gaddy, J. L. (1989b). The biological production of ethanol from synthesis gas. *Appl. Biochem. Biotechnol.* 2, 781–797. doi:10.1007/BF02936525
- Wang, S., Huang, H., Kahnt, J., Mueller, A. P., Köpke, M., and Thauer, R. K. (2013). NADP-specific electron-bifurcating [FeFe]-hydrogenase in a functional complex with formate dehydrogenase in *Clostridium autoethanogenum* grown on CO. *J. Bacteriol.* 195, 4373–4386. doi:10.1128/JB.00678-13
- Worden, R. M., Bredwell, M. D., and Grethlein, A. J. (1997). "Engineering issues in synthesis gas fermentations," in *Fuels and Chemicals from Biomass*, ed. B. Saha (Washington, DC: American Chemical Society), 320–335. ACS Symposium Series.
- Yang, H., and Drake, H. (1990). Differential effects of sodium on hydrogen- and glucose-dependent growth of acetogenic bacterium *Acetogenium kivui*. *Appl. Environ. Microbiol.* 56, 81–86.

Conflict of Interest Statement: The authors declare that the research was conducted in the absence of any commercial or financial relationships that could be construed as a potential conflict of interest.

Copyright © 2018 Oswald, Stoll, Zwick, Herbig, Sauer, Boukis and Neumann. This is an open-access article distributed under the terms of the Creative Commons Attribution License (CC BY). The use, distribution or reproduction in other forums is permitted, provided the original author(s) and the copyright owner are credited and that the original publication in this journal is cited, in accordance with accepted academic practice. No use, distribution or reproduction is permitted which does not comply with these terms.