




Fabrication of Ceramic Micro Parts with Outstanding Mechanical Properties


F. A. Çetinel **, W. Bauer **, J. Haußelt **,

* Laboratory for Materials Process Technology, Department of Microsystems Engineering (IMTEK), University of Freiburg, Germany
 ** Institute for Applied Materials - Materials Process Technology (IAM-WPT), Karlsruhe Institute of Technology, Germany

Motivation: Unique Properties of 3Y-TZP Micro Bending Bars Fabricated via Hot Molding

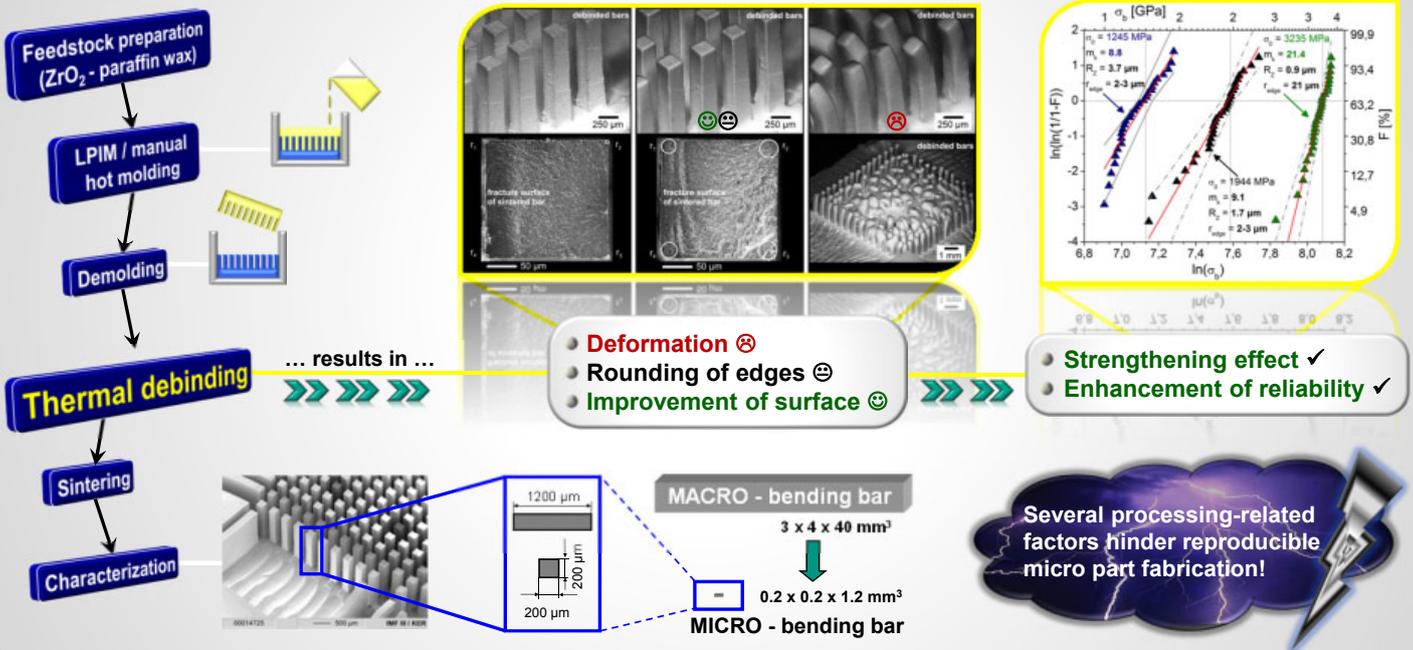

Strengthening by Thermal Debinding: How Surface Defects are Healed and Levelled

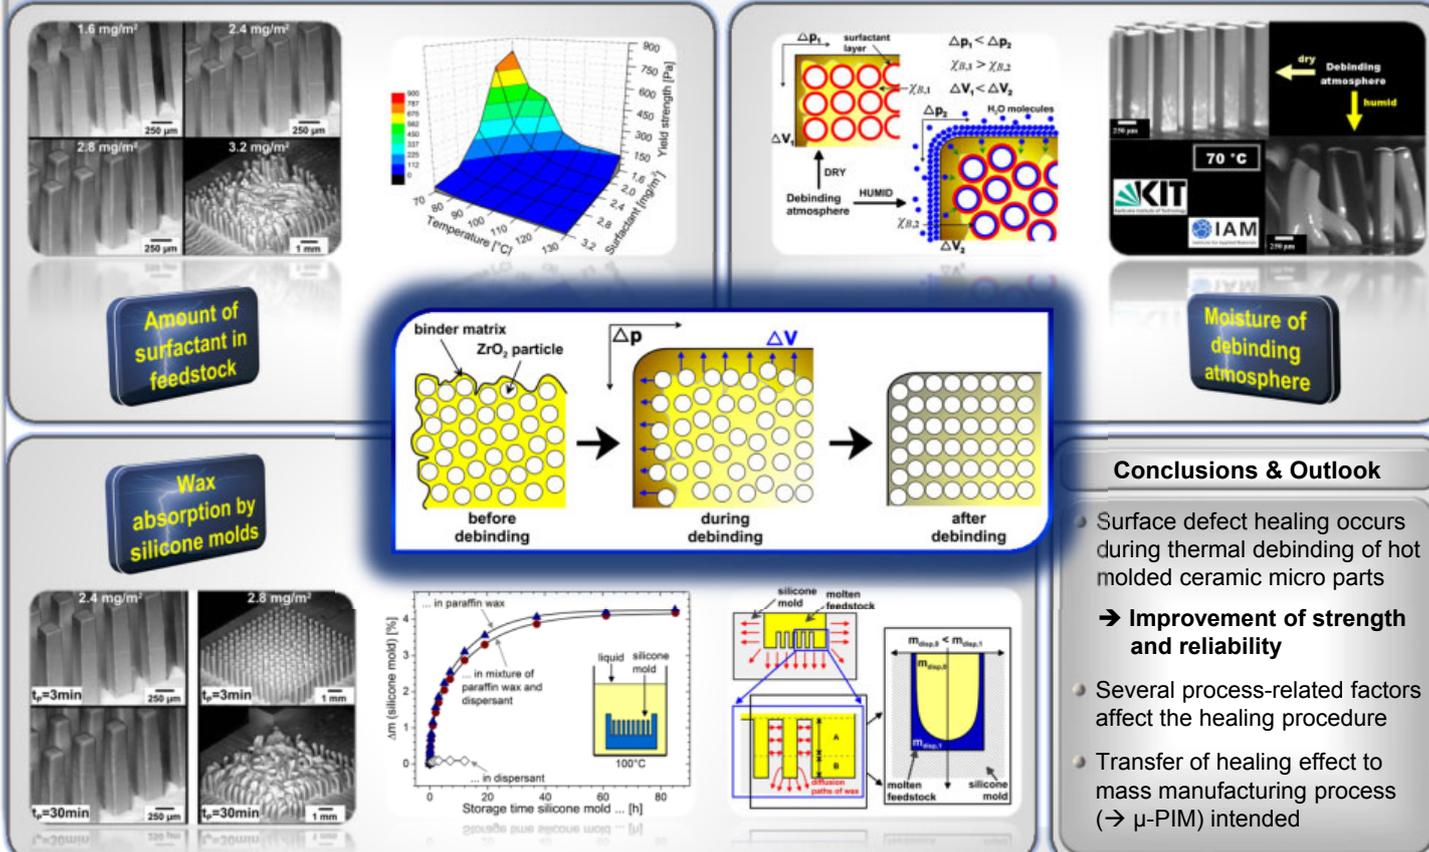

Conclusions & Outlook

- Surface defect healing occurs during thermal debinding of hot molded ceramic micro parts
- ➔ Improvement of strength and reliability
- Several process-related factors affect the healing procedure
- Transfer of healing effect to mass manufacturing process (➔ μ -PIM) intended

References

F.A. Çetinel and W. Bauer, *Keramische Zeitschrift* (62), 2010
 F.A. Çetinel et al., *Ceramics International* (37), 2011
 M. Müller et al., *Microsystem Technologies* (In Press), 2012

Acknowledgements

R. Knitter, M. Müller, M. Schulz, T. Hanemann (KIT, IAM-WPT)
 K.-H. Lang, J. Rögner, D. Gelmedin (KIT, IAM-WK)

