

This is a repository copy of *Temporal feedback control of high-intensity laser pulses to optimize ultrafast heating of atomic clusters*.

White Rose Research Online URL for this paper:
<https://eprints.whiterose.ac.uk/138962/>

Version: Published Version

Article:

Streeter, M. J.V., Dann, S. J.D., Scott, J. D.E. et al. (28 more authors) (2018) Temporal feedback control of high-intensity laser pulses to optimize ultrafast heating of atomic clusters. *Applied Physics Letters*. 244101. ISSN 0003-6951

<https://doi.org/10.1063/1.5027297>

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

Temporal feedback control of high-intensity laser pulses to optimize ultrafast heating of atomic clusters

M. J. V. Streeter, S. J. D. Dann, J. D. E. Scott, C. D. Baird, C. D. Murphy, S. Eardley, R. A. Smith, S. Rozario, J.-N. Gruse, S. P. D. Mangles, Z. Najmudin, S. Tata, M. Krishnamurthy, S. V. Rahul, D. Hazra, P. Pourmoussavi, J. Osterhoff, J. Hah, N. Bourgeois, C. Thornton, C. D. Gregory, C. J. Hooker, O. Chekhlov, S. J. Hawkes, B. Parry, V. A. Marshall, Y. Tang, E. Springate, P. P. Rajeev, A. G. R. Thomas, and D. R. Symes

Citation: *Appl. Phys. Lett.* **112**, 244101 (2018); doi: 10.1063/1.5027297

View online: <https://doi.org/10.1063/1.5027297>

View Table of Contents: <http://aip.scitation.org/toc/apl/112/24>

Published by the [American Institute of Physics](#)

Articles you may be interested in

[Genetic algorithms shape laser pulses to optimize plasma X-ray production](#)

SciLight **2018**, 240003 (2018); 10.1063/1.5043091

[Singlet-triplet minus mixing and relaxation lifetimes in a double donor dot](#)

Applied Physics Letters **112**, 243105 (2018); 10.1063/1.5021500

[Integrated tandem device with photoactive layer for near-infrared to visible upconversion imaging](#)

Applied Physics Letters **112**, 243301 (2018); 10.1063/1.5023430

[Electric-field induced second-harmonic generation of femtosecond pulses in atmospheric air](#)

Applied Physics Letters **112**, 241101 (2018); 10.1063/1.5030171

[Neural network based design of metagratings](#)

Applied Physics Letters **112**, 241102 (2018); 10.1063/1.5033327

[Enhanced energy absorption of high intensity laser pulses by targets of modulated surface](#)

Applied Physics Letters **112**, 221103 (2018); 10.1063/1.5030215



MMR TECHNOLOGIES

**THE WORLD'S RESOURCE FOR
VARIABLE TEMPERATURE
SOLID STATE CHARACTERIZATION**

WWW.MMR-TECH.COM

OPTICAL STUDIES SYSTEMS SEEBECK STUDIES SYSTEMS MICROPROBE STATIONS HALL EFFECT STUDY SYSTEMS AND MAGNETS

The advertisement displays a variety of scientific instruments including optical studies systems, Seebeck studies systems (models SB1000 and K2000), microprobe stations, and Hall effect study systems and magnets (models HS000 and K2000).

Temporal feedback control of high-intensity laser pulses to optimize ultrafast heating of atomic clusters

M. J. V. Streeter,¹ S. J. D. Dann,¹ J. D. E. Scott,¹ C. D. Baird,² C. D. Murphy,² S. Eardley,³ R. A. Smith,³ S. Rozario,⁴ J.-N. Gruse,⁴ S. P. D. Mangles,⁴ Z. Najmudin,⁴ S. Tata,⁵ M. Krishnamurthy,⁵ S. V. Rahul,⁶ D. Hazra,⁷ P. Pourmousavi,⁸ J. Osterhoff,⁸ J. Hah,⁹ N. Bourgeois,¹⁰ C. Thornton,¹⁰ C. D. Gregory,¹⁰ C. J. Hooker,¹⁰ O. Chekhlov,¹⁰ S. J. Hawkes,¹⁰ B. Parry,¹⁰ V. A. Marshall,¹⁰ Y. Tang,¹⁰ E. Springate,¹⁰ P. P. Rajeev,¹⁰ A. G. R. Thomas,^{1,9} and D. R. Symes¹⁰

¹The Cockcroft Institute, Keckwick Lane, Daresbury WA4 4AD, United Kingdom

²York Plasma Institute, Department of Physics, University of York, York YO10 5DD, United Kingdom

³Blackett Laboratory, Imperial College London, London SW7 2AZ, United Kingdom

⁴The John Adams Institute for Accelerator Science, Imperial College London, London SW7 2AZ, United Kingdom

⁵Tata Institute of Fundamental Research, Homi Bhabha Road, Colaba, Mumbai 400005, India

⁶TIFR Center for Interdisciplinary Sciences, Hyderabad 500107, India

⁷Laser Plasma Section, Raja Ramanna Centre for Advanced Technology, Indore 452013, India

⁸Deutsches Elektronen-Synchrotron DESY, Notkestr. 85, 22607 Hamburg, Germany

⁹Center for Ultrafast Optical Science, University of Michigan, Ann Arbor, Michigan 48109-2099, USA

¹⁰Central Laser Facility, STFC Rutherford Appleton Laboratory, Didcot OX11 0QX, United Kingdom

(Received 1 March 2018; accepted 24 April 2018; published online 13 June 2018)

We describe how active feedback routines can be applied at a limited repetition rate (5 Hz) to optimize high-power (>10 TW) laser interactions with clustered gases. Optimization of x-ray production from an argon cluster jet, using a genetic algorithm, approximately doubled the measured energy through temporal modification of the 150 mJ driving laser pulse. This approach achieved an increased radiation yield through exploration of a multi-dimensional parameter space, without requiring detailed *a priori* knowledge of the complex cluster dynamics. The optimized laser pulses exhibited a slow rising edge to the intensity profile, which enhanced the laser energy coupling into the cluster medium, compared to the optimally compressed FWHM pulse (40 fs). Our work suggests that this technique can be more widely utilized for control of intense pulsed secondary radiation from petawatt-class laser systems. *Published by AIP Publishing.*

<https://doi.org/10.1063/1.5027297>

Petawatt lasers are now able to operate with a pulse repetition rate of 1 Hz,¹ and upcoming facilities using more efficient, lower thermal load diode-pumped solid state technology will increase this to 10 Hz² or more. One of the major drivers for the increase in *average* power of such high peak-power systems is to generate bright laser-plasma based secondary sources to provide user beamlines, similar to existing light-source facilities, or energetic particle beams for a range of applications. This move to a higher repetition rate opens the possibility to employ active feedback routines to optimize energy conversion into radiation or particle beams. Due to highly complex non-linear dynamics in intense laser-plasma interactions, the optimal laser pulse properties for the generation of the secondary source cannot be easily predicted, as this is both computationally demanding and requires a complete understanding of all the key physical processes involved. Also, optimization is a many-dimensional problem and so cannot be readily performed by scanning individual parameters.

Sophisticated feedback techniques, usually employing kHz repetition rate lasers operating at relatively low peak intensity, are well-established for coherent control of atomic and molecular processes.³ Programmable elements in the laser system are used to tailor the spatial and temporal profiles of the laser pulse at focus to optimize specific output

parameters. One method is to use a genetic algorithm (GA) to select the most suitable profiles out of an initially random or pseudo-random set and, over a number of generations, the input parameters are *evolved* to improve the chosen output property (referred to as the *fitness function*). The great benefit of this approach is that it can achieve advantageous results without detailed knowledge of the interaction itself and lead to new and unexpected results.

Previous experiments have employed feedback loops to control high harmonic generation,^{4,5} cluster dynamics,^{6–8} and electron beam properties⁹ through temporal and spatial pulse shaping. These studies were performed with low energy pulses (<20 mJ) and, with the exception of He *et al.*,⁹ at relatively low intensities ($<10^{16}$ W cm⁻²). Scaling these techniques to higher energy lasers is challenging because of the limited repetition rate. Although feedback has been used to improve the performance of high power (0.1–1 PW) lasers,^{10,11} it has not been applied *directly* to optimize the secondary sources produced.

Here, we report an experiment which adopted temporal shaping to optimize laser-driven x-rays using a laser capable of delivering much higher energy pulses (~ 1 J) than previously used for such feedback routines. This set-up gives access to higher energy secondary sources such as high-Z K_α sources,^{12,13} 200 MeV electron beams,¹⁴ and directional hard

x-ray sources (keV–MeV)¹⁵ through betatron oscillations and inverse Compton scattering.¹⁶ Our successful implementation of the method may also serve as a proof-of-principle demonstration for 10 Hz PW systems currently being commissioned.

As a target medium, we used a gas of argon clusters that provided a test system for optimization techniques because the dynamics of the interaction are complicated and heavily influenced by the pulse shape.¹⁷ Because of their localized solid density, clusters absorb intense laser light much more efficiently than isolated atoms creating multi-keV electron temperatures.¹⁸ Ultrafast K-shell radiation is emitted on the timescale of the laser pulse by hot electrons creating inner-shell vacancies in the high density cluster core.^{19,20} The clusters subsequently explode and merge forming a hot low density plasma that expands hydrodynamically, emitting x-ray radiation as it cools and recombines on the few nanosecond timescale.²¹ Atomic ionization begins early in the pulse, initially through field ionization and then collisionally as the electron density rises. The charge state can easily reach Ar^{8+} and may reach Ar^{16+} or Ar^{18+} in the polar regions through polarization enhancement of the field.^{22,23}

At moderate laser intensities ($\sim 10^{16} \text{ W cm}^{-2}$), the strength of the laser field is insufficient to overcome the restoring field of the ions so electrons remain bound, forming a quasi-neutral nanoplasma.^{24,25} Inside the cluster, the laser field is shielded while the nanoplasma is super-critical. This suppresses energy transfer until expansion reduces the electron density to $n_e \sim n_c$ (where $n_c = \omega^2 m_e \epsilon_0 / e^2$ is the critical density for laser frequency ω), at which point the nanoplasma moves resonantly with the laser frequency. Many experiments in this regime have shown an enhancement in the laser-cluster coupling with a longer pulse (100s of fs) or multiple pulse structure.^{6–8,17}

At higher intensities, the laser removes a significant proportion of the cluster electrons, thus invalidating purely hydrodynamic models. The extracted electrons gain energy from the laser field during multiple passes through the shielded core of the cluster^{22,26–29} and can reach a temperature of 10s of keV, higher than the ponderomotive energy and much hotter than the 1–2 keV limit of collisional heating. This process allows high absorption to be maintained even with very short (<100 fs) laser pulses.³⁰ We show here that the x-ray generation in the short-pulse high-intensity regime is highly sensitive to the pulse shape and interpret our results as an optimization of the resonant heating of the electron cloud through collisionless processes.

The experiment was conducted using the front end of the Gemini laser facility,³¹ which operates at a 5 Hz repetition rate. The arrangement is shown in Fig. 1. The laser was focused with an $f/16$ off-axis parabolic mirror to a spot size of $22 \mu\text{m}$ FWHM with an on-target pulse energy of 150 mJ and a pulse duration of 40 fs when fully compressed. A deformable mirror was used to optimize the focal spot, giving a peak vacuum intensity of $\sim 4 \times 10^{17} \text{ W cm}^{-2}$. An acousto-optic modulator (Fastlite *Dazzler*) was used to modify the spectral phase of the laser pulse and thereby modify the compressed pulse shape, which was diagnosed using frequency resolved optical gating (Swamp Optics *Grenouille*). A 3 mm diameter gas-jet produced argon clusters with an

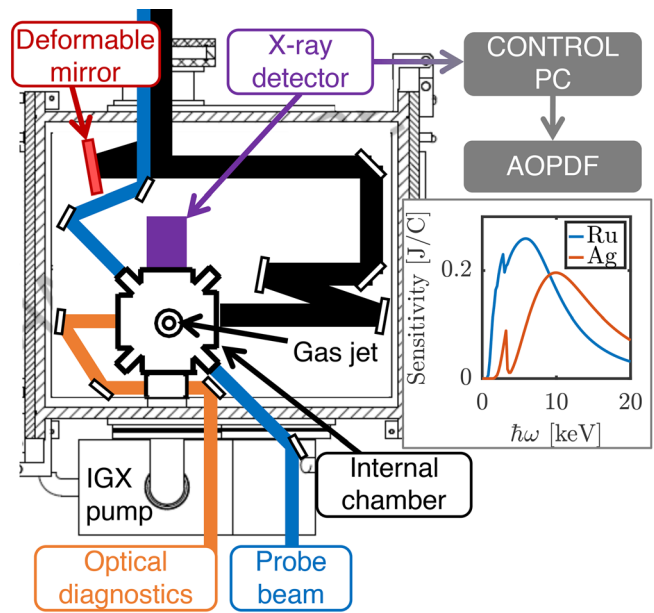


FIG. 1. Experimental layout. The gas jet target is housed in an internal differentially pumped chamber. Diagnostic output is fed into the control PC that applies settings to the acousto-optic programmable dispersive filter in an optimization feedback loop. Sensitivity for the $0.1 \mu\text{m}$ Ru and $2 \mu\text{m}$ Ag filtered PIN diodes is shown.

estimated radius $R_C = 5\text{--}18 \text{ nm}$ over the $7\text{--}40 \text{ bar}$ (1×10^{18} – $5 \times 10^{18} \text{ atoms cm}^{-3}$) range of backing pressures.³² To reduce gas load in the main vacuum chamber, the jet was placed in an internal chamber with 2 mm diameter entrance and exit holes to provide differential pumping. The laser energy before and after the compressor was monitored continuously to check for any drop in performance or degradation of the compressor throughput. X-ray generation was measured using two silicon PIN diodes (Quantrad) mounted inside the internal chamber at 90° to the laser axis, behind a 50 mm 0.09 T magnet to deflect electrons ($<100 \text{ keV}$). One of these (model no. 025-PIN-125) was filtered with $0.1 \mu\text{m}$ Ru and the other (model no. 100-PIN-250) with $2 \mu\text{m}$ Ag. Both filters were held on $3.5 \mu\text{m}$ Mylar coated with $0.1 \mu\text{m}$ Al. The spectral sensitivity of the diodes, calculated taking into account the filter transmission, is shown in the inset of Fig. 1. Signals were averaged over 50 laser pulses to mitigate shot-to-shot fluctuations.

The effect of scanning the second order phase term (linear chirp) with the *Dazzler* on the x-ray signal is shown in Fig. 2(a) for two gas pressures, 15 bar ($R_C \sim 8.5 \text{ nm}$) and 30 bar ($R_C \sim 14 \text{ nm}$). Higher pressure (P) increases the overall atomic density linearly and also the cluster size³² approximately as $R_C \propto P^{3/8}$, leading to stronger x-ray emission. In both cases, the signal is not maximized at the position of the shortest pulse duration (0 fs^2 relative chirp) and shows a strong asymmetry with the positive chirp yielding much higher signals than the negative chirp. Example laser pulse profiles measured by the *Grenouille* are shown in Fig. 2(b). For a positive chirp (600 fs^2), an increased pulse duration results in an increased x-ray yield despite a drop in the peak power of the laser by a factor of 2. Even though a similar pulse shape is measured for a negative chirp (-400 fs^2), the x-ray yield is suppressed in this case. These results highlight

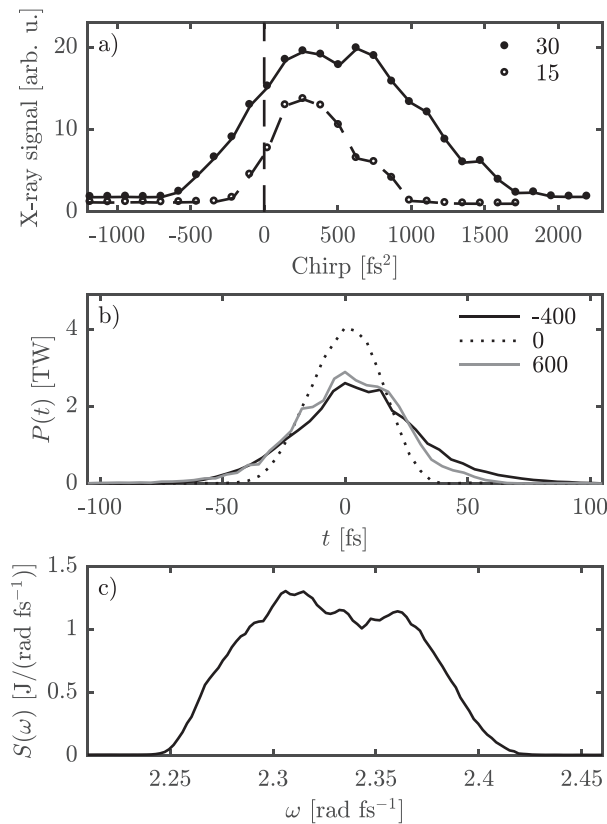


FIG. 2. (a) Detected X-ray signal on a Ru-filtered PIN diode, plotted as a function of second order phase with backing pressures of 15 bar and 30 bar. (b) Laser pulse power profiles for second order phase terms of -400 , 0 , and 600 fs². (c) Laser spectrum.

the complex effects of the spectral phase on the x-ray yield and perhaps the sensitivity to ~ 100 fs timescale pulse contrast, which might also be affected by changing the *Dazzler* pattern.¹⁰ Including 3rd and 4th order spectral phase terms allows a much greater range of pulse shapes to be generated, including those with large asymmetries even with a symmetric spectrum as in this case [Fig. 2(c)]. As the number of variables increases, however, performing scans of the high-dimensionality parameter space to find optimal conditions becomes unfeasible; instead, optimization algorithms such as genetic algorithms are more effective.

To implement the GA, we defined the fitness function as the peak signal detected on the Ru-filtered PIN diode. This diode was used as it was sensitive to lower energy photons and therefore measured a detectable signal even when the x-ray yield was very low. A single *generation* in the algorithm was formed from 15 *individuals*, each individual being a set of spectral phase terms (2nd, 3rd, and 4th terms of a polynomial expansion). The initial generation always contained one individual with the unmodified settings (shortest pulse). The settings for the other individuals were randomly chosen from the permissible parameter ranges (limited to avoid damage to the laser chain). After evaluating the fitness function for each individual, the four best performing ones were selected to be the *parents* for the next generation. Each *child* individual in the new generation was created by a *crossover* of two randomly selected parents. The crossover operation consisted of taking each phase term from one of the two parents at random. The children were further

modified by *mutation*, which consisted of adding random modifications to the phase terms, in order to maintain diversity and explore more of the permissible parameter space. In addition, the best performing individual from the last generation was always preserved and was the first one to be tested in the new generation. This allowed us to check that no significant change had occurred in the experimental conditions (larger than the normal level of fluctuation) during the time taken to acquire data for each generation (about 4 min). The feedback loop was continued until the fitness function appeared to converge to an optimum value.

An optimization of the signal over nine generations each containing 15 members is shown in Fig. 3(a) for 30 bar backing pressure. The early generations show a wide variation because within a random choice of test patterns, many generate a poor signal. The effect of “breeding” the best candidates becomes clear over later generations as the poor performers are rejected and the spread reduces. Generation 4 produced a low signal because of a laser defocus problem that was corrected before the start of generation 5. By generation 6, the x-ray flux reaches an optimum with $\sim 2\times$ the value of the starting point and subsequent evolution does not further increase the signal. An equivalent scan for 15 bar backing pressure shown in Fig. 3(b) shows an improvement in the x-ray flux of $\sim 3\times$. In these cases, we optimized only the peak voltage on the Ru-filtered PIN diode, but it is possible to define more sophisticated fitness functions such as signal ratios between Ross pair filtered diodes to increase

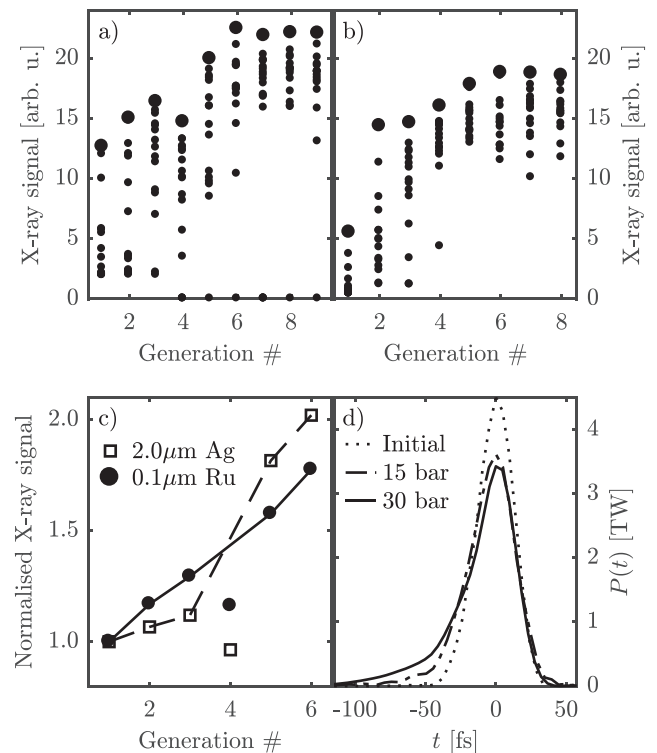


FIG. 3. Optimization of Ru-filtered PIN diode X-ray flux with backing pressures of (a) 30 bar and (b) 15 bar. Each point is the average of 50 shots, with the best individual of each generation shown as a larger point. Error bars are omitted for visual clarity. (c) Improvement of the X-ray signal through the $0.1\ \mu\text{m}$ Ru and $2.0\ \mu\text{m}$ Ag filters, normalized to their starting values with the unmodified laser pulse (Generation 1) for a backing pressure of 30 bar. (d) Power profiles of the initial and optimized pulses from the 15 bar and 30 bar runs.

plasma temperature. Even with our simple routine, a higher increase in the signal ($\sim 2\times$) through the higher energy Ag filter suggests that the increased flux was accompanied by a rise in electron temperature [Fig. 3(c)]. The temporal profiles of the pre-interaction laser pulses at the end of each optimization run are shown in Fig. 3(d) compared to the starting point. In both cases, the *Dazzler* control signal evolved to apply 3rd and 4th order spectral phase terms as well as positive 2nd order phase. This acts to increase the asymmetry in the laser pulse, such that the rising edge is lengthened, while maintaining a relatively high peak power.

Stronger x-ray emission indicates an increase in electron density or temperature and so is linked with more effective transfer of laser energy into the population of extracted electrons. Laser pulses with similar temporal shapes but opposite signs of second order phase [Fig. 2(a)] differed in the x-ray signal by a factor of 3.0 at 30 bar and 5.3 at 15 bar. This points to a dependence of ultrafast cluster dynamics that is more complicated than simply an optimum pulse duration and rather that the interaction is highly sensitive to subtle temporal profile changes on the 10 fs timescale. This is not surprising since the collisionless heating of the extracted electron cloud has an extremely fast timescale and should be strongly affected by changes in the cycle-to-cycle structure of the laser field.

The most important consequence of pulse shaping is likely to be its effect on the expansion of the ionic core, the dynamics of which is primarily determined by the combined laser and electrostatic fields. With a sharp rising edge, ion motion is minimal and we estimate the fraction of liberated electrons as $\sim 15\%$ by equating the laser field with the binding field of the charged cluster (for $R_C = 14$ nm, $n_e = 80n_c$). A slower intensity rise triggers ionization earlier, and the core has time to expand through thermal and Coulomb pressure over the course of the laser pulse. As the cluster expands, the charge density is reduced, making it easier for the laser to extract electrons. The cluster radius has only to increase by a factor of $\sqrt{2}$ (dropping the density to $\sim 30n_c$) to double the number of extracted electrons. The preceding foot on the pulse is longer for higher gas-jet backing pressure since larger clusters expand more slowly. The temporal asymmetry seen in Fig. 2(a) suggests that the laser frequency chirp also plays an important role in the rapidly evolving cluster. The system can be compared to a driven oscillator that is in resonance when the effective frequency of the electron cloud is matched to the laser frequency.³³ Over each cycle of rising intensity, the ionization and electron energies increase. It could be that a positive chirp (increasing laser frequency) maintains a resonant condition for many more cycles than in the opposite case. The exact combinations of spectral phase terms that were found by the GA would not have been easily reached by scanning each phase term individually, and the finely tuned results demonstrate the advantage of using active feedback techniques.

In summary, we have demonstrated the feasibility of applying active feedback control techniques with a > 10 TW laser system operating at 5 Hz. X-ray emission from an argon cluster plasma was optimized with a slowly rising intensity profile that improved the efficiency of the collisionless heating of electrons. Here, we employed a genetic algorithm to

optimize the signal from a single diagnostic, with three optimization parameters. However, there are many alternative algorithms available and one could use a larger parameter space and more intricate fitness functions to further improve experimental outcomes. Moreover, the availability of large-area fast-response piezo-electric based adaptive optics enables optimization routines to be applied also in the spatial domain. When combined with the acousto-optic modulator control of spectral phase, this provides the potential for complete control over the spatio-temporal properties of an intense laser focus to manipulate plasma interactions for specific desired outcomes. Our results suggest that the ability of the laser feedback system to control secondary sources is highly promising for future PW-class facilities planned for application-driven science. Employing this method on a dedicated beamline would provide the capability to initially optimize and then to continuously correct or tune the properties of an x-ray or particle source.

We acknowledge funding from STFC Grant No. ST/P002056/1 and ST/J002062/1 and the EuroNNac, Newton-Bhabha, and Helmholtz ARD programs. S.E. was supported by an AWE CASE award. J.H. and A.T. acknowledge funding from NSF Grant No. 1535628 and DOE Grant No. DE-SC0016804. We thank the staff of the Central Laser Facility for assistance with the experiment.

¹K. Nakamura, H. S. Mao, A. J. Gonsalves, H. Vincenti, D. E. Mittelberger, J. Daniels, A. Magana, C. Toth, and W. P. Leemans, *IEEE J. Quantum Electron.* **53**, 1 (2017).

²B. Rus, P. Bakule, D. Kramer, J. Naylor, J. Thoma, J. T. Green, R. Antipenkov, M. Fibrich, J. Novák, F. Batysta, T. Mazanec, M. A. Drouin, K. Kasl, R. Baše, D. Peceli, L. Koubíková, P. Trojek, R. Boge, J. C. Lagron, Š. Vyhlička, J. Weiss, J. Cupal, J. Hřebíček, P. Hříbek, M. Durák, J. Polan, M. Košelja, G. Korn, M. Horáček, J. Horáček, B. Himmel, T. Havlíček, A. Honsa, P. Korouš, M. Laub, C. Haefner, A. Bayramian, T. Spinka, C. Marshall, G. Johnson, S. Telford, J. Horner, B. Deri, T. Metzger, M. Schultze, P. Mason, K. Ertel, A. Lintern, J. Greenhalgh, C. Edwards, C. Hernandez-Gomez, J. Collier, T. Ditmire, E. Gaul, M. Martinez, C. Frederickson, D. Hammond, C. Malato, W. White, and J. Houzvička, *Proc. SPIE* **9515**, 95150F (2015).

³W. S. Warren, H. Rabitz, and M. Dahleh, *Science (New York, N.Y.)* **259**, 1581 (1993).

⁴R. Bartels, S. Backus, E. Zeek, L. Misoguti, G. Vdovin, I. P. Christov, M. Murnane, and H. C. Kapteyn, *Nature* **406**, 164 (2000).

⁵D. Yoshitomi, J. Nees, N. Miyamoto, T. Sekikawa, T. Kanai, G. Mourou, and S. Watanabe, *Appl. Phys. B* **78**, 275 (2004).

⁶S. Zamith, T. Martchenko, Y. Ni, S. A. Aseyev, H. G. Muller, and M. J. J. Vrakking, *Phys. Rev. A* **70**, 011201 (2004).

⁷A. S. Moore, K. J. Mendham, D. R. Symes, J. S. Robinson, E. Springate, M. B. Mason, R. A. Smith, J. W. G. Tisch, and J. P. Marangos, *Appl. Phys. B* **80**, 101 (2005).

⁸N. X. Truong, S. Göde, J. Tiggesbäumker, and K.-H. Meiwes-Broer, *J. Phys. B: At., Mol. Opt. Phys.* **44**, 225601 (2011).

⁹Z.-H. He, B. Hou, V. Lebaillly, J. A. Nees, K. Krushelnick, and A. G. R. Thomas, *Nat. Commun.* **6**, 7156 (2015).

¹⁰C. Liu, J. Zhang, S. Chen, G. Golovin, S. Banerjee, B. Zhao, N. Powers, I. Ghebregziabher, and D. Umstadter, *Opt. Lett.* **39**, 80 (2014).

¹¹H. T. Kim, V. B. Pathak, K. H. Pae, A. Lifschitz, F. Sylla, J. H. Shin, C. Hojbota, S. K. Lee, J. H. Sung, H. W. Lee, E. Guillaume, C. Thauray, K. Nakajima, J. Vieira, L. O. Silva, V. Malka, and C. H. Nam, *Sci. Rep.* **7**, 10203 (2017).

¹²R. C. Issac, G. Vieux, B. Ersfeld, E. Brunetti, S. P. Jamison, J. Gallacher, D. Clark, and D. A. Jaroszynski, *Phys. Plasmas* **11**, 3491 (2004).

¹³Y. Hayashi, A. S. Pirozhkov, M. Kando, Y. Fukuda, A. Faenov, K. Kawase, T. Pikuz, T. Nakamura, H. Kiriya, H. Okada, and S. V. Bulanov, *Opt. Lett.* **36**, 1614 (2011).

- ¹⁴C. G. R. Geddes, S. Rykovanov, N. H. Matlis, S. Steinke, J.-L. Vay, E. H. Esarey, B. Ludewigt, K. Nakamura, B. J. Quiter, C. B. Schroeder, C. Toth, and W. P. Leemans, *Nucl. Instrum. Methods Phys. Res., Sect. B* **350**, 116 (2015).
- ¹⁵S. Corde, K. Ta Phuoc, G. Lambert, R. Fitour, V. Malka, A. Rousse, A. Beck, and E. Lefebvre, *Rev. Mod. Phys.* **85**, 1 (2013).
- ¹⁶F. Albert and A. G. R. Thomas, *Plasma Phys. Controlled Fusion* **58**, 103001 (2016).
- ¹⁷T. Fennel, K.-H. Meiwes-Broer, J. Tiggesbäumker, P.-G. Reinhard, P. M. Dinh, and E. Suraud, *Rev. Mod. Phys.* **82**, 1793 (2010).
- ¹⁸Y. L. Shao, T. Ditmire, J. W. G. Tisch, E. Springate, J. P. Marangos, and M. H. R. Hutchinson, *Phys. Rev. Lett.* **77**, 3343 (1996).
- ¹⁹F. Dorchies, F. Blasco, C. Bonté, T. Caillaud, C. Fourment, and O. Peyrusse, *Phys. Rev. Lett.* **100**, 205002 (2008).
- ²⁰L. M. Chen, F. Liu, W. M. Wang, M. Kando, J. Y. Mao, L. Zhang, J. L. Ma, Y. T. Li, S. V. Bulanov, T. Tajima, Y. Kato, Z. M. Sheng, Z. Y. Wei, and J. Zhang, *Phys. Rev. Lett.* **104**, 215004 (2010).
- ²¹T. Ditmire, T. Donnelly, R. W. Falcone, and M. D. Perry, *Phys. Rev. Lett.* **75**, 3122 (1995).
- ²²C. Jungreuthmayer, M. Geissler, J. Zanghellini, and T. Brabec, *Phys. Rev. Lett.* **92**, 133401 (2004).
- ²³Y. Fukuda, Y. Kishimoto, T. Masaki, and K. Yamakawa, *Phys. Rev. A* **73**, 031201 (2006).
- ²⁴T. Ditmire, T. Donnelly, A. M. Rubenchik, R. W. Falcone, and M. D. Perry, *Phys. Rev. A* **53**, 3379 (1996).
- ²⁵H. M. Milchberg, S. J. McNaught, and E. Parra, *Phys. Rev. E* **64**, 056402 (2001).
- ²⁶T. Taguchi, T. M. Antonsen, and H. M. Milchberg, *Phys. Rev. Lett.* **92**, 205003 (2004).
- ²⁷B. N. Breizman, A. V. Arefiev, and M. V. Fomytskyi, *Phys. Plasmas* **12**, 056706 (2005).
- ²⁸P. Mulser, M. Kanapathipillai, and D. H. H. Hoffmann, *Phys. Rev. Lett.* **95**, 103401 (2005).
- ²⁹M. Kundu and D. Bauer, *Phys. Rev. Lett.* **96**, 123401 (2006).
- ³⁰L. M. Chen, J. J. Park, K. H. Hong, I. W. Choi, J. L. Kim, J. Zhang, and C. H. Nam, *Phys. Plasmas* **9**, 3595–3599 (2002).
- ³¹C. J. Hooker, J. L. Collier, O. Chekhlov, R. Clarke, E. Divall, K. Ertel, B. Fell, P. Foster, S. Hancock, A. Langley, D. Neely, J. Smith, and B. Wyborn, *J. Phys. IV France* **133**, 673 (2006).
- ³²R. A. Smith, T. Ditmire, and J. W. G. Tisch, *Rev. Sci. Instrum.* **69**, 3798–3804 (1998).
- ³³S. S. Mahalik and M. Kundu, *Phys. Plasmas* **23**, 123302 (2016).