

STRUCTURAL PERFORMANCE OF COLD-FORMED STEEL WITH SELF-
COMPACTING CONCRETE IN A COMPOSITE BEAM SYSTEM

MUSTAPHA MUHAMMAD LAWAN

A thesis submitted in fulfilment of the
requirements for the award of the degree of
Doctor of Philosophy (Civil Engineering)

Faculty of Civil Engineering
Universiti Teknologi Malaysia

DECEMBER 2015

Dedicated to

To my Parents

Late Alhaji Muhammad Lawan and Hajiya Hauwa Muhammad Lawan

My immediate family

Amina Ali Umar (Wife), Safiyya Al-Mustapha Muhammad (Daughter), Fadimatu
Al-Mustapha Muhammad (Daughter), Zainab Al-Mustapha Muhammad (Daughter)
and Al-Mustapha Muhammad Al-Mustapha (Son)

And my entire family

My brothers, Sisters, Nephews and Nieces

ACKNOWLEDGMENT

First and foremost I would like to express my thanks to ALLAH (SWT) for giving me the opportunity to witness the compilation of my doctorate degree. My sincere and profound gratitude to my humble supervisor Prof. Dr. Ir. Mahmood Bin Md. Tahir for his support, guidance, encouragement, patient and understanding throughout the research period. His dedication and technical expertise made my doctoral research possible. I would like to extend my appreciation to Dr. Shek Poi Ngian for huge dedication of his valuable time on providing the research materials during the study period.

My appreciation goes to the technical staff of Structures and Materials Laboratory, Faculty of Civil Engineering, Universiti Teknologi Malaysia (UTM) for their help rendered during the research Laboratory works. I am also grateful to my colleagues who helped in one way or the other for the success of this research work.

My appreciation also goes to my friends from Nigeria whom I met in UTM during my study period. My appreciation goes to my brothers and sisters; Colonel A.T. Muhammad, Yunusa Muhammad, Ashiru Muhammad, Engr Mukhtar Muhammad Lawal, Hamza Muhammad Lawan, Hajiya Binta Muhammad, Hajiya Aishatu Batula Muhammad and late Hindatu Muhammad. The same goes to my friends for their prayers during the research period. My heartiest appreciation goes to my mother, wife and children for their endless patience and understanding during my study period.

Finally, my special thanks to my employer Kano University of Science and Technology, Wudil, and Ministry of Higher Education (MOHE) Malaysia for their immense assistance and support rendered during the study period.

ABSTRACT

The use of composite systems comprising of concrete and hot-rolled steel (HRS) sections is well established as observed in current design codes. But, there is limited technical information available about the use of composite systems that incorporates the use of light gauge steel sections, despite the potentials of the system in residential and light industrial constructions. Therefore, this research work investigated the structural performance of cold-formed steel (CFS) section with Self-Compacting Concrete (SCC) as a composite beam system, by means of shear connection mechanism of bolted shear connectors. The study comprised two components; experimental and theoretical works. The experimental work consisted of two phases; push-out and full-scale experimental tests. The push-out specimens were of the same dimension (800 mm x 600 mm x 75 mm). In push-out test, strength capability and ductility of the proposed bolted shear connectors were determined. Bolted shear connectors of M16, M14 and M12 of grade 8.8 were installed on the flanges of I-beam section of CFS using single nut and washer above and beneath through bolt holes of 17 mm, 15 mm and 13 mm diameters at a designated longitudinal interval of 150 mm, 250 mm and 300 mm respectively, and spaced laterally at 75 mm. The specimens were cast with SCC of grade 40 N/mm². Shear connector size and longitudinal spacing were the varied parameters, and their influence on the ultimate load capacity was investigated. The results showed that the size and the longitudinal spacing of the shear connectors had significantly influenced the ultimate load capacity. Ductility of the shear connectors was determined to be acceptable as an average characteristic slip capacity above 6 mm as recommended by Eurocode 4 was achieved by all shear connectors. Close agreement was recorded between experimental and theoretical values based on Eurocode 4 equations. In full-scale test program, longitudinal spacing employed was 250 mm and 300 mm excluding 150 mm spacing due to overlapping of stress fields as established in push-out test that led to strength reduction. The full-scale specimens were of the same dimension (4500 mm x 1500 mm x 75 mm) and were tested using a four-point bending test. The results showed that the ultimate load and ultimate moment capacities were influenced by the studied parameters as established in push-out test. Results of comparison between experimental and theoretical values revealed good agreement. In conclusion, the CFS-SCC composite beam system can be employed in small and medium size buildings, and in light weight construction industry.

ABSTRAK

Penggunaan sistem komposit yang terdiri daripada keluli konkrit dan keratan tergelek panas (HRS) telah mantap sepertimana yang dilihat didalam kod rekabentuk terkini. Bagaimanapun, terdapat maklumat teknikal yang terhad tentang penggunaan sistem komposit yang menggabungkan penggunaan keratan keluli tolok ringan, walaupun terdapat potensi dalam pembinaan industri perumahan dan pembinaan struktur ringan. Oleh itu, kerja-kerja penyelidikan ini mengkaji prestasi struktur keluli sejuk terbentuk (CFS) dengan pepadatan konkrit sendiri (SCC) sebagai sistem rasuk komposit, melalui cara yang inovatif dengan mekanisme sambungan ricih menggunakan penyambung bolt. Kajian ini terdiri daripada dua komponen; kerja-kerja uji kaji dan teori. Kerja-kerja eksperimen dibahagikan kepada dua fasa; menolak keluar dan ujian eksperimen skala penuh. Spesimen tolak keluar menggunakan dimensi yang sama (800 mm x 600 mm x 75 mm). Dalam ujian tolakan-keluar, keupayaan kekuatan dan kemuluran penyambung ricih diperketatkan yang dicadangkan telah ditentukan. Penyambung bolt ricihan dari M16, M14 dan M12 Gred 8.8 telah dipasang pada bibir atas dan bawah keratan I pada rasuk CFS menggunakan mur tunggal dan cincin penutup melalui lubang bolt 17 mm, 15 mm dan 13 mm diameter pada ketetapan selang membujur 150 mm, 250 mm dan 300 mm masing-masing dan jarak sisi pada 75 mm. Spesimen-specimens ini dituang bersama keratan CFS menggunakan SCC gred 40 N/mm². Saiz penyambung ricih dan jarak membujur adalah parameter yang diubah, dan pengaruh mereka pada kapasiti beban muktamad telah dikaji. Keputusan, mendapati bahawa, saiz dan jarak membujur penyambung ricih yang dicadangkan telah dipengaruhi dengan ketara kapasiti beban muktamad penyambung ricih. Kemuluran penyambung ricih juga didapati tidak memuaskan kerana kapasiti tergelincir pada ciri di atas rata-rata 6 mm seperti yang disyorkan oleh Eurocode 4 telah dapat dicapai untuk semua spesimen. Persefahaman yang rapat dapat dicapai antara nilai-nilai eksperimen dan ramalan berdasarkan Eurocode 4 persamaan. Dalam program ujian berskala penuh, jarak tanaman membujur bekerja ialah 250 mm dan 300 mm tidak termasuk 150 mm jarak pertindihan pada lapangan tekanan sepertimana yang ditetapkan dalam ujian tolakan keluar yang membawa kepada pengurangan kekuatan. Panjang spesimen berskala penuh dengan ukuran yang sama (4500 mm, lebar 1500 mm dan ketebalan 75 mm) dan telah diuji menggunakan ujian lenturan empat titik. Keputusan menunjukkan bahawa beban dan momen muktamad kapasiti muktamad bagi kedua-duanya dipengaruhi secara signifikan oleh parameter dikaji seperti yang disaksikan dalam ujian tolakan keluar. Keputusan perbandingan antara nilai-nilai eksperimen dan teori mendedahkan persefahaman yang baik. Kesimpulannya, CFS-SCC sistem rasuk komposit yang dicadangkan boleh digunakan dalam pembinaan bangunan-bangunan kecil dan sederhana, dan juga dalam pembinaan industri ringan.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xii
	LIST OF FIGURES	xiv
	LIST OF ABBREVIATIONS	xvii
	LIST OF SYMBOLS	xix
	LIST OF APPENDICES	xxv
1	INTRODUCTION	1
	1.1 Introduction	1
	1.2 SCC Brief History	4
	1.3 Problem Statement	5
	1.4 Aim and Objectives of Study	7
	1.5 Scope of Study	7
	1.6 Significance of Study	8
	1.7 Thesis Structure	9
2	LITERATURE REVIEW	11
	2.1 Introduction	11
	2.2 CFS Structures	11
	2.2.1 Advantages of CFS Sections	12
	2.2.2 Disadvantages of CFS Sections	13

	2.2.3	CFS Beams	13
2.3		Self-Compacting Concrete	14
	2.3.1	Engineering Properties of SCC	15
		2.3.1.1 Compressive Strength and Modulus of Elasticity	15
		2.3.1.2 Tensile Strength	16
		2.3.1.3 Shrinkage and Creep	17
		2.3.1.4 Flexural Strength and Durability	17
2.4		Standard Push-out Test	18
	2.4.1	Shear Connectors	22
		2.4.1.1 Headed Stud Shear Connectors	22
		2.4.1.2 Perfobond Shear Connectors	35
		2.4.1.3 Channel Shear Connectors	39
		2.4.1.4 Bolted Shear Connectors	43
2.5		Background of Composite Construction	45
	2.5.1	Fundamentals of Composite Action	46
2.6		Composite Beam Design Approach	48
	2.6.1	Rigid Plastic Approach of Composite Beam Design	48
	2.6.2	Elastic Approach of Composite Beam Design	50
2.7		Review of Earlier Studies on CFS Composite	51
2.8		Concluding Remarks	64
3		RESEARCH METHODOLOGY	66
	3.1	Introduction	66
	3.2	Materials and Their Property Tests	67
		3.2.1 Tensile Test	67
		3.2.2 Compressive Strength Test	68
	3.3	Experimental Study	69
	3.4	Design Equation	70
	3.5	Push-Out Test	73
		3.5.1 Description of Test Specimens	73

	3.5.2	Test Specimens	74
	3.5.3	Casting of Concrete	76
	3.5.4	Test Set-up and Instrumentation	77
	3.5.5	Test Procedure	79
3.6		Full-Scale Beam Flexural Test	79
	3.6.1	Full-Scale Composite Beam Specimens	82
	3.6.2	Test Instrumentation	84
	3.6.3	Test Procedure	86
3.7		Theoretical Analysis	88
3.8		Concluding Remarks	89
4		PUSH-OUT TEST RESULTS, ANALYSIS AND DISCUSSION	90
	4.1	Introduction	90
	4.2	Material Properties	90
	4.2.1	CFS Lipped Channel Section	91
	4.2.2	High Tensile Hexagon Head Bolts (HTHHB)	94
	4.2.3	Welded Wire Fabric Mesh Reinforcement	99
	4.2.4	Self-Compacting Concrete (SCC)	101
4.3		Results and Discussions	104
	4.3.1	Failure Modes	104
	4.3.2	Load-Slip Curve	104
	4.3.3	Specimens with M16 Bolted Shear Connector	117
	4.3.4	Specimens with M14 Bolted Shear Connector	119
	4.3.5	Specimens with M12 Bolted Shear Connector	121
	4.3.6	Effect of Shear Connector Size on Load Capacity	122
	4.3.7	Effect of Shear Connector Spacing on Load Capacity	124

4.4	Comparison between Experimental and Theoretical Results	126
4.5	Comparison between Experimental Results with other Research Studies	128
4.6	Concluding Remarks	130
5	FULL-SCALE TEST RESULTS, ANALYSIS AND DISCUSSIONS	131
5.1	Introduction	131
5.2	Material Properties	131
5.3	Experimental Test Results and Discussions	132
5.3.1	Beam Behavior	132
5.3.2	Failure Modes	134
	5.3.2.1 Composite Beams with M16 bolt	135
	5.3.2.2 Composite Beams with M14 bolt	138
	5.3.2.3 Composite Beams with M12 bolt	141
5.3.3	Analysis and Discussion on Slip	145
5.3.4	Strain Analysis	149
5.4	Parametric Study	161
5.4.1	Influence of Shear Connector Size	161
5.4.2	Influence of Shear Connector Spacing	164
5.5	Discussion on Flexural Stiffness	166
5.6	Theoretical Analysis and Validation	169
5.6.1	CFS Section Properties	169
	5.6.1.1 Gross Cross-Sectional Area	170
	5.6.1.2 Section Classification	171
	5.6.1.3 Effective Section Properties	172
	5.6.1.4 Moment Resistance	172
	5.6.1.5 Buckling Resistance	173
	5.6.1.6 Shear Resistance	174
5.6.2	CFS-SCC Full-Scale Composite Beam	174
	5.6.2.1 Degree of Shear Connection	178
	5.6.2.2 Full Shear Connection	179
	5.6.2.3 Partial Shear Connection	181

	5.6.2.4 Combined Bending and Shear	182
	5.6.2.5 Web Crippling Capacity	183
5.7	Comparison between Experimental and Theoretical Results	183
5.8	Concluding Remarks	185
6	CONCLUSIONS AND RECOMMENDATIONS	186
6.1	Summary	186
6.2	Conclusions	187
	6.2.1 Strength Capacity and Ductility of Shear Connectors	187
	6.2.2 Strength Capacity and Stiffness of Composite Beams	188
	6.2.3 Theoretical Validation of Composite Beam Specimens	190
6.3	Recommendations for Further Work	191
	REFERENCES	193
	Appendices A - C	209 – 266

LIST OF TABLES

TABLE NO.	TITLE	PAGE
3.1	Predicted strength capacity	72
3.2	Details of push-out test specimens	73
3.3	Details of full-scale test specimens	81
4.1	Dimension of CFS section	91
4.2	Dimension of coupon test specimens	92
4.3	Results of coupon tensile test	94
4.4	Results of bolts tensile test	96
4.5	Results of welded wire fabric reinforcement tensile test	100
4.6	SCC design quantities (Supplied by Manufacturer)	101
4.7	Properties of SCC	104
4.8	Failure modes of test specimens	106
4.9	Push-out test results	107
4.10	Effect of shear connector size on ultimate load capacity	123
4.11	Comparison between experimental and theoretical results of push-out test	127
4.12	Comparison between experimental results and other research Studies	129
5.1	Hardened SCC property	132
5.2	Full-scale composite beams test results	133
5.3	Results of experimental end-slip	146
5.4	Experimental strain values	160
5.5	Theoretical strain values	160
5.6	Comparison of strain values between experimental and theoretical	161
5.7	Influence of shear connector size on moment capacity	162

5.8	Influence of shear connector spacing on ultimate load and ultimate moment capacity	165
5.9	Comparison between experimental results and other research works on flexural stiffness	168
5.10	Results of experimental and theoretical capacities of composite beam specimens	177
5.11	Degree of shear connection of composite beam specimens	179

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Typical cold-formed steel section	2
1.2	Typical composite section	3
2.1	Symmetrical CFS I-section beam (a) oriented back-to-back C section (b) clamped I-section (Hsu and Chi, 2003)	14
2.2	Push-out test specimen model according to (BS5400-5: 1979)	19
2.3	Push-out test specimen model according to EC4	20
2.4	Typical load-slip curve of push-out test specimen (EC4)	21
2.5	Typical welded headed studs shear connectors on HRS section	23
2.6	Typical perforbond shear connector	35
2.7	Mechanism in composite beam (Irwan, 2010)	46
2.8	Elements resistance of a composite section	50
2.9	Typical composite beam section (Nguyen, 1991)	52
2.10	Typical CFS box-section composite beam (Abdullah <i>et al.</i> , 1999)	53
2.11	Typical CFS composite beams connection mechanism (Hanaor, 2000)	54
2.12	CFS U-shaped composite girder specimen (Nakamura, 2002)	55
2.13	Typical geometry of composite filled beams (Hossain, 2003)	56
2.14	Typical shear transfer enhancements (Lakkavalli and Liu, 2006)	58

2.15	Typical shear transfer enhancements (Irwan <i>et al.</i> , 2008, 2009 and 2011)	60
2.16	Proposed shear connectors (Saggaft <i>et al.</i> , 2015)	62
2.17	Types and sizes of proposed shear connectors (Alenezi <i>et al.</i> , 2015)	63
2.18	Summary of literature review	64
3.1	CFS coupon tensile test specimen (dimension in mm)	68
3.2	Installed bolt connectors for push-out test specimen	75
3.3	Push-out test configuration (all dimension in mm)	75
3.4	Prepared push-out test specimens	77
3.5	Push-out test set-up	78
3.6	Schematic diagram of full-scale test arrangement	80
3.7	CFS-SCC composite beam preparation	83
3.8	CFS-SCC composite beam specimen	84
3.9	Set-up instrumentation	85
3.10	Location of LVDT's to measure deflection of composite beam	85
3.11	Location of LVDT to measure slip	86
3.12	Position of strain gauges on test specimen	86
3.13	Fitted web at support position	88
3.14	Spreader plates on the concrete slab	88
4.1	Coupon test set-up	92
4.2	Stress-Strain curves of coupon tensile test	93
4.3	Coupon test specimens	94
4.4	Bolt tensile test set-up	95
4.5	Stress-strain curves of bolts tensile test	97
4.6	Bolts tensile test specimens	98
4.7	Tensile test for welded wire fabric mesh	99
4.8	Stress-strain curve of welded wire fabric reinforcement	100
4.9	Welded wire fabric mesh specimens before and after testing	100
4.10	SCC fresh property test	102
4.11	SCC hardened property test	103
4.12	Load-slip curves of push-out test specimens	116

4.13	Failure modes of specimens with M16 bolted shear connector	118
4.14	Shear connector status after test M16 bolt specimens	118
4.15	Failure modes of specimens with M14 bolted shear connector	120
4.16	Shear connector status after test M14 bolt specimens	120
4.17	Failure modes of specimens with M12 bolted shear connector	121
4.18	Effect of shear connector size on load capacity	123
4.19	Effect of shear connector spacing on load capacity	125
5.1	Schematic diagrams of shear force and bending moment	134
5.2	Load versus mid-span deflection of M16 bolt specimens	136
5.3	Failure modes of M16 composite beam specimens	137
5.4	M16 bolted shear connector condition after test	138
5.5	Load versus mid-span deflection of M14 bolt specimens	139
5.6	Failure modes of M14 composite beam specimens	140
5.7	M14 bolted shear connector condition after test	141
5.8	Load versus mid-span deflection of M12 bolt specimens	143
5.9	Failure modes of M12 composite beam specimens	144
5.10	M12 bolted shear connector condition after test	145
5.11	Load against end-slip curves of composite specimens	149
5.12	Load against strain at mid-span of composite specimens	153
5.13	Strain distribution of composite specimens	159
5.14	Influence of shear connector size on moment capacity	163
5.15	Influence of shear connector spacing on moment capacity	166
5.16	Comparison between experimental results and other research works on flexural stiffness	169
5.17	Actual and idealized cross-section	171
5.18	Rigid plastic analysis of composite beam section	175
5.19	PNA cases in composite beam section	180

LIST OF ABBREVIATIONS

ACI	-	American Concrete Institute
AISC	-	American Institute of Steel Construction
AISI	-	American Iron and Steel Institute
ASCE	-	American Society of Civil Engineers
BS	-	British Standard
BTTST	-	Bent-up Triangular Tab Shear Transfer
CAN/CSA	-	Canadian Standard Association
CFS	-	Cold-Formed Steel
CS	-	Closed Section
EC2	-	Eurocode 2
EC3	-	Eurocode 3
EC4	-	Eurocode 4
FEM	-	Finite Element Modelling
FS	-	Full-Scale Specimen
HRS	-	Hot Rolled Steel
HSS	-	High Strength Steel
HTHHB	-	High Tensile Hexagon Head Bolt
IBS	-	Industrialized Building Systems
LVDT	-	Linear Variable Displacement Transducer
M10	-	Bolt with 10 mm diameter
M12	-	Bolt with 12 mm diameter
M14	-	Bolt with 14 mm diameter
M16	-	Bolt with 16 mm diameter
NVC	-	Normal Vibrated Concrete
OS	-	Open box Section
PNA	-	Plastic Neutral Axis

PS	-	Push-out Specimen
RC	-	Reinforced Concrete
SCC	-	Self-Compacting Concrete
SC	-	Screwed Channel
SD	-	Screwed Deck
SF	-	Slump Flow
SG	-	Strain Gauge
USA	-	United States of America
WC	-	Welded Channel
WE	-	Welded Extension
WER	-	Welded Extension and Rod

LIST OF SYMBOLS

A	-	Numerical coefficient (0.5 for beams)
A	-	Area of stud shank
A_{eff}	-	Effective area
A_{cc}	-	Shear area of concrete per connector
A_c	-	Concrete pull-out failure surface area
A_c	-	Area of concrete
$A_{concrete}$	-	Cross-sectional area of concrete
A_g	-	Gross cross-sectional area
$A_{g,sh}$	-	Gross cross-sectional area with sharp corners
A_s	-	Cross-sectional area of the stud shear connector
A_s	-	CFS cross-sectional area
A_{st}	-	Tensile stress area of the bolt connector
A_{steel}	-	Cross-sectional area of steel
A_{tr}	-	Total area of transverse reinforcement
b	-	Slab thickness
b_{eff}	-	Concrete slab effective breadth
b_f	-	Steel flange width
b_o	-	Average rib width
$b_{p,i}$	-	Notional flat width of plane element i for a cross-section with sharp corners
d	-	Diameter of rib holes
d	-	Diameter of stud or bolt
d	-	Concrete dowel diameter
d	-	Effective depth of web
d_o	-	Diameter of stud or bolt

dp	-	Depth of plastic neutral axis
E_c or E_{cm}	-	Modulus of elasticity of concrete
$E_{concrete}$	-	Modulus of elasticity of concrete element
E_{steel}	-	Modulus of elasticity of steel element
E_s	-	Modulus of elasticity of steel material
F_1 and F_2	-	Non-dimensional modifying factors
f_{bv}	-	Shear buckling strength
$F_{b,Rd}$	-	Bearing resistance of bolt
f_{ck}	-	Concrete cylinder compressive strength
$f_{ck,mean}$	-	Average concrete cylinder strength of all specimens
f'_c or f_{cu}	-	Concrete cube compressive strength
$F_{concrete}$	-	Longitudinal resultant in concrete element
$f_{y,mean}$	-	Average steel strength of all specimens
F_y or f_y	-	Yield strength steel element
f_{yb}	-	Basic yield strength
f_{yr}	-	Reinforcement yield strength
F_{shear}	-	Connection force
F_{steel}	-	Longitudinal resultant in steel element
F_u or f_u	-	Tensile strength of steel material
f_{ub}	-	Ultimate tensile strength of bolt
$F_{v,Rd}$	-	Shear resistance of bolt
H	-	Height of the channel shear connector
h or h_p	-	Height of rib
h	-	Slab height downward the connector
h	-	Depth of CFS section
h_c	-	Concrete slab height
h_{sc}	-	Height of shear connector
h_w	-	Height of web between the mid-lines of flanges

$I_{concrete}$	-	Moments of inertia of concrete
I_{steel}	-	Moments of inertia of steel
k	-	Experimental stiffness
k_i	-	Reduction factor
K_{Norm}	-	Normalized stiffness
L_c	-	Contact length between the concrete and steel flange
L_c	-	Length of channel connector
L_f	-	Collar length of BTTST
L_s	-	Span length of BTTST
M	-	Resisting moment
m	-	Number of plane elements
$M_{concrete}$	-	Moment in concrete element
M_{cr}	-	Elastic critical moment for lateral torsional buckling
$M_{c,Rd}$	-	Design moment resistance
M_{Ed}	-	Applied bending moment
M_{steel}	-	Moment in steel element
$M_{u,exp}$	-	Experimental ultimate moment
$M_{u,theory}$	-	Theoretical ultimate moment
N	-	Number of shear connectors provided over the relevant part of the span
N_f	-	Number of shear connectors for full shear connection
n	-	Number of studs subjected to similar displacement
n	-	Number of rib holes
n	-	Number of concrete dowels
n	-	Number of curved elements
n	-	Modular ratio
n_r	-	Number of studs per rib
Pe	-	Elastic load
$P_{e,exp}$	-	Experimental elastic load

P_{Rd}	-	Shear connector design resistance
P_u	-	Ultimate load
$P_{u,exp}$	-	Experimental ultimate load
$P_{u,pre}$	-	Predicted ultimate load
P_{tab}	-	Ultimate load per shear tab
Q_n	-	Nominal strength per channel shear connector
Q_p	-	Static shank failure load of stud
Q_{rib}	-	Strength of shear connector in a rib
Q_{sol}	-	Strength of shear connector in a solid slab
Q_u	-	Resistance of stud connector
q	-	Shear capacity per perfobond shear connector
q_u	-	Capacity per perfobond connector
q_u	-	Strength capacity of channel shear connector
R_n	-	Capacity of channel shear connector
R_q	-	Total shear force transferred by shear connectors
R_{CFS}	-	Resistance of CFS element
R_{SCC}	-	Resistance of concrete element
$R_{w,Rd}$	-	Resistance of web crippling
r_j	-	Internal radius of curved elements j
S_s	-	Nominal length of stiff bearing, taken as the distance over which the applied load is effectively distributed at a slope of 1:1
t	-	Thickness of CFS
t	-	Thickness of connected part
t	-	Web thickness
t_f	-	Flange thickness of channel connector
t_{sc}	-	Thickness of connector
t_w	-	Web thickness of channel connector
$V_{b,Rd}$	-	Design shear resistance
$V_{bw,Rd}$	-	Shear resistance of the CFS section

V_c	-	Shear strength due to concrete pull-out failure
V_{Ed}	-	Applied vertical shear
$V_{u,exp}$	-	Experimental shear
$V_{u,theory}$	-	Theoretical shear
w	-	Average rib width
W_{eff}	-	Effective section modulus
$y_{concrete}$ and	-	Distance of the lowest and upper most fiber of the concrete and steel element, measured from the neutral axis
y_{steel}	-	
Z	-	Distance between the centroids of the concrete and steel element
L/d	-	Span-to-depth ratio of the specimen in consideration
$(L/d)_{mean}$	-	Average span-to-depth ratio of the specimens in comparison
ρ	-	Reduction factor for plate buckling
δ	-	Factor considering the rounded corner effect
δ_u	-	Slip at ultimate load
δ_{uk}	-	Characteristic slip capacity
γ_v	-	Partial factor of safety
γ_{m0}	-	Partial safety factor
γ_{m1}	-	Safety factor taken
γ_{M2}	-	Factor of safety
α	-	Dimensional coefficient
α_{LT}	-	Imperfection factor
θ	-	Angle of BTTST
$\varepsilon_{concrete}$	-	Concrete strain
ε_{steel}	-	Steel strain
χ_{LT}	-	Reduction factor of lateral torsional buckling
λ_1	-	Factor dependent upon concrete type (0.75 for low density concrete, 0.85 for semi-low density concrete, 1.0 for normal density concrete)

ϕ_j	-	Angle between two plane elements
ϕ	-	Slope of the web relative to the flanges
ϕ_{sc}	-	Resistance factor for shear connector

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	Self-Compacting Concrete Detailed Mix-Design	209
B	Design Calculations of Cold-Formed Steel Section	210
C	Design Calculations of CFS-SCC Composite Beams	226

CHAPTER 1

INTRODUCTION

1.1 Introduction

In steel and construction industry, hot-rolled steel (HRS) section and cold-formed steel (CFS) section are two distinguished steel sections that are used. However, among the two steel sections, HRS is the most familiar among building contractors and engineers. The use and application of CFS sections started in the United States of America (USA) and Great Britain for decades, mainly for non-structural purposes only. Though, the use of CFS is expanding in the present era of building constructions (Irwan, 2010; Kibert, 2012). However, in the mid- 20th century, the structural use of CFS sections began especially for commercial and industrial building constructions (Hancock *et al.*, 2001; Riley and Cotgrave, 2014). Recently, the use of CFS sections as an alternative material for roof structure keep increasing due to the quality assurance of steel structures (Yu, 2000).

CFS sections are lightweight material produced by bending a flat steel sheet at room temperature (Hancock, *et al.*, 2001; Lee *et al.*, 2014) into a desired shape that can withstand more load than the flat sheet itself; and are suitable for building construction owing to their high structural performance (Yu and LaBoube, 2010). The most common sections of CFS are channel lipped C and Z sections (Figure 1.1), and the typical thickness ranged from 1.2 to 6.4 mm with a depth range of 51 mm to 305 mm (Yu, 2000; Lee, *et al.*, 2014).

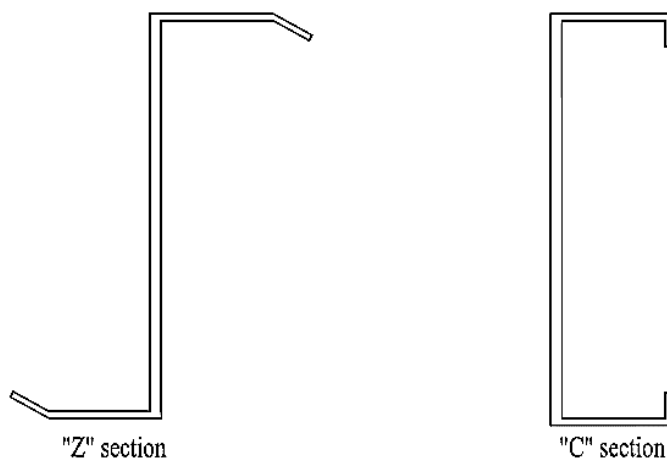


Figure 1.1: Typical cold formed steel sections

Composite construction using CFS section and concrete began in Europe in mid-1940s was used as floor system (Allen, 2006; Talal, 2014). Composite action is categorized by an interactive behaviour between structural steel and the concrete designed to utilize the best load resistance capability. An illustrative steel-concrete composite cross-section usually used in composite beam construction is depicted in Figure 1.2. For the components (i.e. steel-concrete) to act compositely, a mechanical means of shear connection must be provided (Prakash *et al.*, 2012). The most generally used shear connectors are the headed studs shear connectors which are commonly provided at the interface between the concrete and the steel to resist the longitudinal shear (Kim *et al.*, 2001). However, in composite structure, the key element for achieving the composite action is the effectiveness of the shear connectors.

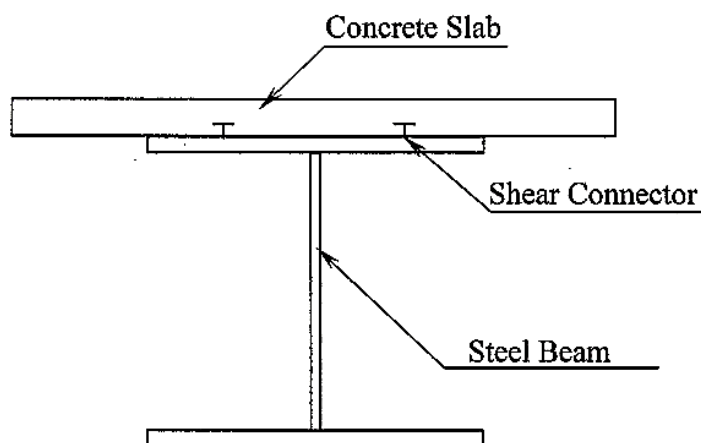


Figure 1.2: Typical composite section

Composite construction is the combination of steel and concrete to form a single unit (Nethercot, 2003). But the use of steel structures especially the CFS sections not compositely lead to a buckling problem which reduces the strength, especially when used as compression members. Therefore, steel beams without lateral restraint are subjected to lateral torsional buckling and twisting (Irwan *et al.*, 2008; Irwan *et al.*, 2009; Irwan *et al.*, 2011). However, a quick development in technology, leads to the use of CFS section in the Industrialization of Building Systems (IBS) and it has become more popular and well accepted in developed and developing countries in the globe respectively. CFS sections are used with concrete as composite structural component and the resulting performances were found to be encouraging. Due to the thinness of the CFS section and its susceptibility to lateral torsional buckling, twisting and web crippling, significant number of research studies (Lau and Hancock, 1987; LaBoube, 1994; Rogers and Hancock, 1997; Wang and Li, 1999; Wilkinson and Hancock, 2000; Schafer, 2002; Holesapple and LaBoube, 2003; Stephens and LaBoube, 2003; Yu and Schafer, 2003; Young, 2004; Young and Ellobody, 2005; Yu and Schafer, 2006; Dubina, 2008; Ranawaka and Mahendran, 2009; Macdonald and Heiyantuduwa, 2012) were conducted to study the stability complications and to improve the performance of the CFS members.

However, with the advantages demonstrated by CFS for use in composite construction, welding of the conventional headed shear studs is not feasible (Hanaor,

2000). Therefore, the development of feasible shear connector for use with the CFS and the concrete as a composite entity is of paramount significance, and hence, required further investigation in order to explore more of its advantages. CFS structural members have several benefits over their conventional counterpart HRS, such as lightness, reduced thickness, high strength and stiffness, accurate detailing, non-shrinking and non-creeping at ambient temperature, non-combustibility, fast and easy erection, ease of fabrication and mass production and easy to install (Yu and LaBoube, 2010). The use of CFS members in composite with concrete is still rarely reported; this could be due to the non-availability of standard specifications made for CFS sections as composite members.

Therefore, this research investigated the structural performance of CFS with Self-Compacting Concrete (SCC) as a composite beam system. In the study, an innovative shear enhancement suitable for CFS section is proposed to accomplish the composite action between the concrete slab and the CFS section. The proposed system of shear connection provided was using bolted shear connectors instead of the conventional headed studs shear connectors as welding of the studs is not feasible with the CFS section. However, the study also proposed the use of SCC instead of the normal vibrated concrete (NVC) as lack of proper vibration leads to creation of air voids thus, leading to the weakening of the concrete slab. The proposed SCC does not require any external vibration thus, compaction is achieved by its own self weight and its homogeneity is maintained even in the presence of congested reinforcement. The findings from this study may magnify the use of CFS in the construction industries of developed and the developing countries. And may also promote the use of the proposed bolted shear connection enhancement as an alternative shear mechanism in composite construction, for small and medium size buildings as well as light weight industrial constructions.

1.2 SCC Brief History

The idea of ‘self-compaction’ largely antedates that of modern SCC. In practical situations, there were important applications for concrete where compaction

is an issue or physically not feasible (Bartos, 2013). For instance, such applications could be found in construction works underwater, foundation works consisting of large diameter concrete piles, very deep concrete diaphragm walling etc. However, the concrete mix required for such kind of applications therefore had to be self-compacting (De Schutter *et al.*, 2008).

The development of present SCC was initiated in Japan in 1980s in which researchers were pursued for paving the way for the introduction of SCC as it is now known (Bartos and Cleland, 1993; Bartos *et al.*, 2004; Bartos, 2013). In 1950s and 1960s during the postwar reconstruction of Japan, it was noticed that the reinforced concrete structures constructed begins to deteriorate after a decade or two. As a result of that, a team of investigation was set up which was headed by Okamura of Tokyo University (De Schutter, *et al.*, 2008). During the course of the investigations they found out that lack of insufficient compaction was the cause of the structural deteriorations. The team proposed a solution by suggesting on increasing the workability (flow) of the fresh concrete mix such that compaction was no longer an issue and the mix would be ‘self-compacting’ (Kuroiva *et al.*, 1993). In the early 1990s, demonstrations and full-scale trials were conducted and the SCC was first used in significant practical application in Japan (De Schutter, *et al.*, 2008).

Due to the advantages of SCC demonstrated since the time of its discovery to date therefore, in this study it’s proposed to be use in composite construction as this is yet to be explored.

1.3 Problem Statement

In steel industries, HRS is more versatile in use both by the engineers and the building contractors as compared with CFS. The use of CFS is limited in the construction industries in which its application is mainly in roof trusses and bridge rails. But, significant number of research studies (Abdullah *et al.*, 1999; Hanaor, 2000; Nakamura, 2002; Hossain, 2003; Lakkavalli and Liu, 2006; Airil and Nethercot, 2007;

Wehbe *et al.*, 2011; Bamaga and Tahir, 2013; Alenezi *et al.*, 2013; Lee *et al.*, 2013) carried out had pointed the potentials of using CFS as a structural member. But the main limiting feature of CFS is the thinness of the section that makes it susceptible to torsional, distortional, lateral-torsional, lateral-distortional and local buckling problems (Irwan, *et al.*, 2011) and its inability to be weld. Therefore, orienting two CFS lipped channel sections back-to-back to form an I-section restores symmetry and minimizes lateral-torsional and to a slighter extent, lateral-distortional buckling. These two advantages possesses by the system, promote the use of CFS sections in a wider range of structural applications (Irwan, *et al.*, 2009; Irwan, *et al.*, 2011). But, conventional method of using HRS sections with headed studs shear connectors to act as composite entity are adopted in the construction of small and medium size buildings, in which the practice leads to a tremendous costs of construction, labor and construction delay etc. But, the emergence of using CFS sections to replace HRS sections in the construction of small and medium rise buildings with an innovative way of shear enhancement of bolted shear connectors installed with a nut and washer, may lead to a significant reduction in construction cost, construction time and labor cost. Also ductility and strength capabilities could be better achieved when compared with the conventional method. On the other hand, the use of conventional NVC in composite construction may lead to an inadequate compaction and insufficient passage of the concrete to a desired position as the flow is controlled by vibration. Therefore, using innovative way of concreting with a flowable and cohesive concrete known as SCC will eliminate the inability of the concrete passage to a required position as it compacts by its own self weight while its homogeneity is maintained been a self-compacting.

Using CFS section with SCC to be integrated compositely is by providing such devices that could generate the composite action, increase strength capabilities and also meet the ductility requirements of the shear connection. Therefore, an innovative way of shear connection is devised in this research that will suitably fit with the CFS as a composite system. The shear connection proposed is of bolted shear connector with single nut and washer to be installed on CFS flanges and beneath, because of their ease of demounting and dismantling advantage.

1.4 Aim and Objectives of Study

The aim of this research is to investigate the structural performance of CFS with SCC as composite beam system. Three specific objectives were considered in this study to achieve the above aim as follows:

- 1) To propose a bolted type shear connector and evaluate its performance by push-out test.
- 2) To study the structural behavior of the proposed CFS-SCC composite beam by integrating with bolted shear connectors.
- 3) To validate the performance of the proposed CFS-SCC composite beam system by comparing with theoretical predictions based on Eurocode 4 recommendations.

1.5 Scope of Study

The research focuses on investigating the structural performance of the proposed CFS-SCC composite beam and also the strength capacity and ductility of the proposed bolted shear connectors. A new technique of composite beam system comprising of CFS section with SCC and an innovative shear connection mechanism is proposed. The study is basically on experimental investigation which focuses on strength and ductility of the proposed shear connectors. The proposed connectors are then used in CFS-SCC composite beam system, to get a better understanding on the performance behavior. The scope of the study is designed in two phases. The first phase is designed to investigate the performance of the proposed bolted shear connectors. The second phase is designed to investigate the performance of the proposed CFS-SCC composite beam system. The CFS section is to be oriented back-to-back to form an I-section beam for the proposed composite beam system. Proposed shear connection mechanism suitable for CFS-SCC composite beam is suggested. The

proposed shear connectors are M16, M14 and M12 bolts of grade 8.8 with height of 75 mm are to be embedded 60 mm in the concrete slab of 75 mm thick. The push-out specimens comprised of two slabs; slab A and slab B of dimension 800 mm x 600 mm x 75 mm are attached to the CFS I-section. The full-scale composite beam system is a simply supported beam of 4500 mm length spanned 4200 mm between supports is to be tested using four-point loading bending test. This type of system of loading produces a constant region of pure bending moment between the point loads. Therefore, the ultimate flexural capacity of the proposed composite beam system can be determined.

1.6 Significance of Study

Composite beams are widely used in the construction industry due to their ability of being rigid, material savings and efficiency in strength (Nie *et al.*, 2006; Tahir *et al.*, 2009). However, the composite action that is achieved in composite construction between the steel beam and the concrete slab is by using of conventional headed stud shear connectors (Pallarés and Hajjar, 2010). It was reported that, significant tripping effects on working surfaces at site are created with the use of headed stud shear connectors due to welding process (Bamaga, 2013). Therefore, with this at stake, an alternative and innovative shear connection mechanism in composite construction with CFS section needs to be employed. The innovative shear connection to be adopted in this research is the use of bolted shear connectors with a single nut and single washer, because of their dismantling and demountable advantage (Pavlović *et al.*, 2013; Moynihan and Allwood, 2014) which could provide the ease for structural repairs.

On the other hand, CFS sections are designed as non-composite beams (Gherzi *et al.*, 2002; Satpute and Varghese, 2012) which are used as floor beams and joists in light-weight commercial and residential edifice. Therefore, the possibility of such floor beams to fail due to lateral-torsional buckling need to be checked. However, as a result of that conventional large HRS steel sections, NVC and headed stud shear connectors are used in the construction of small and medium size buildings which

could result to; construction cost, labor cost, waste of materials, waste of space, and construction delay.

Therefore, using CFS sections with bolted shear connectors in SCC as a composite beam system could significantly increase the strength and stiffness capacities required.

1.7 Thesis Structure

In this sub-section, the structure of the thesis is presented according to each chapter.

Chapter 1 presents the general introduction, problem statement, aims and objectives of the study, scope of the study, methodology to be employed, significance of the research and the thesis structure are all described in this chapter.

Chapter 2 presents a comprehensive review of literature survey on the subject of this study.

Chapter 3 describes detailed methodology of this study on the specimens, test set-up and instrumentations used in the experimental works for push-out test and the full-scale flexural test of CFS-SCC composite beams.

Chapter 4 presents and discusses the experimental results of materials properties test for the materials used in the study. Results of push-out test, load-slip responses of all push-out specimens are presented. Strength capacities and ductility of the specimens as well as their modes of failure are also discussed. Comparison between experimental, theoretical and other researches is also conducted.

Chapter 5 presents and discusses the results of the experimental full-scale flexural beam tests. Load-deflection responses of all composite beam test specimens and their modes of failure are also discussed. Theoretical calculations for the CFS section, validation analysis and calculations of the proposed CFS-SCC composite beams using current design codes and methods are presented. Comparison between the experimental and theoretical results is conducted.

Chapter 6 provides summary, conclusions and recommendations for further works.

REFERENCES

- Abdullah, R., Tahir, M. M. and Osman, M. H. (1999). Performance of CFS of Box-Section as Composite Beam. *Proceedings of the 1999 6th International Conference on Steel and Space Structures* Singapore, 365-370.
- Ahn, J. H., Lee, C. G., Won, J. H. and Kim, S. H. (2010). Shear resistance of the perfobond-rib shear connector depending on concrete strength and rib arrangement. *Journal of Constructional Steel Research*. 66(10), 1295-1307.
- Airil, Y. M. Y. and Nethercot, D. A. (2007). Cross-sectional properties of complex composite beams. *Engineering Structures*. 29, 195-212.
- Alenezi, K., Alhajri, T., Tahir, M. M., Ragaee, M., Badr, K. and Bamaga, S. O. (2013). Strengthen of Cold-Formed Steel Column with Ferrocement Jacket: Push out Tests *International Journal of Civil, Architectural Science and Engineering*. 7(11), 262-272.
- Alenezi, K., Tahir, M. M., Alhajri, T., Badr, M. R. K. and Mirza, J. (2015). Behavior of shear connectors in composite column of cold-formed steel with lipped C-channel assembled with ferro-cement jacket. *Construction and Building Materials*. 84, 39-45.
- Allen, B. D. (2006). History of Cold-Formed Steel *Structure Magazine*, November, 2006: 28-32.
- Ataei, A., Bradford, M. A. and Valipour, H. R. (2015). Experimental study of flush end plate beam-to-CFST column composite joints with deconstructable bolted shear connectors. *Engineering Structures*. 99, 616-630.
- Atan, M. N. and Awang, H. (2011). The Compressive and Flexural Strength of Self-Compacting Concrete Using Raw Rice Husk Ash. *Journal of Engineering Science and Technology*. 6(6), 720-732.

- Badie, S. S., Tadros, M. K., Kakish, H. F., Splittgerber, D. L. and Baishya, M. C. (2002). Large Shear Stud in Composite Action in Steel Bridge Girders. *Journal of Bridge Engineering*. 7(3), 195-203.
- Badogiannis, E. G., Sfikas, I. P., Voukia, D. V., Trezos, K. G. and Tsivilis, S. G. (2015). Durability of metakaolin Self-Compacting Concrete. *Construction and Building Materials*. 82, 133-141.
- Bamaga, S. O. (2013). *Structural Behaviour of Cold-formed Steel as Composite Beam*. Doctor of Philosophy, Universiti teknologi Malaysia.
- Bamaga, S. O. and Tahir, M. M. (2013). Towards Light-Weight Composite Construction: Innovative Shear Connector for Composite Beams. *Applied Mechanics and Materials*. 351-352, 427-433.
- Bamaga, S. O., Tahir, M. M. and Tan, C. S. (2012). Push tests on innovative shear connector for composite beam with cold-formed steel section. *Proceedings of the 2012 21st International Specialty Conference on Cold-Formed Steel Structures - Recent Research and Developments in Cold-Formed Steel Design and Construction*, 325-337.
- Bamaga, S. O., Tahir, M. M., Tan, T. C., Mohammad, S., Yahya, N., Saleh, A. L., Mustaffar, M., Osman, M. H. and Rahman, A. B. A. (2013). Feasibility of developing composite action between concrete and cold-formed steel beam. *Journal of Central South University*. 20(12), 3689-3696.
- Baran, E. and Topkaya, C. (2012). An experimental study on channel type shear connectors. *Journal of Constructional Steel Research*. 74(0), 108-117.
- Bartos, P. (2013). *Fresh concrete: properties and tests*. (1st ed.). Amsterdam, the Netherlands: Elsevier Science.
- Bartos, P. J., Cleland, D. and Marrs, D. L. (2004). *Production methods and workability of concrete*. (edited). London, UK: CRC Press.
- Bartos, P. J. M. and Cleland, D. J. (1993). *Special Concrete: Workability and Mixing*. (edited). London, UK: Spon Press.
- Baskar, K. and Shanmugam, N. E. (2003). Steel–concrete composite plate girders subject to combined shear and bending. *Journal of Constructional Steel Research*. 59(4), 531-557.
- Beushausen, H. and Dittmer, T. (2015). The influence of aggregate type on the strength and elastic modulus of high strength concrete. *Construction and Building Materials*. 74, 132-139.

- BS EN206 (2010). Concrete-Part 9: Additional Rules for Self-compacting Concrete. London: British Standard Institution.
- BS EN12390 (2009). Testing hardened concrete-Part 3: Compressive strength of test specimens. London: British Standard Institution.
- BS1881 (1983). Testing concrete-Part 121: Method for determination of static modulus of elasticity in compression. London: British Standard Institution.
- BS5400 (1979). Steel, concrete and composite bridges-Part 5: Code of practice for design for design of composite bridges. London: British Standard Institution.
- BS5950 (1990). Structural use of steelwork in building-Part 3: Design in composite construction-section 3.1 Code of practice for design of simple and continuous composite beams. London: British Standard Institution.
- BS10002 (2001). Metallic materials-Tensile testing-Part 1: Method of test at ambient temperature. London: British Standard Institution.
- Calado, C., Camões, A., Monteiro, E., Helene, P. and Barkokébas, B., Jr. (2015). Durability indicators comparison for SCC and CC in tropical coastal environments. *Materials*. 8(4), 1459-1481.
- Cândido-Martins, J. P. S., Costa-Neves, L. F. and Vellasco, P. C. G. d. S. (2010). Experimental evaluation of the structural response of Perfobond shear connectors. *Engineering Structures*. 32(8), 1976-1985.
- Celik, K., Meral, C., Petek Gursel, A., Mehta, P. K., Horvath, A. and Monteiro, P. J. M. (2015). Mechanical properties, durability, and life-cycle assessment of self-consolidating concrete mixtures made with blended portland cements containing fly ash and limestone powder. *Cement and Concrete Composites*. 56, 59-72.
- Chen, L., Ranzi, G., Jiang, S., Tahmasebinia, F. and Li, G. (2015). An experimental study on the behaviour and design of shear connectors embedded in solid slabs at elevated temperatures. *Journal of Constructional Steel Research*. 106, 57-66.
- Chen, Y. T., Zhao, Y., West, J. S. and Walbridge, S. (2014). Behaviour of steel-precast composite girders with through-bolt shear connectors under static loading. *Journal of Constructional Steel Research*. 103(0), 168-178.
- Costa-Neves, L. F., Figueiredo, J. P., Vellasco, P. C. G. d. S. and Vianna, J. d. C. (2013). Perforated shear connectors on composite girders under monotonic loading: An experimental approach. *Engineering Structures*. 56, 721-737.

- Craeye, B., Van Itterbeeck, P., Desnerck, P., Boel, V. and De Schutter, G. (2014). Modulus of elasticity and tensile strength of self-compacting concrete: Survey of experimental data and structural design codes. *Cement and Concrete Composites*. 54, 53-61.
- Crisinel, M. (1990). Partial-Interaction Analysis of Composite Beams with profile Sheeting and Non-welded Shear connectors. *Journal of Constructional Steel Research*. 15, 65-98.
- De Schutter, G., Gibbs, J., Domone, P. and Bartos, P. J. (2008). *Self-compacting concrete*. Scotland, UK: Whittles Publishing.
- Domone, P. L. (2007). A review of the hardened mechanical properties of self-compacting concrete. *Cement and Concrete Composites*. 29(1), 1-12.
- Druta, C., Wang, L. and Stephen Lane, D. (2014). Tensile strength and paste–aggregate bonding characteristics of self-consolidating concrete. *Construction and Building Materials*. 55, 89-96.
- Dubina, D. (2008). Structural analysis and design assisted by testing of cold-formed steel structures. *Thin-Walled Structures*. 46(7–9), 741-764.
- Easterling, W. S., Gibbings, D. R. and Murray, T. M. (1993). Strength of Shear Studs in Steel Deck on Composite Beams and Joists. *Engineering Journal, American Institute of Steel Construction*. Second Quarter, 44-55.
- EFNARC (2002). Specification and Guidelines for Self-Compacting Concrete. United Kingdom: EFNARC Publishing.
- EN1992 (2004). Design of concrete structures-Part 1-1: General rules and rules for buildings. Brussels: European Committee for Standardization.
- EN1993 (2006). Design of steel structures-Part 1-3: General rules- Supplementary rules for cold-formed members and sheeting. Brussels: European Committee for Standardization.
- EN1993 (2006). Design of steel structures-Part 1-5: Plated structural elements. Brussels: European Committee for Standardization.
- EN1993 (2005). Design of steel structures-Part 1-8: Design of joints. Brussels: European Committee for Standardization
- EN1994 (2004). Design of composite steel and concrete structures-Part 1-1: General rules and rules for buildings. Brussels: European Committee for Standardization.

- Figueiras, H., Nunes, S., Coutinho, J. S. and Andrade, C. (2014). Linking fresh and durability properties of paste to SCC mortar. *Cement and Concrete Composites*. 45, 209-226.
- Fisher, J. W. (1970). Design of composite beams with formed metal deck. *Engineering J, Am Inst Steel Constr*. 7 (3).
- Frazão, C., Camões, A., Barros, J. and Gonçalves, D. (2015). Durability of steel fiber reinforced self-compacting concrete. *Construction and Building Materials*. 80, 155-166.
- Gencil, O., Ozel, C., Brostow, W. and Martinez-Barrera, G. (2011). Mechanical properties of self-compacting concrete reinforced with polypropylene fibres. *Materials Research Innovations*. 15(3), 216-225.
- Gherzi, A., Landolfo, R. and Mazzolani, F. M. (2002). *Design of Metallic Cold-Formed Thin-Walled Members*. London: Spon Press.
- Goel, S., Singh, S. P. and Singh, P. (2012). Flexural fatigue strength and failure probability of Self Compacting Fibre Reinforced Concrete beams. *Engineering Structures*. 40, 131-140.
- Grant, J. A., Fisher, J. W. and Slutter, R. G. (1977). Composite beams with formed steel deck. *Engineering Journal*. 14(1), 24-43.
- Güneyisi, E., Gesoğlu, M., Booya, E. and Mermerdaş, K. (2015). Strength and permeability properties of self-compacting concrete with cold bonded fly ash lightweight aggregate. *Construction and Building Materials*. 74, 17-24.
- Han, Q., Wang, Y., Xu, J. and Xing, Y. (2015). Static behavior of stud shear connectors in elastic concrete–steel composite beams. *Journal of Constructional Steel Research*. 113(0), 115-126.
- Hanaor, A. (2000). Tests of composite beams with cold-formed sections. *Journal of Constructional Steel Research*. 54, 245–264.
- Hancock, G. J., Murray, T. M. and Ellifritt, D. S. (2001). *Cold-Formed Steel Structures to the AISI Specification*. New York: Marcel Dekker Inc.
- Hanswille, G., Porsch, M. and Ustundag, C. (2007). Resistance of headed studs subjected to fatigue loading: Part I: Experimental study. *Journal of Constructional Steel Research*. 63(4), 475-484.

- He, J., Liu, Y., Chen, A., Wang, D. and Yoda, T. (2014). Bending behavior of concrete-encased composite I-girder with corrugated steel web. *Thin-Walled Structures*. 74, 70-84.
- Helincks, P., Boel, V., De Corte, W., De Schutter, G. and Desnerck, P. (2013). Structural behaviour of powder-type self-compacting concrete: Bond performance and shear capacity. *Engineering Structures*. 48(0), 121-132.
- Higgins, C. (2001). Behaviour of Composite Bridge Deck with Alternative Shear Connectors. *Journal of Bridge Engineering*. 6(1), 17-22.
- Holesapple, M. W. and LaBoube, R. A. (2003). Web crippling of cold-formed steel beams at end supports. *Engineering Structures*. 25(9), 1211-1216.
- Hosain, M. and Pashan, A. (2006). Channel shear connectors in composite beams: push-out tests. *Proceedings of the 2006 Composite Construction in Steel and Concrete V: ASCE*, 501-510.
- Hossain, K. M. A. (2003). Experimental and theoretical behavior of thin walled composite filled beams. *Electronic Journal of Structural Engineering*. 3(3), 117-139.
- Hsu, H. L. and Chi, P. S. (2003). Flexural performance of symmetrical cold-formed thin-walled members under monotonic and cyclic loading. *Thin-Walled Structures*. 41(1), 47-67.
- Irwan, J. M. (2010). *Development of Bent-up Triangular Tab Shear Transfer (BTTST) Enhancement in Cold-Formed Steel (CFS)-Concrete Composite Beams*. Doctor of Philosophy, Universiti Teknologi Mara.
- Irwan, J. M., Hanizah, A. H. and Azmi, I. (2009). Test of shear transfer enhancement in symmetric cold-formed steel–concrete composite beams. *Journal of Constructional Steel Research*. 65(12), 2087-2098.
- Irwan, J. M., Hanizah, A. H., Azmi, I., Bambang, P., Koh, H. B. and Aruan, M. G. (2008). Shear Transfer Enhancement in Precast cold-Formed Steel-Concrete Composite Beams: Effects of Bent-up Tabs Types and Angle *Technology and Innovation for Sustainable Development Conference*. TISD2008, 56-61. Faculty of Engineering, Khon Kaen University, Thailand.
- Irwan, J. M., Hanizah, A. H., Azmi, I. and Koh, H. B. (2011). Large-scale test of symmetric cold-formed steel (CFS)–concrete composite beams with BTTST enhancement. *Journal of Constructional Steel Research*. 67(4), 720-726.

- Jalal, M., Ramezani-pour, A. A. and Pool, M. K. (2013). Split tensile strength of binary blended self compacting concrete containing low volume fly ash and TiO₂ nanoparticles. *Composites Part B: Engineering*. 55(0), 324-337.
- Jayas, B. and Hosain, M. (1988). Behaviour of headed studs in composite beams: push-out tests. *Canadian Journal of Civil Engineering*. 15(2), 240-253.
- Jayas, B. and Hosain, M. (1989). Behaviour of headed studs in composite beams: full-size tests. *Canadian Journal of Civil Engineering*. 16(5), 712-724.
- Johnson, R. P. and Anderson, D. (2004). *Designers' Guide to EN1994-1-1, Eurocode 4: Design of Composite Steel and Concrete Structures*. London: Thomas Telford Publishing.
- José Oliveira, M., Ribeiro, A. B. and Branco, F. G. (2014). Combined effect of expansive and shrinkage reducing admixtures to control autogenous shrinkage in self-compacting concrete. *Construction and Building Materials*. 52(0), 267-275.
- Karatas, M. and Gunes, A. (2015). Engineering Properties of Self-Compacting Concrete Produced by Polypropylene and Steel Fibre. *Periodica Polytechnica Civil Engineering*. 59(2), 95-102.
- Kibert, C. J. (2012). *Sustainable construction: green building design and delivery*. (3rd ed.). John Wiley & Sons.
- Kim, B., Howard, D. W. and Cairns, R. (2001). The behaviour of through deck welded shear connectors: an experimental and numerical study. *Journal of Constructional Steel Research*. 57, 1359-1380.
- Kim, J. S., Kwark, J., Joh, C., Yoo, S. W. and Lee, K. C. (2015). Headed stud shear connector for thin ultrahigh-performance concrete bridge deck. *Journal of Constructional Steel Research*. 108(0), 23-30.
- Kim, S. H., Choi, J., Park, S. J., Ahn, J. H. and Jung, C. Y. (2014a). Behavior of composite girder with Y-type perfobond rib shear connectors. *Journal of Constructional Steel Research*. 103, 275-289.
- Kim, S. H., Choi, K. T., Park, S. J., Park, S. M. and Jung, C. Y. (2013). Experimental shear resistance evaluation of Y-type perfobond rib shear connector. *Journal of Constructional Steel Research*. 82, 1-18.
- Kim, S. H., Heo, W. H., Woo, K. S., Jung, C. Y. and Park, S. J. (2014b). End-bearing resistance of Y-type perfobond rib according to rib width–height ratio. *Journal of Constructional Steel Research*. 103, 101-116.

- Kim, S. H., Park, S. J., Heo, W. H. and Jung, C. Y. (2015). Shear resistance characteristic and ductility of Y-type perfobond rib shear connector. *Steel and Composite Structures*. 18(2), 497-517.
- Klaiber, F. W. and Wipf, T. J. (2000). An Alternate Shear Connector For Composite Action. *Proceedings of the 2000 Mid-continent Transportation Symposium Proceedings IOWA state University, USA.*,
- Krishnapal, P., Yadav, R. K. and Rajeev, C. (2013). Strength Characteristics of Self Compacting Concrete Containing Flyash. *Research Journal of Engineering Sciences*. 2(6), 1-5.
- Kuroiva, S., Mastuoka, Y., Hayakawa, M. and Shindo, T. (1993). *Application of Super-workable concrete to construction of a 20-storey building*. Detroit, MI, USA: American Concrete Institute.
- Kwon, G., Engelhardt, M. D. and Klingner, R. E. (2010). Behavior of post-installed shear connectors under static and fatigue loading. *Journal of Constructional Steel Research*. 66(4), 532-541.
- LaBoube, R. A. (1994). Simplified strength prediction for cold-formed C- and Z-shapes. *Journal of Structural Engineering (United States)*. 120(10), 3102-3103.
- Lakkavalli, B. S. (2005). *Experimental Investigation of Composite Action in Light Gauge Cold-Formed Steel and Concrete*. Doctor of Philosophy, Dalhousie University, Canada.
- Lakkavalli, B. S. and Liu, Y. (2006). Experimental study of composite cold-formed steel C-section floor joists. *Journal of Constructional Steel Research*. 62(10), 995-1006.
- Lam, D. (2007). Capacities of headed stud shear connectors in composite steel beams with precast hollowcore slabs. *Journal of Constructional Steel Research*. 63(9), 1160-1174.
- Lam, D. and El-Lobody, E. (2005). Behavior of Headed Stud Shear Connectors in Composite Beam. *Journal of Structural Engineering*. 131(1), 96-107.
- Lau, S. C. W. and Hancock, G. J. (1987). Distortional buckling formulas for channel columns. *Journal of Structural Engineering*. 113(5), 1063-1078.
- Lawson, R. M. and Chung, K. F. (1994). *Composite Beam Design to Eurocode 4*. Berkshire, UK: Steel Construction Institute.

- Lee, J., Kim, S.-M., Park, H.-S. and Woo, B.-H. (2005). Optimum design of cold-formed steel channel beams using micro Genetic Algorithm. *Engineering Structures*. 27(1), 17-24.
- Lee, L. H., Quek, S. T. and Ang, K. K. (2001). Negative moment behaviour of cold-formed steel deck and concrete composite slabs. *Journal of Constructional Steel Research*. 57(2001), 401-415.
- Lee, Y. H., Tan, C. S., Lee, Y. L., Tahir, M. M., Mohammad, S. and Shek, P. N. (2013). Numerical Modelling of Stiffness and Strength Behaviour of Top-Seat Flange-Cleat Connection for Cold-Formed Double Channel Section. *Applied Mechanics and Materials*. 284-287, 1426-1430.
- Lee, Y. H., Tan, C. S., Mohammad, S., Md Tahir, M. and Shek, P. N. (2014). Review on Cold-Formed Steel Connections. *The Scientific World Journal*. 2014, 11.
- Lee, Y. L., Tan, C. S., Lee, Y. H., Mohammad, S., Tahir, M. M. and Shek, P. N. (2013). Effective Steel Area of Fully Embedded Cold-Formed Steel Frame in Composite Slab System under Pure Bending. *Applied Mechanics and Materials*. 284-287, 1300-1304.
- Leemann, A., Nygaard, P. and Lura, P. (2014). Impact of admixtures on the plastic shrinkage cracking of self-compacting concrete. *Cement and Concrete Composites*. 46(0), 1-7.
- Li, Y. F., Jobe, O., Yu, C. C. and Chiu, Y. T. (2015). Experiment and analysis of bolted GFRP beam-beam connections. *Composite Structures*. 127, 480-493.
- Lin, Z., Liu, Y. and He, J. (2014). Behavior of stud connectors under combined shear and tension loads. *Engineering Structures*. 81, 362-376.
- Lorenc, W., Kozuch, M. and Rowiński, S. (2014). The behaviour of puzzle-shaped composite dowels — Part I: Experimental study. *Journal of Constructional Steel Research*. 101, 482-499.
- Macdonald, M. and Heiyantuduwa, M. A. (2012). A design rule for web crippling of cold-formed steel lipped channel beams based on nonlinear FEA. *Thin-Walled Structures*. 53, 123-130.
- Maia, L. and Figueiras, J. (2012). Early-age creep deformation of a high strength self-compacting concrete. *Construction and Building Materials*. 34, 602-610.
- Maleki, S. and Bagheri, S. (2008). Behavior of channel shear connectors, Part I: Experimental study. *Journal of Constructional Steel Research*. 64(12), 1333-1340.

- Marcello, T. A. and Dezi, L. (1992). Creep effects in composite beams with flexible shear connectors. *Journal of Structural Engineering*. 118(8), 2063-2080.
- Marshall, W., Nelson, H. and Banerjee, H. (1971). An Experiment Study of the Use of High-Strength Friction Grip Bolts as Shear Connectors In Composite Beams. *Structural Engineer*. 49 (4), 171-178.
- Medberry, S. B. and Shahrooz, B. M. (2002). Perfobond Shear Connector For Composite Construction. *AISC Engineering Journal*. 1, 2-12.
- Moy, S. S. J. and Tayler, C. (1996). The Effect of Precast Concrete Planks on Shear Connector Strength. *Journal of Constructional Steel Research*. 36(3), 201-213.
- Moynihan, M. C. and Allwood, J. M. (2014). Viability and performance of demountable composite connectors. *Journal of Constructional Steel Research*. 99(0), 47-56.
- Nagaratnam, B. H., Faheem, A., Rahman, M. E., Mannan, M. A. and Leblouba, M. (2015). Mechanical and durability properties of medium strength self-compacting concrete with high-volume fly ash and blended aggregates. *Periodica Polytechnica: Civil Engineering*. 59(2), 155-164.
- Nakamura, S.I. (2002). Bending Behavior of Composite Girders with Cold Formed Steel U Section. *Journal of Structural Engineering*. 128(9), 0733-9445.
- Narendra Kumar, B., Srinivasa Rao, P. and Surya Manisha, Y. (2015). Physical and chemical durability studies on high performance self compacting hybrid fibre reinforced concrete. *Indian Concrete Journal*. 89(4), 73-82.
- Nethercot, D. A. (2003). *Composite Construction*. New York: Spon Press.
- Nguyen, R. P. (1991). Thin-walled, cold-formed steel composite beams. *Journal of Structural Engineering*. 117(10), 2936-2952.
- Nie, J. G., Cai, C. S., Wu, H. and Fan, J. S. (2006). Experimental and theoretical study of steel-concrete composite beams with openings in concrete flange. *Engineering Structures*. 28(7), 992-1000.
- Oehler, D. J. (1989). Splitting Induced By Shear Connectors in Composite Beams. *Journal of Structural Engineering*. 115(2), 341-362.
- Oehler, D. J. (1990). Behavior of headed studs in composite beams: Push-out tests: Discussion. *Canadian Journal of Civil Engineering*. 17(3), 341-362.
- Oehlers, D. J. and Bradford, M. A. (1995). *Composite Steel and Concrete Structural Members*. Oxford, UK: Kidlington.

- Oehlers, D. J. and Johnson, R. P. (1987). The strength of stud shear connections in composite beams. *The Structural Engineer*. 65(2), 44-48.
- Oguejiofor, E. and Hosain, M. (1992a). Behaviour of perfobond rib shear connectors in composite beams: full-size tests. *Canadian Journal of Civil Engineering*. 19(2), 224-235.
- Oguejiofor, E. and Hosain, M. (1992b). Perfobond rib connectors for composite beams. *Proceedings of Composite Construction in Steel and Concrete II: ASCE*, 883-898.
- Oguejiofor, E. and Hosain, M. (1994). A parametric study of perfobond rib shear connectors. *Canadian Journal of Civil Engineering*. 21(4), 614-625.
- Oguejiofor, E. C. and Hosain, M. U. (1995). Tests of Full Size Beams With Perfobond Rib Connectors. *Canadian Journal of Civil Engineering*. 22, 80-92.
- Oguejiofor, E. C. and Hosain, M. U. (1997). Numerical analysis of push-out specimens with perfobond rib connectors. *Computers & Structures*. 62(4), 617-624.
- Ollgaard, J. G., Slutter, R. G. and Fisher, J. W. (1971). Shear strength of stud connectors in lightweight and normal weight concrete. *AISC Engineering Journal*. 1(1), 55-64.
- Pająk, M. and Ponikiewski, T. (2013). Flexural behavior of self-compacting concrete reinforced with different types of steel fibers. *Construction and Building Materials*. 47, 397-408.
- Pallarés, L. and Hajjar, J. F. (2010). Headed steel stud anchors in composite structures, Part I: Shear. *Journal of Constructional Steel Research*. 66(2), 198-212.
- Parra, C., Valcuende, M. and Gómez, F. (2011). Splitting tensile strength and modulus of elasticity of self-compacting concrete. *Construction and Building Materials*. 25(1), 201-207.
- Pashan, A. and Hosain, M. (2009). New design equations for channel shear connectors in composite beams. *Canadian Journal of Civil Engineering*. 36(9), 1435-1443.
- Pavlović, M., Marković, Z., Veljković, M. and Buđevac, D. (2013). Bolted shear connectors vs. headed studs behaviour in push-out tests. *Journal of Constructional Steel Research*. 88, 134-149.
- Prakash, A., Anandavalli, N., K. Madheswaran, C. and Lakshmanan, N. (2012). Modified Push-out Tests for Determining Shear Strength and Stiffness of HSS

- Stud Connector-Experimental Study. *International Journal of Composite Materials*. 2(3), 22-31.
- Qureshi, J., Lam, D. and Ye, J. (2011). Effect of shear connector spacing and layout on the shear connector capacity in composite beams. *Journal of Constructional Steel Research*. 67(4), 706-719.
- Ranawaka, T. and Mahendran, M. (2009). Distortional buckling tests of cold-formed steel compression members at elevated temperatures. *Journal of Constructional Steel Research*. 65(2), 249-259.
- Richard, J. Y. Y., Yiching, L. and Lai, M. T. (1997). Composite beams subjected to static and fatigue loads. *Journal of Structural Engineering*. 123(6), 765-771.
- Riley, M. and Cotgrave, A. (2014). *Construction technology 2: industrial and commercial building*. Palgrave Macmillan.
- Roberts, T. M. and Al-Amery, R. I. M. (1991). Shear strength of composite plate girders with web cutouts. *Journal of Structural Engineering*. 117(7), 1897-1910.
- Robinson, H. (1988). Multiple stud shear connections in deep ribbed metal deck. *Canadian Journal of Civil Engineering*. 15(4), 553-569.
- Rocha, J. D. B., , Arrizabalaga, E. M., Quevedo, R. L. and Morfa, C. A. R. (2012). Behavior and Strength of welded stud shear connectors in composite beam. *Revista Facultad de Ingenieria Universidad de Antioquia*. (63), 93-104.
- Rodrigues, J. P. C. and Laím, L. (2011). Behaviour of Perfobond shear connectors at high temperatures. *Engineering Structures*. 33(10), 2744-2753.
- Rodrigues, R., de Brito, J. and Sardinha, M. (2015). Mechanical properties of structural concrete containing very fine aggregates from marble cutting sludge. *Construction and Building Materials*. 77, 349-356.
- Rogers, C. A. and Hancock, G. J. (1997). Ductility of G550 sheet steels in tension. *Journal of Structural Engineering*. 123(12), 1586-1594.
- Rozière, E., Granger, S., Turcry, P. and Loukili, A. (2007). Influence of paste volume on shrinkage cracking and fracture properties of self-compacting concrete. *Cement and Concrete Composites*. 29(8), 626-636.
- Saggaff, A., Alhajri, T., Tahir, M. M., Alenezi, K., Tan, C. S., Sulaiman, A., Lawan, M. M. and Ragae, M. (2015). Experimental and Analytical Study of Various Shear Connectors Used for Cold-Formed Steel-Ferrocement Composite Beam. *Applied Mechanics and Materials*. 754-755, 315-319.

- Satpute, R. S. and Varghese, V. (2012). Building Design Using Cold Formed Steel Section. *International Refereed Journal of Engineering and Science*. 1(2), 01-06.
- Schafer, B. W. (2002). Local, distortional, and Euler buckling of thin-walled columns. *Journal of Structural Engineering*. 128(3), 289-299.
- Shim, C. S., Lee, P. G. and Chang, S. P. (2001). Design of shear connection in composite steel and concrete bridges with precast decks. *Journal of Constructional Steel Research*. 57, 203-219.
- Slutter, R. G. and Driscoll, G. C. (1965). Flexural strength of steel-concrete composite beams. *Journal of structural division, ASCE*. 91, 71-99.
- Smith, A. L. and Couchman, G. H. (2010). Strength and ductility of headed stud shear connectors in profiled steel sheeting. *Journal of Constructional Steel Research*. 66(6), 748-754.
- Soleymani Ashtiani, M., Scott, A. N. and Dhakal, R. P. (2013). Mechanical and fresh properties of high-strength self-compacting concrete containing class C fly ash. *Construction and Building Materials*. 47, 1217-1224.
- Sonebi, M., Tamimi, A. K. and Bartos, P. J. M. (2003). Performance and cracking behaviour of reinforced beams cast with self-compacting concrete. *ACI Materials Journal*. 100(6), 492-500.
- Stephens, S. F. and LaBoube, R. A. (2003). Web crippling and combined bending and web crippling of cold-formed steel beam headers. *Thin-Walled Structures*. 41(12), 1073-1087.
- Su, Q. T., Wang, W., Luan, H. W. and Yang, G. T. (2014). Experimental research on bearing mechanism of perfobond rib shear connectors. *Journal of Constructional Steel Research*. 95, 22-31.
- Tahir, M. M., Shek, P. N. and Tan, C. S. (2009). Push-off tests on pin-connected shear studs with composite steel-concrete beams. *Construction and Building Materials*. 23(9), 3024-3033.
- Talal, M. H. F. A. (2014). *Structural Behaviour of an Innovative Precast Cold-Formed Steel Ferrocement as Composite Beam*. . Doctor of philosophy, Universiti Teknologi Malaysia, Skudai.
- Thai, H. T. and Uy, B. (2015). Finite element modelling of blind bolted composite joints. *Journal of Constructional Steel Research*. 112, 339-353.

- Turatsinze, A., Bonnet, S. and Granju, J. L. (2005). Mechanical characterisation of cement-based mortar incorporating rubber aggregates from recycled worn tyres. *Building and Environment*. 40(2), 221-226.
- Turatsinze, A. and Garros, M. (2008). On the modulus of elasticity and strain capacity of Self-Compacting Concrete incorporating rubber aggregates. *Resources, Conservation and Recycling*. 52(10), 1209-1215.
- Turk, K. (2012). Viscosity and hardened properties of self-compacting mortars with binary and ternary cementitious blends of fly ash and silica fume. *Construction and Building Materials*. 37, 326-334.
- Turk, K. and Karatas, M. (2011). Abrasion resistance and mechanical properties of self-compacting concrete with different dosages of fly ash/silica fumes. *Indian Journal of Engineering & Materials Science*. 18, 49-60.
- Valcuende, M., Benito, F., Parra, C. and Miñano, I. (2015). Shrinkage of self-compacting concrete made with blast furnace slag as fine aggregate. *Construction and Building Materials*. 76, 1-9.
- Valente, I. and Cruz, P. J. S. (2004). Experimental analysis of Perfobond shear connection between steel and lightweight concrete. *Journal of Constructional Steel Research*. 60(3-5), 465-479.
- Valipour, H., Rajabi, A., Foster, S. J. and Bradford, M. A. (2015). Arching behaviour of precast concrete slabs in a deconstructable composite bridge deck. *Construction and Building Materials*. 87(0), 67-77.
- Veldanda, M. and Hosain, M. (1992). Behaviour of perfobond rib shear connectors: push-out tests. *Canadian Journal of Civil Engineering*. 19(1), 1-10.
- Verissimo, G. S., Valente, M. I. B., Paes, J. L. R., Cruz, P. J. S. and Fakury, R. H. (2006). Design and experimental analysis of a new shear connector for steel and concrete composite structures *Proceedings of the 3rd International conference on bridge maintenance, safety and management*.
- Vianna, J. d. C., Andrade, S. A. L., Vellasco, P. C. G. and Costa-Neves, L. F. (2013). Experimental study of Perfobond shear connectors in composite construction. *Journal of Constructional Steel Research*. 81, 62-75.
- Vianna, J. d. C., Costa-Neves, L. F., da S. Vellasco, P. C. G. and de Andrade, S. A. L. (2009). Experimental assessment of Perfobond and T-Perfobond shear connectors' structural response. *Journal of Constructional Steel Research*. 65(2), 408-421.

- Vianna, J. d. C., Costa-Neves, L. F., Vellasco, P. C. G. d. S. and de Andrade, S. A. L. (2008). Structural behaviour of T-Perfobond shear connectors in composite girders: An experimental approach. *Engineering Structures*. 30(9), 2381-2391.
- Viest, I. M., Colaco, J. P., Furlong, R. W., Griffis, L. G., Leon, R. T. and Wyllie, L. A. J. (1997). *Composite Construction*. New York: McGraw-Hill.
- Viest, I. M., Siess, C. P., Appleton, J. and Newmark, N. M. (1952). Studies of Slab and Beam Highway Bridges: Part IV. Full Scale Tests of Channel Shear Connectors and Composite T-Beams. *University of Illinois Engineering Excerpt, Station Bulletin*. 405.
- Wang, Q. and Li, W. Y. (1999). Spatial stability of thin-walled eccentric compressive members. *Journal of Engineering Mechanics*. 125(2), 197-204.
- Wehbe, N., Wehbe, A., Dayton, L. and Sigl, A. (2011). Development of Concrete Cold Formed Steel Composite Flexural Members. *Structures Congress*. 3099-3109.
- Wilkinson, T. and Hancock, G. J. (2000). Tests to examine plastic behavior of knee joints in cold-formed RHS. *Journal of structural engineering New York, N.Y.* 126(3), 297-305.
- Wong, Y. C. (1998). Deflection of steel-concrete composite beams with partial shear interaction. *Journal of Constructional Steel Research*. 124(10), 1159-1165.
- Xu, C. and Sugiura, K. (2013). Parametric push-out analysis on group studs shear connector under effect of bending-induced concrete cracks. *Journal of Constructional Steel Research*. 89, 86-97.
- Xu, C., Sugiura, K., Wu, C. and Su, Q. (2012). Parametrical static analysis on group studs with typical push-out tests. *Journal of Constructional Steel Research*. 72, 84-96.
- Xue, W., Wang, H. and Luo, Z. (2008). Static behaviour and theoretical model of stud shear connectors. *Journal of Bridge Engineering*. 13(6), 623-634.
- Yatim, M. Y. M., Shanmugam, N. E. and Wan Badaruzzaman, W. H. (2015). Tests of partially connected composite plate girders. *Thin-Walled Structures*. 91, 13-28.
- Young, B. (2004). Tests and design of fixed-ended cold-formed steel plain angle columns. *Journal of Structural Engineering*. 130(12), 1931-1940.
- Young, B. and Ellobody, E. (2005). Buckling analysis of cold-formed steel lipped angle columns. *Journal of Structural Engineering*. 131(10), 1570-1579.
- Yu, C. and Schafer, B. W. (2003). Local buckling tests on cold-formed steel beams. *Journal of Structural Engineering*. 129(12), 1596-1606.

- Yu, C. and Schafer, B. W. (2006). Distortional buckling tests on cold-formed steel beams. *Journal of Structural Engineering*. 132(4), 515-528.
- Yu, W. W. (1999). *Cold-Formed Steel Structures*. Boca Raton: CRC Press.
- Yu, W. W. (2000). *Cold-Formed Steel Design*. (3rd ed.) United States of America: John Wiley Publishers.
- Yu, W. W. and LaBoube, R. A. (2010). *Cold-Formed Steel Design*. (4th ed.) New Jersey: John Wiley & Sons, Inc.
- Zhong, S. T. (2000). *Steel Structures*. Beijing, China: China Construction Industry Publishing House.
- Zhu, W., Bartos, P. J. M. and Gibbs, J. C. (2001). Uniformity of in-situ properties of self-compacting concrete. *Cement and Concrete Composites*. 23(1), 57-64.
- Zhu, W. and Gibbs, J. C. (2005). Use of different limestone and chalk powders in self-compacting concrete. *Cement and Concrete Research*. 35(8), 1457-1460.