

NUMERICAL MODELLING FOR HYDRODYNAMIC BEHAVIOR OF ROUND  
SHAPE FLNG INTERACTING WITH LNG CARRIER

SIOW CHEE LOON

A thesis submitted in fulfilment of the  
requirements for the award of degree of  
Doctor of Philosophy (Mechanical Engineering)

Faculty of Mechanical Engineering  
Universiti Teknologi Malaysia

JUNE 2016

Specially dedicated to

My beloved family

## ACKNOWLEDGEMENT

First of all, I am grateful to God for the good health and wellbeing that were necessary to complete this thesis.

I would like to express my sincere gratitude to my advisor Dr Jaswar Koto, Prof Carlos Guedes Soares and Allahyarham Ir. Dr Mohamad Pauzi Abdul Ghani for the continuous support of my Ph.D study and related research, for their patience, motivation, and immense knowledge. Their guidance helped me in all the time of research and the writing of this thesis. I could not have imagined having better advisors and mentors for my Ph.D study. I am grateful to Dr. Hassan Abyn for sharing his research data with me and to support my study in the beginning of my Ph.D study.

My sincere thank extends to Prof. Hironori Yasukawa who has given me the opportunity to conduct the experiment in NRIFE, Japan. Also, I would like to thank Dr Hirata and the laboratory managers, Dr Matsuda and Dr Terada for the stimulating discussions on the experiment setup. And I thank my fellow labmates, Mr Khairuddin, Mr Matsumoto, Mr Zakiyama, Mr Hamasaki and Mr Yamashita who helped me in conducting the experiment and worked together to ensure the experiment is able to complete on time. Without their precious support, it would not be possible to conduct this research successfully.

Besides, I would like to thank my parents and my sister for supporting me spiritually throughout my journey in completing Ph.D and my life in general. Last but not the least, I would like to express my heart-felt gratitude to my fiancée, Theodora Tang for always be at my side to cheer me up and stand by me through the good times and bad...

## ABSTRACT

The diffraction potential theory is an efficient and accurate method to predict the hydrodynamic characteristic of a large floating structure. However, this theory under-estimates the damping coefficient as the viscous effect is ignored. This weakness causes the diffraction potential theory to be less accurate in predicting the motion of floating structure in damping dominant region. Therefore, this research aims to propose a method to improve the estimation of hydrodynamic characteristic of free floating round shape Floating Liquefied Natural Gas (FLNG) carrier when it is alone and when it is interacting with another structure which is arranged in parallel head-sea condition. The proposed method was developed by modifying the diffraction potential theory and improving with the application of drag equation. The proposed method was also further developed by using motion's energy dissipation concept and Huygens Principle to predict the influence of wave generated by the motion of nearby structure to the response amplitude operator (RAO) of the FLNG. To validate the proposed method, motion experiments in regular wave were conducted in selected conditions. Comparative study was also conducted by using FLNG's RAO result predicted by ANSYS AQWA software. Over-estimation of peak heave RAO of single FLNG case is reduced from 2.42 to 1.74 by the proposed method as the method considered the viscous damping in its calculation. In interaction cases, the peak heave RAO is increased to 2.1 due to the effect of radiating waves. Besides, the interaction effect also induces sway and roll motion. The peak sway RAO estimated by both proposed method and experiment is around 0.22. The interaction effects on heave RAO and roll RAO are stronger around the motions' natural period as the damping coefficients are reduced around motion natural period. The research results showed that the proposed method improved the accuracy of the simulation by reducing the amount of over-prediction on the floating structure's RAO in damping dominant region.

## ABSTRAK

Teori Keupayaan Belauan adalah cara yang cekap dan tepat untuk meramal ciri-ciri hidrodinamik bagi struktur terapung yang besar. Tetapi, teori ini kurang menganggarkan pekali redaman kerana mengabaikan kesan likat. Kekurangan ini menyebabkan teori Keupayaan Belauan tidak dapat meramal gerakan struktur terapung dengan tepat pada rantau dominan redaman. Oleh itu, kajian ini bertujuan untuk mencadangkan kaedah untuk menganggarkan ciri-ciri hidrodinamik FLNG berbentuk bulat dengan lebih tepat apabila ia bersendirian dan berinteraksi dengan struktur lain yang disusun secara selari dan berhadapan dengan ombak. Kaedah yang dicadangkan mengubahsuai teori Keupayaan Belauan dan memperbaikinya dengan menggunakan persamaan seret. Kaedah ini juga dimajukan dengan menggunakan konsep kehilangan tenaga disebabkan pergerakan struktur dan prinsip Huygens untuk meramalkan kesan daripada ombak yang dihasilkan oleh pergerakan struktur berdekatan dengan FLNG kepada RAO FLNG. Untuk mengesahkan kaedah yang dicadangkan, eksperimen pergerakan struktur disebabkan oleh ombak tetap telah dijalankan dalam keadaan yang terpilih. Perbandingan juga dilakukan dengan menggunakan hasil pengiraan RAO FLNG daripada ANSYS AQWA. Lebihan anggaran pada puncak RAO arah *heaving* bagi kes FLNG bersendirian dikurangkan daripada 2.42 ke 1.74 dengan kaedah yang dicadangkan apabila mengambil kira kesan likat. Pada kes interaksi, puncak RAO arah *heaving* meningkat kepada 2.1 kerana kesan radiasi ombak. Kesan interaksi juga menghasilkan pergerakan struktur pada arah *swaying* dan *rolling*. Puncak RAO arah *swaying* yang dianggarkan oleh kaedah yang dicadangkan dan eksperimen ialah sekitar 0.22. Pengaruh kesan interaksi pada RAO arah *heaving* dan RAO arah *rolling* adalah lebih besar di sekitar tempoh semula-jadi gerakan struktur kerana pekali redaman menjadi rendah. Keputusan kajian ini menunjukkan bahawa kaedah yang dicadangkan telah memperbaiki ketepatan simulasi dengan mengurangkan jumlah lebihan anggaran RAO struktur terapung pada rantau dominan redaman.

## TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	<b>DECLARATION</b>	ii
	<b>DEDICATION</b>	iii
	<b>ACKNOWLEDGEMENT</b>	iv
	<b>ABSTRACT</b>	v
	<b>ABSTRAK</b>	vi
	<b>TABLE OF CONTENTS</b>	vii
	<b>LIST OF TABLES</b>	xiv
	<b>LIST OF FIGURES</b>	xv
	<b>LIST OF ABBREVIATIONS</b>	xxii
	<b>LIST OF SYMBOLS</b>	xxiii
	<b>LIST OF APPENDICES</b>	xxviii
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
	1.1 Background of Study	1
	1.2 Problem Statement	6
	1.3 Objective	9
	1.4 Scope of Research	10
	1.5 Research Question	11
	1.6 Significance of Study	11
	1.7 Organization of the Thesis	12
	1.8 Summary	14

<b>2</b>	<b>LITERATURE REVIEW</b>	<b>15</b>
2.1	Hydrodynamic Interaction on Multiple Floating Structures	16
2.1.1	Basic Concept on Hydrodynamic Interaction Simulation	17
2.1.2	Phenomena on Multiple Structure Interaction	18
2.1.3	Application of Higher Order Boundary Element Method (HOBEM) in Hydrodynamic Interaction Study	20
2.1.4	Comparison of Available Numerical model for Hydrodynamic Interaction Study	21
2.1.5	Alternative Solution in Hydrodynamic Interaction Study	22
2.1.6	Relative Motion and Intact Force between floating structures	24
2.1.7	Application of Numerical Software in Hydrodynamic Interaction Study	24
2.1.8	Summary of Multiple Floating Structures' Hydrodynamic Interaction	26
2.2	Time Domain and Frequency Domain Analysis of Hydrodynamic Interaction	26
2.3	Factors Influence the Motion Response and Numerical wave	26
2.4	Non-Ship-Shape Large Floating Structure Developments and Studies	27
2.5	Effect Mooring on Large Floating Structure Wave Frequency Motion	28
2.6	Effect of Regular and Irregular Wave on Motion of Floating structure	30
2.7	Summary	32

<b>3</b>	<b>RESEARCH METHODOLOGY</b>	<b>33</b>
3.1	Research Flow Chart	33
3.1.1	Initial Research Study	35
3.1.2	Development of Numerical Solution for Simulate Single Floating Structure Hydrodynamic Behaviour	36
3.1.3	Development of Numerical Solution for Simulate Hydrodynamic Interaction between Floating Structures	37
3.1.4	Model Experiment to Verify Propose Method	38
3.2	Models Selection and Design	40
3.3	Variables Considered in Study RAO of Round Shape FLNG	42
3.4	Data Collection	43
3.5	Data Analysis	44
3.6	Result Validation	46
3.7	Selected Theories to Develop Proposed Method	47
3.7.1	Diffraction Potential Theory	47
3.7.2	Drag Equation	48
3.7.3	Huygens Principle	49
3.7.4	Motion Dissipate Energy	49
3.8	Application of Commercial Software	50
3.8	Motion Experiment	51
3.9	Summary	51
<b>4</b>	<b>BASIC HYDRODYNAMIC THEORY</b>	<b>53</b>
4.1	Diffraction Potential Theory	53
4.1.1	3-Dimension Diffraction Theory	54
4.1.2	Constant Panel Method on Solving 3-Dimension Diffraction potential Theory	60
4.1.3	Solution of Source and Normal Dipoles over a Quadrilateral Panel	65



4.1.4	Solution for Real Part of Wave Term of Three Dimension Green Function	68
4.1.5	Execution of Hydrodynamic Force and Hydrodynamic Coefficient	76
4.1.6	General Floating Body Motion Formulation	77
	4.1.6.1 Surge - Pitch Coupling Motion	78
	4.1.6.2 Sway - Roll Coupling Motion	80
	4.1.6.3 Heave Motion	81
	4.1.6.4 Yaw Motion	81
4.2	Drag Force on an Oscillating Structure in Wave	82
	4.2.1 Drag Force Act on an Oscillating Structure in Wave	83
4.3	Wave Energy in Regular Wave Condition	85
4.4	Dynamic of Rigid Structure and Its Energy Relations	88
4.5	Quadratic Splines for Curve Fitting	91
4.6	Huygens Principle for Wave Propagation	93
	4.6.1 Application of Huygens Principle in Generating Oblique Wave	94
4.7	Bisection Method to Solve the Root of Equation	96
4.8	Fourier Series Linearization	97
4.9	Summary	99

<b>5</b>	<b>PROPOSED MATHEMATICAL MODEL FOR EVALUATION OF THE HYDRODYNAMIC CHARACTERISTIC OF FLOATING STRUCTURE</b>	<b>100</b>
5.1	Diffraction Potential Theory with Drag Equation Correction Method	100
	5.1.1 Combination of Diffraction Potential Theory with Drag Equation	101
	5.1.2 Solution of Water Particle Velocity to Predict Drag Force	103

5.1.3	Execution of Projected Area	105
5.1.4	Determination of Drag Coefficient	107
5.2	Progressive Radiating Wave Generated by Free Moving Floating Structure	108
5.2.1	Curve of Wave Crest for Progressive Radiating Wave	108
5.2.2	Propagation of Radiating Wave Generated by Floating Structure Motion	126
5.2.3	Amplitude of Radiating Wave Generated by Floating Structure Motion	130
5.2.4	Potential of Radiating Wave Generated by the Motion of Nearby Structure	138
5.2.5	Interaction Wave Force due to Motion Dissipated Energy	143
5.3	Summary	149
<b>6</b>	<b>NUMERICAL SOLUTION TO PREDICT THE HYDRODYNAMIC CHARACTERISTIC OF FLOATING STRUCTURE</b>	<b>150</b>
6.1	Prediction of the RAO of Single Structure	150
6.2	Prediction of RAO due to Interaction Effect	154
6.3	Estimation of Viscous Damping and Drag Force	157
6.4	Prediction of the Propagation of Radiating Wave Generated by Structure Motion	159
6.5	Prediction of the Interaction Wave Force	161
6.6	Numerical Setup for the proposed method	164
6.7	Numerical Setup for ANSYS AQWA	169
6.7	Summary	170
<b>7</b>	<b>MOTION EXPERIMENT IN WAVE TANK</b>	<b>171</b>
7.1	Experiment Setup for Wave Induce Motion Test	171
7.1.1	Round Shape FLNG Model Installation	172
7.1.2	Natural Period of the Round Shape FLNG	178

7.1.3	KVLCC2 Model Installation	180
7.1.4	Measurement Instrument of Model Test	181
7.1.5	Experiment Test Condition	186
7.2	Experimental Data Analysis	187
7.2.1	Transferring the Linear Motion Data to the Centre of Gravity of the Structure	188
7.2.2	Fourier Series Transformation	192
7.2.3	Execution of Response Amplitude	194
7.2.4	Experiment Data Analysis Program	195
7.3	Sample of Wave Frequency Motion of Round Shape FLNG estimate from Motion Experiment	196
7.4	Summary	202
<b>8</b>	<b>RESULTS AND DISCUSSION</b>	<b>203</b>
8.1	Response Amplitude Operator of Single Round Shape FLNG	204
8.1.1	Added Mass and Damping Coefficient of the Round Shape FLNG	204
8.1.2	Wave force act on the Round Shape FLNG	212
8.1.3	Influence of Drag Equation in the Heave Damping and Heave Force	216
8.1.4	Estimated Response Amplitude Operator of Round Shape FLNG	221
8.2	RAO of Round Shape FLNG When Interacting with another Structure	227
8.2.1	Wave Exciting Force act on the Round Shape FLNG	228
8.2.2	Estimated RAO of Round Shape FLNG When Interacting with another Structure	240
8.3	Comparison RAO of Single Round Shape FLNG without Interaction and RAO of Round Shape FLNG Interacting with another Structure	250
8.4	Summary	260

<b>9</b>	<b>CONCLUSIONS AND RECOMMENDATIONS</b>	<b>261</b>
9.1	Conclusions of Research	261
9.2	Recommendation and Future Work	263
	<b>REFERENCES</b>	<b>265</b>
	Appendices A-H	273-297

## LIST OF TABLES

TABLE NO.	TITLE	PAGE
3.1	Model particular for round shape FLNG	40
3.2	Model particular for KVLCC2	41
3.3	Ranges of the independent variables	44
5.1	Drag Coefficient $C_D$ in the function of L/D	107
6.1	Selected wavelength used to simulate by self-developed programing code	167
7.1	Mooring line segment information	178
7.2	The natural period of the round shape FLNG for each direction of motion	179
7.3	Particular of Soft Spring used to attach the KVLCC2 Model	181
7.4	Selected wavelength for motion experiments	187

## LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	The dominant factor in influence the heave RAO of cylinder structure	4
1.2	Allowance for the change of arrangement of LNG carrier during offloading process	6
3.1	Overall research flow chart	34
3.2	Arrangement of structures in interaction cases study	43
4.1	Definition of direction, coordinates and variables in diffraction potential theory	54
4.2	Local coordinate of each vertex in plan view	67
4.3	The notation used to define the quadratic spline curve	91
4.4	Prediction of spherical Wave propagation by Huygens Principle	93
4.5	Prediction of Plane Wave propagation by Huygens Principle	94
4.6	Predicting of direction of wave propagation by Huygens Principle	95
5.1	Dimension of Vertical Cylinder and flow direction	107
5.2	The label of segment of floating structure in plan view	109
5.3	Tangent direction and normal direction of each segment plane	111
5.4	Calculation of distance between the segment planes number one from origin follows the normal direction	112
5.5	The radiating wave generated by inverted pyramid shape structure	113

5.6	Parameter required to project the panels of structure surface to segment plane	115
5.7	Divide the segment plane into n number of strips	116
5.8	Define the coordinate of strip cut on segment plane	117
5.9	Adjust strip position according to the strip area normal vector direction	120
5.10	The quadratic equation to represent the curve of the hull surface	123
5.11	The direction of wave propagation from the source location	126
5.12	Leading phase between radiating wave in respective to incident wave	146
5.13	Radiating wave interaction between structure <i>P</i> and structure <i>Q</i>	146
6.1	The proposed method using diffraction potential theory with drag equation	152
6.2	The proposed method to predict RAO of floating structure on interaction case	155
6.3	Prediction of damping and drag force using drag equation	158
6.4	The flow chart of proposed method to predict the propagation wave generated by structure motion	160
6.5	Programing flow chart to predict the propagation wave generated by structure motion	162
6.6	Mesh of round shape FLNG applied in the prediction of the RAO by using self-developed programming code	165
6.7	Mesh of KVLCC2 tanker ship applied in the prediction of the RAO by using self-developed programming code	166
6.8	Mesh of round shape FLNG and KVLCC2 tanker ship applied in the prediction of the RAO by using self-developed programming code	166

7.1	The wave dynamic tank used to conduct motion experiment in this research	172
7.2	Measure the mass of steel blocks before arranged the steel block into round Shape FLNG model	173
7.3	Marking of design draught of the round shape FLNG model	173
7.4	Inclining test to identify the position of the centre of gravity for round shape FLNG	174
7.5	Round shape FLNG's Roll decay result	175
7.6	Arrangement of mooring lines and anchor in wave basin	176
7.7	Round shape FLNG model fixed with mooring lines in wave basin in static condition	176
7.8	Mooring line profile	177
7.9	FLNG restoring force due to mooring effect	178
7.10	The position of Round Shape FLNG and KVLCC2 tanker in interaction motion experiment	180
7.11	The location of connection point and fix point to join the soft spring	181
7.12	Theodolite camera system to capture linear motion of FLNG model	182
7.13	Gyroscope to capture model rotational motion of FLNG model	183
7.14	Servo-type wave height measurement device used to measure generated wave height	183
7.15	Wireless remote controller used to synchronize the start function and stop function of all measurement devices in the experiment	184
7.16	The position of the gyroscope and reflective optical tracking markers	185
7.17	Location of model and measurement device in single structure motion experiment	185



7.18	Location of model and measurement device in interaction motion experiment	186
7.19	The relationship between the positions of reflective optical tracking markers and position of centre of gravity of model	189
7.20	Plan view of coordinate system	191
7.21	Interface of the self-developed experiment data processing programming code	196
7.22	Surge motion of FLNG measure from head sea single structure motion experiment test with wavelength 2.27 meters	197
7.23	Heave motion of FLNG measure from head sea single structure motion experiment test with wavelength 2.27 meters	197
7.24	Pitch motion of FLNG measure from head sea single structure motion experiment test with wavelength 2.27 meters	198
7.25	Wave data from head sea single structure motion experiment test with wavelength 2.27 meters	198
7.26	Frequency domain surge RAO of round shape FLNG in wavelength 2.27 meters	199
7.27	Frequency domain heave RAO of round shape FLNG in wavelength 2.27 meters	200
7.28	Frequency domain pitch RAO of round shape FLNG in wavelength 2.27 meters	200
7.29	Frequency domain wave data in wavelength 2.27 meters	201
8.1	Surge added mass of round shape FLNG predicted by the proposed method	205
8.2	Pitch added mass of round shape FLNG predicted by the proposed method	205
8.3	Heave added mass of round shape FLNG predicted by the proposed method	206

8.4	Yaw added mass of round shape FLNG predicted by the proposed method	206
8.5	Surge damping coefficient of round shape FLNG predicted by the proposed method	209
8.6	Pitch damping coefficient of round shape FLNG predicted by the proposed method	209
8.7	Heave damping coefficient of round shape FLNG predicted by the proposed method	210
8.8	Yaw damping coefficient of round shape FLNG predict by the proposed method	210
8.9	Surge wave force act on round shape FLNG predicted by the proposed method	213
8.10	Pitch wave moment act on round shape FLNG predicted by the proposed method	214
8.11	Heave wave force act on round shape FLNG predicted by the proposed method	214
8.12	Comparison of heave damping coefficient of round shape FLNG predict by propose method	218
8.13	Comparison of heave force of round shape FLNG predicted by the proposed method	220
8.14	Surge RAO predicts by proposed method (diffraction potential theory), experiment and ANSYS AQWA	222
8.15	Pitch RAO predicts by proposed method (diffraction potential theory), experiment and ANSYS AQWA	222
8.16	Heave RAO predicts by the proposed method (diffraction potential theory and Jaswar & Siow drag damping correction method ), experiment and ANSYS AQWA	225
8.17	Predicted propagation of radiation wave generated by round shape FLNG	228
8.18	Total surge direction wave force act on the round shape FLNG	229

8.19	Total sway direction wave force act on the round shape FLNG	230
8.20	Total heave direction wave force act on the round shape FLNG	231
8.21	Total roll direction wave moment act on the round shape FLNG	232
8.22	Total pitch direction wave moment act on the round shape FLNG	233
8.23	Total yaw direction wave moment act on the round shape FLNG	234
8.24	Surge RAO of round shape FLNG in interaction cases	241
8.25	Sway RAO of round shape FLNG in interaction cases	242
8.26	Heave RAO of round shape FLNG in interaction cases	243
8.27	Roll RAO of round shape FLNG in interaction cases	244
8.28	Pitch RAO of round shape FLNG in interaction cases	245
8.29	Yaw RAO of round shape FLNG in interaction cases	246
8.30	Comparison of round shape FLNG surge RAO when it alone with when interacting with another floating structure arranged in gap distance 0.5 to breadth of FLNG and in gap distance 0.3 to breadth of FLNG	251
8.31	Comparison of round shape FLNG sway RAO when it alone with when interacting with another floating structure arranged in gap distance 0.5 to breadth of FLNG and in gap distance 0.3 to breadth of FLNG	252
8.32	Comparison of round shape FLNG heave RAO when it alone with when interacting with another floating structure arranged in gap distance 0.5 to breadth of FLNG and in gap distance 0.3 to breadth of FLNG	252
8.33	Comparison of round shape FLNG roll RAO when it alone with when interacting with another floating structure arranged in gap distance 0.5 to breadth of FLNG and in gap distance 0.3 to breadth of FLNG	253

- 8.34 Comparison of round shape FLNG pitch RAO when it alone with when interacting with another floating structure arranged in gap distance 0.5 to breadth of FLNG and in gap distance 0.3 to breadth of FLNG 253
- 8.35 Comparison of round shape FLNG yaw RAO when it alone with when interacting with another floating structure arranged in gap distance 0.5 to breadth of FLNG and in gap distance 0.3 to breadth of FLNG 254

## LIST OF ABBREVIATIONS

AC	-	Alternative Current
ANSYS	-	American Computer-aided engineering software
ANSYS AQWA	-	Diffraction Product of American Computer-aided engineering software
ANSYS CFX	-	Computational Fluid Dynamics software of American Computer-aided engineering software
CFD	-	Computational Fluid Dynamics
CLEAR-VOF	-	Computational Lagrangian-Eulerian Advection Remap-Volume of Fluid
DoF	-	Degree of Freedom
FLNG	-	Floating Liquefied Natural Gas
FPSO	-	Floating Production Storage and Offloading
HOBEM	-	Higher-Order Boundary Element Method
KVLCC2	-	Korean very large crude carrier 2
LNG	-	liquefied natural gas
NRIFE	-	National Research Institute of Fisheries Engineering, Japan
NWT	-	numerical wave tanks
RAO	-	Response Amplitude Of Operation
WAMIT	-	Wave Analysis frequency-domain, free-surface, radiation/diffraction code developed at Massachusetts Institute of Technology

## LIST OF SYMBOLS

$A$		Added mass
$A_{ij}$	-	Added Mass in direction $i$ due to motion in direction $j$
$A_{Proj}$	-	Projected Area
$a_n, b_n, c_n$	-	Constant of parabolic curve $n$ used to represent curve of wave crest
$(\bar{a}, \bar{b}, \bar{c})$	-	Coordinate
$A_w$	-	Water plane area
$B$		damping coefficient
$B_{ij}$	-	Damping Coefficient in direction $i$ due to motion in direction $j$
$b_p$	-	Radiating damping coefficient
$C$	-	Restoring force
$C_a$	-	Added mass coefficient
$C_D$	-	Drag coefficient
$C_M$	-	Mass coefficient
$C_{stP,n}$	-	Intersection position between two connecting strip
$D$	-	Diameter
$Dd, D_{mn}$	-	Normal dipole
$d_s$	-	Distance the steal block shifted
$E_d$	-	Dissipated Energy
$E_f$	-	Energy flux
$E_W$	-	Wave energy over a wave crest
$E_{W i,j}$	-	Wave energy due to the motion $j$ in $i$ -direction
$F_D$	-	Drag force
$F_j$	-	Wave exciting force in direction $j$
$F_p$	-	Diffraction force

$F_{i;n}^P$	-	Radiating wave force acting on the structure $P$ to induce motion in $i$ - direction due to the motion of nearby structure in stage $n$
$F_{i;Tot}^P$	-	Total wave force due to incident wave force and interacting wave force acting on the floating structure $P$ inducing the motion in direction $i$ .
$F_{(P,i;Q,j)}$	-	Wave force acting on the structure $P$ in direction $i$ due to the radiating wave generated by structure $Q$ in the motion direction $j$
$F_{(P,i;Q,j)}^{S,n}$	-	Wave force acting on structure $P$ to induce the motion in direction $i$ due to the motion of structure $Q$ in direction $j$ in stage $n$
$F(t)$	-	Periodic function
$F(f)$	-	Frequency series motion or wave data
$f_j$	-	Average distribution force in motion direction $j$
$f(t)$	-	Time series motion or wave data
$G(\bar{P}; \bar{Q})$	-	Green Function
$\overline{GM}_B$	-	Distance of centre of gravity to centre of transverse direction moment
$\overline{GM}_L$	-	Distance of centre of gravity to centre of moment in longitudinal direction
$G_W(\bar{P}_m, \bar{Q}_n)$	-	Green surface wave
$g$	-	Gravitational acceleration
$h$	-	Water depth
$Im$	-	Imaginary number
$i$	-	Complex number
$J_n$	-	First kind of Bessel function in order $n$
$K, k$	-	Wave number
$KE$	-	Kinetic Energy
$k_{xx}$	-	Radius of gyration in x direction
$k_{yy}$	-	Radius of gyration in y direction
$K_{zz}$	-	Radius of gyration for Z direction
$L$	-	Overall length of floating structure

$l_{Crest}$	-	Length between wave crest
	-	
$l_{Nor}$	-	The distance of the panel from origin of segment plane following the panel normal direction
$l_{mp,m}$	-	Position of the panel $m$ projected to the segment plane
$l_{p0,n}$	-	The distance of the segment plane from origin following the plane normal direction
$l_{rad}$	-	Distance propagate by radiating wave
$l_{st,n}$	-	Length of the strip at the segment
$M_{i,j}$	-	Moment due to motion $j$ in direction $i$
$m_{Nor,n}$	-	Normal direction of strip $n$
$m_{Tang,n}$	-	Tangent direction of strip $n$
$m_{st,n}$	-	Angle of strip $n$
$N$	-	Total number of element
$n$	-	Element number
$n_j$	-	Unit Normal Vector respect to $j$ direction
$n_{st,n}$	-	Area normal vector of the strip $n$
$\vec{n}$	-	Unit normal vector of area
$P_d$	-	Dynamic pressure
$\bar{P}$	-	Field Location
$PE$	-	Potential Energy
$\bar{Q}$	-	Source Location
$\mathcal{R}$	-	Radius of wavelet
$r, R$	-	Horizontal distance
$R_0$	-	Real part of wave term
$R_1$	-	Derivative of $R_0$
$Rt_{i,j}$	-	Ratio of moment in direction $j$ cause by the force in direction $i$ to total moment in direction $j$
$Re$	-	Real number
$S$	-	Surface Area
$S_B$	-	Seabed surface
$S_{cST}$	-	Total length of first radiating wave crest
$S_{cPT}$	-	Total length of radiating wave crest at location $P$



$S_{cP,n}$	-	Length of radiating wave crest represent by strip $n$ at location $P$
$S_{cS,n}$	-	Length of first radiating wave crest represent by strip $n$
$S_F$	-	Free surface area
$S_H$	-	Wet surface area of floating structure
$S_\infty$	-	Boundary located in the infinity distance
$Ss, S_{mn}$	-	Source
$\mathcal{J}$	-	Draught of floating structure
$T$	-	Period
$t$	-	Time
$u(t), u(x, t)$	-	Time dependent fluid particle velocity
$\dot{u}$	-	Horizontal fluid particle velocity
$V_{max}$	-	Magnitude of complex fluid particle velocity
$W_S$	-	Total weight of the model
$w$	-	Circular frequency of incident wave ( $2\pi/T$ )
$\dot{w}$	-	Vertical fluid particle velocity
$w_B$	-	weight of steel block
$X_j$	-	The motion of structure in direction $j$
$\dot{X}(t)$	-	Time dependent floating structure velocity
$\dot{X}_z$	-	Floating structure velocity in Z direction
$\ddot{X}_z$	-	Floating structure acceleration in Z direction
$(x, y, z)$	-	Coordinate
$(x_P, y_P)$	-	Field coordinate
$(x_S, y_S)$	-	Source coordinate
$(x_{st,n}, y_{st,n})$	-	The coordinate of the strip on the segment plane
$\bar{x}_{St,n}$	-	Area normal vector of the strip $n$ in X-direction
$(\tilde{x}_G, \tilde{y}_G, \tilde{z}_G)$	-	Position of the center of gravity of model
$(\tilde{x}_p, \tilde{y}_p, \tilde{z}_p)$	-	Position of reflective optical tracking markers
$(x_{\psi S,n}, y_{\psi S,n})$	-	Connected coordinate of the strip segment plane
$Y_n$	-	Second kind of Bessel function in order $n$
$\bar{y}_{st,n}$	-	Area normal vector of the strip $n$ in Y-direction
$z_a$	-	motion amplitude in stage $n$
$\alpha, \epsilon$	-	Leading Phase

$\beta$	-	Incident wave propagation direction
$\varepsilon_a$	-	Relative error
$\tilde{\gamma}$	-	Floating model initial heading angle
$\lambda$	-	Wavelength
$\lambda/D_{\text{FLNG}}$	-	Ratio of wavelength to Round Shape FLNG's diameter
$\nabla$	-	Displacement floating structure
$\Phi$	-	Complex Wave Potential
$\phi$	-	Complex time independent Wave Potential
$\phi_j$	-	Complex time independent Radiation Wave Potential in direction of motion $j$
$\phi_I$	-	Complex time independent Incident Wave Potential
$\phi_S$	-	Complex time independent Scattering Wave Potential
$\phi_R$	-	Complex time independent Radiation Wave Potential
$\phi_R^S$	-	Diffracted interacting wave potential due to motion of nearby floating structure
$\dot{\phi}_Z$	-	Fluid particle velocity in Z direction
$\varpi$	-	Solid angle
$\rho$	-	Fluid density
$\vartheta$	-	Wave propagation direction
$\theta_{In}$	-	Angle the model inclines
$\theta_{mp,m}$	-	Normal angle of panel $m$
$\theta_{pn,n}$	-	Normal angle for plane $n$
$\theta_{pt,n}$	-	Tangent angle for plane $n$
$\theta_{rad}$	-	Direction of propagation of the radiating wave
$\tilde{\theta}_1$	-	Time dependent roll angle
$\tilde{\theta}_2$	-	Time dependent pitch angle
$\tilde{\theta}_3$	-	Time dependent yaw angle
$\zeta, \zeta_a$	-	Wave amplitude
$\zeta_{a,i}$	-	Radiating wave amplitude due to motion in direction $i$
$\zeta_{a\ i,j}$	-	The wave amplitude due to the motion $j$ in direction $i$

**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>	<b>PAGE</b>
A	Solution on Calculate Length of Wave Crest	273
B	Interface of self-developed software	276
C	Mesh of the floating structure generated by ANSYS AQWA	279
D	Photo of Model Experiment	281
E	Samples Calculation Procedure to Predict Motion Natural Frequency	284
F	Motion Measurement Software for Model Experiment	288
G	List of Related Publication	295

## **CHAPTER 1**

### **INTRODUCTION**

This chapter discusses the background, objectives, problem statement, and the scope of the research. Besides, the content of each chapter in this thesis is also briefly introduced at the end of this chapter.

#### **1.1 Background of Study**

Study on floating structure system is an important research topic in offshore industry. The floating structures are often used to explore natural resources in deep water area because fixed structures such as jacket structure is not applicable in deep water. The floating structures are allowed to move freely within the design limit when the motion of structures is induced by external force such as wave force, drift force, wind force and current force. Besides, the motion characteristics of the floating structures are also easily influenced by the hulls design and the arrangement of structures on sea surface. These motion characteristics would be affected when the floating structures interact with each other on sea surface.

Interaction between floating structures becomes an important research topic especially on the study of the Floating Liquefied Natural Gas Storage (FLNG) offloading system design. This is because the gap between the FLNG with tanker ship is one of the important criteria to determine workability of the offloading system and the success of fluid transfer. To transfer liquefied natural gas (LNG), the

distance between the storage tank and shuttle tanker should be as close as possible in order to reduce the amount of LNG boil off when the LNG is transferring from FLNG to the tanker ship. In recent development, it is suggested that the shuttle tanker has to be arranged side by side with the storage tank so that the pipe length can be minimised. Due to the close distance between floating structures, accurate prediction on the Response Amplitude Operator (RAO) of each structure in a multiple floating structures system are important to ascertain the safety of the structures' arrangement. In general, this study will concentrate on the dynamic motion interaction between floating structures which is used to extract natural gas in deep water area.

As mentioned above, the environmental condition is one of the obstructions in limiting the arrangement of floating structures in the offshore system. Due to effect of wave, current and wind, motions of the floating structures are difficult to predict. In this research, only the influence of first order wave forces to the motion of floating structure was studied because it is a significant factor in inducing the motion of floating structures. According to Ali et al. (2010), the external force acting on the single floating structure is only caused by incident wave in single floating structure system. However, the study of the wave load on the multiple floating structures becomes more complicated as the total wave force acted to the floating structures is the summation of the force from incident wave, the scattering wave from nearby structures and radiating wave due to the motion from nearby structures. This situation increases the complexity of the system and calls for a comprehensive study.


In previous research on hydrodynamic interaction, the studies on the interaction between floating structures focused on the wave drift force and motion response due to the interaction effect. From the research conducted by Ali et al. (2010), the outcome showed that the interaction between multiple floating structures causes the motion response to become higher due to the extra radiating wave force transferred from one floating structure to the nearby floating structures. The observation was evaluated and proved by many researchers through their experimental studies or numerical simulation. However, there are still weaknesses

from the numerical method used in the previous research. For example, some of the mathematical models to simulate the effect of hydrodynamic interaction are not applicable for the study of the structures arranged with a very small gap distance. This is because some of the proposed mathematical models applied Bessel function to simulate the wave propagation. Hence, if the condition could not satisfy the cylindrical coordinate function of Bessel function, the result gained may be incorrect. This problem was raised by Kashiwagi (2008); Kashiwagi and Shi (2010) in their research on comparing the wave interaction theory to their Higher-Order Boundary Element Method (HOBEM). The horizontal wave force they calculated using the theory shows consistent similarity with the result obtained from HOBEM. However, the different results were obtained from both of the theories for vertical wave force. To solve this problem, they applied the exact algebra method to their HOBEM method to allow their methodology works for multiple body interaction in very close gap.

Besides, most of the previous proposed methods were developed based on the potential theory. The diffraction potential theory executes the wave load on the floating structure by estimating the wave diffraction effect. In the potential theory, it is assumed that the viscous effect can be ignored in the calculation. This assumption causes the potential theory to estimate a lower damping coefficient for the motion of floating structures. The damping coefficient of the floating structure is under-predicted, causing the RAO of floating structures prediction to become higher than the actual value in damping dominant region. This weakness of the potential theory was reported by Loken (1981) and Lu et al. (2011). Regarding this problem, over-prediction of RAO by the potential theory is negligible if the natural frequencies of the motions are not in the range of the wave frequency which exists in the structure operating environment. However, if the natural frequency of the motion is within the range of the wave frequency, then accurate estimation on the floating structure's RAO in the damping dominant region is required to ensure the safety of the floating structure.

Furthermore, the RAO of floating structures outside the damping dominant region can be predicted accurately as the diffraction potential theory is able to

estimate the added mass and wave force of the floating structures correctly. From the motion equation, the motion of the floating structures in different wavelength depends on different factors as shown in Figure 1.1. Figure 1.1 shows the example of the heave RAO tendency curve in different length of wavelength for the cylinder structure. When the wavelength is much shorter than the structure length, the motion of floating structure is more dominated by the mass term of the structure. On the other hand, in very long wavelength region, the motion of floating structure is more dominated by the restoring force of floating structure. Typically, the motion response amplitude operator, RAO is equal to one in the region if the wavelength is much longer than the structure length. In the region where the wave frequency is near to the natural frequency of the motion of floating structure, the RAO of the floating structure is more dominated by the damping term. In this region, high resonance effect would be existed. The RAO in the damping dominant region becomes the peak response in the RAO tendency curve.

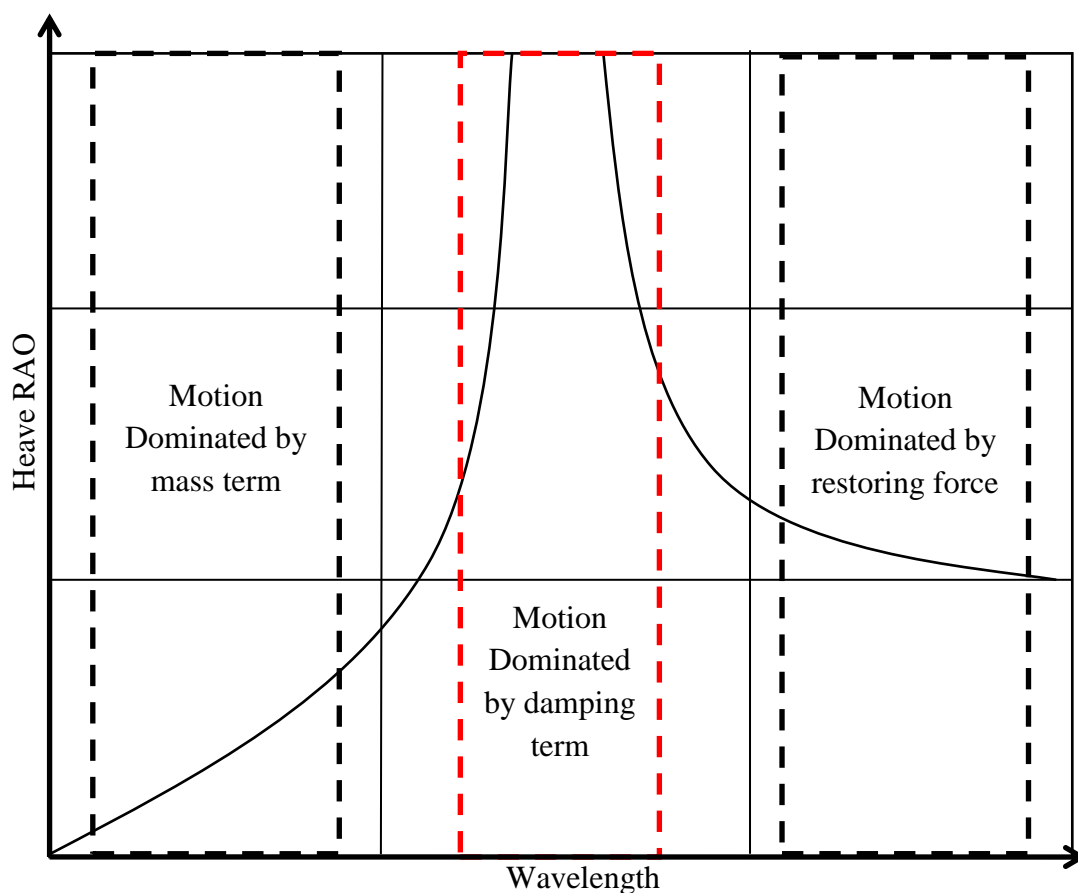


**Figure 1.1** The dominant factor in influence the heave RAO of cylinder structure (Journee and Massie, 2001)

In this research, the new generation of round shape FLNG was selected for the study. The advantage of round shape FLNG over the traditional ship-shape FLNG was studied by Lamport and Josefsson (2008). Their research includes the comparison of motion response, mooring system design, constructability and fabrication, operability, safety and costing between both the structures. The study conducted by Lamport and Josefsson (2008) and Arslan et al. (2011) obtained that this new design of FLNG has a better hydrodynamic behaviour as compared to ship shape structure. Besides, oil and gas companies prefer the FLNG design because it has larger storage volume and larger area for topside facilities. Lamport and Josefsson (2008) also found that the round shape FLNG performed better than ship shape FLNG in these two important factors. Moreover, the simple hull shape for the round shape FLNG also helps to reduce the construction cost as simple hull structures are easier to construct.

Due to the innovative design of a new generation of FLNG technology, there is more freedom to arrange other floating structures around the FLNG. For example, the structure arrangements in the previous design are typically placed in a side by side arrangement or in a tandem arrangement due to the shape of the FLNG. Also, the direction of tanker and FLNG arrangement are respected to the wave propagation direction and cannot be changed during the offloading process. According to Lamport and Josefsson (2008), the round FLNG increases the flexibility of structure arrangement. The relative direction of shuttle tanker to the wave propagation direction is adjustable during the offloading process for a safer arrangement. To allow for horizontal rotations, the offloading system can be designed by utilizing an offloading reel station with the mooring hawser and hose attached on a pinned connection on a 90° trackline system at the periphery of the round shape FLNG. Therefore, the angle of arrangement for the Round Shape FLNG and shuttle tanker can be varied up to 180 degrees as shown in Figure 1.2. Hence, in this research, the study on the RAO of the round shape FLNG only focuses on cases where the structure is alone and the interaction of FLNG with shuttle tanker due to the effect of gap distance between floating structures.



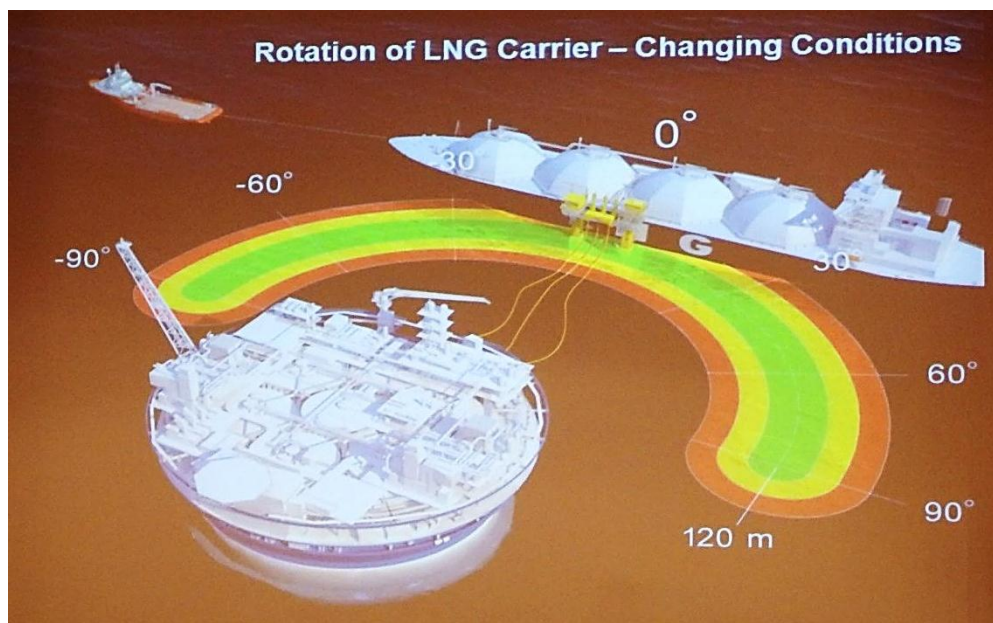

**Figure 1.2** Allowance for the change of arrangement of LNG carrier during offloading process (Sevan Marine, 2014)

## 1.2 Problem Statement

Offshore industry often requests for an accurate and efficient numerical model to predict the behaviour of the floating structure. The numerical model should be able to estimate the dynamic motion of floating structure accurately either the motion is dependent by the mass term, restoring force term or damping term. The amount of over-predict or under-predict in the prediction of motion of floating structure by the numerical model should be minimized to avoid large difference in the motion of the floating structure observed during operating stage when compared to the numerical method result.

However, the current numerical model which has been developed based on the diffraction potential theory to estimate the damping coefficient of the floating structure also has its weakness. The theory ignores the viscous effect in estimating the hydrodynamic behaviour of floating structure, causing the under-estimation of damping coefficient predicted by the theory. This weakness causes the current numerical model to over-predict the motion of the floating structure significantly

when the motion is dominant by the damping term. The over-estimation on the dynamic motion of floating structure in damping dominant region by diffraction potential theory causes the numerical model to be less accurate, and causes the hydrodynamic behaviour of floating structure difficult to predict by the numerical model in damping dominant region.

The inaccuracy of the current numerical model causes higher design cost and consumes longer time during floating structure design process. To predict the hydrodynamic behaviour of the floating structure in damping dominant region, model experiment test can be a good solution. However, the model experiment test is a costly and time consuming method to test the behaviour of floating structure. Therefore, the cost and time consumed to design the floating structure will increase because large amount of experiment test is required in estimating the motion of floating structure in damping dominant region. This is due to the weakness of the current numerical model in predicting the motion of floating structure in the damping dominant region.

According to Kvittem et al. (2012), the diffraction potential theory can predict the hydrodynamic behaviour of large floating structure accurately. This is because the effect of wave diffraction is significant when the incident wave interacts with large floating structure. When the motion of floating structure is dominant by the mass term or dominant by restoring force term, the motion of the floating structure estimated by the diffraction potential theory is close to the experiment result. However, the viscous effect is ignored by the diffraction potential theory, causing the motion predicted by the theory at damping dominant region to become over-estimated significantly. Based on the available literatures, the weakness of the diffraction potential theory as mentioned was also reported by Loken (1981) and Lu et al. (2011). Loken (1981) found that the diffraction potential theory would over predict the motion response of floating structure in damping dominant region due to under prediction of radiation damping by the theory. Besides, Lu et al. (2011) reported similar finding in their research when comparing the potential theory and viscous theory. They found that the viscous theory mostly under-predicts the wave

force in the calculation while the potential theory over predicts the motion when the viscous effect is ignored in the approach of potential theory.

Since the diffraction potential theory is accurate in most regions, except in the damping dominant region, this research proposed to develop the numerical model based on the theory. To improve the numerical model develop based on diffraction potential theory, the numerical model applies drag equation to predict the viscous effect acting on the floating structure because the viscous effect is ignored by the diffraction potential theory. The drag equation is modified in this research. So, The additional viscous damping and linearize drag force calculated by using the modified drag equation can be combined with the radiation damping and radiating wave force estimated by using diffraction potential theory. The damping coefficients and the wave force estimated by both mathematical models are combined in the motion equation to calculate the dynamic motion of floating structure. Therefore, the motion of the floating structure when it is alone and when it is interacting with other structure was calculated by the new numerical model in this research to have a more accurate result regardless of the motion is dominant by mass term, restoring force term or damping term.

From the improvement made to the numerical model, offshore industry stands to benefit substantially from the new proposed numerical model which combines the diffraction potential theory with the drag equation to estimate the motion of floating structure. Through the improved the numerical model, the hydrodynamic behaviour of the floating structure can be predicted by numerical method with higher accuracy. As the motion of the floating structure in damping dominant region is important in designing the floating structure, the proposed numerical model is able to estimate the motion of floating structure with better accuracy. The amount of over-predict in the motion of floating structure can be reduced by the new proposed method. This proposed numerical model provides a better motion analysis method to the offshore industry and helps to reduce the cost and time consumed in designing a floating structure. This target can be achieved by reducing the amount of experiment test required to test the hydrodynamic behaviour of the floating structure.

Improving the accuracy of the numerical model to predict the hydrodynamic behaviour of floating structure is crucial to increase the reliability of the numerical solution to analyse the motion floating structure. The current numerical model is developed based on diffraction potential theory, which is accurate in predicting the motion of floating structure in most regions except the damping dominant region. In this research, the alternative numerical model proposed includes the viscous effect which was ignored by diffraction potential theory in estimating the hydrodynamic behaviour of the floating structure. Through this improvement, the proposed numerical model is able to estimate the motion of floating structure in all the regions of motion regardless of the motion is dominant by mass term, restoring force term or damping term. This is because the under-estimation of the damping coefficient by the diffraction potential theory is improved by introducing the drag equation to predict the viscous damping which is ignored by the diffraction potential theory.

### **1.3 Objective**

To solve the problems mentioned in sub-chapter 1.2, three objectives of this research are listed as follow:

- i. To propose a new estimation method of RAO of a single floating structure using diffraction potential theory and drag equation.
- ii. To further propose the new method as mentioned in the first objective on estimation of RAO of the floating structure due to interaction with another structure using diffraction potential theory, Huygens principle, motions dissipate energy method and drag equation.
- iii. To verify the propose method by conducting motion experiment in basin tank.

#### 1.4 Scope of Research

- i. To develop a method to simulate the motion behaviour of floating structures based on the diffraction potential theory.
- ii. To improve the accuracy of the proposed method to simulate the motion behaviour of floating structures in damping dominant region based on the drag equation.
- iii. To compare the accuracy of the proposed method to the established method in estimating the RAO of floating structures.
- iv. To simulate the RAO of the round shape FLNG in the in regular wave condition.
- v. To study the hydrodynamic behaviour of round shape FLNG in head sea condition.
- vi. To study the hydrodynamic behaviour of round shape FLNG in moderate sea state ocean condition.
- vii. To study the improvement on the accuracy of the floating structures' RAO predicted by the proposed method as compared to the established method using motion experiment result.
- viii. To further develop the proposed method to simulate the effect of interaction between floating structures to the RAO of floating structures using the Huygens Principle and motion dissipate energy concept.
- ix. To simulate the RAO of round shape FLNG when the LNG carrier is arranged closer to the FLNG during offloading process using the proposed method and motion experiment test.
- x. To study the improvement of the accuracy of the predicted round shape FLNG's RAO when it is interacting with LNG carrier by comparing the results from the proposed method and the established method using experiment results.
- xi. To study the effect of wavelength to RAO of round shape FLNG when the structure is interacting with other floating structures using the proposed method.
- xii. To study the influence of LNG carrier to the RAO of round shape FLNG by comparing the RAO of FLNG when it is alone and when FLNG interacts with LNG carrier.

## 1.5 Research Question

To achieve the objectives of the research, the questions on the solution and factors required to consider so the target of this research can be achieved are stated in follow:

- i. What is the factor influence the motion of floating structure?
- ii. How the existing theories estimate the RAO of floating structure?
- iii. What is the weakness of existing theories in order to predict the RAO of floating structure?
- iv. How to develop a new method which can improve the accuracy of the numerical prediction on the RAO of floating structure?
- v. How to simulate the RAO of the round shape FLNG in the selected ocean environment?
- vi. What are the variables influence the motion of the floating structures when the structures are interacting between each other?
- vii. How to develop a new method which can estimate the effect of interacting between the floating structures to the RAO of floating structures?
- viii. What are the important factors must be considered in analyse the effect of interaction between floating structures to the RAO of floating structures?
- ix. How to collect the RAO data which shown the real motion of the round shape FLNG when it is interacting with wave?
- x. How to validate the proposed method and ensure it capability to apply in estimate the RAO of floating structure in selected environment condition?

## 1.6 Significance of Study

In this research, the 6 DoF RAO of new generation round shape FLNG were studied. To estimate the RAO of the round shape FLNG accurately, this research has developed a method to simulate the RAO of the selected floating structure. The proposed method is able to estimate the RAO of the floating structure within the

selected ocean environment condition where the FLNG operates. The proposed method improves the accuracy of the simulation by reducing the amount of over-prediction on the floating structure's RAO in damping dominant region as compared to the result simulated by the existing established method. A more accurate estimation of the RAO in damping dominant region is important for the floating structure which the motion natural frequency of the structure is among the ocean environment condition of the structures designed to operate. Besides, the proposed method also improves the accuracy on simulate the RAO of floating structure when the structure is interacting with another floating structure in the motion damping dominant region. When the structures are arranged nearby each other, accurate prediction of the RAO of the floating structures is important to ensure the safety of the structures.

## **1.7 Organization of the Thesis**

This thesis consists of nine chapters. The first chapter presents the overview discussion on the tasks conducted in this research. The chapter discusses the objectives of this research and the contribution of the research to the topic. The scope and the field of research are explained in this chapter to deliver the idea on the area of discussion in this thesis.

Discussion on literature review is presented in Chapter 2. The literature review focuses on the available methods to simulate the RAO of floating structures. The weaknesses and strengths of the existing methods were also discussed in the chapter. Besides, the chapter includes the experimental study conducted by previous researches to study the motion of floating structures. In this chapter, reviews on the current available FLNG or FPSO are conducted to study the advantages of the selected model as the case study in this research.

In Chapter 3, the methodology of this research is presented. The chapter explain the overall idea of the work conducted in the research. Besides, this chapter

also help in guiding the reader to search for detail information of the methodology used in the research which presented in following Chapter 4 to Chapter 7. The chapter started with presenting the work flow of the research. The research flow chart is shown in this chapter to deliver overview of this research work conducted. After that, the discussion on the variables studied in this research and the process to collect the data which required for analyse in this research was explained. The selected basic concepts used to develop the proposed method in this research are also introduced in this chapter.

In this thesis, chapter 4 serves to explain the basic theories in developing the proposed method. This chapter discusses the equations used to estimate the RAO of floating structure is developed based on the diffraction potential theory. After that, this chapter also explained the concepts used to estimate the interaction effect due to the motion of floating structures.

Chapter 5 explains the development of the proposed method. The first part of Chapter 5 presents the modification on the motion equation which combined the diffraction potential theory explained in Chapter 4 with the linearized drag equation. The purpose of the modification is to improve the accuracy of the method to predict the RAO of floating structure. The second part of Chapter 5 explains the mathematical equations developed to estimate the effect of interaction between floating structures to the RAO of each floating structure based on the concepts presented in Chapter 3 and Chapter 4.

Chapter 6 explains the procedures of the proposed method to estimate the RAO of floating structure when the structure is alone and when the structure is interacting with the nearby floating structure. This chapter also presents the numerical setup in this research to test the proposed method. The numerical setup in this chapter includes the meshing system and the software setup.

Chapter 7 contains the setup of the motion experiment to generate the data used to validate the proposed method. Besides, this chapter presents the selected



conditions of the model scale motion experiments. Other than that, this chapter presents the procedures in processing the experiment data until the RAO tendencies of the selected Round Shape FLNG in each selected conditions is obtained. The data analysis procedures explained in this chapter includes the mathematical model to transfer the measured data from measurement point to FLNG's centre of gravity and the mathematical model used to transform the time domain data to frequency domain.

Chapter 8 presents the RAO tendencies estimated by the proposed method, commercial code and experiments which are then tested in each selected condition. The comparisons were made by compared the RAO of the selected round shape FLNG predicted by proposed method to results predicted by established commercial software and the result from models experiments. The comparisons are showing the validation of the proposed method and the improvement on the proposed method to estimate the RAO of floating structures. The last part of this chapter discusses the influence of second floating structure which arranged nearby the round shape FLNG to the change of RAO tendencies of the round shape FLNG.

In Chapter 9, the conclusion of the thesis explains the overall achievement in this research. The capability of the proposed method is highlighted in this chapter by comparing it to the previous methods. Finally, recommendations are raised up to discuss the future jobs of the research to further improve the proposed method in this research.

## **1.8 Summary**

This chapter introduces the overall target of the research. The background of this research and the objectives aimed to achieve in this research are also presented in this chapter. Besides, the tasks conducted in this research are briefly discussed in this chapter. The detail discussions on the tasks conducted in this research are presented in the remaining chapters of this thesis.

## REFERENCES

- ANSYS. (2012). AQWA User Manual.
- Ali, M. T., Rahaman, M. M., and Anan, T. (2010). A Numerical Study on Hydrodynamic Interaction for a Small 3-D Body Floating Freely Close to a Large 3-D Body in Wave. *Proceedings of The International Conference on Marine Technology*. 11-12 December. Dhaka, Bangladesh, 279-284.
- Arslan, T., Pettersen, B., and Andersson, H. I. (2011). Calculation of the Flow Around Two Interacting Ships. *The IV International Conference on Computational Methods in Marine Engineering*. 28-30 September 2011. Lisbon, Portugal, 254-265.
- Cengel, Y. A., and Cimbala, J. M. (2010). *Fluid Mechanics Fundamentals and Application*. (2 ed.). New York, America: McGraw-Hill.
- Chakrabarti, S. (2000). Hydrodynamic interaction forces on multi-moduled structures. *Ocean Engineering*. 27 (10), 1037-1063.
- Chakrabarti, S. K. (2001). Response due to moored multiple structure interaction. *Marine Structures*. 14 (1-2), 231-258.
- Chapra, S. C., and Canale, R. P. (2010). *Numerical Method for Engineers*. (6<sup>th</sup>-ed.). New York, US: McGraw Hill Higher Education.
- Chatjigeorgiou, I. K., and Mavrakos, S. A. (2010). An analytical approach for the solution of the hydrodynamic diffraction by arrays of elliptical cylinders. *Applied Ocean Research*. 32 (2), 242-251.
- Chatjigeorgiou, I. K. (2011). Three dimensional wave scattering by arrays of elliptical and circular cylinders. *Ocean Engineering*. 38 (13), 1480-1494.
- Chung, J. S. (1994). Added Mass and Damping on an Oscillating Surface-Piercing Circular Column with a Circular Footing. *International Journal of Offshore and Polar Engineering*. 4 (1), 11-17.

- Clauss, G., Lehmann, E. and Østergaard, C. (1992). *Offshore Structures: Volume I: Conceptual Design and Hydromechanics*. London, United Kingdom: Springer-Verlag.
- Clauss, G., Stempinski, F., Dudek, M., and Klein, M. (2009). Water depth influence on wave–structure-interaction. *Ocean Engineering*. 36 (17-18), 1396-1403.
- Cozijn, J. L., and Bunnik, T. H. J. (2004). Coupled Mooring Analysis for a Deep Water Calm Buoy. *23<sup>rd</sup> International Conference on Offshore Mechanics and Arctic Engineering*. 20-25 June. Vancouver, Canada, 1-11.
- Dercksen, A., and Winchers, J. E. W. (1992). A Discrete Element Method on a Chain Turret Tanker Exposed to Survival Condition. *6<sup>th</sup> International Conference on Behaviour of Offshore Structures: BOSS '92*. 7-10 July. London, UK, 1-13.
- Det Norske Veritas, DNV (2011). DNV-RP-H103. Oslo, Norway: Det Norske Veritas.
- Faltinsen, O. M. (1999). *Sea Loads on Ships and Offshore Structures*. Cambridge, United Kingdom: Cambridge University Press.
- Fang, M. C., and Chen, G. R. (2001). The Relative Motion and Wave Elevation Between Two Floating Structures in Waves. *Proceedings of the Eleventh International Offshore and Polar Engineering Conference*. 17–22 June. Stavanger, Norway, 361-368.
- Farid, M. (2014). *Motion of Three Offshore Structures Due to the Effect of Hydrodynamic Interaction*. Bachelor of Engineering Thesis. Universiti Teknologi Malaysia, Skudai, Johor, Malaysia.
- Feng, Q. (2009). Contact dynamics of two floating cable-connected bodies. *Ocean Engineering*. 36 (9–10), 681-690.
- Finnegan, W., and Goggins, J. (2012). Numerical simulation of linear water waves and wave–structure interaction. *Ocean Engineering*. 43 (0), 23-31.
- Fitzgerald, J., and Bergdahl, L. (2007). Including Mooring in the Assessment of a Generic Offshore Wave Energy Converter: A Frequency Domain Approach. *Marine Structures*. 21 (1), 23-46.
- Frigaard, P., Høgedal, M., and Christensen, M. (1993). *Wave Generation Theory*. Aalborg: Hydraulics & Coastal Engineering Laboratory, Department of Civil Engineering, Aalborg University.

- Heavens, O. S., and Ditchburn, R. W. (1991). *Insight into Optics*. Chichester: Wiley & Sons.
- Harnois V., Weller, S. D., Johanning, L., Thies, P. R., Marc, L. B., Dominique, L. R., Veronique, S., and Jeremy, O. (2015). Numerical model validation for mooring systems: Method and application for wave energy converters. *Renewable Energy*. 75, 869-887.
- Herbich, J. B., Ansari, K. A., Chakrabarti, S. K., Demirbilek, Z., Fenton, J. D., Isobe, M., Kim, M. H., Panchang, V. G., Randall, R. E., Triantafyllou, M. S., Webster, W. C. and Xu, B (1999). In *Developments in Offshore Engineering*. Houston, America: Gulf Professional Publishing.
- Heurtier, J. M. (2001). Coupled Dynamic Response of Moored FPSO with Risers. *Proceedings of the Eleventh International Offshore and Polar Engineering Conference*. 17-22 June. Stavanger, Norway, 319 - 326.
- Hong, S. Y., Kim, J. H., Cho, S. K., Choi, Y. R., and Kim, Y. S. (2005). Numerical and experimental study on hydrodynamic interaction of side-by-side moored multiple vessels. *Ocean Engineering*. 32 (7), 783-801.
- International Towing Tank Conference, ITTC (2002). 7.5-02, 07-02.1. Kgs. Lyngby, Denmark: International Towing Tank Conference.
- Inoue, Y., and Ali, M. T. (2003). A Numerical Investigation on the Behaviour of Multiple Floating Bodies of Arbitrary Arrangements in Regular Waves. *Proceedings of The Thirteenth (2003) International Offshore and Polar Engineering Conference*. 25-30 May. Honolulu, Hawaii, USA, 558-562.
- Journee, J. M. J and Massie, W. W. (2001). *Offshore Hydromechanics*. (1<sup>st</sup> ed.). Delf University of Technology.
- Kagawa, Y., Tsuchiya, T., Fujioka, K., and Takeuchi, M. (1999). Discrete Huygens' Model Approach To Sound Wave Propagation—Reverberation In A Room, Sound Source Identification And Tomography In Time Reversal. *Journal of Sound and Vibration*. 225, 61-78.
- Kagemoto, H., and Yue, K. P. (1987). Wave-Induced Motions of Multiple Floating Bodies. *Journal of The Society of Naval Architects of Japan*. 161, 152-158.
- Kashiwagi, M. (2000). Hydrodynamic Interactions Among A Great Number Of Columns Supporting A Very Large Flexible Structure. *Journal of Fluids and Structures*. 14 (7), 1013-1034.

- Kashiwagi M., Takagi, K., Yoshida, N., Murai, M., and Higo, Y (2003). Practical Floating Body Fluid Dynamic Study: Mathematic Calculation Method on Oscillation Motion Problem. Tokyo, Japan: Seizando-Shoten Publishing Co. Ltd. (柏木 正, 高木 建, 吉田 尚史, 村井 基彦, と 肥後 靖。(2003)。実践浮体の流体力学前編-動揺問題の数値計算法。東京都, 日本: 成山堂書店)
- Kashiwagi, M., Endo, K., and Yamaguchi, H. (2005). Wave drift forces and moments on two ships arranged side by side in waves. *Ocean Engineering*. 32 (5-6), 529-555.
- Kashiwagi, M. (2008). 3-D Calculation for Multiple Floating Bodies in Proximity Using Wave Interaction Theory. *International Journal of Offshore and Polar Engineering*. 18 (1), 14–20.
- Kashiwagi, M., and Shi, Q. Q. (2010). Pressure distribution computed by wave-interaction theory for adjacent multiple bodies. *Journal of Hydrodynamics, Ser. B*. 22 (5-1), 526-531.
- Kim, M. S., and Ha, M. K. (2002). Prediction of Motion Responses between Two Offshore Floating Structures in Waves. *Journal of Ship and Ocean Technology*. 6 (3), 13- 25.
- Koo, B. J., and Kim, M.H. (2005). Hydrodynamic interactions and relative motions of two floating platforms with mooring lines in side-by-side offloading operation. *Applied Ocean Research*. 27 (6), 292-310.
- Kvittem, M. I., Bachynski, E. E. and Moan, T. (2012). Effect of Hydrodynamic modeling in Fully Coupled Simulations of a Semi-Submersible Wind Turbine. *Energy Procedia*. 24.
- Lamport, W. B., and Josefsson, P. M. (2008). The Next Generation Of Round Fit-For-Purpose Hull Form FPSOS Offers Advantages Over Traditional Ship-Shaped Hull Forms. *2008 DeepGulf Conference*. 9-11 December. New Orleans, Louisiana, USA, 1-9.
- Liu, S. and Papanikolaou, A. (2012). On Nonlinear Simulation Method and Tools for Evaluating the Performance of Ships and Offshore Structures in Wave. *Journal of Applied mathematics*. 2012 (2012).
- Loken, A. E. (1981). Hydrodynamic interaction between several floating bodies of arbitrary form in waves. *Proc. of Int'l Symposium on Hydrodynamics in Ocean Engineering*. 24-28 August. NIT, Trondheim, Vol. 2,745-779.

- Lu, L., Teng, B., Sun, L., and Chen, B. (2011). Modelling of multi-bodies in close proximity under water waves—Fluid forces on floating bodies. *Ocean Engineering*. 38(13), 1403-1416.
- Mavrakos, S. A. (2004). Hydrodynamic coefficients in heave of two concentric surface-piercing truncated circular cylinders. *Applied Ocean Research*. 26 (3-4), 84-97.
- McIver, P. (2002). Wave interaction with arrays of structures. *Applied Ocean Research*. 24 (3), 121-126.
- Menon, B and V ienneau, J. (1992). SHIPMO Seakeeping Predictions and Correlations. *The Twenty-Third American Towing Tank Conference*. 11-12 June. New Orleans, Louisiana, United States, 55-63.
- Montasir, O. A., Yenduri, A., and Kurian, V. J. (2015). Effect of Mooring Line Configuration on the Dynamic Response of Truss Spar Platforms. *Ocean Engineering*. 96, 161-172.
- Nallayarasu, S., and Prasad, P. S. (2012). Hydrodynamic response of spar and semi-submersible interlinked by a rigid yoke – Part I: regular waves. *Journal of Ships and Offshore Structure*. 7 (3), 297-309.
- Newman, J. N. (1984). An expansion of the oscillatory source potential. *Applied Ocean Research*. 6 (2), 116-117.
- Newman, J. N. (1986). Distributions of sources and normal dipoles over a quadrilateral panel. *Journal of Engineering Mathematics*. 20, 113 – 126.
- Niedziela, J. (2008). *Bessel Functions and Their Applications*. University of Tennessee, Knoxville.
- NMRI, 2016: Model Ship KVLCC2M retrieved March, 2, 2016 from [https://www.nmri.go.jp/institutes/fluid\\_performance\\_evaluation/cfd\\_rd/cfdws05/gothenburg2000/KVLCC/kvlcc\\_g&c.htm](https://www.nmri.go.jp/institutes/fluid_performance_evaluation/cfd_rd/cfdws05/gothenburg2000/KVLCC/kvlcc_g&c.htm).
- Noblesse, F. (1982). The Green function in the theory of radiation and diffraction of regular water waves by a body. *Journal of Engineering Mathematics*. 16 (2), 137-169.
- Ohkusu, M. (1974). Hydrodynamic Force on Multiple Cylinders in Waves. *International Symposium on the Dynamics of Marine Vehicles and Structures in Waves*. 1-5 April. London, UK, 107-112.

- Ohkusu, M. (1998). Validation of Theoretical Methods for Ship Motions by Means of Experiment. *Twenty-Second Symposium on Naval Hydrodynamics*. 9-14 August. Washington, D.C., USA, 341-358.
- Perwitasari, R. N. (2010). *Hydrodynamic Interaction and Mooring Analysis for Offloading between FPSO and LNG Shuttle Tanker*. Master of Engineering Thesis. Norwegian University of Sciences and Technology, Norway.
- Renato, S. T. d. C., Lenzi, A., and Cordioli, J. A. (2015). Time domain representation of frequency-dependent surface impedance using finite impulse response filters in discrete Huygens' modeling. *Applied Acoustics*. 96, 180-190.
- Sannasiraj, S. A., Sundaravadivelu, R., and Sundar, V. (2001). Diffraction–radiation of multiple floating structures in directional waves. *Ocean Engineering*. 28 (2), 201-234.
- Saven Marine, 2016a: Piranema Spirit retrieved March, 2, 2016 from <http://www.sevanmarine.com/projects/floating-production?id=14:piranema-spirit&catid=41>.
- Saven Marine, 2016b: Sevan 1000 FPSO for Goliat retrieved March, 2, 2016 from <http://www.sevanmarine.com/projects/floating-production?id=582:sevan-1000-fpso-for-goliat&catid=41>.
- Shen, Z-r., Ye, H-x, and Wan, D-c. (2014). URANS simulations of ship motion responses in long-crest irregular waves. *Journal of Hydrodynamics*. 26 (3), 436-446.
- Siddorn, P. and Taylor, R. E. (2008). Diffraction and independent radiation by an array of floating cylinders. *Ocean Engineering*. 35 (13), 1289-1303.
- Siow, C. L., Koto, J., Yasukawa, H., Matsuda, A., Terada, D., Soares, C. G., Incecik, A., and Pauzi, M. A. G. (2015). Mooring effect on wave frequency response of round shape FPSO. *Jurnal Teknologi*. 74(5), 59-68.
- SIMMAN, 2014: Geometry and Conditions of KVLCC2 retrieved March, 2, 2016 from <http://simman2014.dk/ship-data/moeri-kvlcc2-tanker/geometry-and-conditions-moeri-kvlcc2-tanker/>.
- Sjöbris, C. (2012). *Decommissioning of SPM buoy*. Master of Science Thesis. Chalmers University of Technology, Gothenburg, Sweden.
- Soares, C. G., Fonseca, N. and Pascoal, R. (2005). Experimental and Numerical Study of the Motions of a Turret Moored FPSO in Waves. *Journal of Offshore Mechanics and Arctic Engineering*. 127(3), 197-204.

- Srinivasan, N., Singh, S., Chakrabarti, S., Sundaravadivelu, R., and Kanotra, R. (2008). Design of Non-Ship-Shape FPSO for Sakhalin-V Deepwater. *SPE Russian Oil and Gas Technical Conference and Exhibition*. 28-30 October. Moscow, Russia.
- Sun, Y. W., and Kang, H. G. (2012). Application of CLEAR-VOF method to wave and flow simulations. *Water Science and Engineering*. 5 (1), 67-78.
- Tajali, Z., and Shafieefar, M. (2011). Hydrodynamic analysis of multi-body floating piers under wave action. *Ocean Engineering*. 38 (17–18), 1925-1933.
- Wang, C. Z., Wu, G. X., and Khoo, B. C. (2011). Fully nonlinear simulation of resonant motion of liquid confined between floating structures. *Computers and Fluids*. 44 (1), 89-101.
- Wang, T. Y., Zhang, J., and Liu, J. K. (2012). Concept Design of a New Non-Ship-Shaped FPSO. *Applied Mechanics and Materials*. 170-173, 2222-2227.
- Yan, S., Ma, Q. W., and Cheng, X. M. (2011). Fully Nonlinear Hydrodynamic Interaction Between Two 3D Floating Structures in Close Proximity. *International Journal of Offshore and Polar Engineering*. 21 (3), 178–185.
- Yılmaz, O. (2004). An iterative procedure for the diffraction of water waves by multiple cylinders. *Ocean Engineering*. 31 (11–12), 1437-1446.
- Yong, L., Baudic, S., Poranski, P., Wichers, J., Stansberg., C. T., and Ormberg, H. (2004). Deepstar Study on Predicting FPSO Responses. *Offshore Technology Conference*. 3-6 May. Houston, Texas, USA, 1-15.
- Yu, R. (1995). *Dynamic Response of a Floating Dock in Regular and Irregular Waves*. Master of Engineering Thesis. Memorial University of Newfoundland, Newfoundland, Canada.
- Yus-Farid, M. (2015). *Numerical Simulation Dynamic Characteristic of X Round-Shaped FPSO*. Bachelor of Engineering Thesis. Universiti Teknologi Malaysia, Skudai, Johor, Malaysia.
- Zhao, W. H., Yang, J. M., Hu, Z. Q., and Wei, Y. F. (2011). Recent developments on the hydrodynamics of floating liquid natural gas (FLNG). *Ocean Engineering*. 38 (14–15), 1555-1567.
- Zhao, W. H., Yang, J. M. and Hu, Z. Q. (2012). Hydrodynamic interaction between FLNG vessel and LNG carrier in side by side configuration. *Journal of Hydrodynamics, Ser. B*. 24 (5), 648-657.



- Zhou, X. C., Wang, D. J., and Chwang, A. T. (1996). Hydrodynamic Interaction between Two Vertical Cylinders in Water Waves. *Applied Mathematics and Mechanics*. 18 (10), 927-940.
- Zhu, H. R., Zhu, R. C., and Miao, G. P. (2008). A Time Domain Investigation on the Hydrodynamic Resonance Phenomena of 3-D Multiple Floating Structures. *Journal of Hydrodynamics, Ser. B*. 20 (5), 611-616.
- Zhu, R. C., Miao, G. P., and Zhu, H. R. (2006). The radiation problem of multiple structures with small gaps in between. *Journal of Hydrodynamics, Ser. B*. 18 (5), 520-526.