

MODELLING AND CONTROL OF SEMI ACTIVE SUSPENSION SYSTEM
INCORPORATING MAGNETORHEOLOGICAL DAMPER FOR GENERIC
VEHICLE

SYABILLAH BIN SULAIMAN

UNIVERSITI TEKNOLOGI MALAYSIA

MODELLING AND CONTROL OF SEMI ACTIVE SUSPENSION SYSTEM
INCORPORATING MAGNETORHEOLOGICAL DAMPER FOR GENERIC
VEHICLE

SYABILLAH BIN SULAIMAN

A thesis submitted in fulfilment of the
requirements for the award of the degree of
Doctor of Philosophy (Mechanical Engineering)

Faculty of Mechanical Engineering
Universiti Teknologi Malaysia

JULY 2017

All praises to Allah the Almighty
To my parents, Sulaiman Mamat and Zainuyah Abbas,
my wife Siti Zubaidah, my daughter Siti Aisyah Humaira and my son Safwan Sadiq

ACKNOWLEDGEMENT

I am greatly indebted to Allah s.w.t. on his blessing for making this study successful. In preparing this thesis, I was in contact with many people, researchers, academicians, and practitioners. They have contributed towards my understanding and thoughts. In particular, I wish to express my sincere appreciation to my supervisors, Assoc. Prof. Dr. Pakharuddin Mohd. Samin, Prof. Dr. Hishammuddin Jamaluddin, Prof. Ir. Dr. Roslan Abd. Rahman and DDr. Saiful Anuar Abu Bakar for their guidance, advice and support throughout the process for completing this project. Without their continued support and interest, this thesis would not been the same as presented here.

I am also thankful to Universiti Teknologi Malaysia (UTM), Zamalah Scholarship, Ministry of Higher Education (MoHE) and Working Student Scheme UTM (SPB-Vote No. R.J130000.7824.4F94 and SPB-Vote No. Q.J130000.2524.09H92) for funding my Ph.D study. My sincere appreciation also extends to all my colleagues, Automotive Laboratory staffs, Faculty of Mechanical Engineering staffs and others who have provided assistance at various occasions. Their views and tips are useful indeed.

Finally, I like to thank to my beloved parents, Sulaiman Mamat and Zainuyah Abbas, and my parent in-laws, Mohd. Tumari and Mariam Ehsan and to all my brothers, Syaifullah, Syahmirullah and Syahirullah. Last but not least, to my beloved wife Siti Zubaidah, my daughter Siti Aisyah Humaira and my son Safwan Sadiq, for always give me support and passion to finish my study.

ABSTRACT

This study presents the simulation and experimental works for Magnetorheological (MR) semi active suspension system in generic vehicles. In simulation study, a seven degree of freedom (7-DOF) vehicle model was developed using MATLAB-Simulink and verified using TruckSim. A semi active controller with road friendliness oriented was developed to reduce vehicle tire force; besides, ride comfort becomes the secondary objective of the proposed controller. The proposed semi active controllers which are Tire Force Control (TFC), Aided Tire Force Control (ATFC) and ground Semi Active Damping Force Estimator (gSADE) and simulation results were compared with existing controller known as Groundhook (GRD) and passive suspension system. Then, these controllers were applied experimentally using generic quarter vehicle model. The overall results showed gSADE is the most effective controller in reducing vehicle tire force and improving ride comfort. Both reduction of gSADE vehicle tire force and ride comfort compared with passive system are similar about 14.2%. In the simulation study, ideal and real cases (using MR damper model) were conducted. In the ideal case, two bump profiles were used to test the effectiveness of the controller and the results showed gSADE recorded the highest improvement of the tire force followed by ATFC, TFC, GRD and passive system. The maximum improvement of gSADE control compared with passive system is about 21% in reduction of tire force and 22% in improving ride comfort. A similar test was conducted using MR damper model, and the overall result showed gSADE recorded almost similar improvement of the tire force compared with TFC. The maximum reduction of vehicle tire force and improvement of ride comfort using gSADE control compared with passive are 15% and 30%, respectively.

ABSTRAK

Kajian ini membentangkan kerja simulasi dan eksperimen bagi Magnetreologi (MR) suspensi separa sistem aktif dalam kenderaan umum. Dalam kajian simulasi, sebuah kenderaan dengan tujuh darjah kebebasan (7-DK) dibangunkan dengan menggunakan MATLAB-Simulink dan disahkan menggunakan TruckSim. Kawalan separa aktif dengan berorientasikan mesra jalanraya dibangunkan untuk mengurangkan daya tayar kenderaan; selain itu, keselesaan perjalanan dijadikan objektif sekunder. Pengawal separa aktif yang dicadangkan ialah *Tire Force Control* (TFC), *Aided Tire Force Control* (ATFC) dan *ground Semi Active Damping Force Estimator* (gSADE) dan hasil simulasi dibandingkan dengan pengawal sedia ada yang dikenali sebagai *Groundhook* (GRD) dan sistem suspensi pasif. Kemudian semua pengawal tersebut digunakan dalam eksperimen menggunakan model kenderaan suku-umum berskala. Keputusan keseluruhan menunjukkan pengawal gSADE paling berkesan dalam mengurangkan daya tayar kenderaan dan meningkatkan keselesaan tunggangan. Kedua-dua pengurangan kawalan gSADE iaitu daya tayar kenderaan dan keselesaan tunggangan berbanding dengan sistem pasif adalah sama iaitu 14.2%. Dalam kajian simulasi, kes ideal dan sebenar (menggunakan model peredam MR) telah dijalankan. Dalam kes ideal, dua profil bonggol telah digunakan untuk menguji keberkesanan pengawal dan keputusan menunjukkan gSADE telah mencatat peningkatan terhadap pengurangan daya tayar yang paling tinggi diikuti oleh ATFC, TFC, GRD dan sistem pasif. Peningkatan maksima kawalan gSADE berbanding dengan sistem pasif adalah kira-kira 21% dalam pengurangan daya tayar dan 22% peningkatan keselesaan tunggangan. Ujian yang sama telah dijalankan dengan menggunakan model peredam MR, dan keputusan keseluruhan menunjukkan gSADE mencatat peningkatan terhadap pengurangan daya tayar yang hampir sama dengan TFC. Pengurangan maksima daya tayar kenderaan dan peningkatan keselesaan tunggangan menggunakan kawalan gSADE berbanding pasif adalah masing-masing 15% dan 30%.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENTS	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xii
	LIST OF FIGURES	xiii
	LIST OF SYMBOLS	xix
	LIST OF ABBREVIATIONS	xxv
	LIST OF APPENDICES	xxvii
1	INTRODUCTION	1
	1.1 Background of Problem	1
	1.2 Statement of Problem	3
	1.3 Objective of the Study	4
	1.4 Scope of the Study	4
	1.5 Research Methodology	5
	1.6 Significant of Research	8
	1.7 Contribution of Research	8
	1.8 Organization of the Thesis	9
2	LITERATURE REVIEW	11
	2.1 Introduction	11

2.2	Types of Vehicle Suspension System	13
2.2.1	Passive Suspension	13
2.2.2	Semi-Active Suspension	15
2.2.3	Active Suspension	16
2.3	Performance Criteria of Vehicle Suspension System	17
2.3.1	Road Friendliness	17
2.3.2	Ride Quality	18
2.4	Vehicle Model	19
2.4.1	Two Degree of Freedom Quarter Vehicle Model	20
2.4.2	Seven Degree of Freedom Full Vehicle Model	20
2.4.3	Summary of Heavy Vehicle Model	21
2.5	Semi Active Suspension Control Algorithm	22
2.5.1	Skyhook Control	22
2.5.2	Groundhook Control	23
2.5.3	Hybrid Skyhook-Groundhook Control	24
2.5.4	Modified Skyhook Control	26
2.5.5	Modified Groundhook Control	26
2.5.6	Modified Hybrid Control	27
2.5.7	H_{∞} Control	27
2.5.8	Fuzzy Control	28
2.5.9	Skyhook Fuzzy Control	28
2.5.10	Genetic Algorithm Aided Control	29
2.5.11	Neural Network Control	30
2.5.12	Acceleration Driven Damper Control (ADD)	31
2.5.13	Hybrid Stability Augmentation System-Force Control (HSAS-FC)	32
2.5.14	Semi Active Damping Force Estimator (SADE)	32
2.6	Rheological Fluid	33
2.6.1	Electrorheological Fluid and Damper	34
2.6.2	Magnetorheological Fluid and Damper	36
2.6.3	ER and MR Modeling	39
2.6.3.1	Bingham Model	39
2.6.3.2	Gamota-Filisko Model	40

	2.6.3.3	Bouc-Wen Model	41
	2.6.3.4	Modified Bouc-Wen Model	42
2.7		Summary	44
2.8		Semi-Active Suspension Technology in Automotive Industries	48
3		VEHICLE RIDE MODELLING AND VERIFICATION	50
3.1		Introduction	50
3.2		Assumption and Limitation	52
3.3		Development of Equation of Motion	53
3.4		Validation of Passive Vehicle Model	56
	3.4.1	Vehicle Parameters	56
	3.4.2	Model Description and Simulation in MATLAB-Simulink	57
	3.4.3	Model Description and Simulation in TruckSim	58
3.5		Verification of Full Vehicle Model	59
	3.5.1	Vehicle Ride Test using Pitch Mode Bump	60
		3.5.1.1 Test at 40 km/h of Vehicle Speed	61
		3.5.1.2 Test at 50 km/h of Vehicle Speed	63
		3.5.1.3 Test at 60 km/h of Vehicle Speed	64
	3.5.2	Vehicle Ride Test using Roll Mode (Left/Right) Bump	65
		3.5.2.1 Test at 40 km/h of Vehicle Speed	67
		3.5.2.2 Test at 50 km/h of Vehicle Speed	68
		3.5.2.3 Test at 60 km/h of Vehicle Speed	70
3.6		Validation of Quarter Vehicle Model	71
	3.6.1	Quarter Vehicle Modelling	71
	3.6.2	Experimental Setup	73
	3.6.3	Quarter Vehicle Ride Performance	76
3.7		Summary	77

4	CONTROL STRATEGY OF A SEMI ACTIVE SUSPENSION SYSTEM	79
4.1	Introduction	79
4.2	Proposed Semi Active Suspension Control	80
4.2.1	Tire Force Control	81
4.2.2	Aided Tire Force Control	82
4.2.3	Ground Semi Active Damping Force Estimator	84
4.3	Performance Evaluation of Vehicle with Semi Active Suspension System	85
4.4	Development a Scaled Model of Quarter Vehicle Test Rig	86
4.4.1	Components of the Quarter Vehicle Test Rig	88
4.4.1.1	Shaker Actuation	88
4.4.1.2	Magnetorheological Damper	89
4.4.1.3	Spring	91
4.4.1.4	Sprung and Unsprung Masses	92
4.4.2	Arduino ® Mega Main Board and Sensors Connection	94
4.4.3	Development of Quarter Vehicle with Semi Active Suspension System	96
4.5	Determination of Controller Coefficients of Quarter Vehicle Test Rig	99
4.6	Performance of Semi Active Suspension System	101
4.7	Summary	106
5	PERFORMANCE OF A SEMI ACTIVE SUSPENSION CONTROL IN FULL VEHICLE	108
5.1	Introduction	108
5.2	Full Vehicle Analysis with Semi Active Suspension Control	109
5.2.1	Road Profile	109
5.2.2	Determination of Proposed and Existing Controller Coefficients	113
5.2.3	Controller Performance	116

5.3	Summary	136
6	PERFORMANCE OF A SEMI ACTIVE SUSPENSION CONTROL STRATEGY USING MAGNETORHEOLOGICAL DAMPER	138
6.1	Introduction	138
6.2	Modelling of Full Vehicle Analysis with Semi Active Suspension Control using Magnetorheological Damper	138
6.3	Magnetorheological Damper and Voltage Generator Model	140
6.3.1	Parametric Magnetorheological Damper Model for Full Vehicle Model	140
6.3.2	Force Tracking Control	141
6.4	The Performance of Semi Active Suspension System using Magnetorheological Damper	144
6.5	Summary	156
7	CONCLUSION	157
7.1	Conclusion	157
7.2	Recommendation for Future Works	159
	REFERENCES	160
	Appendices A - I	169 - 241

LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	The summarized literature review of study on heavy vehicle model	22
2.2	Comparison between MR fluid and ER fluid (Mazlan, 2008; Samin, 2010)	38
2.3	The summarized literature review of the semi-active suspension control strategy	44
3.1	Parameter of full vehicle model	57
3.2	Parameter of quarter vehicle model	72
3.3	Frequency on the shaker	73
4.1	Sprung mass	93
4.2	Unsprung mass	94
4.3	RMS of sprung acceleration	105
4.4	RMS of quarter vehicle tire force	105
4.5	RMS of current generated	106
5.1	ISO 8608:1995 values of $G_d (no)$ (Agostinacchio <i>et al.</i> , 2014)	112
5.2	RMS full vehicle model at square bump	134
5.3	RMS full vehicle model at random excitation	135
6.1	RMS of voltage generated at square bump	152
6.2	RMS of voltage generated at random excitation	153
6.3	RMS of full vehicle with MR damper model at square bump	154
6.4	RMS of full vehicle with MR damper model at random excitation	155

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Research procedure	7
2.1	Classical scheme of a wheel-to-chassis suspension in a vehicle (Savaresi <i>et al.</i> , 2010)	12
2.2	Passive suspension model	14
2.3	Semi active suspension model	15
2.4	Active suspension model	16
2.5	Skyhook configurations in 2 DOF system	23
2.6	Groundhook configurations in 2 DOF system	24
2.7	Hybrid Skyhook-Groundhook configurations in 2 DOF system	25
2.8	Fuzzy logic control with aided genetic algorithm (Zhang <i>et al.</i> , 2010)	30
2.9	Parallel plate model	34
2.10	Damping characteristic of ER fluid (Savaresi <i>et al.</i> , 2010)	35
2.11	Schematic diagram of ER damper (Savaresi <i>et al.</i> , 2010)	35
2.12	Damping characteristic of MR fluid (Savaresi <i>et al.</i> , 2010)	36
2.13	Schematic diagram of MR damper (Savaresi <i>et al.</i> , 2010)	37
2.14	Distribution of magnetic field lines: (a) $I = 0$ A, (b) $I = 0.6$ A (Sapinski and Filus, 2003)	37
2.15	Schematic of the arrangement of magnetic particles (a) under normal condition without magnetic field, (b) when magnetic field is applied (Mazlan, 2008)	39
2.16	Mechanical model of a Bingham model (Sapinski and Filus, 2003)	40
2.17	Mechanical model of an Extension Bingham model (Sapinski and Filus, 2003)	40

2.18	Mechanical model of a Bouc-Wen model (Spencer <i>et al.</i> , 1997)	42
2.19	Mechanical model of a Modified Bouc-Wen model (Spencer <i>et al.</i> , 1997)	43
2.20	MagneRide principle of operation (Dzierzek, 2008)	49
3.1	Seven degree of freedom of vehicle ride model	54
3.2	MATLAB-Simulink block diagram of vehicle in ride motion	58
3.3	TruckSim user interface	59
3.4	Pitch mode bump	60
3.5	Vehicle responses at 40 km/h for pitch bump; (a) Sprung acceleration, (b) Sprung Displacement, (c) Pitch angle, (d) Suspension deflection, (e) Tire force	62
3.6	Vehicle responses at 50 km/h for pitch bump; (a) Sprung acceleration, (b) Sprung Displacement, (c) Pitch angle, (d) Suspension deflection, (e) Tire force	64
3.7	Vehicle responses at 60 km/h for pitch bump; (a) Sprung acceleration, (b) Sprung Displacement, (c) Pitch angle, (d) Suspension deflection, (e) Tire force	65
3.8	Roll Mode (Left and Right) Bump	66
3.9	Vehicle responses at 40 km/h for roll bump; (a) Sprung acceleration, (b) Sprung Displacement, (c) Pitch angle, (d) Roll angle, (e) Suspension deflection, (f) Tire force	68
3.10	Vehicle responses at 50 km/h for roll bump; (a) Sprung acceleration, (b) Sprung Displacement, (c) Pitch angle, (d) Roll angle, (e) Suspension deflection, (f) Tire force	69
3.11	Vehicle responses at 60 km/h for roll bump; (a) Sprung acceleration, (b) Sprung Displacement, (c) Pitch angle, (d) Roll angle, (e) Suspension deflection, (f) Tire force	70
3.12	Quarter vehicle model in MATLAB-Simulink	72
3.13	Quarter vehicle test rig	73
3.14	Instrumentation	74
3.15	Sensor and channel setup in Dewesoft®	75

3.16	Sensor reading in Dewesoft®	75
3.17	Simulation and experimental result at 2.9 Hz	76
3.18	Simulation and experimental result at 3.6 Hz	76
3.19	Simulation and experimental result at 4.2 Hz	77
4.1	ATFC control decision	83
4.2	Control structures between SADE and gSADE control; (a) SADE control, (b) gSADE control	85
4.3	Scaled of quarter vehicle model test rig	87
4.4	Tire and the shaker actuator contact	88
4.5	MR damper RD-1005-3	89
4.6	Modified Bouc-Wen model in MATLAB-Simulink	90
4.7	MR damper RD-1005-3 force versus velocity relationship	90
4.8	MR damper RD-1005-3 force versus displacement relationship	91
4.9	Suspension spring	92
4.10	Determination of spring stiffness	92
4.11	Sprung mass	93
4.12	Unsprung mass	93
4.13	ADXL335 accelerometer on sprung mass	94
4.14	Mounted location of the force sensor	95
4.15	Arduino® Mega board connections	96
4.16	Schematic diagram of the semi active suspension system	97
4.17	MATLAB-Simulink interface integrated with Arduino® main board	98
4.18	Current generator box (WonderBox®)	98
4.19	Quarter vehicle model optimal selection of damping coefficient, C_{grd}	99
4.20	Quarter vehicle model optimal selection of ATFC gain, G	100
4.21	Quarter vehicle model optimal selection of gSADE controller gain, G_{gSADE}	101
4.22	Quarter vehicle ride index at 5.1 Hz	102
4.23	Quarter vehicle DLSF at 5.1 Hz	103
5.1	Ideal semi active suspension system	109
5.2	Square bump input	110

5.3	Arrangement of square bump (a) top view, (b) side view, (c) vehicle motion	111
5.4	Random road excitation	113
5.5	Three dimensional arrangement of random excitation road	113
5.6	Full vehicle model optimal selection of damping coefficient, C_{grd}	114
5.7	Full vehicle model optimal selection of ATFC gain, G	115
5.8	Full vehicle model optimal selection of gSADE controller gain, G_{gSADE}	116
5.9	Sprung acceleration of full vehicle model at 0.1 meter bump	118
5.10	Sprung acceleration of full vehicle model at random excitation	118
5.11	Tire force (front left, FL) of full vehicle model at 0.1 meter bump	119
5.12	Tire force (front right, FR) of full vehicle model at 0.1 meter bump	120
5.13	Tire force (rear left, RL) of full vehicle model at 0.1 meter bump	120
5.14	Tire force (rear right, RR) of full vehicle model at 0.1 meter bump	120
5.15	Tire force (front left, FL) of full vehicle model at random excitation	121
5.16	Tire force (front right, FR) of full vehicle model at random excitation	121
5.17	Tire force (rear left, RL) of full vehicle model at random excitation	121
5.18	Tire force (rear right, RR) of full vehicle model at random excitation	122
5.19	Roll angle of full vehicle model at 0.1 meter bump	123
5.20	Roll angle of full vehicle model at random excitation	123
5.21	Pitch of full vehicle model at 0.1 meter bump	124
5.22	Pitch angle of full vehicle model at random excitation	124

5.23	Full vehicle model ride index at 0.1 meter bump	125
5.24	Full vehicle model ride index at random excitation	125
5.25	Full vehicle model DLSF (front left, FL) at 0.1 meter bump	126
5.26	Full vehicle model DLSF (front right, FR) at 0.1 meter bump	127
5.27	Full vehicle model DLSF (rear left, RL) at 0.1 meter bump	127
5.28	Full vehicle model DLSF (rear right, RR) at 0.1 meter bump	127
5.29	Full vehicle model DLSF (front left, FL) at 0.1 random excitation	128
5.30	Full vehicle model DLSF (front right, FR) at 0.1 random excitation	128
5.31	Full vehicle model DLSF (rear left, RL) at 0.1 random excitation	128
5.32	Full vehicle model DLSF (rear right, RR) at 0.1 random excitation	129
5.33	Periodogram for vehicle body vertical acceleration at 0.1 meter bump	131
5.34	Periodogram for vehicle body vertical acceleration at random excitation road	132
6.1	Semi active suspension system using MR damper block diagram	139
6.2	Schematic of MR Damper (Dyke et al., 1996)	140
6.3	Modified RD-1005 MR damper behaviors for heavy vehicle	141
6.4	Force tracking model in MATLAB-Simulink block diagram	142
6.5	Force tracking control of MR damper for sinusoidal target force	143
6.6	Force tracking control of MR damper for square target force	143
6.7	Force tracking control of MR damper for sawtooth target force	143

6.8	Full vehicle with MR damper model ride index at 0.1 meter bump	145
6.9	Full vehicle with MR damper model ride index at random excitation	145
6.10	Full vehicle with MR damper model DLSF (front left, FL) at 0.1 meter bump	146
6.11	Full vehicle with MR damper model DLSF (front right, FR) at 0.1 meter bump	146
6.12	Full vehicle with MR damper model DLSF (rear left, RL) at 0.1 meter bump	147
6.13	Full vehicle with MR damper model DLSF (rear right, RR) at 0.1 meter bump	147
6.14	Full vehicle with MR damper model DLSF (front left, FL) at random excitation road	147
6.15	Full vehicle with MR damper model DLSF (front right, FR) at random excitation road	148
6.16	Full vehicle with MR damper model DLSF (rear left, RL) at random excitation road	148
6.17	Full vehicle with MR damper model DLSF (rear right, RR) at random excitation road	148
6.18	Periodogram for vehicle body vertical acceleration at 0.1 meter bump with MR damper	150
6.19	Periodogram for vehicle body vertical acceleration at random excitation with MR damper	151

LIST OF SYMBOLS

A	-	Surface area [m ²]
A_{fSADE}	-	fSADE gain
A_{SADE}	-	SADE gain
a	-	Length of vehicle from the center of gravity to the front end
B	-	Sampling interval
b	-	Length of vehicle from the center of gravity to the rear end
c	-	Length of the vehicle from the center of gravity to the right end
c_0	-	Viscous damping
c_{0a}	-	Modified Bouc-Wen damping constant
c_{0b}	-	Modified Bouc-Wen damping constant
c_1	-	Damping coefficient
c_{1a}	-	Modified Bouc-Wen damping constant
c_{1b}	-	Modified Bouc-Wen damping constant
c_{ADD}	-	Acceleration Driven Damper damping coefficient
$c_{d,ij}$	-	Damping coefficient at; i for front or rear and j for left or right
c_{grd}	-	Groundhook damping coefficient
c_{gSADE}	-	gSADE damping coefficient
c_{mg}	-	Modified Groundhook damping coefficient
c_{ms}	-	Modified Skyhook damping coefficient
c_s	-	Damping coefficient
c_{SADE}	-	SADE damping coefficient
c_{sky}	-	Skyhook damping coefficient

c_{s_fuzzy}	- fSADE damping coefficient
c_{TFC}	- Tire Force Control damping coefficient
d	- Length of the vehicle from the center of gravity to the left end
F	- Force [N]
F_{ADD}	- Acceleration Driven Damper damping force
F_{ATFC}	- Aided Tire Force Control damping force
F_{BM}	- Bingham model force
F_{BW}	- Bouc-Wen model force
F_{dg}	- Modified Groundhook damping force
F_{dh}	- Modified Hybrid Skyhook-Groundhook damping force
F_{ds}	- Modified Skyhook damping force
F_{dt}	- Damper tire force
F_{fSADE}	- fSADE damping force
F_{GFM}	- Gamota-Filisko model force
F_{GRD}	- Groundhook damping force
F_{gSADE}	- gSADE damping force
F_{hybrid}	- Hybrid Skyhook-Groundhook damping force
F_L	- Vertical load
F_{MBW}	- Modified Bouc-Wen model force
$F_{S,FL}$	- Sprung front left force
$F_{S,FR}$	- Sprung front right force
$F_{S,ij}$	- Suspension sprung force at; i for front or rear and j for left or right
$F_{S,RL}$	- Sprung rear left force
$F_{S,RR}$	- Sprung rear right force
F_{SADE}	- SADE damping force
F_{sd}	- Suspension damper force

- $F_{sd,ij}$ - Suspension damper force at; i for front or rear and j for left or right
- F_{SKY} - Skyhook damping force
- F_{ss} - Suspension spring force
- $F_{ss,ij}$ - Suspension spring force at; i for front or rear and j for left or right
- $F_{t,ij}$ - Dynamic tire force at; i for front or rear and j for left or right
- F_{TFC} - Tire Force Control damping force
- $F_{ts,ij}$ - Vehicle tire stiffness at; i for front or rear and j for left or right
- F_v - Force from the MR damper characteristic at specific relative velocity
- $F_{v,max}$ - Maximum force at 5 V
- $F_{v,min}$ - Minimum force at 0 V
- f - Semi active suspension damping force
- f_0 - Force due to presence of accumulator
- f_a - Active suspension damping force
- f_c - Coulomb friction force
- G - Aided Tire Force Control gain
- G_d - Road roughness in term of power spectrum density
- g - Gravity acceleration [m/s^2]
- g_{SADE} - gSADE gain
- h - Distance between fixed and moving plate [m]
- h_s - The centre of gravity of sprung mass
- I - Desired current [Amp]
- I_i - Current from 0 to 2 Amp
- I_{max} - Maximum current ,2 Amp
- I_{min} - Minimum current 2, Amp
- J_x - Moment of inertia about x -axis
- J_y - Moment of inertia about y -axis

k	- ISO road roughness classification
k_0	- Linear spring stiffness
k_1	- Spring stiffness
k_s	- Suspension spring stiffness
$k_{s,ij}$	- Spring stiffness at; i for front or rear and j for left or right
k_t	- Tire stiffness
L	- Length of road profile
m_1	- Sprung mass
m_2	- Unsprung mass
m_s	- Sprung mass
$m_{u,FL}$	- Unsprung mass at front left
$m_{u,FR}$	- Unsprung mass at front right
$m_{u,RL}$	- Unsprung mass at rear left
$m_{u,RR}$	- Unsprung mass at rear right
$m_{u,ij}$	- Unsprung mass at; i for front or rear and j for left or right
n	- Bouc-Wen and modified Bouc-Wen hysteresis parameter
n_{\max}	- Maximum theoretical sampling spatial frequency
n_s	- Spatial frequency
n_0	- 0.1 cycle/meter
n_i	- Generic spatial frequency
T	- Time [s]
v	- Desired Voltage
v_i	- Voltage from 0, 1, 2, 3, 4, 5 V
v_{\max}	- Maximum voltage, 5 V
v_{\min}	- Minimum voltage, 0 V
v_p	- Plate velocity [m/s]
x	- Abscissa variable
x_0	- Initial displacement

x_1	- Sprung mass displacement
\dot{x}_1	- Sprung mass velocity
\ddot{x}_1	- Sprung mass acceleration
x_2	- Unsprung mass displacement
\dot{x}_2	- Unsprung mass velocity
\ddot{x}_2	- Unsprung mass acceleration
\dot{x}_{12}	- Relative velocity between sprung and unsprung masses
z	- Modified Bouc-Wen hysteretic component
z_0	- Road elevation
\dot{z}_1	- Sprung mass velocity
\ddot{z}_1	- Sprung mass acceleration
\dot{z}_2	- Unsprung mass velocity
\ddot{z}_2	- Unsprung mass acceleration
\dot{z}_{12}	- Relative velocity between sprung and unsprung masses
$z_{r,ij}$	- Road elevation at; i for front or rear and j for left or right
$\ddot{z}_{s,eff}$	- Effective values of ride index performance
\ddot{z}_s	- Sprung acceleration
$z_{s,ij}$	- Sprung vertical displacement at; i for front or rear and j for left or right
$\dot{z}_{s,ij}$	- Sprung vertical Velocity at; i for front or rear and j for left or right
$z_{u,ij}$	- Unsprung vertical displacement at; i for front or rear and j for left or right
$\dot{z}_{u,ij}$	- Unsprung vertical velocity at; i for front or rear and j for left or right
$\ddot{z}_{u,ij}$	- Unsprung vertical acceleration at; i for front or rear and j for left or right
α	- Bouc-Wen and modified Bouc-Wen hysteresis parameter
α_a	- Modified Bouc-Wen damping constant

α_b	-	Modified Bouc-Wen damping constant
α_{ms}	-	Modified Skyhook to passive combined ratio
β	-	Bouc-Wen and modified Bouc-Wen hysteresis parameter
β_{mg}	-	Modified Groundhook to passive combined ratio
φ_i	-	Random phase angle
$\ddot{\varphi}$	-	Roll acceleration
γ	-	Bouc-Wen and modified Bouc-Wen hysteresis parameter
η	-	Modified Bouc-Wen constant
μ	-	Hybrid Skyhook-Groundhook combined ratio
μ_{ATFC}	-	Aided Tire Force Control combined ratio
μ_m	-	Modified Hybrid Skyhook-Groundhook combined ratio
δ	-	Bouc-Wen and modified Bouc-Wen hysteresis parameter
$\ddot{\theta}$	-	Pitch acceleration

LIST OF ABBREVIATIONS

ADD	- Acceleration Driven Damper
ATFC	- Aided Tire Force Control
CDC	- Continuous Damping Control
ConF	- Control Forces
CPU	- Computer Processing Unit
DAQ	- Data Acquisition System
DLC	- Dynamic Load Coefficient
DLSF	- Dynamic Load Stress Factor
DOF	- Degree-of-Freedom
ER	- Electrorheological
FLO	- Fuzzy Logical Controller
fSADE	- Fuzzy Semi Active Damping Force Estimator
GRD	- Groundhook
gSADE	- Ground Semi Active Damping Force Estimator
H_{∞}	- H-Infinity
HGV	- Heavy Goods Vehicles
HSAS-FC	- Hybrid Stability Augmentation System-Force Control
ISO	- International Organization for Standardization
MHSG	- Hybrid Skyhook-Groundhook
MR	- Magnetorheological
MRD	- Magnetorheological Damper
PSD	- Power Spectrum Density
PWM	- Pulse Width Modulation
RMS	- Root-Mean-Square
SADE	- Semi Active Damping Force Estimator
SKY	- Skyhook
TFC	- Tire Force Control

USB - Universal Serial Bus

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	List of Publications	169
B	Simulation Graphs	172
C	Experiment Graphs	184
D	Data and Specification of Arduino Mega 2560	208
E	Data and Specification of ADXL335 Accelerometer	211
F	Data and Specification of KISTLER Accelerometer	228
G	Data and Specification of Force Sensor	232
H	Data and Specification of Current Generator	236
I	Data and Specifications of Magnetorheological Damper MR-1005-3	239

CHAPTER 1

INTRODUCTION

1.1 Background of Problem

A vehicle that transports goods needs high vehicle stability, ride comfort and road friendliness. Some of this vehicle is regularly driven on different terrains, and thus the stability of the vehicle needs to be studied to improve the vehicle ride quality and road friendliness. Generally, suspension is one of the important systems that can be improved to achieve good ride comfort and road friendliness (Woodrooffe, 1995).

A vehicle suspension system is a mechanism that separates the vehicle body (sprung mass) from vehicle wheels (unsprung mass). Ride, handling and safety are criteria that always been considered in designing a vehicle suspension. There are three types of common suspension being used in the automotive industry namely passive, semi active and active suspensions. Many automotive researchers have studied the benefits of passive suspension system intensively compared to active and semi active suspension. Active suspension control systems rely entirely on external power to supply forces to operate the actuators. Although an active suspension provides better performance than semi active suspensions, it has major drawbacks such as the need for a large external power source, increased complexity and cost and decreased reliability. Therefore, research on semi active suspension control systems has grown extensively because a semi active suspension offers both the reliability of a passive system and the versatility of an active control system; its performance lies between active and passive suspension system (Hedrick and Yi, 1991; Yi *et al.*,1992).

In recent years, magnetorheological (MR) fluids have attracted researchers' interest due to their wide range of use as vibration dampers for vehicle suspension systems (Bakar *et al.*, 2011). Their damping capabilities can be adjusted very quickly by applying suitable electric or magnetic fields (Stanway *et al.*, 1996; Bakar *et al.*, 2011). MR fluid dampers enable vibration control of semi active suspension systems with reaction times in the range of milliseconds; in addition, it requires low power consumption. Due to their rather simple mechanical design which involves only few moving parts thus ensure high technical reliability and exhibit almost no wear (Butz and Stryk, 2002). These fluids can vary their viscosity by varying the magnetic field across the fluid. The fluid contains iron particles which are aligned by magnetic field (Spencer *et al.*, 1997) and this alignment makes the oil stiffer and rigid. The fluid responds very quickly and the alignment can be done within 6.1 ms (millisecond) (Symans and Constantinou, 1999). The MR damper is seen as a safe damper, because of its action when power loss occurs; after semi active suspension loss its power it will revert to a passive damper.

Semi active suspension serves the same purpose as passive suspension; the only difference is semi active suspension damping forces can be controlled. The idea of semi active suspension has been introduced by Karnopp *et al.* (1974) and the controller initially proposed is Skyhook (SKY) control for ride control. Novak and Valasek, (1996) have proposed modified skyhook known as Groundhook (GRD) control with the purpose of reducing vehicle tire force. Most of the important and basic issue to be studied in a semi active suspension system is ride comfort and mostly in passenger vehicle. One of the widely used comforts oriented controller which has been successfully applied in semi active suspension is Skyhook control. Other numerous approaches have also been developed such as optimal control (Savaresi *et al.*, 2005), clipped optimal control (Canale *et al.*, 2006; Giorgetti *et al.*, 2006) and H^∞ control (Du *et al.*, 2005).

For heavy vehicle, aiming to reduce vehicle tire force is challenging. Cole and Cebon, (1989), and Cole *et al.* (2000) did extensive work on semi active suspension for heavy vehicle, both theoretical and experimental. Groundhook control was also investigated by Valasek *et al.* (1997) and shown the reduction of heavy vehicle tire

force (Novak and Valasek, 1996; Savaresi *et al.*, 2005). In theory, semi active suspension with GRD controller can control tire velocity by installing fictitious damper on the vehicle ground; and it shows that the proposed controller is able to reduced vehicle tire force.

1.2 Statement of Problem

The designer of heavy goods vehicles (HGVs), today are more aware of the needs to design suspension system that satisfies an additional criterion, namely road friendliness that reduces road damage caused by heavy goods vehicles. The forces of interaction between the tires and the road surface induce stresses on the pavement, which ultimately will lead to road failure (Tsampardoukas *et al.*, 2008; Yarmohamadi and Berbyuk, 2012). For passenger vehicles the contact forces between tires and road are too small to cause significant pavement damage (Valasek *et al.*, 1998). The high cost of maintenance of highways and road networks, because of premature road failure due to heavy traffic has caused global concern. Fluctuating component of tire-road force is the main contributor to road damage along with other environmental factors (Pable *et al.*, 2007). For HGVs the contact forces between tires and road are considerable and hence for these vehicles, suspension parameters need to be selected to reduce road damage.

Ride comfort and road friendliness of a vehicle performances are dependent on the road that the vehicle travels. Ride comfort is proportional to the absolute acceleration of the vehicle body, road friendliness is linked to the vehicle unsprung performances (Chen *et al.*, 2010); and stability of the vehicles is related to the tire-ground (Eslaminasab, 2008).

The aim of this research is to propose a semi active suspension control for generic vehicle, incorporating with magnetorheological damper by developing a new control algorithm and investigate the effectiveness of the proposed control structure in term of road friendliness and ride comfort. Furthermore, to develop understanding the effect of the semi active damper performance response time due to different control

strategies through analytical and simulation methods. On the other hand, the technology of MR damper in semi active suspension has not yet been adopted for heavy vehicle (Eslaminasab, 2008).

1.3 Objective of the Study

The primary objective of this study is to propose a new control algorithm for generic vehicle to improve road friendliness and ride comfort. The supporting objective of this study are:

1. To develop seven degree of freedom (7-DOF) vehicle ride model and verify the passive vehicle model that was developed in MATLAB-Simulink with multi-body vehicle simulation software.
2. To investigate the effectiveness of the propose controller which known as Tire Force Control (TFC), Aided Tire Force Control (ATFC) and Ground Semi Active Damping Force Estimator (gSADE). The investigation in term of road friendliness and ride comfort in ideal and practical (application of MR damper model) cases.
3. To develop semi active suspension experimental test rig to validate the performance of the propose controller. The semi active suspension test rig is based on generic quarter vehicle model using MR damper.

1.4 Scope of the Study

The scopes of this study are defined as the followings:

1. Simulation study is performed on light-heavy duty truck ride (7-DOF) model where the parameters are selected from light-heavy duty truck model. The vehicle model is validated by comparing the simulation results from

MATLAB-Simulink model with vehicle simulation software namely TruckSim.

2. The quarter vehicle test rig was validated by comparing between MATLAB-Simulink and experiment results. The quarter vehicle model in MATLAB-Simulink was used to tune the controller parameters and then these parameters were applied in the experimental study.
3. The investigations of the proposed and existing controllers were only performed in vehicle ride motion; all the vehicle responses were recorded and used to analyzed the capability of the controllers in attenuating vehicle motion. The proposed controllers were compared with passive suspension and established semi active controller namely Groundhook (GRD).
4. Semi active suspension using magnetorheological damper model which based on Bouc-Wen model were used, where the rheological fluid properties control the variable damping force, in simulation study using light-heavy duty truck model.
5. The LORD[®] Ltd. damper, MR damper (MRD 1005-3) were used in the scaled quarter vehicle test rig. The MR damper was controlled by the current generator where the amount of current was decided by the controllers.

1.5 Research Methodology

Related past research has been reviewed to find out what other researchers have done and suitable method to develop semi active suspension system was selected. Based on vehicle ride model, related equation of motion was extracted to construct passive vehicle model in MATLAB-Simulink and validate that model with TruckSim vehicle dynamic software. Similar parameter was selected for both vehicle model, and then related vehicle responses were compared.

After MATLAB-Simulink model was accepted, then the semi active suspension model was developed. There are four aspects considered in developing the vehicle semi active system; these are vehicle model, control algorithm, current or voltage generator and MR damper model.

The first aspect is the validated vehicle model; similar vehicle model that was developed in MATLAB-Simulink were used in developing semi active suspension system. The second part is control algorithm; there are numerous control algorithms for semi active suspension but only several controllers are suitable for heavy vehicle. Most control algorithms improved vehicle ride only and ignore tire forces; in this study, the vehicle performances in term of dynamic tire forces and vehicle ride comfort were considered. The proposed controller capabilities in controlling vehicle responses will be evaluated by conducting several tests. The propose controller will also be compared with existing semi active suspension controller (Groundhook, GRD) to study its performances.

The third aspect is the implementation of current or voltage generator; this generator will generate the appropriate voltage or current to be supplied to the MR damper model. Voltage generator model was developed using a simple continuous state control and this approach has been similarly adopted by other researchers (Sims *et al.*, 1999; Lai and Liao, 2002; Hudha *et al.*, 2005; Bakar, 2013).

The last aspect is MR damper model. MR damper response was modeled by modified Bouc-Wen model which was proposed by Spencer *et al.*, (1997). MR damper provides semi active force as feedback to the vehicle suspension model and controlled by voltage or current generator. When the magnetic field is applied, the particle chains formed, the fluid reversibly changes between free flowing fluid to semi-solid (Tian *et al.*, 2011). Figure 1.1 shows flow of research procedure.

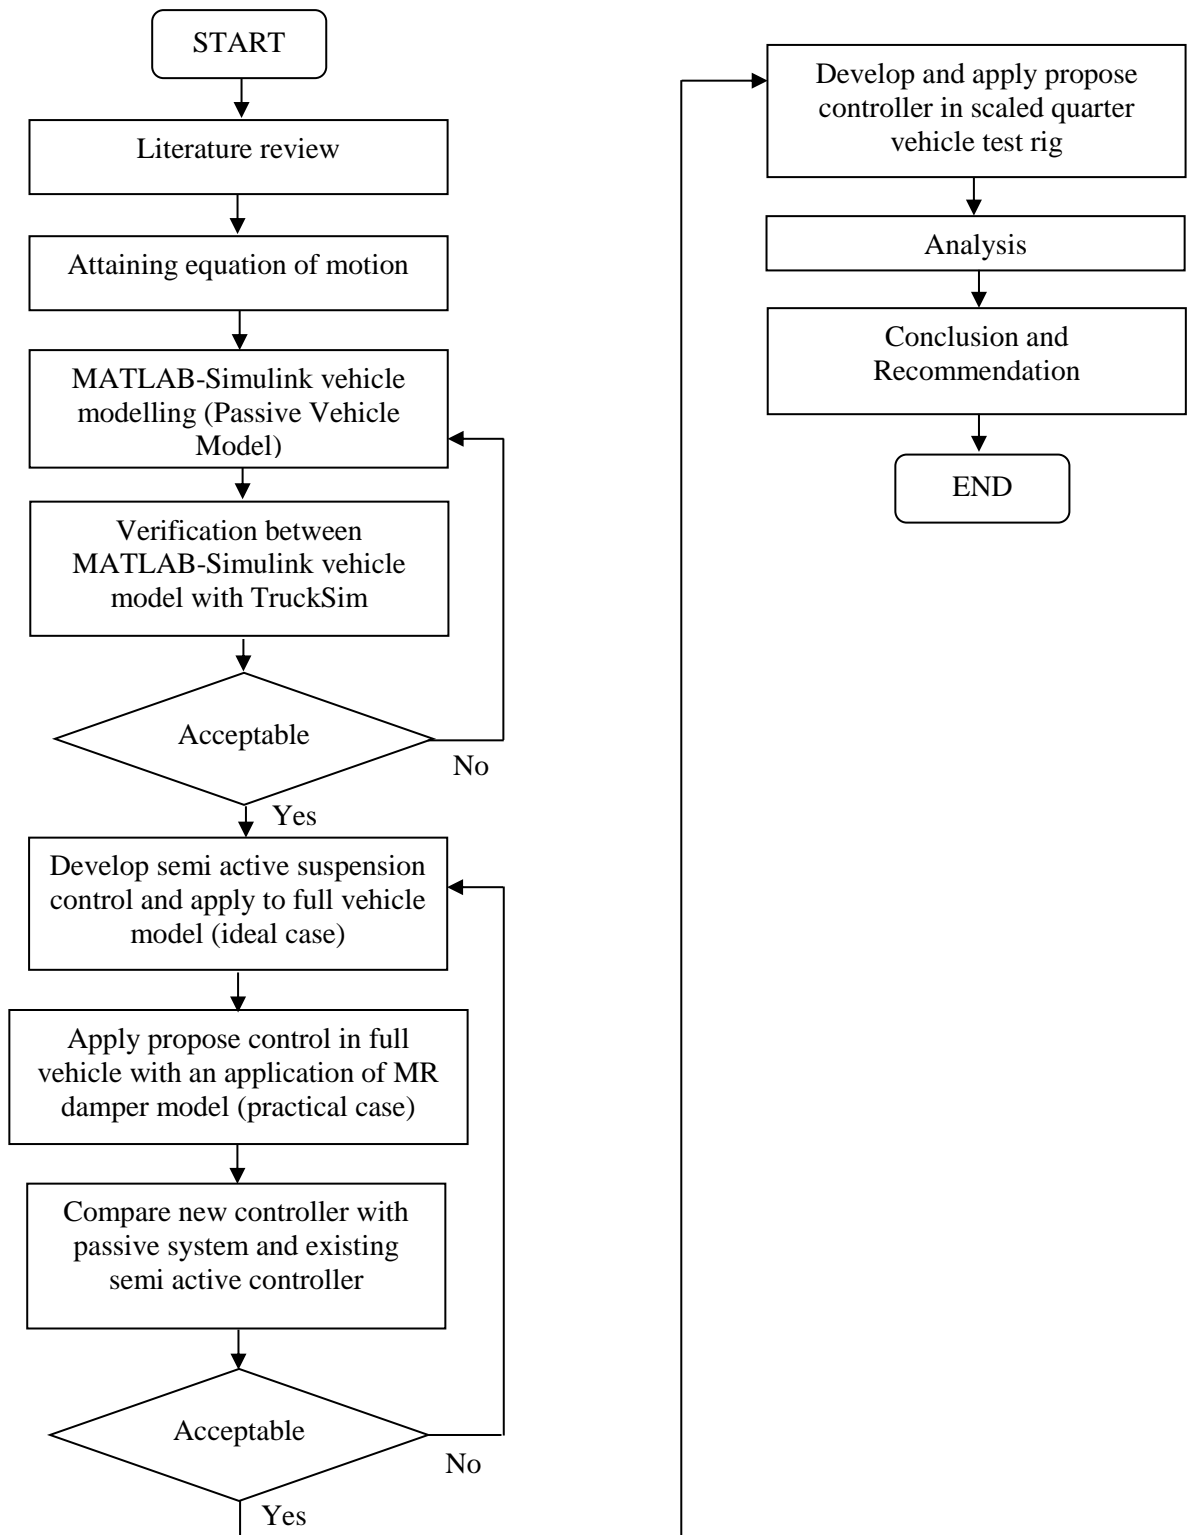


Figure 1.1 Research procedure

1.6 Significant of Research

Based on previous study, road friendliness (road damage) are the important issue need to be considered in designing a heavy vehicle suspension together with vehicle ride comfort. Even though, there are some studies on those criteria but their studies were limited to the simulation and most of the studies considered in improving passenger vehicles rather than heavy vehicles. Most vehicles used passive suspensions; those vehicles are being driven in different terrains and carry goods; so, effective control strategies in semi active suspension need to be develop to reduce road damage and improve vehicle ride comfort.

With a new proposed controller, whereby able to reduce road damage; the cost of worldwide road pavement issue can be reduced. While, by improving vehicle ride comfort, vehicle that carrying goods inside it can reduce the probability from being damage; i.e. vehicle that carry machine or anything that sensitive enough from high vibration. Proposed controller also can be applied to the passenger vehicle because the controller able to improve ride comfort.

The proposed control performances will be compared with passive and existing semi active suspension control (Groundhook, GRD) in ideal case study; then the MR damper model will be applied and integrated with the controller as in actual/practical case study. This study is not limited to simulation only but extended to experimental work, where the proposed controller is tested using scaled quarter vehicle rig to test the real time performance of the controller.

1.7 Contribution of Research

The contributions of this research are given as follows:

1. Three new semi active control algorithms were proposed which aim to reduce vehicle tire force; these controllers are TFC, ATFC and gSADE. The TFC was

designed based on unsprung mass acceleration control, so it able to reduce the vehicle tire force during uneven road condition; furthermore, reduce the road damage. The ATFC is designed based on the sprung and unsprung acceleration control, so that the controller is not only perform on the tire force but extended to the vehicle ride comfort. Semi active suspension with gSADE control is almost similar concept as ATFC, but the advantages of this controller is it maximize the function of MR damper by selecting the best current to send as an input to the MR damper.

2. Simulated performance analysis in ideal and actual/practical studies, and these algorithms performance were compared with existed semi active controller which is GRD and passive suspension system. In ideal case, the controllers were act as perfect system, where all require forces can be achieve. In practical studies, the actuator model is applied to the system to give limitation to the controller. The proposed and existing controller were performed using similar analysis.
3. Real-time application of these controllers in scaled quarter vehicle test rig; and also to compare performances of the proposed controllers with GRD control and passive suspension system. The vehicle test rig is interchangeable between passive and semi active system.

1.8 Organization of the Thesis

Chapter 1 is the introduction chapter. This chapter introduces the background of research, problems statement, research methodology, the contribution of research and organization of the thesis was clearly described.

Chapter 2 presents the literature review of related work of semi active suspension. In this chapter, the classification of vehicle suspension, the performance criteria that considered in designing suspension and related vehicle model was defined. This chapter also explained the overview of semi active suspension control which have been done by researchers and engineers; and then the research gap was identified.

Chapter 3 presents the vehicle ride modelling and validation. This chapter describes the vehicle model developed by mathematically. Assumption and limitation on the vehicle modelling are also explained. The vehicle model description in MATLAB-Simulink and TruckSim software explained. The validation is shown by comparing the vehicle responses between MATLAB-Simulink and TruckSim model. Finally, the validation of quarter vehicle model in MATLAB-Simulink is presented by comparing the vehicle responses between MATLAB-Simulink and experiment.

Chapter 4 presents the study of a semi active controller in the suspension system. Three control algorithms were proposed, these controllers known as Tire Force Control (TFC), Aided Tire Force Control (ATFC) and ground Semi Active Damping Force Estimator (gSADE). The performances of semi active suspension system using the quarter vehicle rig with the used of actual MR damper. This chapter describes the development of a scaled quarter vehicle test rig. The components which involved in the experiment, and the development of semi active system in real-time are clearly explained. Finally, the results of vehicle performances are discussed.

Chapter 5 present the semi active suspension control which were applied on the verified full vehicle (7-DOF) model. The performances of the controllers were simulated by two types of road profile as an input, and the vehicle responses was compared with the existing controller which known as Groundhook (GRD) control, and also was compared with a passive suspension system. Related vehicle responses are recorded and discussed.

Chapter 6 presents the application of the MR damper model in the semi active suspension system. MR dampers and voltage generator model are also explained. The performances of the proposed controllers were simulated using verified vehicle model. Similar road profiles as in the ideal case was used to evaluate vehicle performances. Finally, the results of vehicle performances are discussed.

Chapter 7 gives the overall conclusion of the thesis. This chapter also provides several recommendations for future work.

REFERENCES

- Agharkakli, A., Sabet, G. S. and Barouz, A. (2012). Simulation and Analysis of Passive and Active Suspension System Using Quarter Car Model for Different Road Profile. *International Journal of Engineering Trends and Technology*. 3(5): 636-644.
- Agostinacchio, M., Ciampa, D. and Olita, S. (2014). The Vibrations Induced by Surface Irregularities in Road Pavements - A Matlab Approach. *European Transport Research Review*. 3: 267–275.
- Ahmadian, M. (2005). On the Development of Fuzzy Skyhook Control for Semi active Magneto-Rheological Systems. *Smart Structures and Materials*. 268: 268-282
- Ahmadian, M. and Pare, C. A. (2000). A Quarter-Car Experimental Analysis of Alternative Semi-Active Control Methods. *Journal of Intelligent Material Systems and Structures*. 11(8): 604-612.
- Albinsson, A and Routledge, C. (2013). *The Damper Levels Influence on Vehicle Roll, Pitch, Bounce and Cornering Behaviour of Passenger Vehicles*. Master Thesis. Chalmers University of Technology.
- Ancey, C. (2005). Notebook: Introduction to Fluid Rheology. In: Ancey, C. *Rheometry*. Ecole Polytechnique, Lausanne, Switzerland, pp. 17-56.
- Bahaghighat, M. K., Kharrazi, S., Lidberg, M., Falcone, P. and Schofield, B. (2010). Predictive Yaw and Lateral Control in Long Heavy Vehicles Combinations. *The 49th IEEE Conference on Decision and Control (CDC 2010)*. Hilton Atlanta, Atlanta, GA, USA. December 15-17.
- Bakar, S. A. A. (2013). *Magnetorheological Semi Active Suspension Employing Semi-Active Damping Force Estimator Algorithms for Passenger Vehicle*. Ph.D. Thesis. Universiti Teknologi Malaysia.

- Bakar, S. A. A., Jamaluddin, H., Rahman, R. A., Samin, P. M. and Hudha, K. (2008). Vehicle Ride Performance with Semi-Active Suspension System Using Modified Skyhook Algorithm and Current Generator Model. *International Journal of Vehicle Autonomous Systems*. 6(3-4): 197-221.
- Bakar, S. A. A., Jamaluddin, H., Rahman, R. A., Samin, P. M., Masuda. R., Hashimoto, H. and Inaba, T. (2011). Modelling of Magnetorheological Semi-Active Suspension System Controlled by Semi-Active Damping Force Estimator. *International Journal of Computer Applications in Technology*. 42(1): 49-64.
- Barnes, H. A. (2000). A Handbook of Elementary Rheology. In: Barnes, H. A. *What Is Flow and Deformation*. Wales: Cambrian Printers. The University of Wales Institute of Non-Newtonian Fluid Mechanics, Department of Mathematics Aberystwyth, Dyfed, pp. 5-9.
- Bossis, G., Volkova, O., Lacis, S. and Meunier, A. (2002). Magnetorheology: Fluids, Structures and Rheology. In: Bossis, G., Volkova, O., Lacis, S. and Meunier, A. *Ferrofluids* Springer Berlin Heidelberg, pp. 202-230.
- Braga, R. P. (1997). *Model Validation Methods*. Instituto Politecnico de Portalegre Portugal: Lecture Notes.
- Can, W. and Weirui, W. (2009). Chaotic Behaviors of Half Car Model Excited by the Road Surface Profile. *IEEE Conference on Information Science and Engineering (ICISE)*. Nanjing, Jiangsu Sheng, China, December 26-28.
- Chen, Y., He, J. and Zhang, W. (2010). Truck Suspension System Optimization to Improve Ride Comfort and Road Friendliness. *IEEE Conference of Mechanical and Electrical Technology (ICMET 2010)*. Singapore, September 10-12.
- Cheng, C. P., Chao, C. H. and Li, T. H. S. (2010). Design of Observer-Based Fuzzy Sliding-Mode Control for an Active Suspension System with Full-Car Model. *IEEE Conference on Systems Man and Cybernetics (SMC 2010)*. Harbiye Military Museum and Cultural Center Istanbul, Turkey, October 10-13.
- Doraiswamy, D. (2002). The Origins of Rheology: A Short Historical Excursion. *Rheology Bulletin*. 71(1): 1-9.
- Dos Santos, F. L. M., Góes, L. C. S. and Serpa, A. L. (2010). Semi-Active Suspension Control with One Measurement Sensor Using H_∞ Technique. *The 9th Brazilian Conference on Dynamics, Control and their Applications*. Brazil. June 7-10.

- Du, H., Sze, K. Y. and Lam, J. (2005). Semi-Active H_{∞} Control of Vehicle Suspension with Magneto-Rheological Dampers. *Journal of Sound and Vibration*. 283(3), 981-996.
- Dyke, S. J. and Spencer Jr, B. F. (1997). A Comparison of Semi-Active Control Strategies for the MR Damper. *IEEE Conference Intelligent Information Systems Proceedings (IIS'97)*. Grand Bahama Island, Bahamas, December 8-10.
- Dyke, S. J., Spencer Jr, B. F., Sain, M. K. and Carlson, J. D. (1996). Modeling and Control of Magnetorheological Dampers for Seismic Response Reduction. *Smart Materials and Structures*. 5(5): 565-575.
- Dzierzek, S. (2008). *MagneRide Performance and Challenges*. Unpublished note, Delphi Automotive.
- Edgar, N.S., Luis, J.R., Reza, L. and Danial, S. (2004). Rollover Prediction and Control In Heavy Vehicles via Recurrent Neural Networks. *The 43rd IEEE Conference on Decision and Control*. Atlantis, Paradise Island, Bahamas, 14-17 December 2004.
- Faris, W. F., BenLahcene, Z. and Hasbullah, F. (2012). Ride Quality of Passenger Cars: An Overview on the Research Trends. *International Journal of Noise and Vibration*. 8(3): 185-199.
- Félix-Herrán, L. C., de Jesús Rodríguez-Ortiz, J., Soto, R. and Ramírez-Mendoza, R. (2008). Modeling and Control for a Semi-Active Suspension with a Magnetorheological Damper Including the Actuator Dynamics. *The IEEE Conference on Electronics, Robotics and Automotive Mechanics Conference (CERMA'08)*. Cuernavaca, Morelos, Italy, September 30 - October 3.
- Fischer, D. and Isermann, R. (2004). Mechatronic semi-active and active vehicle suspensions. *Control Engineering Practice*. 12(11): 1353-1367.
- Florin, A., Ioan-Cozmin, M. R. and Liliana, P. (2013). Passive Suspension Modeling Using Matlab, Quarter Car Model, Input Signal Step Type. *TEHNOMUS - New Technologies and Products in Machine Manufacturing Technologies*. 1, 258-263.
- Foale, T. (2002). Motorcycles. In Foale, T. (Ed.) *Motorcycle Handling and Chassis Design: The Art and Science* (pp. 6-39). Spain: Publication Data.
- Giuclea, M., Sireteanu, T., Stancioiu, D. and Stammers, C. W. (2004). Modelling of Magnetorheological Damper Dynamic Behaviour by Genetic Algorithms

- Based Inverse Method. *Proceedings of Romanian Academy Series A*. 5(1): 5563.
- Haibo, L. and Jianwei, Y. (2009). Study on Semi-Active Suspension System Simulation Based on Magnetorheological Damper. *IEEE Conference on Intelligent Computation Technology and Automation (ICICTA'09)*. Zhangjiajie, China. October 10-11.
- Hashemnia, S. and Bahari, M. H. (2009). Genetic Algorithm Aided Groundhook Control Strategy for Semi-Active Magneto Rheological Damper Suspension System. *Australian Journal of Basic and Applied Sciences*. 3(2): 1136-1144.
- Hashiyama, T., Furuhashi, T. and Uchikawa, Y. (1995). Design of Fuzzy Controllers for Semi-Active Suspension Generated Through the Genetic Algorithm. *IEEE Conference on Artificial Neural Networks and Expert Systems*. Dunedin, New Zealand. November 20-23.
- Hong, K. S., Sohn, H. C. and Hedrick, J. K. (2002). Modified Skyhook Control of Semi-Active Suspensions: A New Model, Gain Scheduling, and Hardware-In-The-Loop Tuning. *Journal of Dynamic Systems, Measurement, and Control*. 124(1): 158-167.
- Hrovat, D. (1990). Optimal Control for Quarter-Car Vehicle Models. *Automatica*. 26(5): 845-860.
- Hudha, K. (2005). *Non-parametric Modeling and Modified Hybrid Skyhook Groundhook Control of Magnetorheological Dampers for Automotive Suspension System*. Ph.D. Thesis. Universiti Teknologi Malaysia.
- Hudha, K., Jamaluddin, H., & Samin, P. M. (2008). Disturbance Rejection Control of a Light Armoured Vehicle Using Stability Augmentation Based Active Suspension System. *International Journal of Heavy Vehicle Systems*. 15(2-4): 152-169.
- Hudha, K., Jamaluddin, H., Samin, P. M. and Rahman, R. A. (2005). Effects of Control Techniques and Damper Constraint on the Performance of a Semi-Active Magnetorheological Damper. *International Journal of Vehicle Autonomous Systems*. 3(2-4): 230-252.
- Huurman, M. (2002). Geometric and Structural Design of Roads and Railways. In: Huurman, M. *Chapter 3: Traffic Loadings and Road Roughness*. Delft University of Technology, Netherlands, pp. 92-114.

- International Organization for Standardization. (1995). *ISO 8608:1995*. Geneva: International Organization for Standardization ISO Central Secretariat.
- Jie, C., Cangsu, X. and Shaomin, L. (2008). A Sliding Mode Semi-Active Control for Suspension Based on Neural Network. *IEEE Conference on Intelligent Control and Automation (WCICA 2008)*. Chongqing, China. June 25-27.
- Jolly, M. R., Bender, J. W. and Carlson, J. D. (1998). Properties and Applications of Commercial Magnetorheological Fluids. *SPIE 5th Annual Symposium on Smart Structures and Materials*. San Diego, California, USA. March 1-5.
- Karnopp, R. M., Crosby, R. A. and Harwood, R. A. (1974). Vibration Control Using Semi-Active Force Generators. *ASME Transactions*. 96(2): 619-626.
- Khemoudj, O., Imine, H. and Djemai, M. (2010). Variable Gain Sliding Mode Observer for Heavy Duty Vehicle Tyre Forces Estimation. *The 11th International Workshop on Variable Structure Systems*. Mexico City, Mexico, June 26-28.
- Li, C. and Zhao, Q. (2010). Fuzzy Control of Vehicle Semi-Active Suspension with MR Damper. *WASE International Conference on Information Engineering (ICIE 2010)*. Beidaihe, China. August 14-15.
- Lu, Y., Yang, S. and Li, S. (2011). Research on Dynamics of a Class of Heavy Vehicle-Tire-Road Coupling System. *Science China Technological Sciences*. 54(8): 2054-2063.
- Luis, F., Carlos, L. and Luiz, A. (2010). Semi-Active Suspension Control with One Measurement Sensor Using H-Infinity Technique. *The 9th Brazillian Conference on Dynamics, Control and their Applications (DINCON' 10)*. Brazil, June 7-11.
- Malaysia (2006). *Akta Jalan-Jalan Persekutuan (Pengurusan Persendirian)*. P.U. (A) 380 1984.
- Mazlan, S. A. B. (2008). *The Behaviour of Magnetorheological Fluids in Squeeze Mode*. Dublin City University: Ph.D. Thesis.
- Mechanical Simulation Corporation, (2009). *TruckSim 8 Math Models* [Brochure]. USA: Mechanical Simulation Corporation.
- Naraghi, M. and Zadeh, E. N. (2001). Effect of Heavy Vehicle Suspension Designs on Dynamic Road Loading – A Comparative Study. *SAE Technical Paper*. 2766: 1-9.

- Novak, M. and Valasek, M. (1996). A New Concept of Semi-Active Control of Trucks Suspension. *Proc. AVEC 96 Int. Symposium on Advanced Vehicle Control*. June 24-26. Aachen University of Technology. 1(1): 141-151.
- Oueslati, F., Rakheja, S. And Sankar, S. (1995). Study of an Active Suspension for Improved Ride Quality and Reduced Dynamic Wheel Loads. *Road Transport Technology, University of Michigan Transportation Research Institute, Ann Arbor*. 4: 441-452.
- Pitcher, G. (2010). *Newelectronics. On the Level*. 43(8): 14-16.
- Roman, L., Florea, A. and Cofaru, I. I. (2014). Software Application for Assessment the Reliability of Suspension System at Opel Cars and of Road Profiles. *Fascicle Management and Technology Engineering*. 1: 289-294.
- Rossi, C. and Lucente, G. (2004). H_{∞} Control of Automotive Semi-Active Suspensions. *Proceedings of the 1st IFAC Symposium on Advances in Automotive Control (AAC)*. Salerno, Italy. April 19-23.
- Rousseau, A., Kim, N., Kwon, J. and Delorme, A. (2009). *Vehicle Model Validation*. Unpublished note, U. S. Department of Energy.
- Şahin, İ., Engin, T. and Çeşmeci, Ş. (2010). Comparison of Some Existing Parametric Models for Magnetorheological Fluid Dampers. *Smart Materials and Structures*. 19(3): 035012.
- Sam, Y. M. and Osman, J. H. S. (2005). Modeling and Control of the Active Suspension System Using Proportional Integral Sliding Mode Approach. *Asian Journal of Control*. 7(2): 91-98.
- Samin, P. M. (2010). *Hybrid Stability Augmentation System-Force Control of Semi-Active Suspension with Magnetorheological Damper*. Ph.D. Thesis. Universiti Teknologi Malaysia.
- Samin, P. M., Jamaluddin, H., Rahman, R. A., Bakar, S. A. A. and Hudha, K. (2007). Modeling and Validation of a 7-DOF Full Car for Ride Quality. *Conference on Applications and Design in Mechanical Engineering (CADME07)*. Putra Brasmana Hotel, Kuala Perlis, Malaysia, October 25-26.
- Sampson, D.J.M., Mckevitt, G. and Cebon, D. (2000). The Development of an Active Roll Control System for Heavy Vehicle. *Vehicle System Dynamics*, 33: 704-715.
- Sapiński, B. and Filuś, J. (2003). Analysis of Parametric Models of MR Linear Damper. *Journal of Theoretical and Applied Mechanics*. 41(2): 215-240.

- Savaresi, S. M. and Spelta, C. (2007). Mixed Sky-Hook and ADD: Approaching the Filtering Limits of a Semi-Active Suspension. *Journal of Dynamic Systems, Measurement and Control*. 129(4): 382-392.
- Savaresi, S. M., Silani, E. and Bittanti, S. (2005). Acceleration-Driven-Damper (ADD): An Optimal Control Algorithm for Comfort-Oriented Semi-Active Suspensions. *ASME Transactions Journal of Dynamic Systems, Measurement, and Control*. 127(2): 218-229.
- Savaresi, S., Poussot-Vassal, C. and Spelta, C. (2010). Suspension Oriented Vehicle Models. In *Semi-Active Suspension Control Design for Vehicles*. UK: Elsevier. Pp. 41-69
- Setiawan, J., Safarudin, M. and Singh, A. (2009). Modeling, Simulation and Validation of 14 DOF Full Vehicle Model. *International Conference on Instrumentation, Communication, Information Technology, and Biomedical Engineering 2009, ICICI-BME 2009*. Institut Teknologi Bandung, Bandung, Indonesia, November 23-25.
- Singh, P. A. and Darus, I. Z. M. (2011). Enhancement of SUV Roll Dynamics Using Fuzzy Logic Control. *IEEE Conference on Informatics and Computational Intelligence (ICI)*. Bandung, Indonesia. December 12-14.
- Ślaski, G. and Maciejewski, M. (2011). Design of a Fuzzy Logic Controller for a Semi-Active Vehicle Suspension. *Warsaw University of Technology Research Papers*. 78: 97-111.
- Song, X., Ahmadian, M. and Southward, S. C. (2005). Modeling Magnetorheological Dampers with Application of Nonparametric Approach. *Journal of Intelligent Material Systems and Structures*. 16(5): 421-432.
- Spencer Jr, B. F., Dyke, S. J., Sain, M. K. and Carlson, J. (1997). Phenomenological Model for Magnetorheological Dampers. *Journal of Engineering Mechanics*. 123(3): 230-238.
- Tang, C. Y., Zhao, G. Y., Li, H. and Zhou, S. W. (2009). Research on Suspension System Based on Genetic Algorithm and Neural Network Control. *IEEE Conference on Intelligent Computation Technology and Automation (ICICTA 2009)*. Zhangjiajie, China, October 10-11.
- Tao, R. (2001). Super-Strong Magnetorheological Fluids. *Journal of Physics: Condensed Matter*. 13(50): 979-999.

- Tian, Y., Zhang, M., Jiang, J., Pesika, N., Zeng, H., Israelachvili, J., Yonggang, M., Shizu, W. and Wen, S. (2011). Reversible Shear Thickening at Low Shear Rates of Electrorheological Fluids Under Electric Fields. *Physical Review E*. 83(1): 011401.
- Titli, A., Roukieh, S. and Dayre, E. (1993). Three Control Approaches for the Design of Car Semi-Active Suspension (Optimal Control, Variable Structure Control, Fuzzy Control). *The 32rd IEEE Conference on Decision and Control (CDC 1993)*. San Antonio, Texas. USA. December 15-17.
- Truong, D. Q. and Ahn, K. K. (2012). Smart Actuation and Sensing Systems - Recent Advances and Future Challenges. In Seminara, L., Pinna, L., Capurro, M. and Valle, M. *MR Fluid Damper and Its Application to Force Sensorless Damping Control System* (pp. 383-424). Italy: INTECH Open Access Publisher.
- Tsampardoukas, G., Stammers, C. W. and Gugliemino, E. (2008). Hybrid Balance Control of a Magnetorheological Truck Suspension. *Journal of Sound and Vibration*. 317(3): 514-536.
- Turnip, A., Hong, K. S. and Park, S. (2009). Modeling of a Hydraulic Engine Mount for Active Pneumatic Engine Vibration Control Using the Extended Kalman Filter. *Journal of Mechanical Science and Technology*. 23(1): 229–236.
- Turnip, A., Park, S. and Hong, K. S. (2010). Sensitivity Control of a MR-Damper Semi-Active Suspension. *International Journal of Precision Engineering and Manufacturing*. 11(2): 209-218.
- Valasek, M., Novak, M., Sika, Z. and Vaculin, O. (1997). Extended Ground-Hook - New Concept of Semi-Active Control of Truck. *Vehicle System Dynamics*. 2(5): 289-303.
- Wang, D. H. and Liao, W. H. (2011). Magnetorheological Fluid Dampers: A Review of Parametric Modelling. *Smart Materials and Structures*. 20(2): 1-34.
- Watson, I. and Wylie, A. (2008). *Report by Frazer-Nash Consultancy Limited: Articulated Dumper Truck Rollover*. Health and Safety Executive, United Kingdom. pp. 17-26.
- Wen, W., Huang, X. and Sheng, P. (2008). Electrorheological Fluids: Structures and Mechanisms. *Soft Matter*. 4(2): 200-210.
- Woodrooffe, J. (1995). Heavy Truck Suspension Damper Performance for Improved Road Friendliness and Ride Quality. *SAE Technical Paper*. 952636: 49-54.

- Yarmohamadi, H. and Berbyuk, V. (2012). Effect of Semi-Active Front Axle Suspension Design on Vehicle Comfort and Road Holding for a Heavy Truck. *SAE International Paper Series*. 1931: 1-13.
- Yi, K. and Hedrick, J. K. (1989). Active and Semi-Active Heavy Truck Suspensions to Reduce Pavement Damage. *University of California Transportation Center*.
- Zaouk, A., Bedewi, N., Kan, C. and Dhafer, M. (1996). Validation of a Non-Linear Finite Element Vehicle Model Using Multiple Impact Data. *ASME Applied Mechanics Division-Publications-AMD*. Vol. 218, pp. 1-15.
- Zhang, J., Zhao, Z., Sun, Y. and Han, W. (2010). Optimal Design of Fuzzy Logic Controller for Multi-Body Model of Semi-Active Suspension Based on Genetic Algorithm. *IEEE Conference on Industrial Electronics and Applications (ICIEA)*. Taichung, Taiwan. June 15-17.
- Zhang, M. L, Yu, T., Jiang, J. L., Zhu, X. L., Meng, Y. G. and Wen, S. Z. (2009). Compression Enhanced Shear Yield Stress of Electrorheological Fluid. *Chinese Physics Letters*. 26(4): 048301.