



*Journal of Applied Fluid Mechanics*, Vol. 9, No. 3, pp. 1273-1283, 2016.  
Available online at [www.jafmonline.net](http://www.jafmonline.net), ISSN 1735-3572, EISSN 1735-3645.  
DOI: 10.18869/acadpub.jafm.68.228.24221

## Mean Velocity Predictions in Vegetated Flows

M. Morri<sup>1</sup>, A. Soualmia<sup>1†</sup> and P. Belleudy<sup>2</sup>

<sup>1</sup> *Laboratory of Water Sciences and Technology, National Institute of Agronomy of Tunisia, University of Carthage, Tunis, Tunisia*

<sup>2</sup> *University of Grenoble Alpes, LTHE, F-38000 Grenoble, France*

†Corresponding Author Email: [amel.inat@hotmail.fr](mailto:amel.inat@hotmail.fr)

(Received November 13, 2014; accepted May 13, 2015)

### ABSTRACT

Vegetation plays an important role in influencing the hydrodynamic behavior, ecological equilibrium and environmental characteristics of water bodies. Several previous models have been developed, to predict hydraulic conditions in vegetated rivers, but only few are actually used in practice. In This paper six analytic model derived for submerged vegetation are compared and evaluate: Klopstra *et al.* (1997); Stone and Shen (2002); Van velzen (2003); Baptist *et al.* (2007); Huthoff *et al.* (2007) and Yang and Choi (2010). The evaluation of the flow formulas is based on the comparison with experimental data from literature using the criteria of deviation. Most descriptors show a good performance for predicting the mean velocity for rigid vegetation. However, the flow formulas proposed by Klopstra *et al.* (1997) and Huthoff *et al.* (2007) show the best fit to experimental data. Only for experiments with law density, these models indicate an underestimation. Velocity predicted for flexible vegetation by the six models is less accurate than the prediction in the case of rigid vegetation.

**Keywords:** Mean velocity; Vegetation; Analytic models; Measured data; Performance; Underestimation.

### NOMENCLATURE

$A_p$	solidity	MAE	mean absolute error
$a$	density of elements in the canopy	RMSE	mean square error
$a_v$	integration constant	$R^2$	coefficient of determination
$C_D$	drag coefficient	$s$	separation between individual resistance elements
$C_p$	turbulent intensity, height –averaged over vegetation height	$u(z)$	vertical velocity
$C_3$	constant integration in the model of Klopstra <i>et al.</i> (1997)	$u_*$	shear velocity
$C_u$	constant in Yang and Choi (2010) model	$u_{v0}$	characteristic constant flow velocity in non- submerged vegetation
$D$	diameter of plant stems	$U_1$	mean velocity flow inside the vegetation
$d$	zero-plane displacement	$U_2$	mean velocity flow above the vegetation
$E$	the mean error	$U$	average velocity over the total depth
$F_D$	drag force	$U_C$	the maximum velocity in the vegetation layer
$g$	acceleration due to gravity	$z_0$	length scale for bed roughness of the surface layer
$h$	water depth	$z$	the vertical coordinate
$h_p$	vegetation height	$\alpha$	closure parameter
$h_s$	distance between the vegetation top and the surface layer virtual bed	$\kappa$	Von Karman's constant (0.41)
$i$	energy gradient	$\tau(z)$	the shear stress
$K_n$	roughness height	$\tau_b$	the bed shear stress
$L$	length scale	$\rho$	the density of water
$l$	mixing length	$\sigma$	the standard deviation of the mean error
$l^*$	submergence ratio		
$m$	density of vegetation		

### 1. INTRODUCTION

The presence of vegetation affects stream process

may change the river hydraulic conditions, the morphology, as well as the local fine sediment deposition; it may have significant influence on the

overall discharge capacity of a river and may increase flood risks (Wu and He, 2009; Liu and Shen, 2008; Gharbi *et al.*, 2014). The vegetation occurs under different forms within rivers and flood plains; it can be flexible or rigid and submerged or emergent in flows. The drag on vegetation increased overall flow resistance and reduced the shear stress. Therefore, it's important to have suitable prediction of increased resistance caused by vegetation to control floods and the ecosystem of the stream and to understand the processes that contribute to velocity distributions (Yang and Choi, 2010; Katul *et al.*, 2011; Huthoff *et al.*, 2007; Nepf, 2012,).

The mean velocity may be useful in the estimation of shear velocities and the bed shear stresses. These parameters are key factors in estimating the bed load transport and the related scour, deposition, entrainment and bed changes in rivers. Velocity distribution is related directly to the bed shear stress for non-vegetated flow; while, for vegetated flow, it's related to the vegetation drag because the vegetation roughness is much larger than the river bed roughness (Samani and Mazaheri, 2009; Wu and He, 2009). Due to the importance of vegetation resistance in rivers, many studies have been devoted to this topic over the last decades. As a result, different experiments in laboratory flumes have been carried out (Shimizu and Tsujimoto, 1994; Lopez et Garcia, 2001; Tsujimoto et al, 1993; Jarvela, 2005) and several vegetation-resistance methodologies have been proposed to model the effects of vegetation on open-channel flow (Augustijn *et al.*, 2011, Morri *et al.*, 2015). Such relations exist that relate the average flow velocity to the hydraulic roughness (Chézy, 1769; Darcy-weisbach, 1845; Manning, 1889; Strickler, 1923; Keulegan, 1938). These equations are widely used in hydraulic engineering and surface hydrology, especially in the context of flood routing (Katul *et al.*, 2011). They were originally derived to describe the roughness of bottom and side walls, and they were not derived to describe the complex interactions of vegetation with flow (Huthoff *et al.*, 2007). Traditional descriptors were used for predicting the losses of the flume and didn't include shape drag. That's why constant roughness parameter is not useful for describing vegetation resistance; except for a very large submergence ratio, vegetation could be calculated with a constant roughness coefficient (Augustijn *et al.*, 2008). In addition, many experimental studies of vegetation related resistance to flow have shown that detailed plant characteristics may have important influences on flow resistance. Therefore, newly approaches have been derived based on vegetation characteristics (vegetation height  $h_p$ , density of vegetation  $m$ , diameter of plant stems  $D$ , drag coefficient  $C_D$ ), instead of using a constant roughness coefficient using analytical models. These approaches, account for the turbulence caused by surface properties, geometrical boundaries, obstructions and other factors

causing losses (Huthoff *et al.*, 2007). Most of these relationships adopted a two-layer model (Klopstra *et al.*, 1997; Stone and Shen, 2002; Van velzen, 2003; Baptist *et al.*, 2007; Huthoff *et al.*, 2007; Yang et Choi, 2010). In this approach, the flow domain was divided into two layers, a "vegetation layer" through the vegetation and "the surface layer" above it (Fig.1). The flow in each of the two layers was described separately. The logarithmic flow velocity profile is adopted for solving the velocity above the vegetation, and the momentum equation within the vegetated layer. The continuity of the velocity and the shear stress between the two layers is ensured by boundary conditions at the interface. The average velocity ( $U$ ) over the total depth is given by combination between the mean velocity flow inside ( $U_1$ ) and above the vegetation ( $U_2$ ) (Klopstra *et al.*, 1997; Huai *et al.*, 2009; Jarvela, 2005).

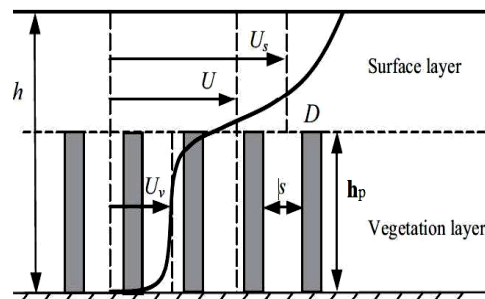


Fig. 1. Velocity profile within and above vegetation (Augustijn *et al.*, 2011).

However, the wide variety of vegetation types and hydrodynamic conditions considered in these works make it difficult to compare results and draw general conclusions useful in the in practice (Augustijn *et al.*, 2011). In this context, this study aims to understand and determine the range of validity and applicability of some analytical models (Van Velzen *et al.*, 2003, klopstra *et al.*, 1997, Stone and Shen, 2002, and Huthoff *et al.*, 2007, Yang and Choi, 2010) and select the most adequate for predicting the mean flow velocity through submerged vegetation. These models are validated using measurement data in flume with flexible and rigid vegetation.

## 2. Analytical Models Description

### 2.1 Klopstra *et al.* (1997) Model

Kolpstra *et al.* (1997) proposed an analytical expression for the velocity distribution. This method based on the momentum equation for the vegetation layer assuming uniform steady flow and using the Boussinesq concept, to describe the shear stress.

$$\frac{\partial \tau}{\partial z} = F_D(z) - \rho g i \quad (1)$$

where  $\tau(z)$  is the shear stress,  $\rho$  is the density of water,  $z$  is the vertical coordinate,  $g$  is the

acceleration gravity,  $i$  is the energy gradient and  $F_D$  is the drag force determined by the following expression:

$$F_D(z) = \frac{1}{2} \rho m D C_D u(z) \quad (2)$$

With  $m$  is the density of vegetation ( $m^2$ ),  $D$  is the diameter of plant stems ( $m$ ),  $C_D$  is the drag coefficient and  $u(z)$  is the vertical velocity ( $m/s$ ).

Using the Boussinesq concept, the shear stress, can be described by the following expression:

$$\tau(z) = \rho \alpha u(z) \frac{\partial u(z)}{\partial z} \quad (3)$$

$\alpha$  is the turbulent length scale derived from experimental data. Klopstra *et al.* (2007) proposed the following expression to determine this parameter:

$$\alpha = 0.079 h_p \ln\left(\frac{h}{h_p}\right) - 0.0009 \quad (4)$$

$h$  is the water depth ( $m$ ) and  $h_p$  is the vegetation height ( $m$ ).

Then, the momentum equation (1) becomes:

$$u(z) \frac{\partial^2 u(z)}{\partial z^2} + \left(\frac{u(z)}{\partial z}\right)^2 = \frac{m D C_D u(z)^2}{2\alpha} - \frac{g i}{\alpha} \quad (5)$$

The analytic solution of this momentum equation gives the velocity distribution in the vegetated layer. The bottom shear stress is neglected behind the vegetation shear stress.

In the surface layer, the velocity follows a logarithmic profile that was derived using Prandtl's mixing length theory. The connection between the boundary conditions at the interface ensures the continuity of the velocity and the shear stress between the two layers, allows the determination of the logarithmic law parameters and the mean velocity in the surface layer.

$$u(z) = \frac{u^*}{\kappa} \ln\left(\frac{z - (h_p - h_s)}{z_0}\right) \quad (6)$$

$\kappa$  is Von Karman's constant (0.41),  $h_s$  is the distance between the vegetation top and the surface layer virtual bed ( $z_0 < h_s < h$ ),  $z_0$  is the length scale for bed roughness of the surface layer ( $m$ ) and  $u^*$  is the virtual bed shear stress.

The average velocity over the total depth ( $U$ ) is given by combination between the mean velocity flow inside ( $U_1$ ) and above the vegetation ( $U_2$ ):

$$U = \frac{h_p}{h} U_1 + \frac{(h - h_p)}{h} U_2 \quad (7)$$

Kolpstra *et al.* (1997) determined the total average velocity through submerged vegetation and it is given by the following expression:

$$U = \frac{\sqrt{i}}{h} \left[ \frac{\frac{2}{\sqrt{2A}} (\sqrt{C_3 e^{h_p \sqrt{2A}} + u_{v0}^2} - \sqrt{C_3 + u_{v0}^2}) + \frac{u_{v0}}{\sqrt{2A}} \ln\left(\frac{\sqrt{C_3 e^{h_p \sqrt{2A}} + u_{v0}^2} - u_{v0}}{\sqrt{C_3 e^{h_p \sqrt{2A}} + u_{v0}^2} + u_{v0}}\right) *}{(\sqrt{C_3 + u_{v0}^2} + u_{v0}) + \frac{\sqrt{g(h - (h - (h_p - h_s))}}{\kappa}}}{((h - (h_p - h_s)) \ln\left(\frac{(h - (h_p - h_s))}{z_0}\right) - h_s \ln\left(\frac{h_s}{z_0}\right) - (h - h_p))} \right] \quad (8)$$

where,  $A$  is a help variable:

$$A = \frac{m D C_D}{2\alpha} \quad (9)$$

The constants  $C_3$  follow from boundary conditions.

$u_{v0}$  is the characteristic constant flow velocity in non-submerged vegetation:

$$u_{v0} = \sqrt{\frac{2g}{C_D m D}} \quad (10)$$

## 2.2 Stone and Shen (2002) Model

Stone and Shen (2002), started with the momentum balance in streamwise direction:

$$\tau = \tau_b + F_D \quad (11)$$

With  $\tau_b$  is the bed shear stress (which is neglected),  $\tau$  is the total bed shear stress and determined by the following expression:

$$\tau = \rho g h (1 - A_p \Gamma^*) \quad (12)$$

$A_p$  is the solidity, which is defined as the fraction of horizontal area taken by the cylinder:

$$A_p = \frac{1}{4} \pi D^2 m \quad (13)$$

$\Gamma^*$  is the submergence ratio

$$\Gamma^* = \frac{h_p}{h} \quad (14)$$

The drag force is determined by the following expression:

$$F_D = \frac{1}{2} C_D \rho m D h_p U_c^2 \quad (15)$$

$U_c$  is the maximum velocity in the vegetation layer which is defined as:

$$U_c = \frac{U_1}{(1 - D\sqrt{m})} \quad (16)$$

Substituting equations (12) and (15) in equation (11) and neglecting the bed shear stress gives the expression of the mean velocity in the vegetation layer:

$$U_1 = U_{v0} \sqrt{i} (1 - D\sqrt{m}) \sqrt{\left(\frac{h}{h_p} - \frac{1}{4} \pi D^2 m\right)} \quad (17)$$

The total average velocity (U) over the total depth:

$$U = U_1 \sqrt{\frac{h}{h_p}} \quad (18)$$

Then, it's given by the following expression:

$$U = u_{v0} \sqrt{i} (1 - D\sqrt{m}) \sqrt{\left(\frac{h}{h_p} - \frac{1}{4} \pi D^2 m\right) \frac{h}{h_p}} \quad (19)$$

### 2.3 Van Velzen (2003) Model

In the vegetation layer, Van velzen (2003) assumed uniform velocity which is unaffected by the surface layer flow (Gualtieri and Mihailovic, 2012). The forces acting on the flow are the shear stress and drag forces on the plants. The sum of these forces in the streamwise direction is equal to zero because the bed shear stress is neglected and the following equation is derived:

$$\rho g h i - F_D = 0 \quad (20)$$

$F_D$  is the drag force, which can be expressed as:

$$F_D = \frac{1}{2} \rho C_D m D U_1^2 \quad (21)$$

Substitution of equation (21) in equation (20) and solving it for  $U_1$  gives the velocity inside the vegetation:

$$U_1 = U_{v0} \sqrt{i} \quad (22)$$

The flow in the surface layer is described by a logarithmic term:

$$U = U_1 + 18 \sqrt{(h - h_p) i} \log\left(\frac{12(h - h_p)}{k_n}\right) \quad (23)$$

Then the total average velocity through submerged vegetation is given by the following expression:

$$U = U_1 + 18 \sqrt{(h - h_p) i} \log\left(\frac{12(h - h_p)}{k_n}\right) \quad (24)$$

$K_n$  is the roughness height and it's given by the empirical function:

$$K_n = 1.6 h_p^{0.7} \quad (25)$$

### 2.4 Baptist *et al.*(2007) Model

Baptist *et al.* (2007) model is based on an analytical solution of the momentum balance of flow through and over vegetation, using the Boussinesq's eddy viscosity approach and the mixing-length theory.

The expression of the velocity in the vegetation layer is given by:

$$U_i = \frac{L\sqrt{i}}{h_p} \left[ \frac{2(u(h_p) - \sqrt{a_v + u_{v0}^2})}{+ u_{v0} \ln\left(\frac{(u(h_p) - u_{v0}) * (\sqrt{a_v + u_{v0}^2} + u_{v0})}{(u(h_p) + u_{v0}) (\sqrt{a_v + u_{v0}^2} - u_{v0})}\right)} \right] \quad (26)$$

$L$  is the length scale (m),  $a_v$  is the integration constant.

$$L = \sqrt{\frac{C_p l}{C_D m D}} \quad (27)$$

$$a_v = \frac{2Lg(h - h_p)}{C_p l \exp\left(\frac{h_p}{l}\right)} \quad (28)$$

The coefficient  $C_p$  is the turbulent intensity, height – averaged over the vegetation height and  $l$  is the mixing length.

For the surface layer, Prandtl's mixing length concept is adopted, and the mean velocity is given by the following expression:

$$U_2 = \frac{\sqrt{g(h - h_p) i}}{\kappa(h - h_p)} \left[ \frac{(h - d) \ln\left(\frac{h - d}{z_0}\right) + (h_p - d) *}{\ln\left(\frac{h_p - d}{z_0}\right) - (h - h_p)} \right] \quad (29)$$

Where  $d$  is the zero-plane displacement (m), which is located at distance from the bed inside the vegetation.

The total average velocity is given by the following expression:

$$U = \frac{\sqrt{i}}{h} \left[ U_{v0} \ln\left(\frac{(u(h_p) - u_{v0}) (\sqrt{a_v + u_{v0}^2} + u_{v0})}{(u(h_p) + u_{v0}) (\sqrt{a_v + u_{v0}^2} - u_{v0})}\right) + \frac{\sqrt{g(h - h_p) i}}{\kappa(h - h_p)} \left[ \frac{(h - d) \ln\left(\frac{h - d}{z_0}\right) + (h_p - d) *}{\ln\left(\frac{h_p - d}{z_0}\right) - (h - h_p)} \right] \right] \quad (30)$$

### 2.5 Huthoff *et al.* (2007) Model

Huthoff (2007) derived an analytical expression for the velocity flow through and over vegetation by describing the flow by its bulk behavior to avoid the necessity of integration over depth and the associated complications of depth-dependent turbulence intensities.

In the vegetation layer, the mean velocity is given by the following expression:

$$U_1 = U_{v0} \sqrt{i} \sqrt{\frac{h}{h_p}} \quad (31)$$

In the upper layer, using assumption scaling the velocity is given by the following equation:

$$U_2 = U_{v0} \sqrt{i} \left(\frac{(h - h_p)^{\frac{2}{3} \left(1 - \left(\frac{h}{h_p}\right)^{-5}\right)}}{s}\right) \quad (32)$$

With,  $s$  is the separation between individual

resistance elements:

$$s = \frac{1}{\sqrt{m}} - D \quad (33)$$

The expression for the average velocity of the entire flow depth becomes:

$$U = U_{v0} \sqrt{i} \left( \sqrt{\frac{h_p}{h}} + \frac{(h-h_p)}{h} \left( \frac{h-h_p}{s} \right)^{2/3(1-(\frac{h}{h_p})^{-5})} \right) \quad (34)$$

### 2.6 Yang et Choi (2010) Model

Yang and Choi (2010) used the two layer approach to determine the velocity profile. The velocity is assumed to be uniform in the vegetation and it has been determined by applying a momentum balance. In the upper layer, the velocity profile follows a logarithmic distribution.

The equation of the velocity in the vegetation layer ( $U_1$ ) is given by:

$$U_1 = U_{v0} \sqrt{i} \sqrt{\frac{h}{h_p}} \quad (35)$$

In the upper layer, the expression of the velocity ( $U_2$ ) is given by:

$$U_2 = U_1 + \frac{C_u u_*}{\kappa} \left( \frac{h}{h-h_p} \ln\left(\frac{h}{h_p}\right) - 1 \right) \quad (35)$$

With  $u_*$  is the shear velocity.

The average velocity over the total depth ( $U$ ) is given by combination between the mean velocity flow inside ( $U_1$ ) and above the vegetation ( $U_2$ ):

$$U = \frac{C_u u_*}{\kappa} \left( \ln\left(\frac{h}{h_p}\right) - \left(\frac{h-h_p}{h}\right) \right) + U_1 \quad (36)$$

$\kappa$  is Von Karman's constant (0.41) and  $C_u$  is a constant where:

$$C_u = 1 \text{ for } a \leq 5 \text{ m}^{-1} \quad (37)$$

$$C_u = 2 \text{ for } a > 5 \text{ m}^{-1} \quad (38)$$

$a$  is the density of elements in the canopy ( $\text{m}^{-1}$ ) which is described by the frontal area per canopy volume.

### 3. ANALYTICAL MODELS EVALUATION

The use of experimental data flume available in the literature (Table 1, 2), concerning the free surface flow in presence of vegetation (rigid and flexible), allows the verification of the validity and the ability of these models in predicting the mean velocity.

For flexible vegetation, the average deflected height is taken in some experiments (Kouwen *et al.*, 1969; Murota *et al.*, 1984; Tsujimoto *et al.*, 1993; Tsujimoto *et al.*, 1991; Ikeda *et al.*, 1996; Jarvela, 2003; Carollo *et al.*, 2005). However, others authors used the erected height of vegetation (Ree and Crow, 1977; Meijer, 1998 (a); Yang and Choi, 2009).

The bed roughness was assumed negligible in the experiments.

The drag coefficient used in these experiments, is defined by different ways:

Some authors used an equation depending on the Reynolds number (Rowinski *et al.*, 2002; Poggi *et al.* 2004)

Other calculated the drag value based on Petryk and Bosmaijan (1975) equation (Meijer, 1998 (a,b); Tsujimoto *et al.*, 1993) and the bed shear stress (Stone and Shen, 2002).

The equation of Petryk and Bosmaijan (1975) is given by the following expression:

$$U = \sqrt{\frac{2g}{C_D m D}} \sqrt{i} \quad (39)$$

Lopez and Garcia (1997, 2001), Yang and Choi (2009), used a constant value based on experiments done by Dunn *et al.*, 1997.

Murphy *et al.* (2007) assumed a drag coefficient varied with depth and used the average value. Others, use a constant value and they didn't mention how they derived a value for the drag coefficient (Tsujimoto and Kitamura, 1990; Einstein and Banks, 1950; Kouwen *et al.* (1969); Murota *et al.*, 1984; Murota *et al.*, 1984 and Tsujimoto *et al.*, 1991).

When no drag coefficient was given by authors (Ree and Crow, 1977; Ikeda and Kanazawa, 1996; Jarvela, 2003; Carollo *et al.*, 2005) a value of 1 was assumed.

The Drag coefficient of flexible vegetation is not constant due to the bending of vegetation. It decreases when the vegetation is deflected. For rigid emergent vegetation, a constant value is expected. However, for submerged vegetation, the average drag coefficient is used.

The verification of the performance of these six descriptors for predicting the mean velocities is determined due to a comparison between the measured and simulated velocities using the criteria of deviation (the mean error  $E$ , the Mean Absolute Error (MAE), the Root-Mean Square Error (RMSE), the Coefficient of determination ( $R^2$ ) and the standard deviation of the mean error ( $\sigma$ ).

$$E = \frac{1}{N} \left( \sum_{i=1}^n (\text{measured}_{\text{value}} - \text{calculated}_{\text{value}}) \right) \quad (40)$$

$$\text{MAE} = \frac{1}{N} \left( \sum_{i=1}^n |\text{measured}_{\text{value}} - \text{calculated}_{\text{value}}| \right) \quad (41)$$

$$\text{RMSE} = \sqrt{\frac{1}{N} \left( \sum_{i=1}^n (\text{measured}_{\text{value}} - \text{calculated}_{\text{value}})^2 \right)} \quad (42)$$

$$\sigma = \sqrt{\frac{1}{N} \left( \sum_{i=1}^n (\text{measured}_{\text{value}} - \text{calculated}_{\text{value}} - E)^2 \right)} \quad (43)$$

**Table 1 Experiments data used for verification the performance of the models in the prediction the mean velocity in the case of rigid vegetation**

Author(s)	Nombre of experiments	vegetation characteristics			
		$h_p(m)$	D(m)	$m(m^2)$	$C_D$
Lopez and Garcia (1997)	6	0.07-0.14	0.0064	42-388	1.13
Lopez and Garcia (2001)	12	0.12	0.0064	42-384	1.13
Tsujimoto and Kitamura (1990)	8	0.045	0.0015	2500	1.46
Meijeri (1998 b)	36	0.9-1.5	0.008	64-256	0.96-1
Einstein and Banks(1950)	20	0.038	0.0064	3-108	1.4
Stone and Shen (2002)	92	0.124	0.0127	481	1.11
Poggi <i>et al.</i> (2004)	5	0.12	0.004	67-1072	1.5
Murphy <i>et al.</i> (2007)	24	0.07-0.139	0.006	250-800	0.61-1

**Table 2 Experiments data used for verification of the models in the prediction of the mean velocity in the case of flexible vegetation**

Author(s)	Nombre of experiments	vegetation characteristics			
		$h_p(m)$	D(m)	$m(m^2)$	$C_D$
Kouwen <i>et al.</i> (1969)	27	0.05-0.1	0.005	5000	3
Ree and Crow (1977)	30	0.2-0.3	0.005	1076-1464	1
Murota <i>et al.</i> (1984)	8	0.048-0.06	0.00024	4000	2.75
Tsujimoto <i>et al.</i> (1993)	12	0.06	0.00062	10000	2
Tsujimoto <i>et al.</i> (1991)	8	0.02-0.04	0.0015	2500	3.14
Ikeda and kanazawa (1996)	7	0.04	0.00024	20000	1
Meijer (1998 a)	7	1.55-1.65	0.0057	254	1.81
Rowinski <i>et al.</i> (2002)	8	0.165	0.000825	2500-10000	1.22-1.35
Jarvela (2003)	12	0.15-0.29	0.0028	512-12000	1
Carollo <i>et al.</i> (2005)	80	0.04-0.08	0.0045	28000-44000	1
Yang and Choi (2009)	5	0.035	0.0002	1400	1.13

### 3.1 Analytical Models Compared with Data of Rigid Vegetation

The comparison between the measured and simulated mean velocities by different analytical models using data of rigid vegetation is summarized in the table 3.

A High value of  $R^2$  and a low value of MAE, RMSE and  $\sigma$  indicate the good performance of the model. Most descriptors show a good performance in this case. However, Baptist *et al.* (2007) model performs less well, with a low value of  $R^2$  (26 %) and High value of (MAE, RMSE and  $\sigma$ ). The model of Huthoff *et al.* (2007) and Klopstra *et al.* (1997) show the best agreement with a high coefficient of determination (80%).

The difference between the models depends on the transition of the velocity in the vegetation layer and the surface layer.

Baptist *et al.* (2006), Van Velzen *et al.* (2003), Stone and Shen (2002) and Yang and Choi (2010) assume a constant velocity over the depth in the vegetation layer neglecting the influence of the higher velocities in the vegetation layer.

Van Velzen *et al.* (2003) defined the velocity in the surface layer, by an empirical roughness height used in the Keulegan equation. Baptist *et al.* (2006) used simulated data to find an equation for the surface layer, by genetic programming. Stone and Shen (2002) model differs from the method of Baptist *et al.* (2006) and Van Velzen (2003) by the using of the solidity and they define the relation between the velocity in the vegetation layer, and the mean velocity over the entire depth.


In fact, the velocity profile at the top of the vegetation is needed to define the velocity profile in the surface layer because between these two layers the turbulence is the highest, due to the difference in velocity. That's why the theoretical background

of the descriptions of Klopstra *et al.* (1997) and Huthoff (2007) is most realistic, because they describe the mean velocity taking the interaction between the vegetation layer and surface layer into account. Klopstra *et al.* (1997) used the turbulent length-scales to define the energy exchange between the two layers. Huthoff (2007) used scaling considerations of the bulk flow field to avoid complications associated with smaller scale flow processes. Therefore, the theoretical soundness of these descriptions is better than the other descriptions.


**Table 3 Mean velocities calculated by analytic models compared to the mean velocities measured with data of rigid vegetation**

Author(s)	$\sigma$ (m/s)	MAE (m/s)	RMSE (m/s)	R <sup>2</sup>
Klopstra <i>et al.</i> (1997)	0.148	0.073	0.148	0.793
Huthoff and al (2007)	0.127	0.068	0.132	0.816
Van Velzen(2003)	0.223	0.128	0.252	0.774
Yang and Choi (2010)	0.234	0.092	0.235	0.714
Stone and Shen (2002)	0.376	0.138	0.380	0.691
Baptist and al (2007)	3.039	0.529	3.079	0.260

The following figure shows a comparison between the measured mean velocity and calculated by Klopstra *et al.* (1997) and Huthoff *et al.*(2007) in the case of rigid vegetation:

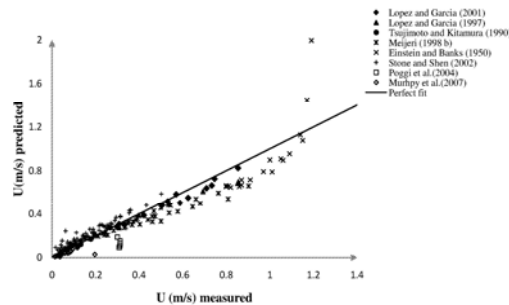

**Fig. 2. Measured and calculated mean velocity by Klopstra *et al.*(1997).**

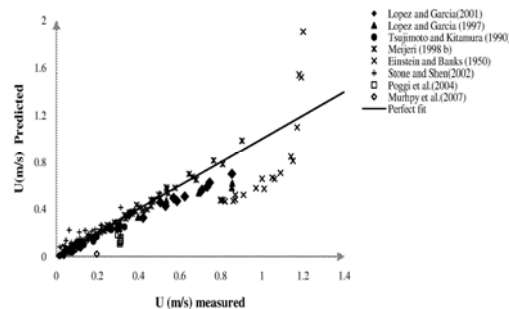

**Fig. 3. Measured and calculated mean velocity by Huthoff *et al.* (2007).**

Mean velocity calculated by Klopsra *et al.* (1997) and Huthoff *et al.* (2007) show a reasonable agreement with data of rigid vegetation.

The differences between the performances of the two remaining descriptors are small. However, these models, indicate an under estimation of Einstein and Banks (1950) data. This experiment used very sparse vegetation (2.7-108 m<sup>-2</sup>), however, for sparse vegetation, bed roughness becomes higher and has an effect on the flow. In this case, this parameter shouldn't be neglected. That could explain the deviation between the measured and calculated velocities spatially for higher velocities.

In general, river models are used to set a safety standard, so, it's very important that a method can predict higher velocities as accurate as possible. Therefore, graphs are presented with the mean error between the predicted and measured velocities for each model to investigate under which circumstances the model shows the largest/smallest errors (Fig. 4).

For smaller velocities, more data sets were available. However, the difference in performance of the different descriptors is small. For higher velocities, the prediction of the mean velocities by the different models indicates an under-estimation or over-estimation and the error is often greater than 0.1 m/s in this case, spatially for the velocities measured by Meijeri (1998 b); Einstein and Banks and Poggi *et al.* (2004). These experiments are done with sparse vegetation; however, the descriptors are validated for dense vegetation neglecting the bed shear stress effect, which can be the main reason of this deviation between the measured and calculated velocities.


The model of Huthoff *et al.* (2007) shows the smallest error in the prediction of the average velocities.

In general, the comparison between the measured and simulated mean velocities using the criteria of deviation and the graphs of the mean error shows the performance of Huthof *et al.* (2007) model in the prediction of the mean velocity for submerged, rigid and dense vegetation. Following Figure 4, the validity of this model in the prediction of the mean velocity could reach to 0.8 m/s. That's very import for flood management to set a safety standard.

### 3.2 Analytical Models Compared with Data of Flexible Vegetation

All of these analytical models are set for rigid vegetation and it's questioned about their performance in calculating the behavior of flexible vegetation.

The comparison between the measured and simulated mean velocities by the different analytic models using data of flexible vegetation is summarized in the table 4.

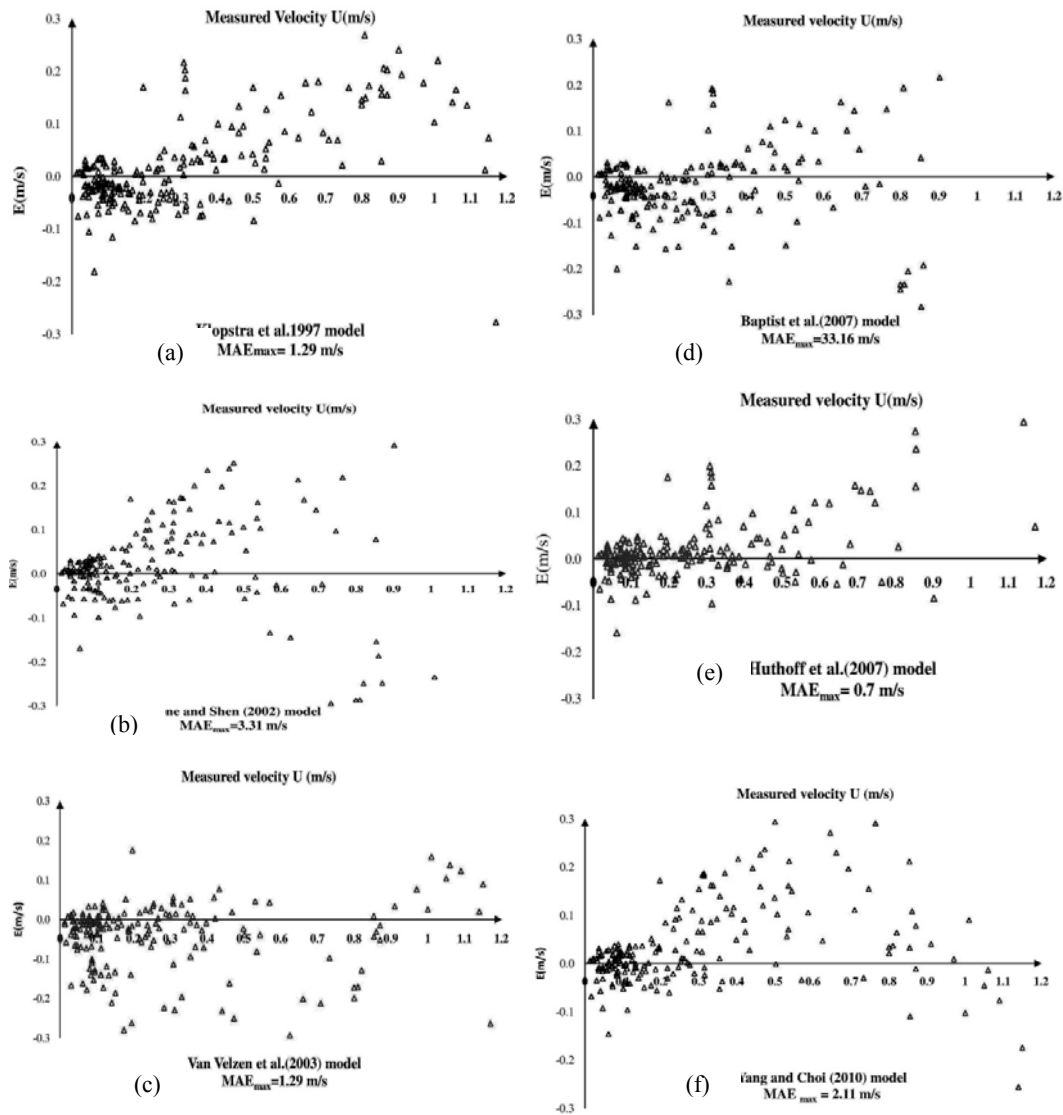

**Fig. 4.** Mean error (E) between the measured mean velocities and the predicted ones by the different analytic models in the case of rigid vegetation.

**Table 4** Mean velocities calculated by analytic models compared to ones measured with data of flexible vegetation

Author(s)	$\sigma$ (m/s)	MAE (m/s)	RMSE (m/s)	$R^2$
Klopstra <i>et al.</i> (1997)	0.258	0.184	0.302	0.208
Huthoff <i>et al.</i> (2007)	0.226	0.170	0.254	0.383
Van Velzen (2003)	0.598	0.305	0.601	0.131
Yang and Choi (2010)	0.245	0.211	0.312	0.261
Stone and Shen (2002)	0.277	0.267	0.373	0.06
Baptist <i>et al.</i> (2007)	0.252	0.297	0.385	0.224


The determination of deviation's criterion between the measured mean velocity and the predicted velocity by the six models shows a small value of a

coefficient of determination ( $< 50\%$ ). However, the prediction by Stone and Shen (2002) and Baptist *et al.* (2007) performs again the least in comparison to the other descriptors.

In general, the prediction of flexible vegetation by the different models is less accurate than prediction of rigid vegetation. Figure 5 shows the mean error between the measured and calculated velocities. In the case of flexible vegetation, the mean error is often greater than 1 when  $u > 1$  m/s.

Predicting the vegetation resistance in this case is very complex since the flexibility of the vegetation is not even taken into account by some models. In addition, all these descriptors, used vegetation in simplified form with fixed and identical plant height and diameter. However, for flexible vegetation, the deflected plant height decreases, due to the increasing of the velocity, therefore the drag coefficient should also decrease at higher velocities. Using a constant coefficient isn't suitable in this



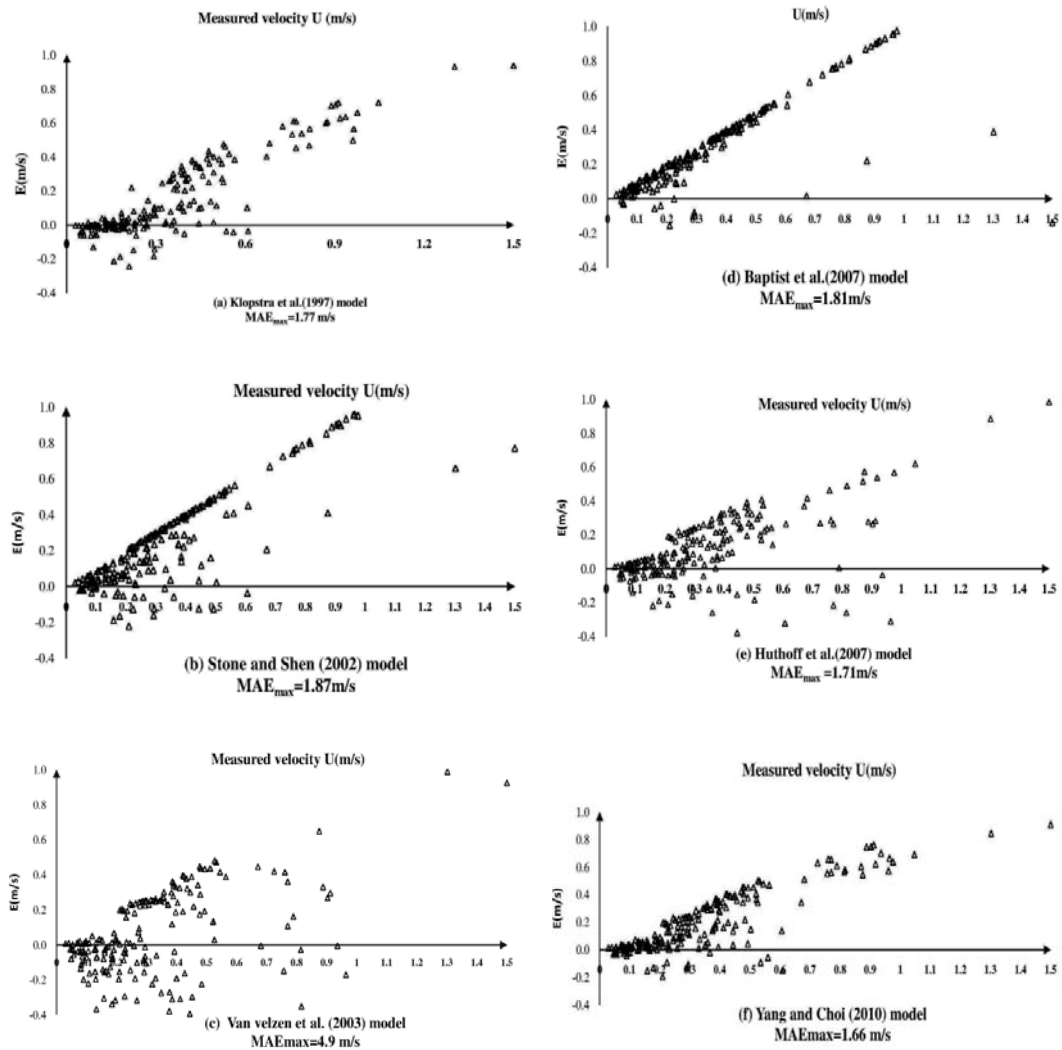

**Fig. 5. Mean error (E) between the measured mean velocities and the predicted ones by the different analytic models in the case of flexible vegetation.**

case. These could explain the deviation between the measured and calculated velocities in this case.

#### 4. CONCLUSION

Several descriptions for rigid vegetation under emergent and submerged conditions were found in literature. The aim of this study was to identify and evaluate the capacity of six analytic models, for predicting the mean velocity by compiling a wide data set of flow experiments.

A data set for submerged rigid and flexible vegetation used in this article to evaluate and determine the range of applicability of these descriptors for predicting the mean velocity.

In the case of rigid vegetation, Most of descriptors show a good performance, with  $R^2$  above (60%).

Only Baptist *et al.* (2007) model performs less well ( $R^2=26\%$ ). However, Huthoff *et al.* (2007) and klopstra *et al.* (1997) model show the best agreement ( $R^2=80\%$ ).

For smaller velocities, the difference in the performance between these descriptors is small but, for higher velocities, the error between the measured velocity and predicted velocity is often greater than 0.1m/s.

These models were validated for dense vegetation and they neglect the bed shear stress. However, for sparse vegetation, bed roughness becomes higher and has an effect on the. That could explain the deviation between the measured and calculated velocities spatially for higher velocities.

The prediction of flexible vegetation by the six models is less accurate than the prediction in the case of rigid vegetation. For flexible vegetation, the deflected plant height decreases, due to the increasing of the velocity, therefore the drag coefficient should also decrease at higher velocities. Using a constant coefficient isn't suitable in this case. Moreover, all descriptions use simplified representation of the reality. These reasons may explain the deviation between the measured and calculated velocities.

In perspective, we will include the model of Huthoff *et al.* (2007) in a computer code (Telemac 2D) to predict the mean velocity in flow through vegetation and we will apply the new model in a real cases (rivers).

#### ACKNOWLEDGEMENTS

The authors wish to thank, the group of LTHE specially the RIVER team (Grenoble) for their cooperation and for the helpful comments and suggestions.

#### REFERENCES

- Augustijn, D. C. M., A. Galema and F. Huthoff (2011). Evaluation of flow formulas for submerged vegetation. *EUROMECH Colloquium 523 :Ecohydraulics: linkages between hydraulics, morphodynamics and ecological processes in rivers*, Clermont-Ferrand, France 147-152
- Augustijn, D. C. M., F. Huthoff and E. H. van Velzen (2008). Comparison of vegetation roughness Descriptions, *4th International Conference on Fluvial Hydraulics, River flow*, Çeşme, Izmir, Turkey 343-350.
- Baptist, M. J., V. Babovic, J. Rodríguez Uthurburu, M.
- Carollo, F. G., V. Ferro and D. Termini (2005). Flow resistance law in channels with flexible submerged vegetation. *Journal of Hydraulic research* 131, 554-564.
- Einstein, H. A. and R. B. Banks (1950). Fluid resistance of composite roughness, *Transactions of the Amer. Geoph. Union* 31(4), 603-610.
- Gharbi, M., A. Soualmia, D. Dartus and L. Masbernat (2014). A Comparative Analysis of Lajeunesse Model with other Used Bed Load Models - Effects on River Morphological Changes. *Journal of Water Resources and Ocean Science* 3(5), 61-68.
- Gualtieri, C. and D. T. Mihailovic (2012). *Fluid Mechanics of Environmental Interfaces, Second Edition*, CRC Press Book.
- Huai, W. X., Y. H. Zeng, Z. G. Xu and Z. H. Yang (2009). Three-layer model for vertical velocity distribution in open channel flow with submerged rigid vegetation. *Advances in Water Resources* 32,487-492.
- Huthoff, F., D. C. M. Augustijn and S. J. M. H. Hulscher (2007). Analytical solution of the depth-averaged flow velocity in case of submerged rigid cylindrical vegetation. *Water Resources Research* 43(W06413) 1-10.
- Ikeda, S. and M. Kanazawa (1996). Three-dimensional Organized Vortices above Flexible Water Plants". *Journal of Hydraulic Engineering* 122(11), 634-640.
- Jarvela, J. (2003). Influence of Vegetation on Flow Structure in Floodplains and Wetlands, *Proceeding of the 3<sup>rd</sup> IAHR symposium on River Coastal and Estuarine morphodynamic*, Madrid 845-856.
- Jarvela, J. (2005). Effect of submerged flexible vegetation on flow structure and resistance. *Journal of Hydrology* 307, 233-241.
- Katul, G. G., D. Poggi and L. Ridolfi (2011). A flow resistance model for assessing the impact of vegetation on flood routing mechanics, *Water Resources Research* 47(8), W08533.
- Keijzer, R. E. Uittenbogaard, A. Mynett and A. Verwey (2007). On inducing equations for vegetation resistance. *Journal of Hydraulic Research* 45(4), 435-45.
- Klopstra, D., H. J. Barneveld, J. M. van Noortwijk and E. H. van Velzen (1997). Analytical Model for Hydraulic Roughness of Submerged Vegetation. *Proceeding of theme A, Managing coping with scarcity and abundance, the 27<sup>th</sup> congress of the international Association for Hydraulic Research*, San Fransisco 775-780.
- Kouwen, N., T. E. Unny and H. M. Hill (1969). Flow Retardance in Vegetated Channels. *Journal of the Irrigation and Drainage Division* 95(IR2), 329-342.
- Liu, C. and Y. Shen (2008). Flow structure and sediment transport with impacts of aquatic vegetation. *Journal of Hydrodynamics* 20(4), 461-468.
- Lopez, F. and M. H. Garcia (1997). Open-channel flow through simulated vegetation: Suspended sediment transport modeling. *Water Resources Research* 34(9), 2341-2352.
- Lopez, F. and M. H. Garcia (2001). Mean Flow and Turbulence Structure of Open Channel Flow through Non-Emergent Vegetation. *Journal of Hydraulic Engineering* 127(5), 392-402.
- Meijer, D. M. (1998). Flume Studies of Submerged Vegetation. PR121.10, HKV, Lelystad (in Dutch).
- Meijer, D. M. (1998). Flume Studies of Submerged Reed. PR177, HKV, Lelystad (in Dutch).
- Morri, M., A. Soualmia and Ph. Belleudy (2015). Analytical Models Evaluation for Predicting Vertical Velocity Flows through Submerged Vegetation. *International Journal of Engineering Research* 4(1), 9-12.
- Murota, A., T. Fukuhara and M. Sato (1984). Turbulence Structure in Vegetated Open Channel Flows. *Journal of hydroscience and hydraulic engineering* 2(1), 47-61.
- Murphy, E., M. Ghisalberti and H. Nepf (2007). Model and laboratory study of dispersion in flows with submerged vegetation, *Water Resources Research* 43(5), 1-12.
- Nepf, H. (2012). Hydrodynamics of vegetated

- channels. *Journal of Hydraulic Research* 50(3), 262-279.
- Petryk, S. and G. Bosmajian (1975). Analysis of flow through vegetation. *Journal of the Hydraulic Division of the American Society of Civil Engineers* 101(7), 871-884.
- Poggi, D., A. Porporato, L. Ridolfi, J. D. Albertson and G. G. Katul (2004). The effect of vegetation density on canopy sub-layer turbulence. *Bound.-Layer Meteor* 111(3), 565-587.
- Ree, W. O. and F. R. Crow (1977). Friction Factors for Vegetated Waterways of Small Slope. ARS-S-151. *Agricultural Research Service* 56, U.S. Department of Agriculture, Stillwater, Oklahoma, USA.
- Rowinski, P. M. and J. Kubrak (2002). A mixing-length model for predicting vertical velocity distribution in flows through emergent vegetation. *Hydrological Sciences-Journal* 47, 893-904.
- Samani, J. M. V. and M. Mazaheri (2009). An analytical model for velocity distribution in transition zone for channel flows over inflexible submerged vegetation. *Journal of Agriculture Science and Technology* 11, 573-584.
- Shimizu, Y. and T. Tsujimoto (1994). Numerical analysis of turbulent open-channel flow over a vegetation layer using a k-e turbulence model. *Journal of hydrosience and hydraulic engineering* 11(2),57-67.
- Stone, M. B. and H. T. Shen (2002). Hydraulic resistance of flow in channels with cylindrical roughness. *Journal of hydraulic engineering* 5(128), 500-506.
- Teng, L., L. Chen, S. Smith and L. Lam (2002). *FRP-Strengthened RC Structures*. Chichester, UK.: John Wiley and Sons
- Tsujimoto, T. T. Okada and K. Kontani (1993). Turbulent structure of open-channel flow over flexible vegetation. Progressive Report. Hydraulic Laboratory, Kanazawa University.
- Tsujimoto, T., T. Okada and T. Kitamura (1991). Turbulent flow over flexible vegetation covered bed in open channels. KHL progressive report 1, Kanazawa University, Kanazawa, Japan.
- Van, Velzen, E. H., P. Jesse, P. Cornelissen and H. Coops (2003). Stromings weerstand vegetatie in uiterwaarden; Handboek. *RIZA Reports*, 2003.028 and 2003.029, Arnhem, Netherlands.
- Wu, W. and Z. HE (2009). Effects of vegetation on flow conveyance and sediment transport capacity. *International Journal of Sediment Research* 24(3), 247-259.
- Yang, W. and S. Choi (2010). A two-layer approach for depth-limited open-channel flows with submerged vegetation. *Journal of Hydraulic Research* 48(4), 466-475.