

Evaluation of Reservoir Properties Using Wireline Logs of Well Sarai-Sidhu-1, Punjab Platform, Central Indus Basin, Pakistan

Mustafa Yar¹, Syed Waqas Haider^{2,*}, Raja Ahtisham Ghafoor³, and Tallat Majeed Khan³

¹ Lecturer, Department of Geology, FATA University, Darra Adam Khel, F.R. Kohat, Pakistan

² M.S. Student, Department of Earth and Environmental Sciences, Bahria University, Shangrilla Road E-8, Islamabad, Pakistan

³ Graduates, Department of Earth and Environmental Sciences, Bahria University, Shangrilla Road E-8, Islamabad, Pakistan

Received: August 26, 2017; revised: September 06, 2017; accepted: October 08, 2017

Abstract

The well Sarai Sidhu-01 is located on Punjab Platform, Central Indus Basin, Pakistan. Punjab Platform is the eastern part of Central Indus Basin, and tectonically it is the stable portion of Indus Basin, which was least affected during Tertiary Himalayan orogeny. This study attempts to decipher reservoir potential for hydrocarbon exploration. It aims to delineate a subsurface hydrocarbon bearing zone and to estimate the reservoir properties. A complete suite of wireline logs containing Caliper log (CALI), gamma ray log (GR), spontaneous potential log (SP), neutron log (ϕ_N), density log (ϕ_D), and resistivity logs (MSFL, LLS, and LLD) with all drilling parameters and well tops were utilized. The methodology adopted to accomplish this task includes the calculation of volume of shale (V_{sh}) by using gamma ray log and effective porosity (ϕ_E) by using density and neutron logs. Resistivity of water (R_w) was calculated by SP method, and the saturation of water (S_w) and the saturation of hydrocarbons (S_h) is calculated with the help of Archie's equation. According to log signatures, Lumshiwai formation of early Cretaceous age encountered in well in the depth range of 5433 ft. to 5797 ft. was marked as a possible reservoir, and this zone was evaluated for its reservoir potential in detail using a set of equations. The average values calculated for different parameters are as follows: $V_{sh} = 30\%$, $\phi_E = 17\%$, $S_w = 46\%$, and $S_h = 54\%$. The analysis shows that S_h is low, so it is inferred that Lumshiwai formation has a low potential and is economically not feasible for hydrocarbons production.

Keywords: Reservoir Characterization, Wireline Logs, Sarai Sidhu-1, Punjab Platform, Petrophysics

1. Introduction

Wireline logging is a practice to attain information about subsurface strata encountered in a borehole drilled for hydrocarbon exploration (Rider, 2002). Its key purpose is to evaluate the potential of a formation to act as a reservoir for accumulation and economical recovery of hydrocarbons.

The present study has been performed on well Sarai-Sidhu-1 located in tehsil Kabirwala, District Khanewal, Punjab province, Pakistan (Figure 1); geologically, it is a part of Central Indus Basin. Sarai

* Corresponding Author:

Email: syedwaqas.haider@live.com

Sidhu-1 was drilled by Amoco in 1973-74 on seismically delineated prospect up to TD 15303 ft., and initially low-quality gas was discovered in cretaceous sequence; now, it is an abandoned well (Quadri and Quadri, 1998).

The main objective of this study is the demarcation of hydrocarbon bearing zone and its evaluation for reservoir characteristics by interpreting wireline logs in well Sarai-Sidhu 01. Reservoir characterization includes the estimation of different physical parameters, i.e. the volume of shale (V_{sh}), porosity (ϕ), saturation of water (S_w), and hydrocarbons.



Figure 1
Tectonic map of the studied area (Kadri, 1995).

2. Regional geology and tectonic settings

The central Indus Basin from east to west comprises of three units (Figure 2); Punjab Platform, Sulaiman depression, and Sulaiman Fold belt (Raza et al., 1989). The well under study lies on Punjab platform (Figure 2). Punjab Platform marks the eastern segment of Central Indus Basin, and it is a broad monocline dipping gently towards Sulaiman depression (Kadri, 1995). In the north, Sargodha high separates Central Indus Basin from the Upper Indus Basin. Sukkur Rift comprises of Jacobabad and Mari Kandh-Kot, and highs are present in the south separating it from the southern Indus Basin. It is locked by Indian shield in the east and by the marginal zone of the Indian plate in the west (Shah, 1977). The area was relatively less affected by Tertiary Himalayan orogenic event because of its greater distance from the collision zone (Raza et al., 1989). The Punjab Platform is covered by thick unconsolidated quaternary alluvial deposits of sand, silt, and clay with the maximum thickness of about 1600 ft. (Kadri, 1995; Raza et al., 1989). The oldest rocks encountered in Punjab Platform through drilling are Infra-Cambrian Salt range formation (Kadri, 1995; Humayun et al., 1991). Table 1 shows the stratigraphy of the study area encountered in the borehole of Sarai-Sidhu 01. The Punjab Platform further extends towards east into India, where it is called Bikaner-Nagaur Basin; significant

quantities of oil have been discovered from Infra-Cambrian evaporites therein (Aadil and Sohail, 2014). This discovery enhanced the exploration activities on Punjab Platform.

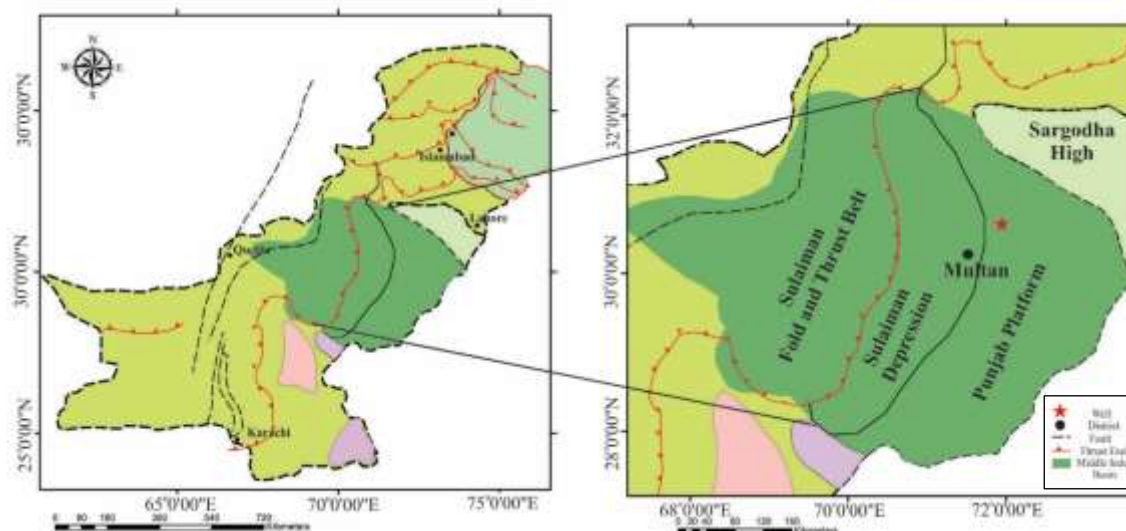


Figure 2

Tectonic map of Pakistan highlighting Central Indus Basin and its sub-divisions (Modified after Kadri, 1995).


Table 1
Borehole stratigraphy of Sarai-Sidhu-1.

Era	Period / epoch	Formation	Lithology description	Formation tops (feet)	Hydrocarbon system		
					Seal	Source	Reservoir
CENOZOIC	PLIOCENE	NAGRI	Claystone, Siltstone	00.0			
	MIOCENE	CHINJI	Claystone, Siltstone	2063.97			
		SAKESAR	Limestone	4373.68			
	EOCENE	NAMMAL	Shale, Limestone	4582.67			
		GHAZIJ	Shale, Sandstone	4681.75	■		
	PALEOCENE	DUNGHAN	Limestone	5178.80			■
RANIKOT		Limestone, Shale	5291.99	■			
MESOZOIC	CRETACEOUS	LUMSHIWAL	Sandstone	5433.07			■
		CHICHALI	Sandstone	5797.24			
		SAMANA SUK	Limestone, Shale	5985.56		■	
	JURASSIC	SHINAWARI	Limestone, Sandstone	6434.71			■
		DATTA	Shale	6746.71	■		
	TRIASSIC	KINGRIALI	Sandstone, Shale	6807.74			
TREDIIAN		Sandstone	7185.03				
PALEOZOIC		AMB	Limestone	7355.64			
	PERMIAN	SARDHAI	Clays	7664.69			
		WARCHA	Sandstone	8202.1			

3. Material and methodology

Data acquired to accomplish this study consist of open-hole wireline logs of well Sarai-Sidhu-01 and well tops. Data are provided by Land Mark Resources (LMKR) with prior approval of Directorate General Petroleum Concessions (DGPC) Islamabad, Pakistan; they include Caliper log (CALI), gamma ray log (GR), spontaneous potential log (SP), resistivity logs (LLD, LLS, and MSFL), neutron log (ϕ_N), density log (ϕ_D), and well tops along with all drilling parameters. The workflow adopted for logs interpretation is illustrated in Table 2.

Table 2
Methodology adopted for research work.

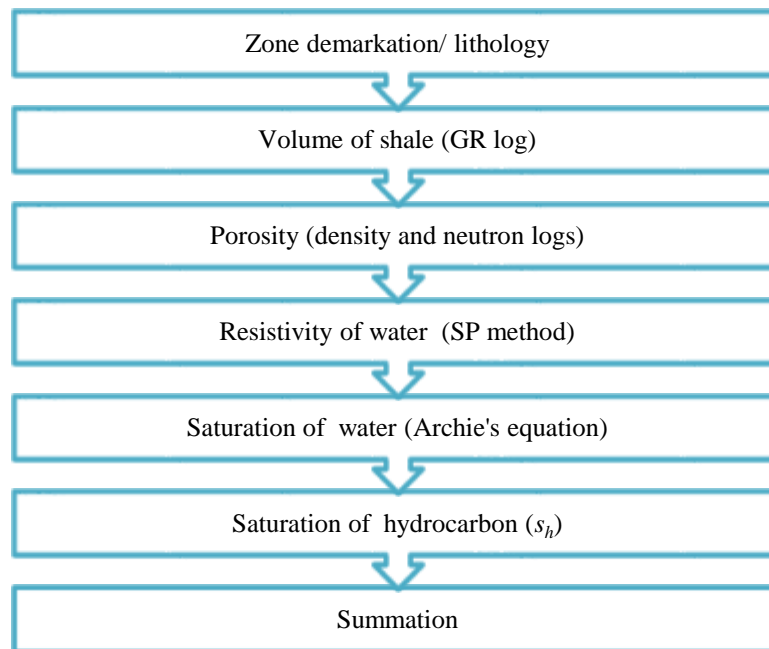

4. Results and discussion

The evaluation of the reservoir properties of well Sarai-Sidhu-01 was performed by the careful analysis of all the available wireline logs data. A zone is marked on the bases of GR log trend (Figure 3a) in a depth range of 5433.07 ft. to 5797.24 ft. as a possible reservoir. The total thickness of zone is 364 ft. Well tops of Sarai-Sadhu -01 (Table 1) confirmed this zone as Lumshiwal formation of a cretaceous age. Further analysis shows that the effective porosity calculated using neutron and density logs for the zone of interest is 17% (Figure 3c). The average saturation of water calculated using Archie's equation is 46%, and the saturation of hydrocarbon is 54% (Figure 3c). After applying cut offs to minimum extractable hydrocarbons, net pay thickness is calculated 150 ft. for the whole zone in different depth intervals. Figure 3 shows the combined graphs of all the calculated parameters for the reservoir evaluation of Lumshiwal formation.

A zone of interest, having the fair potential to act as a reservoir for the accumulation of hydrocarbons, is marked with gamma ray log and correlated with the other logs in a depth range of 5433.07 ft. to 5797.24 ft. (Figure 3). This zone is tested for its hydrocarbon potential using a set of equations.

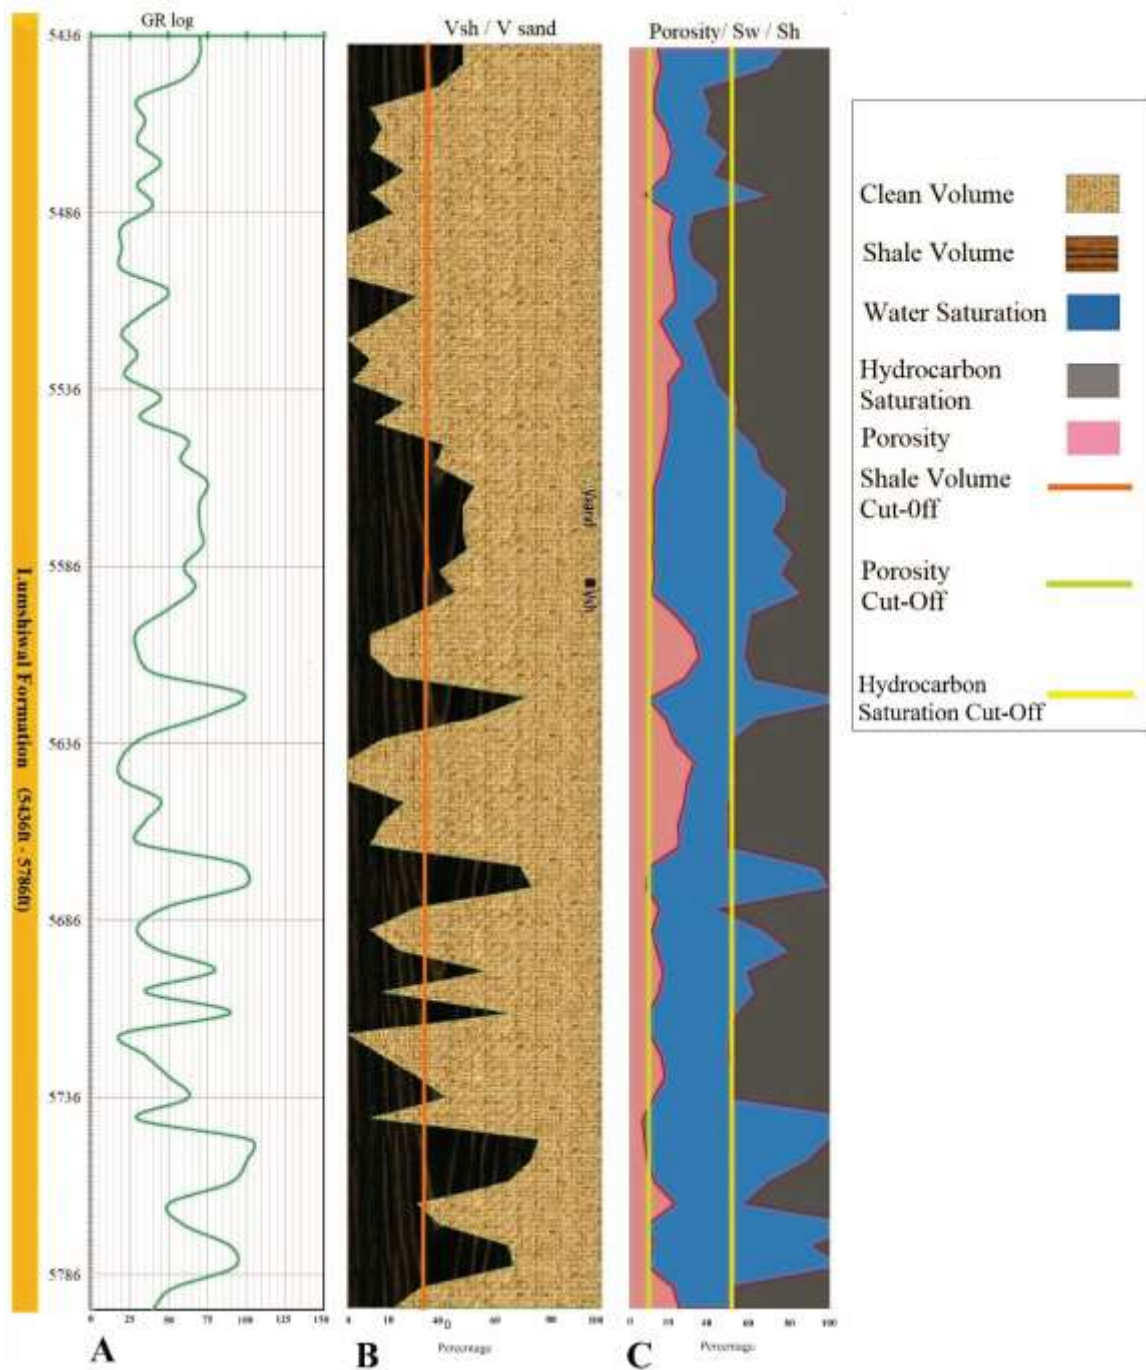


Figure 3

Composite graphs for the complete evaluation of our zone of interest; A) GR log curve in our zone of interest; B) the composite graph of V_{sh} and V_{sand} ; and C) the combined graph of porosity, S_w , and S_h .

4.1. Calculation of volume of shale (V_{sh})

V_{sh} is also known as the dirtiness of reservoir, and GR log is used for the calculation of V_{sh} using the following equation (Rider, 1996).

$$V_{sh} = \frac{(GR \log - GR \min)}{(GR \max - GR \min)} \quad (1)$$

where,

- GR log = Gamma ray log reading.
- GR max = Maximum gamma ray deflection in the zone.
- GR min = Minimum gamma ray deflection in the zone.

4.2. Calculation of clean volume (V_{sand})

V_{sand} is the cleanliness of a reservoir, known as the net to gross ratio. V_{sand} is obtained by subtracting 1 from V_{sh} . Equation is given below.

$$V_{sand} = 1 - V_{sh} \quad (2)$$

4.3. Porosity calculations

Porosity analysis is an important factor for reservoir evaluation. In the present study, neutron and density logs are used for porosity calculations. Neutron log (ϕ_N) measures hydrogen ion present in formation, so it can be calculated directly from log curves; density porosity is calculated using the following equation (Rider, 1996).

$$\text{Density Porosity } (\phi_D) = \frac{(RHOM - RHOB)}{(RHOM - RHOF)} \quad (3)$$

where,

- $RHOM$ = Matrix density (constant values according to lithology)
- $RHOF$ = Fluid density (from log header)
- $RHOB$ = Bulk density (density log values from log curve)

Average porosity is calculated using combined neutron-density logs with the following equation (Rider, 1996).

$$\text{Average Porosity} = \phi_{N-D} = \sqrt{\frac{(\phi_N^2 + \phi_D^2)}{2}} \quad (4)$$

where,

- ϕ_N = Neutron porosity
- ϕ_D = Density porosity

$$\text{Effective porosity} = \phi_E = \phi_{Avg} \times (1 - V_{clean}) \quad (5)$$

where,

- ϕ_E = Effective porosity
- ϕ_{Avg} = Total porosity
- V_{clean} = Volume of sand

4.4. Resistivity of water (R_w)

The calculation of R_w is very sensitive because the saturation of water depends on it. Spontaneous

potential (*SP*) method is adopted for the determination of R_w ; calculations involve the determination of SSP, which is calculated directly from the *SP* log curve. Formation temperature is also determined by using Equation 6:


$$\text{Formation Temperature} = T_f = T_s + Df \left(BHT - \frac{T_s}{TD} \right) \quad (6)$$

where,

- BHT = Bottom hole temperature
- T_s = Surface temperature
- TD = Total depth
- Df = Formation depth

Bottom hole temperature (BHT) and the resistivity of mud filtrate at the surface temperature ($Rmf @ T_s$) were taken from the header of wireline log. To calculate the resistivity of mud filtrate at formation temperature ($Rmf @ T_f$) the Schlumberger Gen-9 chart was used. The $Rmf @ T_f$ is converted to Rmf_{eqv}/Rw_{eqv} using Schlumberger's SP-1 chart (Schlumberger, 2009). Using these values, R_w is determined by Schlumberger's SP-2 chart (Schlumberger, 2009). Table 3 shows the systematic approach to found parameters for determining R_w by the SP procedure.

Table 3
Step by step parameters to be found for the determination of R_w .

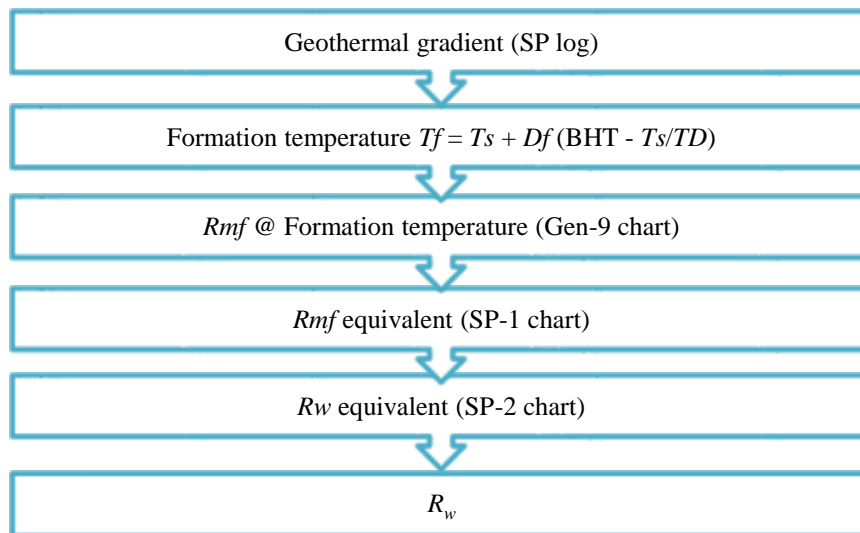

4.5. Saturation of water

Archie's equation is applied to the calculation of S_w (Rider, 1996).

$$\text{Saturation of water} = S_w = n \sqrt{\left(\frac{a \cdot R_w}{\phi_m \times R_t} \right)} \quad (7)$$

where,

- S_w = Saturation of water
- n = Saturation exponent

- a = Tortuosity factor
- R_w = Resistivity of formation water
- ϕ = Porosity
- m = Cementation exponent
- R_t = Resistivity of uninvaded zone

a is a tortuosity factor, which varies from 0.91 to 1.05, and it is normally taken as 1 (Elias and Steagall, 1996). m is cementation exponent, which ranges from 1.8 to 2 for sandstones (Salem and Chilingarian, 1999b). n value also ranges from 2.40 to 4.24 (Elias and Steagall, 1996).

4.6. Saturation of hydrocarbons

The determination of hydrocarbon saturation depicts the potential of reservoir to produce economically feasible hydrocarbons. It is calculated by Equation 8 (Rider, 1996)

$$S_h = 1 - S_w \quad (8)$$

Saturations of water and hydrocarbons (Figure 3c) are opposite to each other; in other words, where the saturation of hydrocarbons increases, the saturation of water drops. The saturation of hydrocarbons calculated for our zone of interest is 30%, which is very low for an economic recovery of hydrocarbons.

5. Cut off

Applying cut off is a manual practice for petrophysical evaluation. Cut offs are employed to find an average value in the zone of interest, where we find the least extractable volume of hydrocarbons. Cut off grades used to determine economically feasible zone for hydrocarbons production is 30% for V_{sh} , 10% for porosity, and 50% for saturation of hydrocarbons.

6. Conclusions

The analysis shows although the porosity is high, the saturation of hydrocarbon is least economically feasible for recovery. Therefore, it is concluded that Lumshiwai formation of early Cretaceous age has a low potential for an economic recovery of hydrocarbons due to the low volume of hydrocarbons present in pore spaces.

Acknowledgements

We are extremely thankful to the Land Mark Resources (LMKR) and Director General Petroleum Concessions (DGPC) Pakistan for giving the data of the required wells. Furthermore, we are grateful to the Department of Earth and Environmental Sciences, Bahria University, Islamabad for providing us with the facilities to complete this project.

Nomenclature

CALI	: Caliper log
GR	: Gamma ray log
LLD	: Laterolog deep
LLS	: Laterolog shallow
MSFL	: Micro-spherical focused log

R_W	: Resistivity of water
SP	: Spontaneous potential log
S_w	: Saturation of water
V_{sh}	: Volume of shale
ρ_D	: Density log
ρ_E	: Effective porosity
ρ_N	: Neutron log

References

- Aadil, N. and Sohail, G. M., 3D Geological Modeling of Punjab Platform, Middle Indus Basin, Pakistan, through Integration of Wireline Logs and Seismic Data, Journal Geological Society of Indian, Vol. 83, p. 211-217, 2014.
- Archie, G. E., The Electrical Resistivity Log as an Aid in Determining Some Reservoir Characteristics, Transaction of American Institute of Mining, Metallurgical and Petroleum Engineers (TAIME), Vol. 146, p. 54-62, 1942.
- Elias, V. L. G. and Steagall, D. E., The Impact of the Values of Cementation Factor and Saturation Exponent in the Calculation of Water Saturation for Macaé Formation, Campos Basin, SCA Conference Paper Number 9611, 1996.
- Humayun, M., Lillie, R. J., and Lawrence, R. D., Structural Interpretation of Sulaiman Folds Belt and Foredeep, Pakistan, Tectonophysics Vol. 10, p. 299-324, 1991.
- Kadri, I. B., Petroleum Geology of Pakistan, P. 300, Pakistan Petroleum Limited, Karachi, Pakistan, 1995.
- Raza, H. A., Ahmed, R., Alam, S., and Ali, S. M., Petroleum Zones of Pakistan, Pakistan Journal of Hydrocarbon Research, Vol. 1, p. 21-56, 1989.
- Quadri, V.N. and Quadri, S.M.G.J., Failure-to-success Targets May Lie in Pakistan Basins, Oil and Gas Journal, Vol. 96, No. 12, p. 92-97, 1998.
- Rider, M. H., the Geological Interpretation of Well Logs, John Wiley and Sons, New York, 1996.
- Rider, M. H., the Geological Interpretation of Well Logs, 2nd Edition, Sutherland, Rider-French Consulting, 2002.
- Salem, H. S. and Chilingarian, G. V., The Cementation Factor of Archie's Equation for Shaly Sandstone Reservoirs, Journal of Petroleum Science and Engineering, Vol. 23, P. 83-93, 1999b.
- Schlumberger, Log Interpretation Charts, Gen-9, SP-1, SP-2 Charts, p.19-20, 2009.
- Shah, S. M. I., Precambrian and Paleozoic, Stratigraphy of Pakistan, Memoir, Vol. 12, p. 1-29, Geological Survey of Pakistan, Quetta, 1977.