



Biochemical Application Compilation and Architecture Synthesis for Fault-Tolerant Digital Microfluidic Biochips

Alistar, Mirela; Pop, Paul; Madsen, Jan

Publication date:
2013

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):

Alistar, M., Pop, P., & Madsen, J. (2013). Biochemical Application Compilation and Architecture Synthesis for Fault-Tolerant Digital Microfluidic Biochips. Poster session presented at Lab-on-a-Chip World Congress, San Diego, CA, United States.

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.


- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Biochemical Application Compilation and Architecture Synthesis for Fault-Tolerant Digital Microfluidic Biochips


Authors: Mirela Alistar, Paul Pop, Jan Madsen

Biochemical Application Model

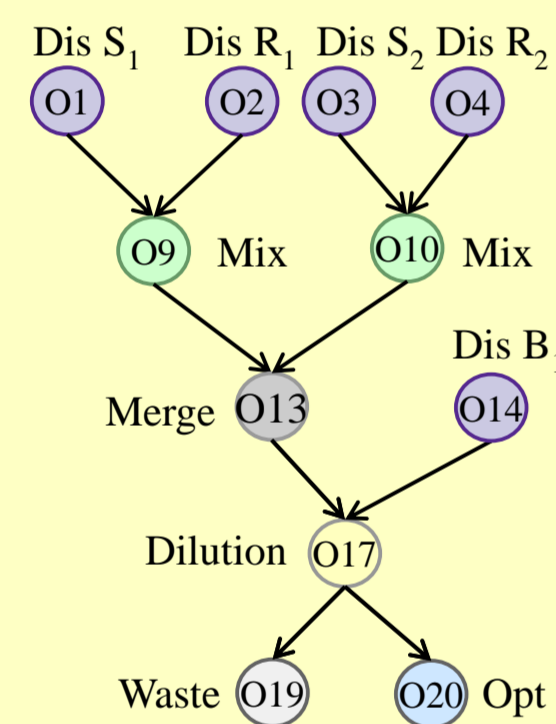


A biochemical protocol is modeled as a directed graph, where the nodes represent the operations and the edges represent the relationship between them. An operation is ready to execute when its inputs have arrived. Examples of operations are: dispensing, mix, dilution, optical detection, merge. Droplets are transmitted through the edges from one operation to its successor operation.

Biochip Architecture Model

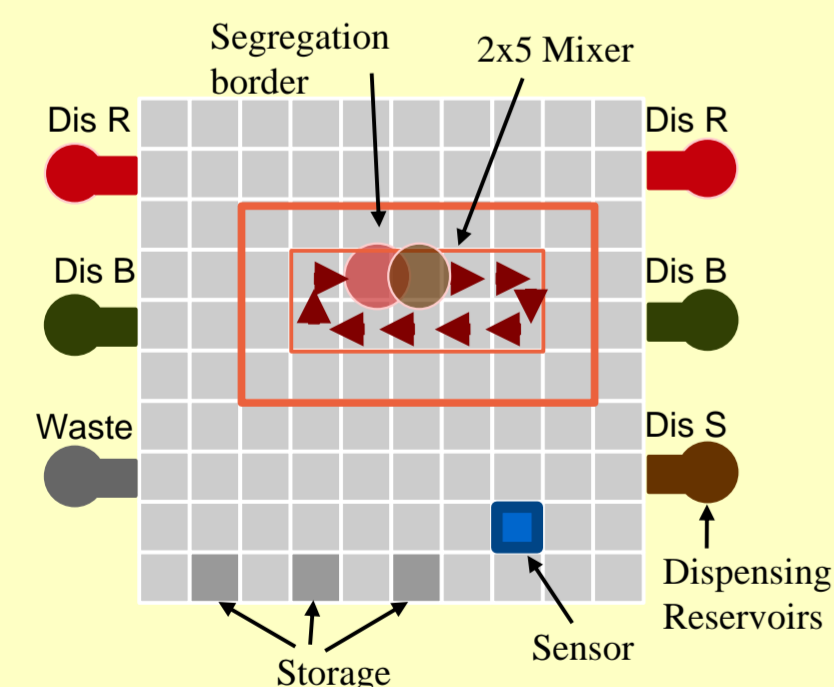


A biochip architecture is modeled as an array of electrodes. Operations execute within specified areas called *modules*, which can be placed on any electrodes of the biochip. These architectures are general-purpose and highly reconfigurable.

Challenge: Faults

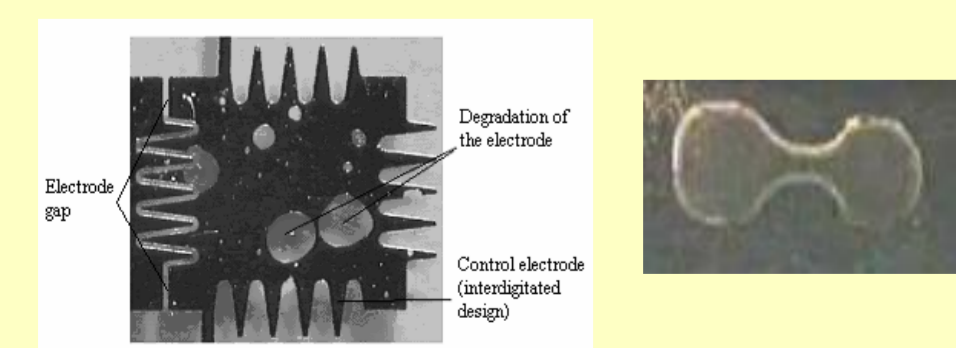


The applications have high sensitivity to volume variations. Faults during runtime, such as an unbalanced split, can compromise the result of the application.


Runtime Compilation

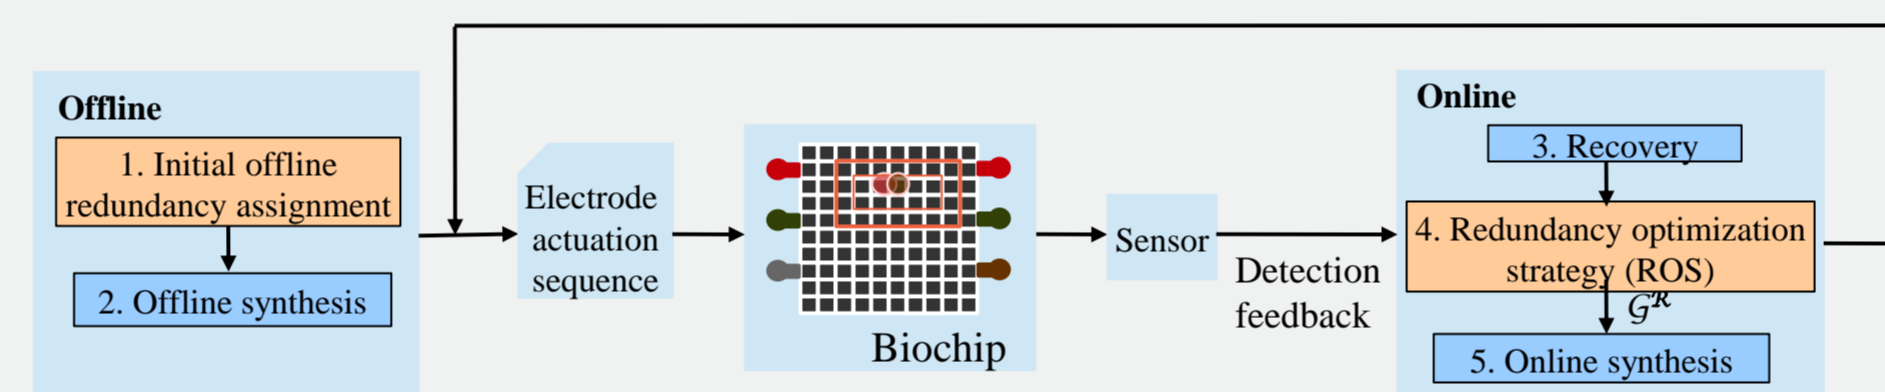



Recovery Methods

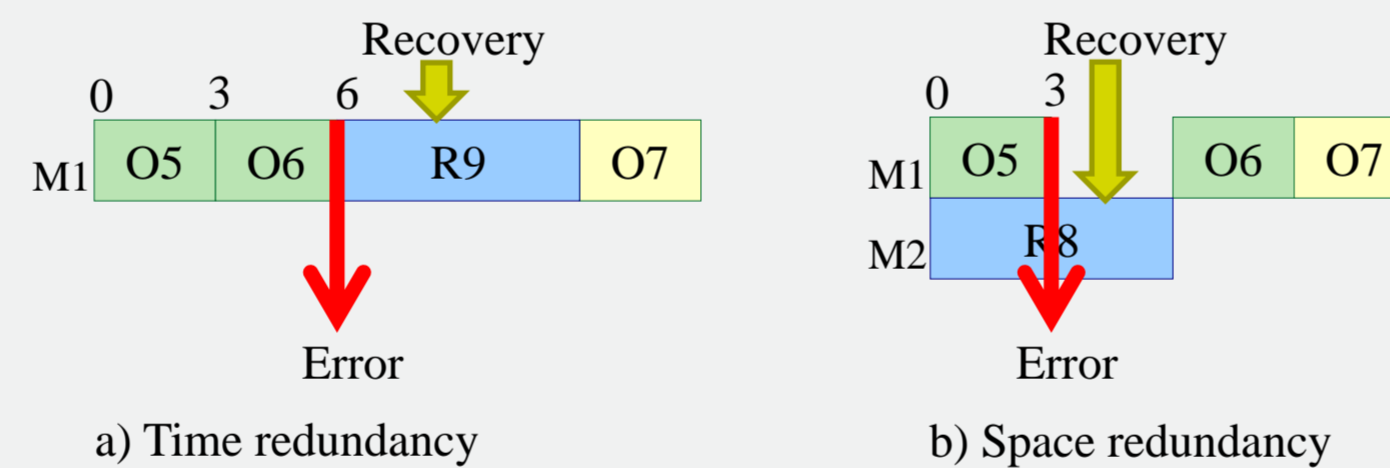

Compilation Tasks

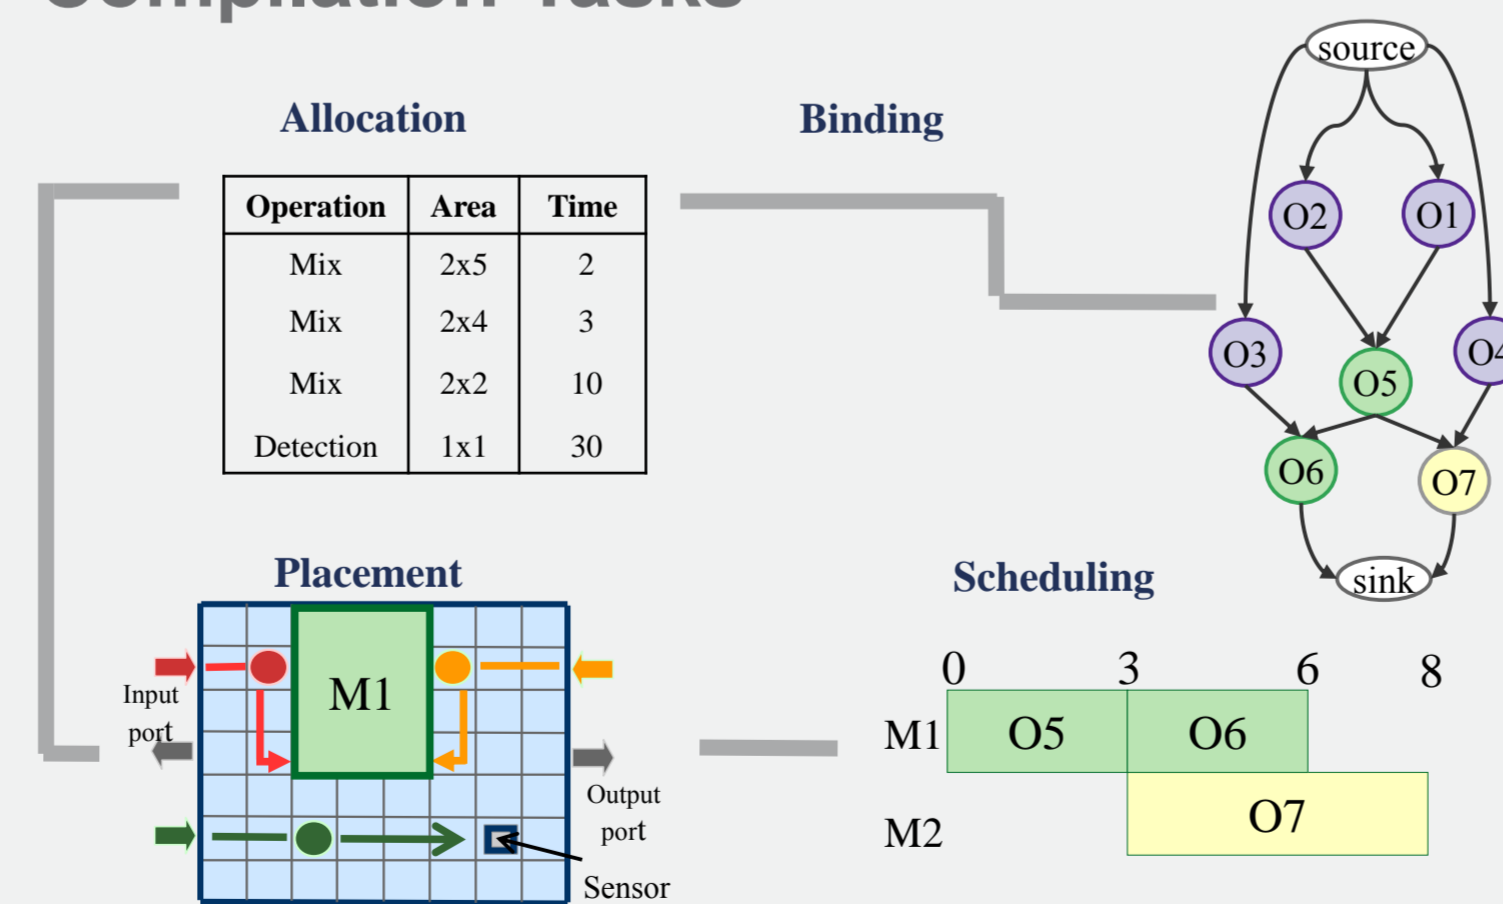

Application Specific Architecture

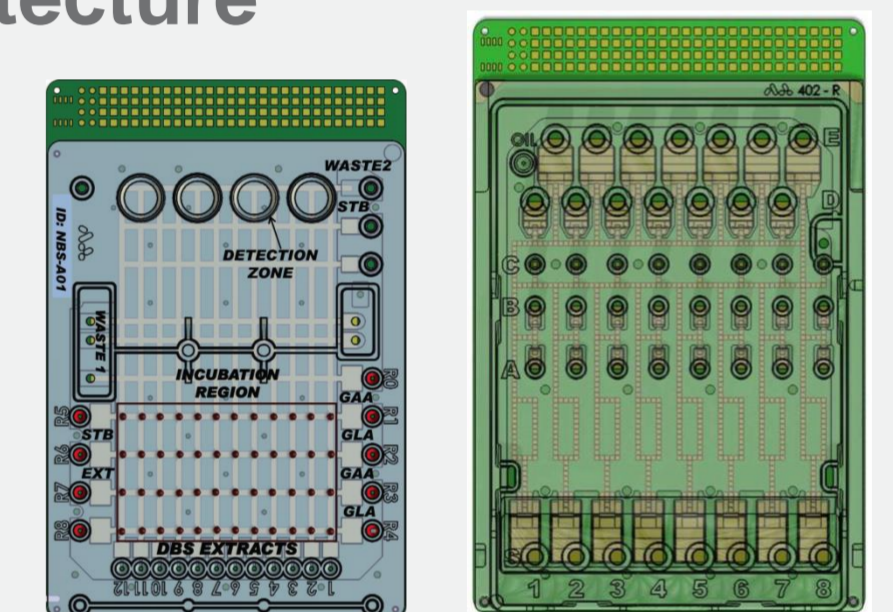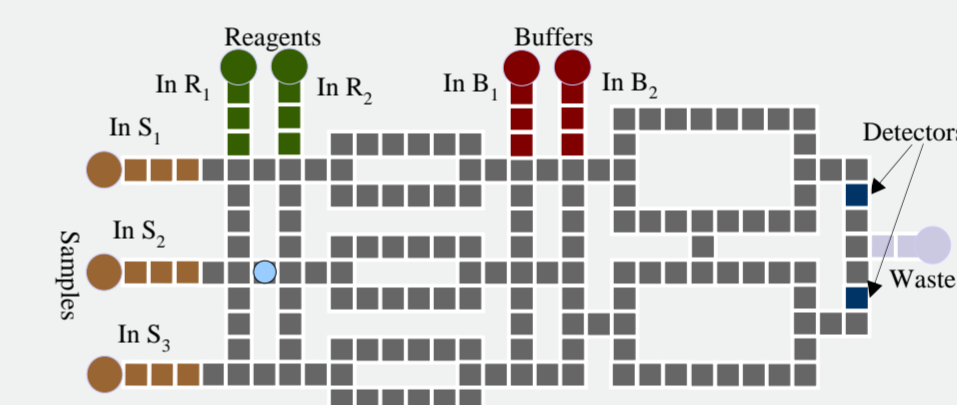


Cost Evaluation

Name	Unit Cost	Dimensions (mm)	Time (s)
Electrode	1	1.5 x 1.5	N/A
Input Reservoir	3	1.5 x 4.5	2
Waste Reservoir	3	1.5 x 4.5	N/A
Capacitive Sensor	1	1.5 x 4.5	0
Optical Sensor	9	4.5 x 4.5	8

$$Cost_A = \sum N_{M_i} \times Cost_{M_i}$$

- where
- A is the architecture
 - N_{M_i} is the number of components M_i
 - $Cost_{M_i}$ is the cost of the physical component M_i

Problem Formulation

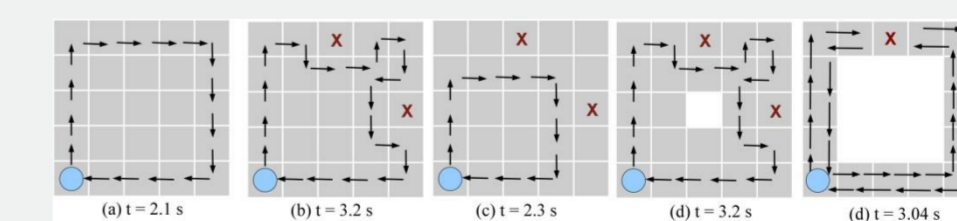

Evaluation of fault-tolerant overhead (faults are marked with X)

- Given**
 - Biochemical application
 - Deadline requirements
 - Library of components
 - The number k of permanent faults
- Determine** an application-specific architecture A , so that
 - the cost is minimized and
 - the application completes within deadline for any occurrence of the k permanent faults