

Technical University of Denmark



## Numerical simulation of wave-induced scour and backfilling below submarine pipelines

Fuhrman, David R.; Baykal, Cüneyt; Sumer, B. Mutlu; Jacobsen, Niels Gjørl; Fredsøe, Jørgen

*Published in:*

Abstract Book of the 34th International Conference on Coastal Engineering

*Publication date:*  
2014

[Link back to DTU Orbit](#)

*Citation (APA):*

Fuhrman, D. R., Baykal, C., Sumer, B. M., Jacobsen, N. G., & Fredsøe, J. (2014). Numerical simulation of wave-induced scour and backfilling below submarine pipelines. In Abstract Book of the 34th International Conference on Coastal Engineering

**DTU Library**  
Technical Information Center of Denmark

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

## NUMERICAL SIMULATION OF WAVE-INDUCED SCOUR AND BACKFILLING BELOW SUBMARINE PIPELINES

David R. Fuhrman, Technical University of Denmark, Department of Mechanical Engineering, [drf@mek.dtu.dk](mailto:drf@mek.dtu.dk)

Cüneyt Baykal, Technical University of Denmark, Department of Mechanical Engineering, [cbykl@mek.dtu.dk](mailto:cbykl@mek.dtu.dk)

B. Mutlu Sumer, Technical University of Denmark, Department of Mechanical Engineering, [bms@mek.dtu.dk](mailto:bms@mek.dtu.dk)

Niels G. Jacobsen, Deltares, [Niels.Jacobsen@deltares.nl](mailto:Niels.Jacobsen@deltares.nl)

Jørgen Fredsøe, Technical University of Denmark, Department of Mechanical Engineering, [jf@mek.dtu.dk](mailto:jf@mek.dtu.dk)

A fully-coupled hydrodynamic and morphodynamic numerical model is utilized for the simulation of wave-induced scour and backfilling processes beneath submarine pipelines. The model is based on solutions to incompressible Reynolds-averaged Navier-Stokes equations, coupled with  $k-\omega$  turbulence closure, with additional bed and suspended load descriptions forming the basis for sea bed morphology. The morphological evolution is updated continuously, rather than being based on period- or other time-averaging techniques. For further details regarding the sediment transport and morphological models, see Jacobsen et al. (2014). Wave motions are driven as oscillatory flows, as described by Liang & Cheng (2005).

Simulations (using laboratory scales) involving wave-induced scour over the range of Keulegan-Carpenter number  $5.6 \leq KC \leq 30$  have been conducted. Two examples are illustrated in Figure 1, depicting the time series of computed scour specifically for  $KC=5.6$  and  $KC=30$ . On both plots the horizontal dashed line indicates the target scour depth, based on the experimentally-based regression equation of Sumer & Fredsøe (1990):  $S/D=0.1(KC)^{0.5}$ . Here  $S$  is the scour depth directly beneath the pipeline center,  $D$  is the pipeline diameter, and  $t^*$  is a dimensionless morphological time. As seen, the model consistently predicts equilibrium scour depths that are in line with experimental findings, demonstrating a clear tendency for increased scour as  $KC$  grows. Similar accuracy has likewise been found for predicting wave-induced scour with intermediate  $KC$  values, as well as for the corresponding scour time scales.

Wave-induced backfilling processes have additionally been studied by subjecting initial conditions taken from scour simulations with larger  $KC$  to new wave climates characterized by lower  $KC$  values. A single example is demonstrated in Figure 2, which depicts the computed scour depth following a change in wave climate from  $KC=30$  to  $5.6$ . As seen, the model predicts backfilling towards the expected equilibrium scour depth based on the new wave climate, in line with experimental findings of Fredsøe et al. (1992). The simulated backfilling time scales are the same order of magnitude as in experiments, though the observed two-stage backfilling process (e.g. Figure 2) complicates a more systematic characterization.

The simulated model-scale sequences of scour and backfilling, e.g. combining Figure 1 (bottom) and Figure 2, have been estimated to represent temporal durations the order of individual storms at full practical scales.

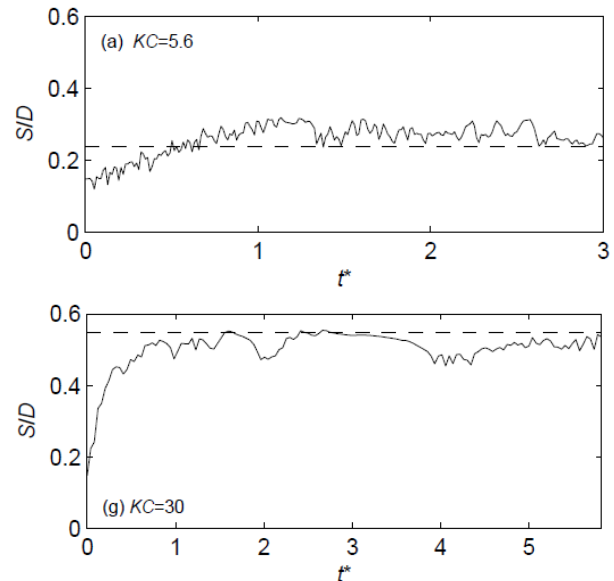


Figure 1 – Time series of computed wave-induced scour depth with (top)  $KC=5.6$  and (bottom)  $KC=30$

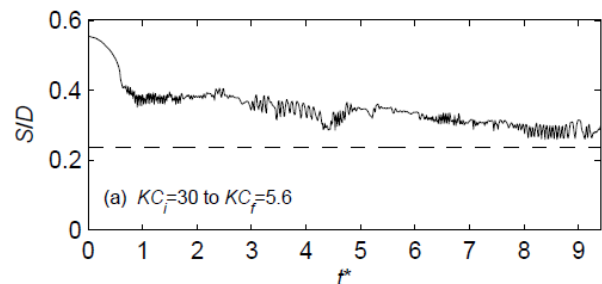


Figure 2 – Time series of computed scour depth after a change in wave climate from  $KC=30$  to  $KC=5.6$

### REFERENCES

- Fredsøe, Sumer, Arnskov (1992): Time scale for wave/current scour below pipelines. *Int. J. Offshore Polar Eng.* **2**, 13-17.
- Jacobsen, Fredsøe, Jensen (2014): Formation and development of a breaker bar under regular waves. Part 1: Model description and hydrodynamics. *Coast. Eng.* (in press).
- Liang, Cheng (2005): Numerical model for wave-induced scour below a submarine pipeline. *J. Waterw. Port. C-ASCE* **131**,193-202.
- Sumer, Fredsøe (1990): Scour below pipelines in waves. *J. Waterw. Port. C-ASCE* **114**, 599-614.