

Programme & The Book of Abstracts

Seventeenth Annual Conference

YUCOMAT 2015

Herceg Novi, Montenegro, August 31 – September 4, 2015

organised by

MATERIALS RESEARCH SOCIETY OF SERBIA

endorsed by



20th Anniversary YUCOMAT Conference

SEVENTEENTH ANNUAL CONFERENCE

YUCOMAT 2015

Hunguest Hotel Sun Resort Herceg Novi, Montenegro,
August 31-September 4, 2015
<http://www.mrs-serbia.org.rs>

Programme and The Book of Abstracts

Organised by:
Materials Research Society of Serbia

Endorsed by:
**Materials Research Society,
European Materials Research Society
and
Federation of European Material Societies**

Title: THE SEVENTEENTH ANNUAL CONFERENCE
YUCOMAT 2015
Programme and The Book of Abstracts

Publisher: Materials Research Society of Serbia
Knez Mihailova 35/IV, P.O.Box 433, 11000 Belgrade, Serbia
Phone: +381 11 2185-437; Fax: + 381 11 2185-263
<http://www.mrs-serbia.org.rs>


Editors: Prof. Dr. Dragan P. Uskoković and Prof. Dr. Velimir Radmilović

Technical editor: Aleksandra Stojičić

Cover page: Aleksandra Stojičić and Milica Ševkušić
Front cover: modified photo by BélaBéla; Wikimedia
(http://commons.wikimedia.org/wiki/File:Herceg_Novi.JPG); CC-BY-SA 3.0 Unported
Back cover: modified photo *Belgrade bridges* by mcveja; Flickr
(<https://www.flickr.com/photos/mcveja/2428406067/>); CC-BY 2.0 Generic

Copyright © 2015 Materials Research Society of Serbia

Acknowledgments: This conference is 20th Anniversary of the First YUCOMAT Conference.

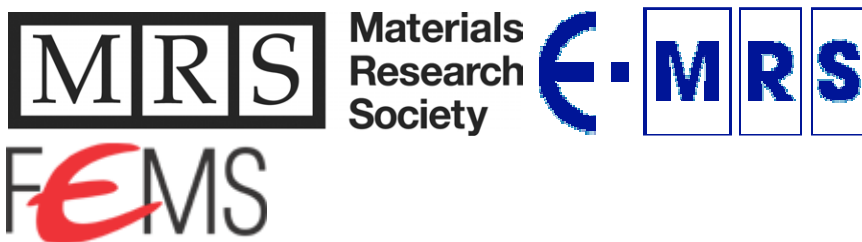

Printed in: Biro Konto
Sutorina bb, Igalo – Herceg Novi, Montenegro
Phones: +382-31-670123, 670025, E-mail: bkonto@t-com.me
Circulation: 220 copies. The end of printing: August 2015

Fluorine Doping of Layered Na_xCoO_2 Structure

Dragana Jugović, Miloš Milović, Miodrag Mitrić, Nikola Cvjetičanin,

Max Avdeev, Bojan Jokić, Dragan Uskoković

¹*Institute of Technical Sciences of SASA, Belgrade, Serbia*, ²*Vinča Institute of Nuclear Sciences, University of Belgrade, Belgrade, Serbia*, ³*Faculty of Physical Chemistry, University of Belgrade, Belgrade, Serbia*, ⁴*Bragg Institute, Australian Nuclear Science and Technology Organisation, Locked Bag 2001, Kirrawee DC, NSW 2232, Australia*, ⁵*Faculty of Technology and Metallurgy, University of Belgrade, Belgrade, Serbia*

The room temperature Na-ion secondary battery has been under focus lately due to its feasibility to compete against the already well-established Li-ion secondary battery. Transition metal oxides of general formula Na_xMO_2 have been investigated as potential cathode materials for sodium batteries. Layered Na_xCoO_2 is synthesized via solid-state method at 900 °C in air atmosphere. Fluorine doping of the as-prepared powder is established by the use of ammonium hydrogen difluoride (NH_4HF_2) as a fluorinating agent. The fluorination takes place only at low temperature (200 °C), while the treatment at higher temperatures (≥ 400 °C) facilitates the formation of NaF. It is shown that various and controllable amounts of fluorine can be successfully incorporated into the structure. Finally, the effects of fluorine doping on both structural and electrochemical properties are examined.

Advances in Improvement of Pb-Based Thin Layers Deposited on Nb Substrate

Anna Kosinska¹, Marek Barlak¹, Jerzy Lorkiewicz¹, Jacek Sekutowicz²,

Robert Nietubyć¹, Lukasz Kurpaska¹, Katarzyna Nowakowska – Langier¹

¹*National Center for Nuclear Research, st. A. Soltana 7, 05-400 Swierk, Poland*,

²*Deutsches Elektronen Synchrotron (DESY), 85 Notkestrasse, D-22-607 Hamburg, Germany*

Improvement of adhesion between deposited lead thin layer on niobium substrate is a challenging task due to their highly different physical and chemical characteristics. The fundamental problem is that niobium and lead tend to oxidize which cause poor deposition of the applied layers. In this study we use the Rod Plasma Injector (RPI) technique (operating in PID and DPE regimes) to solve the problem of insufficient adhesion between Pb layer deposited on Nb substrate with or without additional Ti or Sn layers. In order to assess thickness of thin layer we use Calotester device and SEM/EDX techniques. Finally, nanoindentation technique was implemented to evaluate mechanical properties of studied system. Reported results revealed that melting of the substrate occurs above certain energy threshold. Moreover, the Ti layer unlike the Pb layer is continuous, smooth and homogeneous. The goal of this study is to improve adhesion of deposited Pb thin layer.