

Ecosystem services from combined natural and engineered water and wastewater treatment systems: Going beyond water quality enhancement



Joanna Zawadzka^{a,*}, Elaine Gallagher^b, Heather Smith^b, Ron Corstanje^a

^a Centre for Environment and Agricultural Informatics, School of Water, Energy and Environment, Cranfield University, MK43 0AL, UK

^b Cranfield Water Science Institute, School of Water, Energy and Environment, Cranfield University, MK43 0AL, UK

ARTICLE INFO

Keywords:

Ecosystem services
Habitat connectivity
Nature-based solutions
Water and waste water treatment
InVEST models
Circuitscape

ABSTRACT

Combined natural and engineered water and waste water systems (cNES) are nature-based solutions that utilise naturally occurring processes to remove impurities from water and therefore contribute to the ecosystem service of water quality enhancement. We hypothesise that these systems may also have a potential to deliver ecosystem services other than their primary purpose of water purification and we use spatially-explicit modelling tools to determine these benefits. We focused on three different types of cNES: bank filtration (BF), managed aquifer recharge/soil aquifer treatment (MAR/SAT), and constructed wetlands (CW), and combined the ecosystem services cascade, DESSIN and CICES conceptual frameworks with multiple InVEST 3.4.4 models to investigate the spatial distribution of intermediate ecosystem services within the sites as well as in the surrounding landscape. We also determined the role of habitats present within the sites in wider landscape's connectivity to the nearest Natura 2000 areas using the Circuitscape 4.0 model, assessed the public perception of the aesthetic value of two of the cNES technologies, i.e. CW and MAR/SAT, via an online survey, and linked the determined ecosystem services to their likely beneficiaries. Our results indicated that the sites characterised with semi-natural ecosystems had a good potential for ecosystem services provision and that the selected cNES technologies were favourably received by the public as compared to their engineered equivalents. We concluded that determination of ecosystem services potential from nature-based solutions, such as cNES technologies, should be done in consideration of various contextual factors including the type of habitats/ecosystems present within the proposed solutions, the location within the landscape as well as properties and ecosystem services potential of the areas surrounding the sites, all of which can be facilitated by deployment of spatially-explicit ecosystem service models at early stages of the planning process.

1. Introduction

Ecosystem services have been broadly defined as the benefits humans derive from nature (Millennium Ecosystem Assessment, 2005). Although initially natural or semi-natural environments have been considered as the main source of these benefits, today it is recognised that non-pristine environments can also supply them (Honey-Rosés et al., 2014). An example of ecosystem services derived from anthropogenically altered environments or nature-based solutions, defined as “actions which are inspired by, supported by or copied from nature” (European Union, 2015), are the biogeochemical processes used in engineered water and wastewater treatment systems that use microbial ecosystems to remove biosolids and biochemicals, such as excess N and P, from effluent (Graham and Smith, 2004). In this context, ecosystem

services are seen as an opportunity to lower the economic cost of water and wastewater treatment (Geber and Björklund, 2001), and their assessments are confined within social rather than both natural and social capitals as defined by Costanza et al. (2014).

Benefits resulting from improvement of water quality can be considered as primary ecosystem services from water and wastewater treatment technologies (Masi et al., 2016). The advent of ecological engineering, whereby engineered and natural treatment solutions are combined together into one system has initiated a potential for secondary ecosystem services that are not directly connected to water quality enhancement. Such combined natural and engineered systems (cNESs) include constructed wetlands (CW), riverbank filtration (RBF) and managed aquifer recharge/soil aquifer treatment (MAR/SAT). River bank filtration has been proven to be an inexpensive way of

* Corresponding author at: Centre for Environment and Agricultural Informatics, School of Water, Energy and Environment, Building 53 (Bullock Building), Cranfield University, Cranfield, Bedfordshire MK43 0AL, UK.

E-mail address: joanna.zawadzka@cranfield.ac.uk (J. Zawadzka).

<https://doi.org/10.1016/j.ecoena.2019.100006>

Received 6 February 2019; Received in revised form 28 March 2019; Accepted 19 April 2019

Available online 24 May 2019

2590-2903/ © 2019 The Author(s). Published by Elsevier B.V. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

treatment of raw surface water (Tufenkji et al., 2002) for drinking water purposes. RBF utilises naturally occurring processes of adsorption, reduction, physicochemical filtration, and biodegradation within the unsaturated or saturated alluvial valley aquifer whilst water infiltrates from the riverbed to the pumping well located at a distance away. Similar processes are utilised in the managed aquifer recharge/soil aquifer treatment (MAR/SAT) technology that is used for recycling storm water or treated sewage effluent for non-potable and indirect potable reuse in urban and rural areas (Dillon et al., 2010). Managed aquifer recharge is conducted via “planned use of injection wells, and infiltration basins and galleries for rainwater, storm water, reclaimed water, mains water and water from other aquifers that is subsequently recovered for all types of uses” and often requires that water is pre-treated before it is allowed to infiltrate as well as undergoes post-treatment before it can be used. Constructed wetlands, on the other hand, use the emergent vegetation and filtering substrate’s capacity to remove pollutants and nutrients from multiple types of wastewater (Almuktar et al., 2018; Arden and Ma, 2018; Wang et al., 2017).

Although each of these cNES technologies have been acclaimed for their role in delivering of the primary ecosystem services, their potential for the supply of secondary ecosystem services has not been fully explored and has been limited to constructed wetlands in terms of their recreational, educational, and habitat-creation potential (Ghermandi and Fichtman, 2015; Masi et al., 2016; Semeraro et al., 2015). These ecosystem services are associated not only with the water area of the constructed wetland, but also adjacent natural and semi-natural land use that is under administration for a given site and their surroundings.

In this paper, we hypothesise that combined natural and engineered solutions to water and wastewater treatment can provide additional benefits in terms of secondary ecosystem services supply and related societal values. The novelty of our approach consists in a) consideration of a broad range of cNES technologies and ESs in the assessments; b) basing the assessments of ES for cNES on spatially-explicit modelling tools as well as online surveys; c) determining the ecosystem services potential of a given site based on comparisons with their surrounding landscape, and d) linking intermediary to final ecosystem services for a given site, and by doing so perform a rare study were both the biophysical and human well-being sides of the ecosystem services cascade are addressed. We envisage that the presented approach should be adopted at early planning stages for placement and design of new cNES sites that would ensure their full ecosystem services potential is fully utilised, which is increasingly important in the rapidly urbanising world.

2. Materials and methods

2.1. Methodological approach

In this work we follow the ecosystem services cascade framework (Potschin-Young et al., 2018) that intuitively conceptualises the pathway of ecosystem services generation starting from the ecosystem itself and ending at the tangible benefits derived from it, including their potential economic value. The cascade is representative of the ‘impact evaluation’ part of the recently developed DESSIN approach (Anzaldua et al., 2018) designed to quantify water-related ecosystem services within the DPSIR (Drivers-Pressures-State-Impact-Response) framework that focuses on identification of environmental drivers and effects within a given study area, and in our opinion is better suited for comprehensive considerations of environmental impacts as a result of an intervention (i.e. land use or management change) within a given study area. Our approach, however, puts an emphasis on ecosystem services potential of specific cNES technologies for water/waste water treatment without consideration of alternative scenarios, and therefore we adopt the simpler conceptual approach, maintaining the key aspects of both frameworks (Fig. 1). We maintained the nomenclature of ecosystem services used in the DESSIN framework, i.e. we refer to the

intermediate ecosystem services (IESs) as ecosystem services that are provided but not necessarily utilised or appreciated by humans and final ecosystem services (FESs) as ecosystem services that are provided and directly utilised or appreciated and therefore can undergo economic evaluation. We also adopted the common international classification of ecosystem services (CICES) typology (Haines-Young and Potschin, 2013) to determine types of ecosystem services that can be derived from our case study areas.

Our assessment starts with the description of the biophysical structure and processes of our ecosystems, which is done via parameterisation of the models with relevant descriptors for the assessment of each ecosystem service under study. The models themselves represent the processes or ecosystem functions occurring within the ecosystems and their outputs determine the potential of each study area to deliver intermediate ecosystem services. Next, groups of beneficiaries for the intermediate ecosystem services specific to each case study area are identified using the final ecosystem goods and services (FEGS-CS) classification developed by Landers and Nahlik (2013a,b), and potential economic value of key ecosystem services is discussed.

We chose to base our assessment on spatially-explicit models to quantify ecosystem services as these are capable of capturing multi-scale effects of ecosystem processes driving ecosystem services supply (Zulian et al., 2018) and provide information suitable for spatial planning and policy development (Maes et al., 2012). We therefore expanded the size of the study areas considered beyond the administrative boundaries of the sites, to which we refer to as the core case study area, with an attempt to capture any off-site effects that can be mitigated by each site. We chose to use watersheds as the wider case study areas as these would allow for capturing ecosystem services related to water flow in the landscape. Another benefit of such assessments is the ability to compare the amounts of ESS generated at each considered site to their wider-landscape setting, and by doing so, determine the role each cNES technology in ecosystem services provision in their local context.

For the ease of interpretation of the spatial outputs, we compared the mean amount of ESSs generated at each site to the mean value of ESSs generated at each land cover patch in the wider landscape as well as within the site, by calculation of the site/LULC-patch ratio, being an adaptation of the methodology for analysis of changes in ecosystem services presented in Zawadzka et al. (2017).

We also included the assessment of the aesthetic value of CW and MAR/SAT technologies via an online survey aiming at capturing respondents’ perception of these technologies as compared to their engineered equivalents. In this case, biophysical structure of the cNES was represented by photographs of exemplars of given technologies.

2.2. Study areas

We determined the ecosystem services from three case study areas representing riverbank filtration (RBF), managed aquifer recharge/soil aquifer treatment (MAR/SAT) and constructed wetlands (CW) cNES for water and waste water treatment. The selection of the sites was determined by willingness of partners of AquaNES project to participate in the assessment and overall potential of the sites to supply ecosystem services determined from descriptions of all sites available at the beginning of the project. Locations of case study areas are shown in Fig. 2.

2.2.1. Riverbank filtration – Poznan/Mosina, Poland

The bank filtration site is located on the Krajowska Island located on the right bank of the Warta River, in Wielkopolska Voivodship in Poland 30 km south-east from Poznan. The site is managed by the Water Company Aquanet SA, scientific research is overviewed by researchers from the Adam Mickiewicz University in the city of Poznan. The site comprises 28 riverbank filtration wells located in the floodplain 70–80 m away from the river bank and the extracted water at the rate of 44,750 m³/day is supplied to the city of Poznan. The entire water

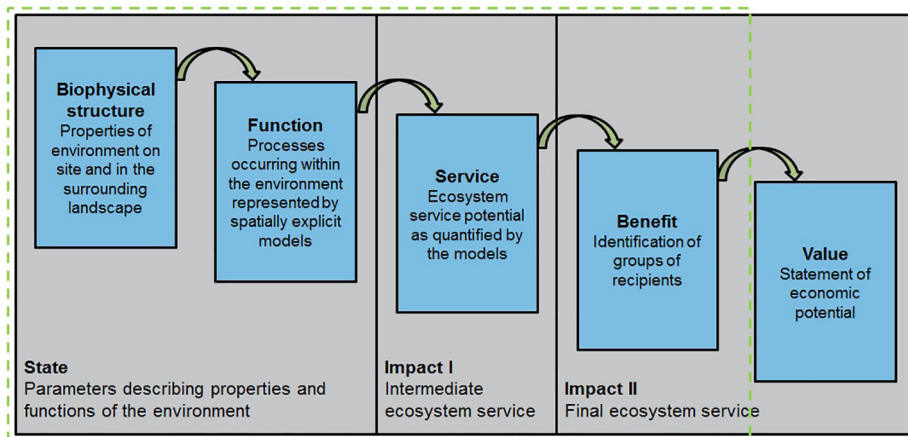


Fig. 1. Theoretical approach to ESS assessment assumed this study incorporating both the ecosystem services cascade and DESSIN frameworks. The green rectangle indicates the scope of the assessment carried out in this study. (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

capture system includes also a 7 km long series of 56 wells on the higher river terrace located at the distance of 480–1000 m from the river, four MAR basins located in the floodplain and one drainage well located 5 m below the river bed – all of which together supply 60,000–70,000 m³ of water per day, with maximum capacity of 150,000 m³/day.

Land cover on the Krajowska Island includes a stretch of managed grass near the wells, as well as woodland and semi-natural grassland in the central area of the Island. A road formed from concrete slabs provides access to the wells along the river, and there is a pumping station on the eastern side of the site. The entire island is a water protection zone and as a result public access is forbidden.

The wider case study area is 502 km² in size and covers a variety of land covers. It also encompasses several Natura 2000 sites as well as national nature protection areas, and the core study area is located within the boundaries of these sites.

2.2.2. MAR/SAT – Basel/Lange Erlen – Switzerland

The Lange Erlen MAR/SAT site is located at the outskirts of the City of Basel, in the Basel-Stadt canton in Switzerland and it is used for the purpose of treating Rhine River water as part of the potable water treatment process. The site operator is Industrielle Werke Basel, and the scientific activities are carried out by Fachhochschule Nordwestschweiz Hochschule für Life Sciences. The Lange Erlen site comprises 23 recharge areas 1.2–10 ha in size that are covered mainly by woody vegetation and are located on either sides of the Wiese River that is a right-hand tributary of the Rhine. The recharge areas are not accessible to the public, however, adjacent park areas are open for recreation.

The wider case study area delimited as a watershed from DEM analysis extends largely to Baden-Württemberg German state and is 157 km² in size.

2.2.3. Constructed wetlands – Reinbach/Erftverband – Germany

The Erftverband site is located near the City of Reinbach in the state of North Rhine Westphalia in Germany. The constructed wetland is planned to be built over the duration of the project and is 4500 m² in size. Its purpose is dual – during dry weather it is going to provide advanced treatment of waste water treatment plant effluent, and during wet weather it will treat the effluent from combined sewer overflows. The secondary purpose of the wetland is to slow down the peak runoff and flood protection. The constructed wetland is going to be planted with common reed (*Phragmites australis*) and use retention soil filter for additional subsurface treatment of wastewater. Due to mounding and separation from the ground with a sealing membrane, the wetland is hydrologically disconnected from the wider landscape. The effluent from the wetland is discharged to the Rotterbach River.

The main stakeholders are the Erftverband company who is the operator of the WWTP as well as the inhabitants of the Reinbach city and people potentially affected by the flooding.

The wider case study area is a watershed 302 km² in size encompassing a variety of land uses and extends onto the German state of Rhineland-Palatinate.

2.3. Methods

2.3.1. Quantitative assessment of ecosystem services from cNES

Quantitative ecosystem assessments were carried out in three modes. Firstly, relevant models from the suite of InVEST 3.4.4 (Tallis and Polasky, 2009) tools were deployed to quantify the amounts of ecosystem services generated from each case study site and their surrounding landscape. Five InVEST 3.4.4. models were run: pollination (POLL), carbon storage and sequestration (C), seasonal water yield (SWY), nutrient delivery ratio (NDR) and sediment delivery ratio (SDR). The models use land use/land cover (LULC) maps as the primary driver of ecosystem services, and due to local character of the selected case study site, we chose to use large scale maps capturing necessary detail of the land cover on sites as well as their surroundings. The legends of original vector maps were simplified and the maps were converted to a raster format required by the InVEST models at 5 m spatial resolution that allowed for depiction of small LULC patches as well as main linear features such as roads and rivers. The InVEST models also required additional spatial datasets representing the topography, soils and climate (Table 1), and these were selected to maintain consistency between assessments made for site located across different countries. Specific details on further parameterisation of these models are given in [Supplementary Materials 1](#).

We also assessed the role that each site plays in terms of habitat connectivity for species of flying mammals and birds found within Natura 2000 areas present in the study area catchments in the case of CW and MAR/SAR, and the Natura 2000 site within which the RBF site is located. Our intention was to assess local dispersal rather than migratory movement, which would require consideration of far larger study areas than it was practically feasible. We used the Circuitscape 4.0 model (McRae et al., 2008) that describes species movement across the landscape through electrical current theory and requires assigning resistance values to LULC classes in order to determine the ease of movement across the landscape. In order to do so, we identified habitat preferences of each species, including their response to human threats, and assigned a value of 1, 25, 50, 75 or 100 (where 1 means high preference and 100 – avoidance) to each LULC class present in the wider study areas based on the information on the species in the IUCN Red List (IUCN, 2018). We then calculated an average score for each LULC class to produce a single resistance map submitted to the model. The model also requires specification of nodes, i.e. points between which connectivity is assessed, and we chose 50 randomly placed points located at the outer edges of the Natura 2000 network patches (Fig. 3). This was done in a random fashion as we wished to determine

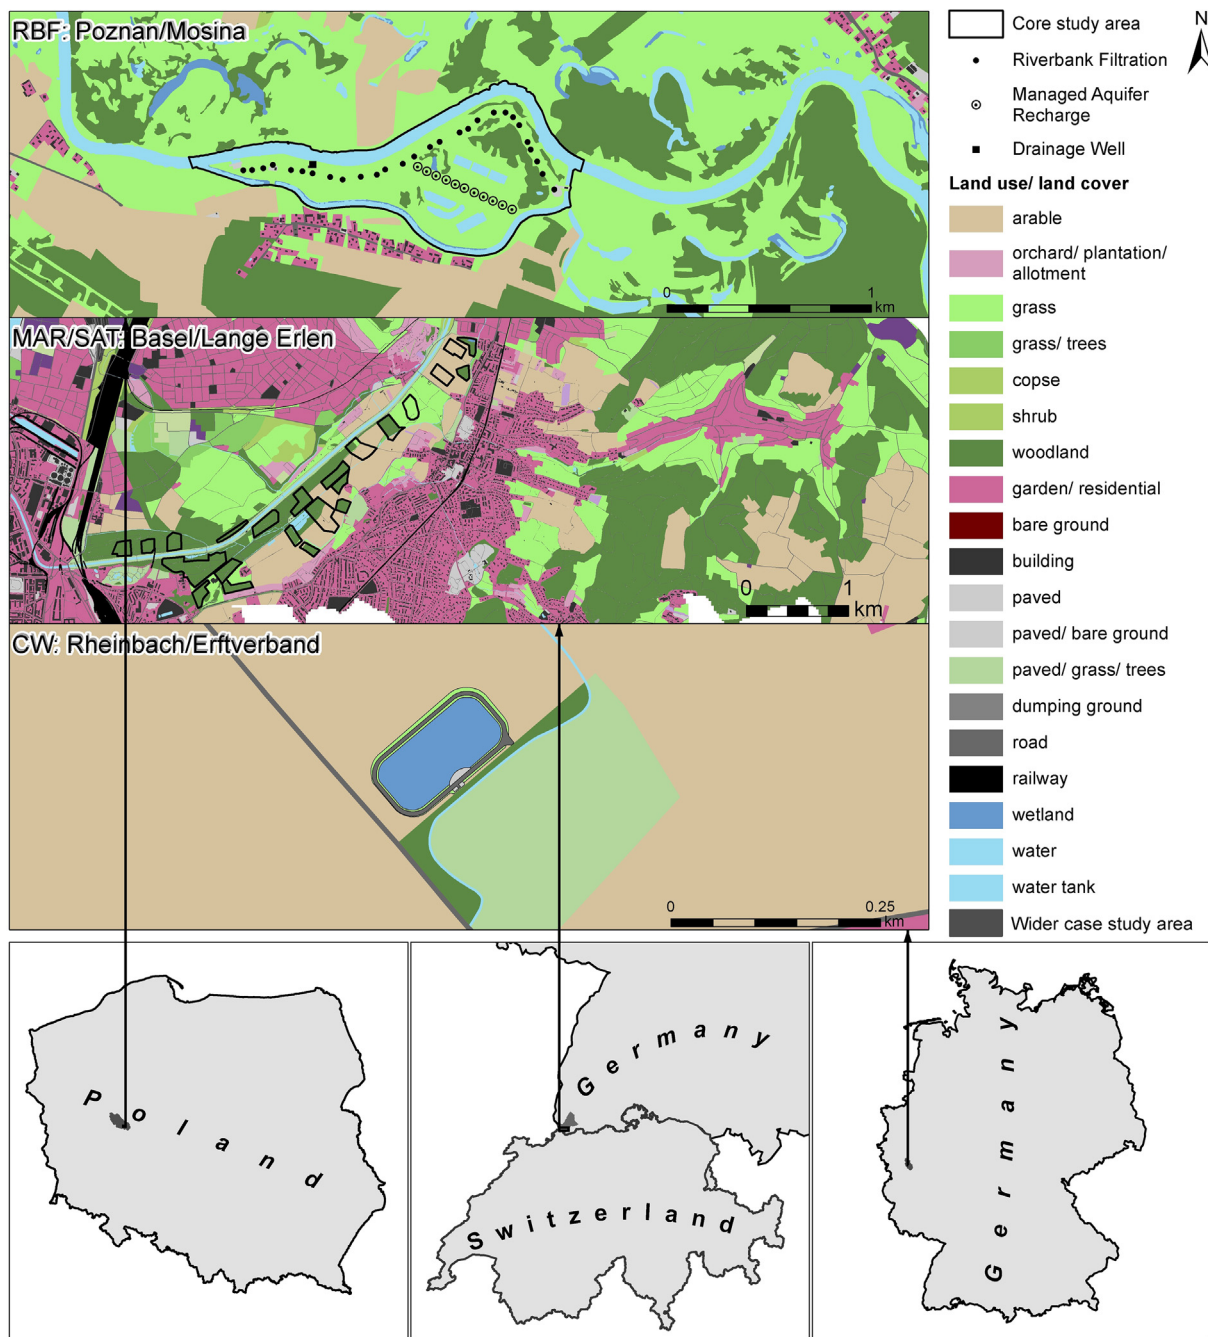


Fig. 2. Core and wider study areas for the three case study sites undergoing ecosystem services assessment. RBF – riverbank filtration, MAR/SAT – Managed aquifer recharge/soil aquifer treatment, CW – constructed wetland.

connectivity rather than habitat, and information on particular nesting sites was not available. Lists of species present and resistivity values assigned to each LULC class are shown in [Supplementary Materials 2](#).

The outputs of the spatially-explicit models, both the InVEST 3.4.4 and Circuitscape, were analysed in two manners. Firstly, the pixel-based spatial outputs of the models were summarised with the mean function within each individual LULC patch in the wider study area, for the cNES site and its immediate surroundings, with the purpose of contextual assessment of the levels of ecosystem service supplied by the site. Carbon stock potential in biomass (CBIOM) was determined from the output of the InVEST 3.4.4 Carbon Storage and Sequestration model and the total carbon stock (CTOT), including the carbon stocks in biomass and soils, was determined as the sum of CBIOM and carbon storage in soils derived from the SoilGrids (Hengl et al., 2017) dataset.

We split the carbon stocks output into the two pools to make account of the fact that whilst carbon stocks in soil are difficult to amend, carbon stocks in biomass will depend on factors such as land cover and age and type of vegetation, and can be altered subject to appropriate management and planning. Pollination outputs (POLL) are shown as the mean value of pollinator supply and abundance layers returned by the InVEST 3.4.4. Pollinators model. We decided to show two outputs for the InVEST 3.4.4 Seasonal Water Yield model – quick flow and base flow – as both can depict important and at times contrasting ecosystem services, either of generation of flood risk or hydropower potential, and replenishing of ground waters. As for the InVEST 3.4.4 Nutrient Delivery Ratio model, we analysed the N and P export layers together with the N and P retention layers. The latter, although not part of the standard outputs, were derived as a difference from nutrient load layer and

Table 1
List of spatial inputs and their sources for ecosystem services and habitat connectivity models deployed in particular case study sites.

Model	Dataset type	Dataset detail	Site	Spatial resolution	Reference
All (InVEST and Circuitscape)	LULC	BDOT10k topographic map	Poznan/Mosina (Poland)	Converted to 5 m raster	https://www.geoportal.gov.pl/dane/baza-danych-obiektow-topograficznych-bdot
		swissTLAM3D (large-scale with geometric accuracies ranging from 0.2 to 3 m)	Basel/Lange Erlen (Swiss side)		https://shop.swisstopo.admin.ch/en/products/landscape/tlm3d
		ATKIS Digitales Landschaftsmodell 50 – DLM50 (Baden-Württemberg) at 1:50 k scale	Basel/Lange Erlen (German side)		https://www.lgl-bw.de/lgl-internet/opencms/de/index.html
		ATKIS Digitales Landschaftsmodell 50 – DLM50 (Nordrhein-Westfalen) at 1:50 k scale	Reinbach/Erftverband (Germany)		https://www.bezreg-koeln.nrw.de/brk_internet/geo-basis-landschaftsmodelle/dlm_50/index.html
SWY NDR SDR	DEM	European Environmental Agency EU-DEM	All	25 m	https://land.copernicus.eu/product-portfolio/overview
C	Soil Organic Carbon Stocks (t/ha)	Soil Grids	All	250 m	(Hengl et al., 2017)
SWY (and indirectly NDR)	Potential Evapotranspiration	Monthly Global PET from Global Aridity and PET Database	All	1000 m	(Zomer et al., 2008, 2006)
	Monthly mean precipitation	Global WorldClim v2.0	All	1000 m	(Fick and Hijmans, 2017)
	Soil depth	Soil Grids	All	250 m	(Hengl et al., 2017)
	Saturated hydraulic conductivity	KS dataset from 3D soil hydraulic database of Europe	All	250 m	(Tóth et al., 2017)
SDR	Rainfall erosivity index	European rainfall erosivity map	All	500 m	(Panagos et al., 2015)
	Soil Erodibility Index	The European soil erodibility map	All	500 m	(Panagos et al., 2014)

nutrient export layer. We argue that even in the case of the net positive nutrient export, it is also important to consider the part of nutrients that are retained within the landscape. For similar reasons both sediment export and retention outputs of the InVEST 3.4.4. Sediment Delivery Ratio model are shown. The habitat connectivity output depicting the cumulative current between habitat nodes from the Circuitscape model has also been summarised over individual LULC patches and displayed together with the InVEST models. It has to be noted that we only run the carbon, pollinator and connectivity models for the CW (Erftverband) site, as the constructed wetland should be treated as an isolated system from the water and nutrient cycling as well as sediment retention perspective due to its sealing from the ground and surrounding landscape by an impermeable membrane and elevated banks preventing water and mass transport into and away from the CW by natural processes represented by the corresponding InVEST models.

The spatial layers subsequently formed a basis for numerical assessments whereby the amounts of services derived from each cNES site are tabularised and expressed in units per hectare and per entire site, where appropriate.

The third mode of assessment was done for the purpose of identifying people's perception on the aesthetic value of two out of three cNES technologies – CW and MAR/SAT – as compared to their engineered equivalents: sediment tank (ST) and potabilisation plant (PP) using a series of nine questions with 5-point Likert Scale response format ranging from 'strongly disagree' to 'strongly agree' (Supplementary Materials 3). This was done via an online survey designed in Qualtrics deployed to UK residents ensuring that the sample was representative of British demographics through stratification. The results were analysed using paired *t*-test and the Cramer's V statistic (Zawadzka et al., 2015) that can be used to compare categorical responses at the scale of 0–1, where 1 indicates a maximum agreement.

2.3.2. Identification of beneficiaries

Beneficiaries for the intermediate ecosystem services were determined during the qualitative assessment using the FECS-CS classification of beneficiaries (Landers and Nahlik, 2013b) to ensure IESs and their beneficiaries are systematically matched. Subsequently, presence of the potential beneficiaries specific to each case study site was evaluated. Identification of both potential and actual beneficiaries was essential for upscaling of our results that otherwise would be very case-specific and allowed for recognition of full ecosystem services potential of a given technology that may not be revealed in the case-specific assessment.

3. Results

3.1. Intermediate ecosystem services from cNES technologies

In this section the ecosystem services potential that can be attributed specifically to each case study area is discussed. The results of spatially explicit InVEST models are shown in Figs. 4–6, and habitat connectivity maps are displayed in Fig. 7. Concise summary of modelled amounts of ecosystem services from each site is available in Supplementary Materials 5.

3.1.1. Carbon storage

RBF case study site, due to its location in the floodplain, can store considerable amounts of carbon in the rich alluvial soils, amounting to 667 tC ha⁻¹ or 37, 484 t per the entire site. The MAR/SAT site can store 274 tC ha⁻¹ of carbon or 16,576 t per site in the soil, and the carbon storage underneath the constructed wetland was not assessed as due to the construction process the upper layers of the soil would have been removed.

Vegetation present on the RBF site can contribute a fair store of carbon which amounts to 15 tC ha⁻¹ or 848 t per site, whereas the MAR/SAT site could potentially store 85 tC ha⁻¹ or 5,145 t per site. The

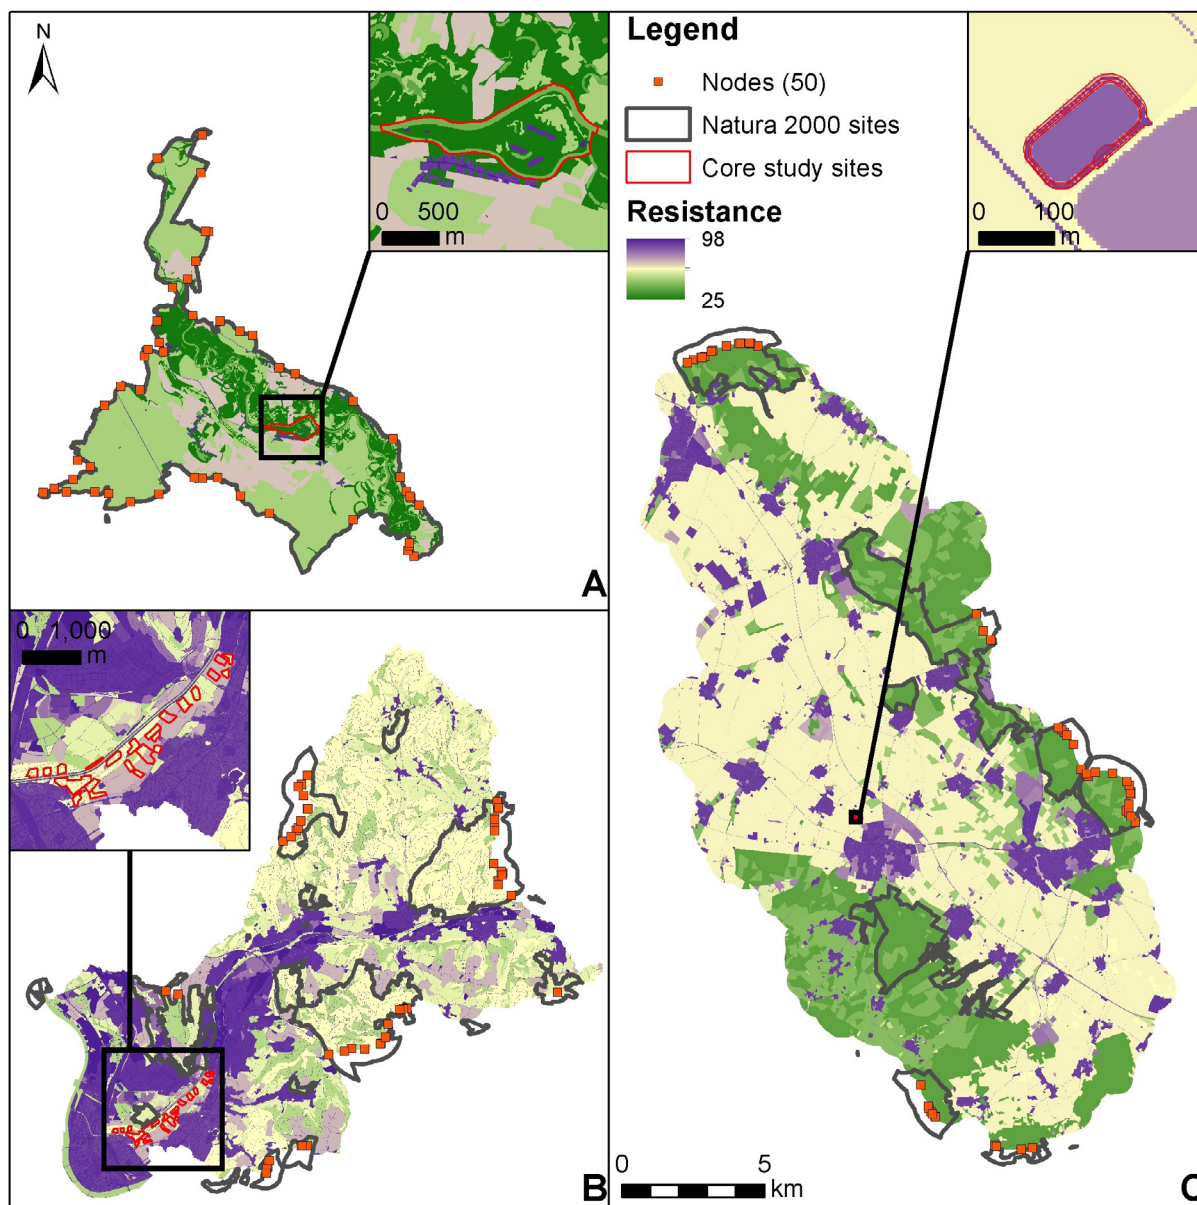


Fig. 3. Resistance values assigned to each LULC class in the case study areas and habitat nodes used as the inputs to the Circuitscape habitat connectivity model: A – RBF, B – MAR/SAT, C – CW. Lower values indicate a lower resistance to species movement.

reed beds planted in the CW could store 32 tC ha^{-1} , assuming total aboveground biomass in common reed of 17 tC ha^{-1} and belowground biomass of 80 tC ha^{-1} (Tripathee and Schäfer, 2015), and the carbon content usually amounting to 45–50% of the weight of oven-dry biomass (Schlesinger, 1991). All other assumptions with regards to the parameterisation of the InVEST carbon model followed published values and is discussed in detail in Supplementary Materials 1.

Spatial assessment of the total carbon stocks revealed that the RBF site blends in with the surrounding landscape very well and only carbon stored in biomass may appear lower than in the adjacent land cover classes. The contextual character of this site has to be considered here as the entire area belongs to areas of nature protection and has a fairly natural character – the carbon stock in biomass on site that is managed for operational use may therefore be slightly lower than in the surrounding landscape. In the case of the other case study sites – MAR/SAT and CW, carbon stocks are comparable or higher. This is due to the fact that the MAR/SAT site is largely covered by woodland that is a much better carbon pool than arable land, grassland or urban land. The CW, on the other hand, is located within intensive arable land and can

contribute higher carbon storage capacity in biomass than arable land.

3.1.2. Pollination

The InVEST 3.4.4 Pollinators model assesses the suitability of land cover in a given area to support the presence of user-defined pollinators in the landscape based on the availability of nesting and foraging grounds as well as mean foraging distance the species can typically cover. In this study we chose to use six species of bumble bees (*Bombus* sp.) (Table S1.7) as key pollinators of wild flowers and commercial crops (Carvell et al., 2017) and assumed springtime and early summer conditions for availability of floral resources. The spatial interpretation of the output maps, that were generated by averaging the pollinator supply and abundance output maps for all six pollinator species, leads to a conclusion that each site can provide supporting grounds for these pollinators. The RBF site has comparable pollinator capacity to adjacent semi-natural grasslands and the MAR/SAT site stands out from its mainly agricultural and urbanised matrix. The model parameterisation for the CW site assumed that there is little nesting or foraging ground availability within the area of the reed bed, however, there is some

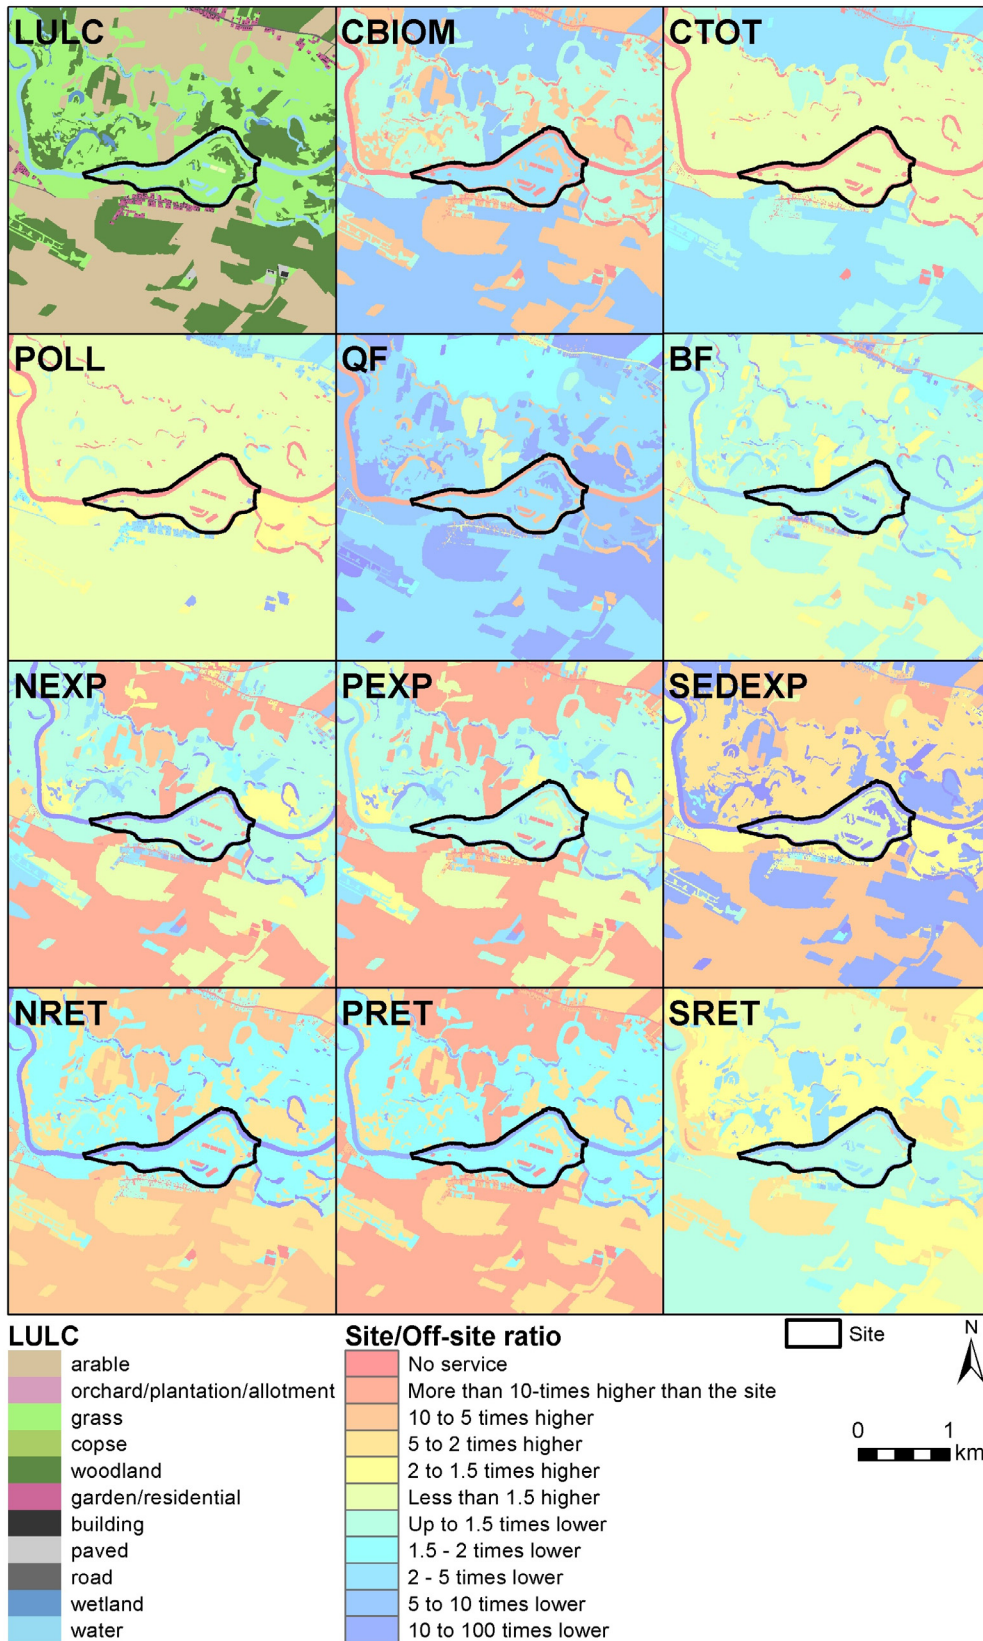


Fig. 4. Ecosystem services ratio between the mean value of each IES on site and the means of surrounding land use patches for the RBF Poznan/Mosina site. CBIOM – carbon storage in biomass; CTOT – total carbon storage (biomass + soil); POLL – mean of pollination abundance and supply; QF – quick flow; BF – base flow; NEXP, PEXP, SEDEXP – nitrogen, phosphorus and sediment export NRET, PRET, SRET – nitrogen, phosphorus and sediment retention. Shades of yellow to orange indicate areas with higher values of modelled amounts than the average for the site; shades of blue indicate areas of lower values of modelled amounts. (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

capacity to support pollinators within the grassed banks of the wetland, and that capacity appears to exceed the capacity of the surrounding agricultural land in the modelling output.

3.1.3. Regulation of hydrological cycles

Contributions to the hydrological cycle of each cNES technologies was assessed with the InVEST 3.4.4 Seasonal water yield model. The model has the capacity to determine both the amount of surface runoff, or quick flow (QF), that can potentially enter the stream and the

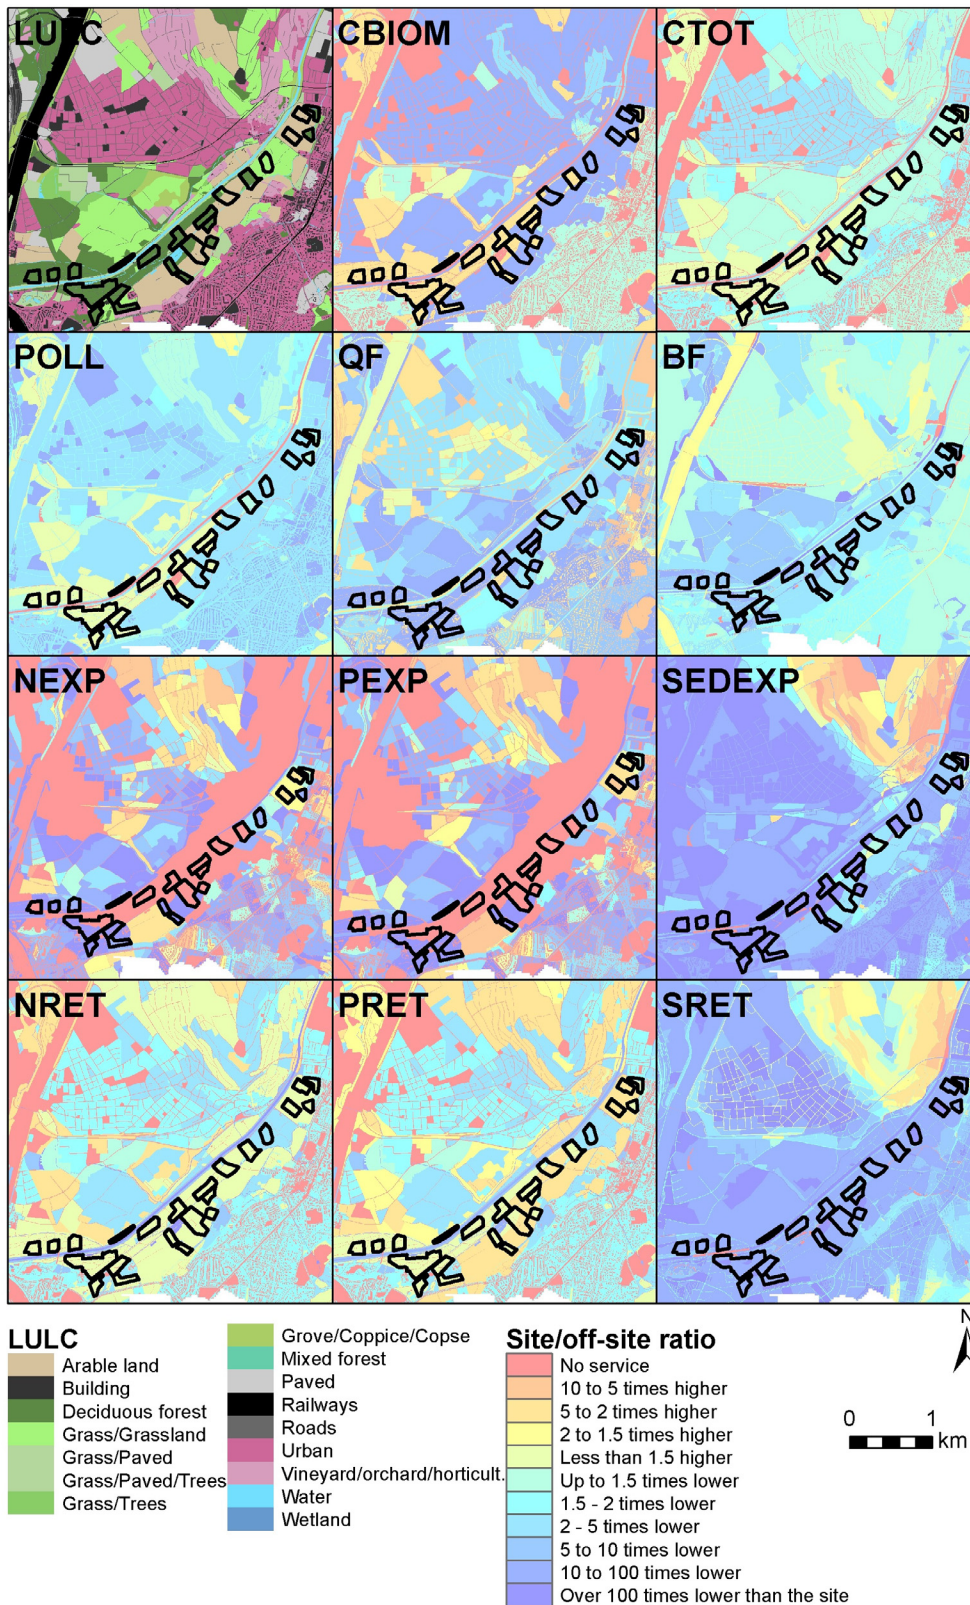


Fig. 5. Ecosystem services ratio between the mean value of each IES on site and the means of surrounding land use patches for the MAR/SAT Basel/Lange Erlen site. CBIOM – carbon storage in biomass; CTOT – total carbon storage (biomass + soil); POLL – mean of pollination abundance and supply; QF – quick flow; BF – base flow; NEXP, PEXP, SEDEXP – nitrogen, phosphorus and sediment export NRET, PRET, SRET – nitrogen, phosphorus and sediment retention. Shades of yellow to orange indicate areas with higher values of modelled amounts than the average for the site; shades of blue indicate areas of lower values of modelled amounts. (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

amount of water infiltrating into the aquifer, or the base-flow (BF), allowing for capturing of a more balanced view of the water cycle within the study area. Spatial assessment of the RBF site reveals that it can contribute relatively high amounts of run-off to the neighbouring Warta River, which can be justified by primarily grassy land cover that has lower evapotranspiration coefficient than woody vegetation. Due to

the closeness to the river, the generated quick flow cannot be retained within the landscape and therefore enters the stream. The higher amount of available quick flow corresponds to the higher capacity of the site to generate base flow, which appears to be relatively high as compared to the wider case study area. In absolute terms, the modelled amount of water entering the stream is $290 \text{ m}^3 \text{ ha}^{-1}$ or $16,240 \text{ m}^3 \text{ per}$

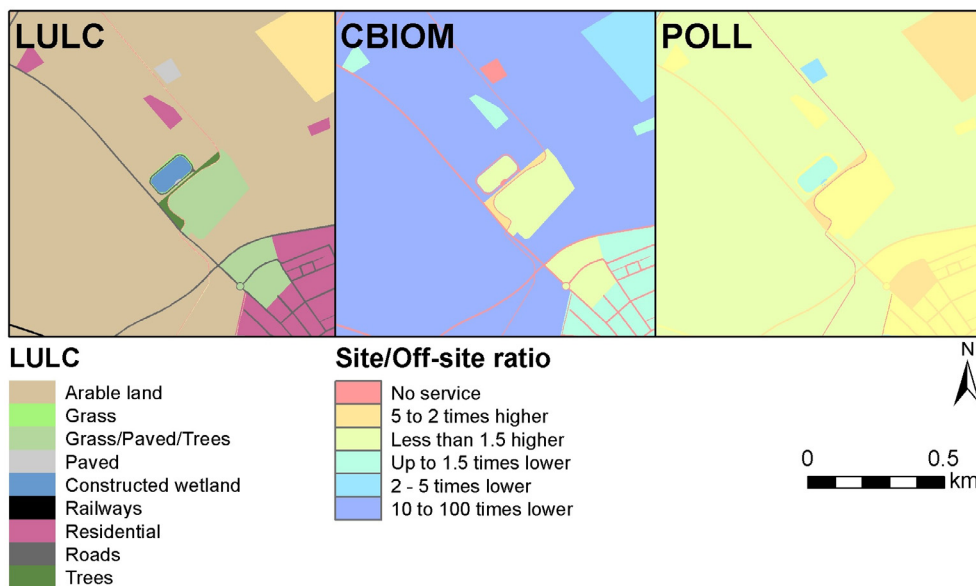


Fig. 6. Ecosystem services ratio between the mean value of each IES on site and the means of surrounding land use patches for the CW Reinbach/Erftverband site. CBIOM – carbon storage in biomass; POLL – mean of pollination abundance and supply. Shades of yellow to orange indicate areas with higher values of modelled amounts than the average for the site; shades of blue indicate areas of lower values of modelled amounts. (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

site, and the amounts of generated base flow are $7.7 \text{ m}^3 \text{ ha}^{-1}$ and 431.2 m^3 per site on a yearly basis. Quick flow generated from the MAR/SAT recharge areas is low as compared to the wider case study area, which corresponds well to the primary woody character of the

land cover. As a result, the amount of base flow infiltrating into the ground is also lower than from the surrounding landscape. It has to be noted here that these results do not take into account the amount of water purposefully directed into the ground as part of the water

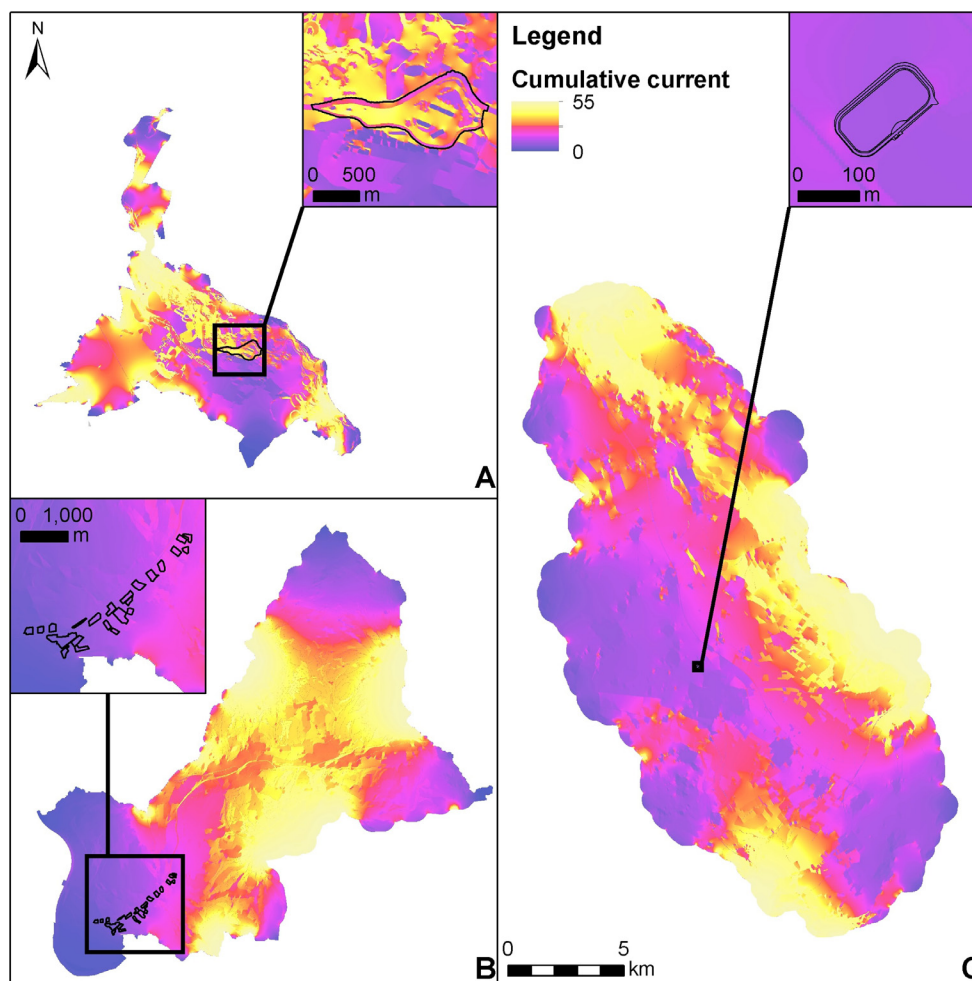


Fig. 7. Habitat connectivity within A – the Natura 2000 area within which the RBF case study site is located, B – MAR/SAT, and C – CW case study sites as seen by the Circuitscape model.

treatment process, as well as the fact that the modelled high amounts of base flow from residential areas surrounding the site would normally be captured by the storm drainage system. Nevertheless, given that the MAR/SAT site has a natural character, the modelling results can be representative of the actual amounts of quick flow and base flow generated, and these amount to 190 m³ ha⁻¹ or 11,400 m³ per site in terms of the surface run-off, and 20 m³ ha⁻¹ or 1200 m³ per site for the groundwater recharge.

The results of the SWY model indicate that although the amounts of surface run-off generated from precipitation on the sites greatly exceed the amount of water infiltrating of to the ground, they allow for recognising the fact that infiltration of water can occur on these sites, which is not usually the case in anthropogenic environments characterised with considerable soil sealing. As to the amounts of surface run-off, these could potentially contribute to increased flooding risk – and their actual role in this respect would need to be studied further in their local and regional contexts.

3.1.4. Nutrient and sediment balance

Nutrient balance at the RBF and MAR/SAT sites was modelled with the InVEST 3.4.4 Nutrient Delivery Ratio model. The model analyses the fate on nutrients within the landscape based on the topography of the terrain represented by the digital elevation model, the amount of available water for surface run-off, represented by the quick flow output of the InVEST Seasonal Water Yield model, and the land cover capacity to be both a source and sink of nutrients. The main model output, the nutrient export map specifies how much of N or P at a given location can reach the nearest stream. The amount of nutrients that were prevented from entering the stream can also be derived from the model outputs and here is referred to as nutrient retention.

The spatial analysis for the RBF site reveals that despite relatively high amounts of surface water run-off, both N and P export from the site is relatively low. This is likely due to low nutrient loadings assigned to grass, which covers a substantial area of the site as well as the protection channel encompassing the site from the south that prevents nutrients mobilised ex-situ from entering the site. Low nutrient loadings and the site’s separation from the wider landscape have contributed to the relatively low amounts of nutrients retained on site as compared to other land cover classes present in the wider case study area. Table 2 shows, however, that the amounts of nutrients captured on site as compared to the amounts exported to the river are circa 40-times higher, indicating a great potential of the site to capture excess nutrients.

In the case of the MAR/SAT site, the spatial analysis shows that both N and P export from the recharge areas is lower than from the surrounding landscape, and that numerous recharge areas do not generate P export. The recharge areas, however, show higher capacity for nutrient retention than the surrounding land cover classes, and therefore can act as a buffer for neighbouring urban areas for nutrient retention. This is confirmed by the absolute modelled values of nutrient export and retention from the site (Table 2), showing that nutrient retention is 300–460 times higher than nutrient export.

The modelled N and P export amounts from the MAR/SAT site, which is primarily covered by woody vegetation, correspond to the minimum observed export values from forested plots marked as control

Table 2

Modelled amounts of nitrogen and phosphorus exported from and retained within the riverbank filtration (RBF) and managed aquifer recharge/soil aquifer recharge (MAR/SAT) sites.

Site	N export		N retention		P export		P retention	
	kg/ha	kg/site	kg/ha	kg/site	kg/ha	kg/site	kg/ha	kg/site
RBF	0.630	35	24	1345	0.013	0.726	0.530	29
MAR/SAT	0.187	11	86	5144	0.007	0.436	2.330	140

in the Measured Annual Nutrient loads from Agricultural Environments (MANAGE v5 4-4-18) database (Harmel et al., 2008, 2016; Reckhow et al., 2007), which for total N ranged from 0 to 12.1 kg/ha (n = 12), with several values below 1 kg/ha, and for total P range between 0.002 and 0.21 kg/ha (n = 7), with averages never exceeding 1 kg/ha. The verification of the RBF results should take into account export coefficients from both grassy and woody vegetation, and the possible values can also be found in the MANAGE database. For example, native ungrazed grasslands export on average 0.1–0.49 kg/ha (n = 13) of P, with minimum values ranging between 0 and 0.07 kg/ha (n = 11). The average N export coefficients ranged between 0.5 and 1.94 (n = 5) kg/ha. These observations indicate that modelled N and P export amounts for both sites are possible, if placed on a lower end of the ranges, however, this could be justified by the sites’ flat topography not conducive to excess nutrient export. Sediment balance

Sediment export is modelled by the InVEST 3.4.4 Sediment delivery ratio model based on the USLE equation that can determine erosion rates from an area based on the properties of rainfall, soil susceptibility to erosion, topography and land cover impact on the likelihood of dislocation of soil particles (Wischmeier and Smith, 1978). Sediment retention, on the other hand, determines the role of land cover present within the study area to retain sediments by comparison of the amount of sediment delivered by the current study area to the same study is covered with bare soil only. The model takes also into account the connectivity of the landscape, making assumptions of how much sediment may be dislocated from one location to another.

The spatially-explicit results from the SDR model show that the RBF site generates and retains low amounts of sediment as compared to the wider landscape, which, as in the case of nutrient modelling, can be explained partly by the unique topographic setting of the site whereby the protective channel prevents external sources of sediment from entering to the site. The type of land cover and very low slopes also contribute to low sediment loads that can be generated from the site, corresponding to high capacity to retain any excess sediment. Modelled values summarised for the site reveal that, on yearly basis, very little sediment is generated from the site, and that the amount of sediment retained there is circa 40 times higher.

The spatial analysis of the results obtained from the MAR/SAT site reveals that in its geographical setting dominated by flat slopes, the site and the surrounding landscape generate very little sediment that could eventually enter surface water bodies. As a result, some of the recharge areas as well as surrounding land cover patches that would normally have sediment retention potential do not retain sediment, the reason for which being lack of sediment dislocated from areas located upslope from those locations. The absolute values of sediment export and retention on the site are shown in Table 3 and reveal similar pattern as in the case of the RBF site, of sediment retention capacity being circa 50 times higher than sediment export from the site.

The MANAGE database used to verify the NDR model results can also be used to verify the results of the SDR model. Average annual soil loss observations for control forested plots ranged between 12 and 111 kg/ha (n = 11), and for native grasslands 27–482 kg/ha (n = 12), which places the results for the MAR/SAT site within the observed ranges. Given these measurements, the result for the RBF site appears to be an underestimation, which could have resulted from the presence of

Table 3

Modelled amounts of sediment exported and retained within the riverbank filtration (RBF) and managed aquifer recharge/soil aquifer recharge (MAR/SAT) sites.

Site	Sediment export		Sediment retention	
	t/ha	t/site	t/ha	t/site
RBF	0.006	0.353	0.266	15
MAR/SAT	0.018	1.054	0.933	56

a protective channel capturing sediments from upslope areas before they enter the site.

3.1.5. Habitat connectivity

The analysis of the results for the contribution of each site to habitat connectivity across the wider landscape obtained from the Circuitscape model reveals that the RBF site has the highest capacity to provide a stepping stone for modelled species. Both MAR/SAT and CW sites appear to have more marginal roles in that respect. These results should be treated with caution as the outcomes of the model can depend on multiple factors including the type of species for which assessment is made and their habitat requirements, habitats present on site as well as in the areas surrounding the site, providing potential ecological corridors, and the location of nodes, i.e. the species source points for which the model assesses connectivity. In this study, the emphasis was put on species that are present within the Natura 2000 sites located within the wider case study areas, oftentimes characterised with specific habitat requirements pertaining to the Natura 2000 sites themselves, and therefore difficult to find elsewhere. This could be the reason for the RBF site to appear most connected, which can be explained by the fact that this site is located within a Natura 2000 site, and contains habitats favoured by multiple species, as seen from low resistance values (Fig. 3). In the case of the MAR/SAT, the resistance values are low, however, the site is located away from Natura 2000 sites and is separated from them by urban areas that prevent species movements to and from the site. In the case of the CW, it is surrounded by agricultural land with medium resistance values, is characterised with high resistance to species movement, and is located away from the Natura 2000 sites, which amounted to its overall low role in habitat connectivity. Should the assessment be based on more common species that are used to anthropogenic influences, the result of the model could have been much different.

3.1.6. Aesthetic quality

Aesthetic value of CW and MAR/SAR cNES technologies was assessed from the responses received to the online survey aiming at comparison of these technologies to their engineered equivalents (sediment tank for CW and potabilisation plant for MAR/SAR). The survey received the total of 760 responses.

A series of paired t-tests (Tables S4.1–S4.2 Supplementary Materials 4) were run to determine preference of the engineered or natural treatment option on a number of dimensions which are presented below. It can be seen that on all dimensions, there was greater preference for the constructed wetland (CW) than for the engineered equivalent primary sediment tank (ST). It was also shown that there was greater preference on all dimensions for MAR/SAT over the potabilisation plant (PP). These results were confirmed by low values of Cramer's V statistic that ranged between 0.07–0.09 and 0.16–0.21 for each question for the CW-ST and MAR/SAT-PP indicating a marked difference in people's perception of these paired technologies. The distribution of the responses revealed that indeed they were largely positive for the cNES technologies (Fig. 8A–D).

3.2. Final ecosystems services from cNES technologies

In this section, main ecosystem services beneficiaries for the previously identified intermediate ecosystem services are determined (Table 4), full list of potential beneficiaries is given in Table S5.3 in Supplementary Materials 5. Each cNES technology played a certain role in terms of carbon storage, and as such may contribute to the regulation of global climate and therefore may benefit all humanity. The sites are also facilitators for pollinator supply, which can have a role in terms of pollinating crops, either commercial, such as apples in orchards found within the wider case study areas of the CW and RBF cNES technologies, plantations of blueberries and black currants (RBF), or recreational in allotments (CW, MAR/SAT) and private gardens (RBF). Due to

the media attention that the issue of maintaining populations of pollinators has been receiving, the general public or 'people who care' can also be included in the group of beneficiaries. Pollinators also play a role in maintenance of wildflower populations which can contribute to the aesthetic value of the wider landscape, which can be especially important for the RBF site, surrounded by semi-natural grasslands. Similarly, the role of the sites in habitat connectivity can be appreciated by people who care, as well as people who appreciate outdoors biodiversity as part of recreation, artistic inspiration, or as a medium for education. Strengthening of ecological corridors can also be appreciated by administrative bodies of nature protection areas as well as businesses that depend on the presence of particular species that can attract visitors to the area.

The beneficiaries of sediment and nutrient retention include people who use water bodies for recreation, such as swimming, bathing, fishing or boating or hiking in their proximity; as well as water treatment plants benefitting from better quality of surface water. Sediment retention can also contribute to reduced siltation of water bodies, which can have tangible benefits for users of surface waters for irrigation, commercial fresh-water fish catchers, or energy generators requiring pure water for their cooling systems.

Generation of quick flow that would enter water bodies, in non-excessive amounts, can contribute to the maintenance of the sufficient water levels that in turn could promote commercial use for transportation purposes, irrigation, electricity generation (hydropower and cooling), as well as recreation, inspiration and drinking water production. On the other hand, excess surface run-off may contribute to increased flood risk and cause damages to home owners and industry.

Water retention, however, can contribute to aquifer recharge and water storage that can be subsequently extracted for drinking and industrial purposes as well as contribute to the maintenance of adequate groundwater levels for plant growth utilised in agriculture and forestry.

Good aesthetic value of the cNES technologies can be important for people living nearby, visiting the area for recreational purposes or in any other way benefiting from pleasing landscapes.

Our study identified potential groups of beneficiaries of modelled intermediate ecosystem services whose importance in the context of each study area may vary. We did not attempt economic valuation of identified FESs; instead, we discuss relevant examples from literature to give a notion of monetary value of ESs assessed here. Pollination by wild bees has been shown to improve the quality, shelf life and commercial value of strawberries (Klatt et al., 2013), and apples (Garratt et al., 2014), as well as increase yield of oil seed rape (Stanley et al., 2013), among others. The economic value of this service can be assessed based on the prices and dependence ratio for crops directly used for human consumption (Gallai et al., 2009), the cost of alternative pollination sources, such as managed bees, and the value of production resulting from bee pollination (Winfree et al., 2011), or by willingness to pay methods. Using the latter method, Breeze et al. (2015) estimated the value of pollination in the UK in the context of local produce supply and wildflower pollination to be £25.5–£12.6 per person. The value of insect pollinators to agricultural production on an oceanic island of Terceira (Azores), was approximated at €170,291 for the entire island using data on producer prices and assuming crop dependency ratio of 10.5% (Picanço et al., 2017). Sediment retention services and resulting reduced siltation of surface waters can be monetised by assessing costs associated with change in water withdrawal due to sedimentation in watersheds, as well as avoided costs of flood damage (Alam, 2018). For example, the national costs associated with flood damage and flood risk management due to soil erosion in England and Wales were estimated at £168 million (Graves et al., 2015). The economic value of water retention due to forested land can be estimated from costs of technical substitutes such as dam construction that would store the equivalent amounts of water, and the value of one hectare of woodland was estimated at 43US\$ (2007) in a watershed located in Iran (Mashayekhi et al., 2010). Flood protection ecosystem service could also be valued

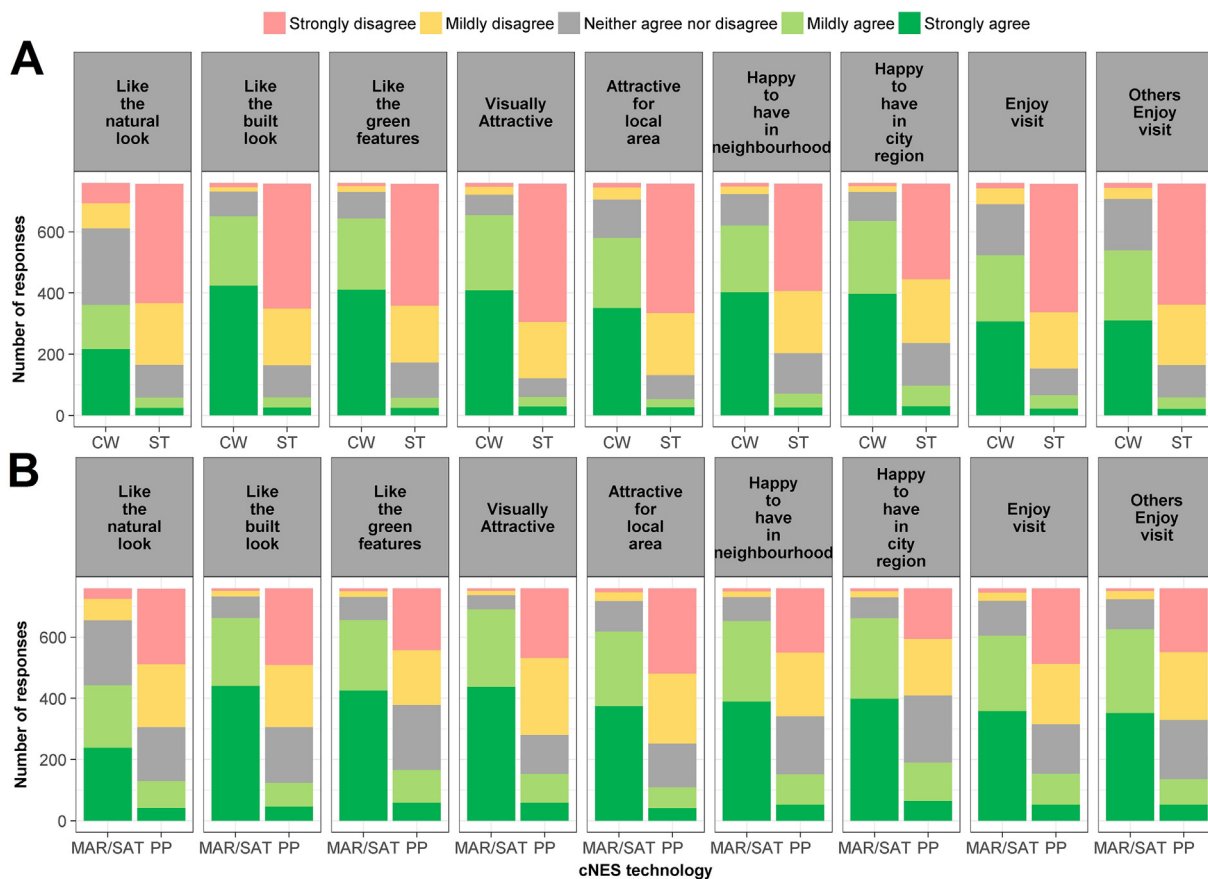


Fig. 8. Responses to the online surveys regarding comparisons between cNES and their engineered equivalents. A – distribution of the responses for the CW/ST pair, and B – for the MAR/SAT PP pair of technologies responses in the negative (red and yellow), neutral (grey) and positive categories (green) indicating that people’s perception was mostly positive for the cNES categories and mostly negative for their engineered equivalents. (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

from avoided cost of damage to buildings, infrastructure, crop failure, production stoppage and costs of emergency services and others (Barth and Döll, 2016) and such cost could amount up to £1.4 billion in the UK (Graves et al., 2015). Reduced export of nutrients to surface water bodies could be evaluated based on replacement costs of constructed wetlands (La Notte et al., 2015) as well as avoided losses to fish production due to avoided eutrophication as a result of nutrient buffering capacity natural wetlands (Simonit and Perrings, 2011). Carbon storage in carbon pools could be evaluated based on the abated social cost of carbon which measures the present value of future economic damages cause by an additional ton of carbon emissions (Yang et al., 2018). The aesthetic value and habitat connectivity services could be indirectly monetised with the use of economic benefits associated with recreational activities, such as for example travel costs (Ezebilo, 2016) to the areas affected by the sites.

4. Discussion

In this study, we deployed spatially explicit ecosystem services models in order to map and quantify the ecosystem services potential of three cNES technologies: riverbank filtration, managed aquifer recharge/soil aquifer treatment, and constructed wetlands with the overall aim of determining their contribution to societal well-being beyond that of potable water and wastewater purification, and by doing so, we have demonstrated the multifunctional character of these technologies. The choice of the InVEST modelling tools was dictated by their ability to not only allocate the ecosystem services supply potential in spatial domain, but also incorporate the spatial context into the modelling process. The latter feature of the models is particularly

important for ecosystem services depending on flows of ecological functions, or landscape processes, underpinning the ecosystem’s capacity to supply services (Kreiling et al., 2018; López-Pintor et al., 2018), highlighting the importance of the situational context of the study area. For example, the capacity of a given study area to retain sediments or nutrients will not only depend on the retention capacity of land cover present in this area, but also the amount of material entering the site determined by retention capacity of land cover located upslope of that study area, steepness of slopes, and amount of available water to carry the material downhill. Moreover, the SDR and NDR models attempt at quantification of the amounts of sediments or nutrients dislocated from a given area and entering surface water bodies, highlighting the importance of the land surface properties downslope from the site. Conversely, the amount of water yield generated at the site and entering water bodies will depend on the topography of the wider study area and water retention capacity due to soil type, evapotranspiration and amount of precipitation, all of which are taken into account in the SWY model. The landscape context is also important for the quantification of pollination and habitat connectivity services. The former is modelled by the InVEST Pollinators model incorporating not only suitability of habitats, represented by the LULC map, to host pollinators, but also the pollinators’ ability to cover distances and the spatial arrangement of LULC patches providing support for pollinators. We chose to use the Circuitscape model for habitat connectivity estimation due to its ability to reflect the flows of species movement throughout the landscape (Grafius et al., 2017). From the modelled services, only carbon storage can be treated as independent from ex-situ processes.

The estimated carbon stock in biomass reflects the expected published values of carbon storage found in literature for various land uses,

Table 4
Final ecosystem services and their beneficiaries for the three cNES technologies mapped into the CIGES and FEGS-CS classification systems at case study sites. Y – presence of a beneficiary, POS – high possibility of presence of a beneficiary, MAR – marginal role, N – beneficiary not present, n/a – not applicable due to lack of IES. Continued on next page.

IESs	CIGES section (IESs)	CIGES class (IESs)	CIGES section (FESs)	CIGES class (FESs)	Beneficiary (FEGS-CS)	RBF	MAR/SAT	CW
Pollination	Regulation and maintenance	Pollination and seed dispersal	Provisioning	Cultivated crops Wild plants, algae and their outputs Experiential use of plants, animals and land-seascapes in different environmental settings Existence	Farmers Food Pickers and Gatherers Experiencers and Viewers All humans	Y Y Y Y	POS POS Y Y	POS POS POS Y
Carbon storage	Regulation and maintenance	Global climate regulation by reduction of greenhouse gas concentrations	Regulation and maintenance	Global climate regulation by reduction of greenhouse gas concentrations	All humans	Y	Y	Y
Habitat connectivity	Regulation and maintenance	Lifecycle maintenance, habitat and gene pool protection	Cultural	Experiential use of plants, animals and land-seascapes in different environmental settings Intellectual and representative interactions Scientific, educational, aesthetic Other cultural outputs (Existence)	Experiencers and Viewers Educators and Students Researchers People who care (Existence)	Y POS POS POS	Y POS POS POS	MAR MAR N POS
Sediment retention	Regulation and maintenance	Filtration/sequestration/storage/accumulation by ecosystems	Cultural	Physical use of land-/seascapes in different environmental settings Physical use of land-/seascapes in different environmental settings	Anglers Boaters	POS POS	POS MAR	n/a n/a
Nutrient retention	Regulation and maintenance	Filtration/sequestration/storage/accumulation by ecosystems	Cultural	Experiential use of plants, animals and land-seascapes in different environmental settings Physical use of land-/seascapes in different environmental settings	Experiencers and Viewers Anglers	Y POS	Y POS	n/a n/a
Water yield (quick flow)	Regulation and maintenance	Hydrological cycle and water flow maintenance	Cultural	Physical use of land-/seascapes in different environmental settings	Boaters	POS	MAR	n/a
Water retention (base flow)	Regulation and maintenance	Hydrological cycle and water flow maintenance	Cultural	Experiential use of plants, animals and land-seascapes in different environmental settings Physical use of land-/seascapes in different environmental settings Physical use of land-/seascapes in different environmental settings	Experiencers and Viewers Anglers Boaters	Y POS POS	Y POS POS	n/a n/a n/a
Water retention (base flow)	Regulation and maintenance	Hydrological cycle and water flow maintenance	Provisioning	Groundwater for drinking purposes	Municipal Drinking Water Plant Operators	Y	Y	n/a
Aesthetics	Not applicable	Not applicable	Cultural	Experiential use of plants, animals and land-seascapes in different environmental settings Other cultural outputs (Existence)	Experiencers and Viewers People who care (Existence)	Y POS	Y POS	n/a POS

and therefore actual amounts may differ somewhat from the modelled values due to differences in species composition, age of woody vegetation as well as duration of land use, management practices and local climate. It is also important to recognise that we did not account for possible greenhouse gas emissions from frequently inundated sites, and especially constructed wetlands, which under specific conditions may contribute significant emissions to the atmosphere (Maucieri et al., 2017). Although the carbon stocks in soil were estimated from the global SoilGrids dataset, which is a predictive dataset with overall 61% accuracy (Hengl et al., 2017), we consider the estimates as accurate for relative comparisons of soil carbon between the sites and their wider landscape. The predicted amounts of sediment export on both RBF and MAR/SAT sites were low and were set within the typical values of soil erosion estimated by various authors for England and Wales (Graves et al., 2015) for land cover classes dominant on both sites – woodland or grassland. The modelled values are interpretable in average annual terms, and actual soil losses from the sites may vary with the year-to-year changes in the state of vegetation or weather conditions (Guerra et al., 2014). In terms of nutrient export, the NDR model has been shown to perform well in terms of relative magnitudes of N and P export from catchments rather than absolute amounts (Redhead et al., 2018) and therefore spatially explicit maps of nutrient export derived for each wider study area can be reliably used to interpret the relative contributions of each site to the overall nutrient loss from the landscape. The SWY model has only been recently developed and therefore no studies from similar geographic areas to this study exist in literature. Nevertheless, the performance of the SWY model was found to be satisfactory in case studies located in Rwanda (Bagstad et al., 2018) and Australia (Wang et al., 2018) with a recommendation that fine resolution of the input spatial data, as is the case in this study, corresponded with higher reliability of the modelling outputs. The results of the pollination model indicated that all sites can promote wild pollinator abundance in the landscape, however, the InVEST model has been shown to be particularly sensitive to parameters describing the availability of nesting grounds and the mean foraging distance covered by the pollinators (Groff et al., 2016), and therefore specific local conditions that were not captured during the study may alter the significance of the case study areas in pollinator supply.

In this work we have refrained from conducting full economic valuation of ecosystem services from cNES technologies as our modelled results are only indicative of the possible amounts of ecosystem services derived from the sites, did not undergo rigorous ground-truthing with measured data, and depend on the environmental contexts of each site. Nevertheless, should an economic valuation be required for a given decision context, Boithias et al. (2016) offer a compendium of guidelines that could be followed to achieve an accurate estimation of the monetary value of ecosystem services in a given socio-economic context with consideration of main sources of uncertainty including the number of ecosystem services and their benefits considered, valuation methods used, and uncertainty around the valuation metrics applied. For example, aspects such as costs of N and P treatment, costs of health and environmental damages per unit of the nutrient as well as the value of land cover resulting from water purification for drinking purposes could be considered to determine the value of nutrient retention. However, economic valuation should not be limited to a single IES, and rather embrace multiple IESs and all associated benefits to avoid underestimations in the assessment.

This study has practical implications for planning decisions and landscape design at a number of different levels. Firstly, the presented methodology for spatially explicit ecosystem services and ecological connectivity assessments could be implemented at a landscape level to determine optimal location for prospective cNES sites that would bring the most of societal benefits. It could also help inform the decision on what particular cNES technology, or the design of this technology (e.g. nature and configuration of constructed wetlands) is best placed to deliver ecological and societal benefits. Secondly, this study highlights

the importance of the land cover present within each site for ecosystem services generation and therefore creates space for ecological/environmental engineering interventions. For example, the cNES sites could form a link for biodiversity and pollination by introducing native meadow plant species to areas covered by grass, forming a key link in green infrastructure development, particularly in more densely populated areas (e.g. urban systems). Dense vegetation present within appropriately placed cNES sites could also act as a buffer between agricultural fields and surface water bodies, reducing the amount of excess nutrients or sediments entering into the streams.

5. Conclusions

The presented modelling study of ecosystem services derived from three types of cNES technologies for water and waste water treatment revealed their multifunctional potential in terms of secondary ecosystem services supply, i.e. ecosystem services above that of water purification due to natural processes inherent to the natural components of the treatment methods. These services are derived from natural and semi-natural land cover classes present within the sites formed as a result of extensive use and presence of protection zones restricting intensive use of the sites. From the three investigated cNES technologies, the riverbank filtration (RBF) and managed aquifer recharge/soil aquifer treatment (MAR/SAT) proved to play a role in all seven ecosystem services assessed here: carbon storage, pollination, water retention, sediment retention, nutrient retention and habitat connectivity for biodiversity. The constructed wetland (CW) had a role in carbon storage and pollination services. These results are highly sensitive to the local conditions of the sites as well as their wider landscape context, such as the type of land cover and its spatial configuration on-site and off-site, management practices on-site affecting the state of vegetation, the spatial extent of the site and the natural/semi-natural land cover on-site, as well as topography of the wider study area and climate. Due to these considerations, the results of this study cannot be generalised to overall guidance concerning ecosystem potential of these cNES technologies. For the same reasons, any comparisons between the ecosystem services potential of the studied sites were avoided, as the same technology in different environmental settings can have different potential to deliver ecosystem services. Our study also indicated that people's perception of the aesthetic value of the CW and MAR/SAT technologies as compared to their engineered equivalents can be largely positive, subject to the sensitivities around the type of land cover on the site. In conclusion, cNES technologies for water and wastewater treatment can make important contributions to ecosystem services supply subject to widespread implementation in appropriate environmental settings and land cover management promoting ecological functioning of ecosystems present on the sites.

Data underlying this study can be accessed the Cranfield University repository at <https://doi.org/10.17862/cranfield.rd.7994120.v1>.

Declaration of Competing Interest

None.

Acknowledgments

This research was funded as part of the AquaNES Project by the European Union's Horizon 2020 research and innovation programme under Grant agreement No. 689450. The authors would also like to thank project partners from the cNES demonstration sites for their engagement in the data collation stage which greatly facilitated modelling and discussion of the results.

Appendix A. Supplementary data

Supplementary data to this article can be found online at <https://>

doi.org/10.1016/j.ecoena.2019.100006.

References

- Alam, M., 2018. Ecological and economic indicators for measuring erosion control services provided by ecosystems. *Ecol. Indic.* 95, 695–701. <https://doi.org/10.1016/j.ecoind.2018.07.052>.
- Almuktar, S.A.A.N., Abed, S.N., Scholz, M., 2018. Wetlands for wastewater treatment and subsequent recycling of treated effluent: a review. *Environ. Sci. Pollut. Res.* <https://doi.org/10.1007/s11356-018-2629-3>.
- Anzaldua, G., Gerner, N.V., Lago, M., Abhold, K., Hinzmann, M., Beyer, S., Winking, C., Riegels, N., Krogsgaard Jensen, J., Termes, M., Amorós, J., Wencki, K., Strehl, C., Ugarelli, R., Hasenheit, M., Nafo, I., Hernandez, M., Vilanova, E., Damman, S., Brouwer, S., Rouillard, J., Schwesig, D., Birk, S., 2018. Getting into the water with the ecosystem services approach: the DESSIN ESS evaluation framework. *Ecosyst. Serv.* 30, 318–326. <https://doi.org/10.1016/j.ecoser.2017.12.004>.
- Arden, S., Ma, X., 2018. Constructed wetlands for greywater recycle and reuse: a review. *Sci. Total Environ.* <https://doi.org/10.1016/j.scitotenv.2018.02.218>.
- Bagstad, K.J., Cohen, E., Ancona, Z.H., McNulty, S.G., Sun, G., 2018. The sensitivity of ecosystem service models to choices of input data and spatial resolution. *Appl. Geogr.* 93, 25–36. <https://doi.org/10.1016/j.apgeog.2018.02.005>.
- Barth, N.C., Döll, P., 2016. Assessing the ecosystem service flood protection of a riparian forest by applying a cascade approach. *Ecosyst. Serv.* 21, 39–52. <https://doi.org/10.1016/j.ecoser.2016.07.012>.
- Boithias, L., Terrado, M., Corominas, L., Ziv, G., Kumar, V., Marqués, M., Schuhmacher, M., Acuña, V., 2016. Analysis of the uncertainty in the monetary valuation of ecosystem services—a case study at the river basin scale. *Sci. Total Environ.* 543, 683–690. <https://doi.org/10.1016/j.scitotenv.2015.11.066>.
- Breeze, T.D., Bailey, A.P., Potts, S.G., Balcombe, K.G., 2015. A stated preference valuation of the non-market benefits of pollination services in the UK. *Ecol. Econ.* <https://doi.org/10.1016/j.ecolecon.2014.12.022>.
- Carvell, C., Bourke, A.F.G., Dreier, S., Freeman, S.N., Hulmes, S., Jordan, W.C., Redhead, J.W., Sumner, S., Wang, J., Heard, M.S., 2017. Bumblebee family lineage survival is enhanced in high-quality landscapes. *Nature* 543, 547–549. <https://doi.org/10.1038/nature21709>.
- Costanza, R., de Groot, R., Sutton, P., van der Ploeg, S., Anderson, S.J., Kubiszewski, I., Farber, S., Turner, R.K., 2014. Changes in the global value of ecosystem services. *Global Environ. Change* 26, 152–158. <https://doi.org/10.1016/j.gloenvcha.2014.04.002>.
- Dillon, P., Toze, S., Page, D., Vanderzalm, J., Bekele, E., Sidhu, J., Rinck-Pfeiffer, S., 2010. Managed aquifer recharge: rediscovering nature as a leading edge technology. *Water Sci. Technol.* 62, 2338–2345. <https://doi.org/10.2166/wst.2010.444>.
- European Union, 2015. *Towards an EU Research and Innovation Policy Agenda for Nature-Based Solutions & Re-Naturing Cities*. Publications Office of the European Union 10.2777/765301.
- Ezeibilo, E.E., 2016. Economic value of a non-market ecosystem service: an application of the travel cost method to nature recreation in Sweden. *Int. J. Biodivers. Sci. Ecosyst. Serv. Manage.* 1–14. <https://doi.org/10.1080/21513732.2016.1202322>.
- Fick, S.E., Hijmans, R.J., 2017. WorldClim 2: new 1-km spatial resolution climate surfaces for global land areas. *Int. J. Climatol.* 37, 4302–4315. <https://doi.org/10.1002/joc.5086>.
- Gallai, N., Salles, J.M., Settele, J., Vaissière, B.E., 2009. Economic valuation of the vulnerability of world agriculture confronted with pollinator decline. *Ecol. Econ.* 68, 810–821. <https://doi.org/10.1016/j.ecolecon.2008.06.014>.
- Garratt, M.P.D., Breeze, T.D., Jenner, N., Polce, C., Biesmeijer, J.C., Potts, S.G., 2014. Avoiding a bad apple: Insect pollination enhances fruit quality and economic value. *Agric. Ecosyst. Environ.* 184, 34–40. <https://doi.org/10.1016/j.agee.2013.10.032>.
- Geber, U., Björklund, J., 2001. The relationship between ecosystem services and purchased input in Swedish wastewater treatment systems — a case study. *Ecol. Eng.* 18, 39–59. [https://doi.org/10.1016/S0925-8574\(01\)00064-7](https://doi.org/10.1016/S0925-8574(01)00064-7).
- Ghermandi, A., Fichtman, E., 2015. Cultural ecosystem services of multifunctional constructed treatment wetlands and waste stabilization ponds: time to enter the mainstream? *Ecol. Eng.* 84, 615–623. <https://doi.org/10.1016/j.ecoleng.2015.09.067>.
- Grafius, D.R., Corstanje, R., Siriwardena, G.M., Plummer, K.E., Harris, J.A., 2017. A bird's eye view: using circuit theory to study urban landscape connectivity for birds. *Landsc. Ecol.* 32, 1771–1787. <https://doi.org/10.1007/s10980-017-0548-1>.
- Graham, D.W., Smith, V.H., 2004. Designed ecosystem services: application of ecological principles in wastewater treatment engineering. *Front. Ecol. Environ.* 2, 199–206. [https://doi.org/10.1890/1540-9295\(2004\)002\[0199:DESAOE\]2.0.CO;2](https://doi.org/10.1890/1540-9295(2004)002[0199:DESAOE]2.0.CO;2).
- Graves, A.R., Morris, J., Deeks, L.K., Rickson, R.J., Kibblewhite, M.G., Harris, J.A., Farewell, T.S., Truckle, I., 2015. The total costs of soil degradation in England and Wales. *Ecol. Econ.* 119, 399–413. <https://doi.org/10.1016/j.ecolecon.2015.07.026>.
- Groff, S.C., Loftin, C.S., Drummond, F., Bushmann, S., McGill, B., 2016. Parameterization of the InVEST crop pollination model to spatially predict abundance of wild blueberry (*Vaccinium angustifolium* Aiton) native bee pollinators in Maine. *USA. Environ. Model. Software* 79, 1–9. <https://doi.org/10.1016/j.envsoft.2016.01.003>.
- Guerra, C.A., Pinto-Correia, T., Metzger, M.J., 2014. Mapping soil erosion prevention using an ecosystem service modeling framework for integrated land management and policy. *Ecosystems* 17, 878–889. <https://doi.org/10.1007/s10021-014-9766-4>.
- Haines-Young, R., Potschin, M., 2013. *Common International Classification of Ecosystem Services (CICES): Consultation on Version 4*.
- Harmel, D., Qian, S., Reckhow, K., Casebolt, P., 2008. The MANAGE database: nutrient load and site characteristic updates and runoff concentration data. *J. Environ. Qual.* 37, 2403. <https://doi.org/10.2134/jeq2008.0079>.
- Harmel, D.R., Christianson, L.E., McBroom, M.W., Smith, D.R., Higgs, K.D., 2016. Expansion of the MANAGE database with forest and drainage studies. *JAWRA J. Am. Water Resour. Assoc.* 52, 1275–1279. <https://doi.org/10.1111/1752-1688.12438>.
- Hengl, T., Mendes de Jesus, J., Heuvelink, G.B.M., Ruiperez Gonzalez, M., Kilibarda, M., Blagotić, A., Shangguan, W., Wright, M.N., Geng, X., Bauer-Marschallinger, B., Guevara, M.A., Vargas, R., MacMillan, R.A., Batjes, N.H., Leenaars, J.G.B., Ribeiro, E., Wheeler, I., Mantel, S., Kempen, B., 2017. SoilGrids250m: global gridded soil information based on machine learning. *PLoS One* 12, e0169748. <https://doi.org/10.1371/journal.pone.0169748>.
- Honey-Rosés, J., Schneider, D.W., Brozović, N., 2014. Changing ecosystem service values following technological change. *Environ. Manage.* 53, 1146–1157. <https://doi.org/10.1007/s00267-014-0270-6>.
- IUCN, 2018. *The IUCN Red List of Threatened Species*. Accessed Jul-Oct 2018.
- Klatt, B.K., Holzschuh, A., Westphal, C., Clough, Y., Smit, I., Pawelzik, E., Tschamtkke, T., 2013. Bee pollination improves crop quality, shelf life and commercial value. *Proc. R. Soc. B Biol. Sci.* 281, 20132440. <https://doi.org/10.1098/rspb.2013.2440>.
- Kreiling, R.M., Thoms, M.C., Richardson, W.B., 2018. Beyond the edge: linking agricultural landscapes, stream networks, and best management practices. *J. Environ. Qual.* 47, 42. <https://doi.org/10.2134/jeq2017.08.0319>.
- La Notte, A., Liqueste, C., Grizzetti, B., Maes, J., Ego, B., Paracchini, M., 2015. An ecological-economic approach to the valuation of ecosystem services to support biodiversity policy. A case study for nitrogen retention by Mediterranean rivers and lakes. *Ecol. Indic.* 48, 292–302. <https://doi.org/10.1016/j.ecoind.2014.08.006>.
- Landers, D.H., Nahlík, A.M., 2013a. Final ecosystem goods and services classification system (FECS-CS).
- Landers, D.H., Nahlík, A.M., 2013b. Final ecosystem goods and services classification system (FECS-CS).
- López-Pintor, A., Sanz-Cañada, J., Salas, E., Rescia, A., López-Pintor, A., Sanz-Cañada, J., Salas, E., Rescia, A.J., 2018. Assessment of agril-environmental externalities in Spanish socio-ecological landscapes of olive groves. *Sustainability* 10, 2640. <https://doi.org/10.3390/su10082640>.
- Maes, J., Ego, B., Willemen, L., Liqueste, C., Vihervaara, P., Schägner, J.P., Grizzetti, B., Drakou, E.G., Notte, A.L., Zulfan, G., Bouraoui, F., Luisa Paracchini, M., Braat, L., Bidoglio, G., 2012. Mapping ecosystem services for policy support and decision making in the European Union. *Ecosyst. Serv.* 1, 31–39. <https://doi.org/10.1016/j.ecoser.2012.06.004>.
- Mashayekhi, Z., Panahi, M., Karami, M., Khalighi, S., Malekian, A., 2010. Economic valuation of water storage function of forest ecosystems (case study: Zagros Forests, Iran). *J. For. Res.* 21, 293–300. <https://doi.org/10.1007/s11676-010-0074-3>.
- Masi, F., Rizzo, A., Bresciani, R., Conte, G., 2016. Constructed wetlands for combined sewer overflow treatment: ecosystem services at Gorla Maggiore, Italy. *Ecol. Eng.* <https://doi.org/10.1016/j.ecoleng.2016.03.043>.
- Maucieri, C., Barbera, A.C., Vymazal, J., Borin, M., 2017. A review on the main affecting factors of greenhouse gases emission in constructed wetlands. *Agric. For. Meteorol.* 236, 175–193. <https://doi.org/10.1016/j.agrformet.2017.01.006>.
- McRae, B.H., Dickson, B.G., Keitt, T.H., Shah, V.B., 2008. Using circuit theory to model connectivity in ecology, evolution, and conservation. *Ecology* 89, 2712–2724. <https://doi.org/10.1890/07-1861.1>.
- Millennium Ecosystem Assessment, 2005. *Ecosystems and Human Well-being: Synthesis*. Washington, DC.
- Panagos, P., Ballabio, C., Borrelli, P., Meusburger, K., Klik, A., Rousseva, S., Tadić, M.P., Michailides, S., Hrabalíková, M., Olsen, P., Aalto, J., Lakatos, M., Rymaszewicz, A., Dumitrescu, A., Begería, S., Alewell, C., 2015. Rainfall erosivity in Europe. *Sci. Total Environ.* 511, 801–814. <https://doi.org/10.1016/j.scitotenv.2015.01.008>.
- Panagos, P., Meusburger, K., Ballabio, C., Borrelli, P., Alewell, C., 2014. Soil erodibility in Europe: a high-resolution dataset based on LUCAS. *Sci. Total Environ.* 479–480, 189–200. <https://doi.org/10.1016/j.scitotenv.2014.02.010>.
- Picanço, A., Gil, A., Rigal, F., Borges, P.A.V., 2017. Pollination services mapping and economic valuation from insect communities: a case study in the Azores (Terceira Island). *Nat. Conserv.* 18, 1–25. <https://doi.org/10.3897/natureconservation.18.11523>.
- Potschin-Young, M., Haines-Young, R., Görg, C., Heink, U., Jax, K., Schleyer, C., 2018. Understanding the role of conceptual frameworks: reading the ecosystem service cascade. *Ecosyst. Serv.* 29, 428–440. <https://doi.org/10.1016/j.ecoser.2017.05.015>.
- Reckhow, K., Potter, S., Harmel, D., Casebolt, P., Green, C., Haney, R., 2007. Compilation of measured nutrient load data for agricultural land uses in the United States. *J. Am. Water Resour. Assoc.* 42, 1163–1178. <https://doi.org/10.1111/j.1752-1688.2006.tb05604.x>.
- Redhead, J.W., May, L., Oliver, T.H., Hamel, P., Sharp, R., Bullock, J.M., 2018. National scale evaluation of the InVEST nutrient retention model in the United Kingdom. *Sci. Total Environ.* 610–611, 666–677. <https://doi.org/10.1016/j.scitotenv.2017.08.092>.
- Schlesinger, W.H., 1991. *Biochemistry, and Analysis of Global Change*. Academic Press, New York, USA.
- Semeraro, T., Giannuzzi, C., Beccarisi, L., Aretano, R., De Marco, A., Pasimeni, M.R., Zurlini, G., Petrosillo, I., 2015. A constructed treatment wetland as an opportunity to enhance biodiversity and ecosystem services. *Ecol. Eng.* 82, 517–526. <https://doi.org/10.1016/j.ecoleng.2015.05.042>.
- Simonit, S., Perrings, C., 2011. Sustainability and the value of the “regulating” services: wetlands and water quality in Lake Victoria. *Ecol. Econ.* 70, 1189–1199. <https://doi.org/10.1016/j.ecolecon.2011.01.017>.
- Stanley, D.A., Gunning, D., Stout, J.C., 2013. Pollinators and pollination of oilseed rape crops (*Brassica napus* L.) in Ireland: ecological and economic incentives for pollinator conservation. *J. Insect Conserv.* 17, 1181–1189. <https://doi.org/10.1007/s10841-013-9599-z>.
- Tallis, H., Polasky, S., 2009. Mapping and valuing ecosystem services as an approach for conservation and natural-resource management. *Ann. N. Y. Acad. Sci.* <https://doi.org/10.1111/j.1749-6632.2009.04152.x>.

- Tóth, B., Weynants, M., Pásztor, L., Hengl, T., 2017. 3D soil hydraulic database of Europe at 250 m resolution. *Hydrol. Process.* 31, 2662–2666. <https://doi.org/10.1002/hyp.11203>.
- Tripathee, R., Schäfer, K.V.R., 2015. Above- and belowground biomass allocation in four dominant salt marsh species of the Eastern United States. *Wetlands* 35, 21–30. <https://doi.org/10.1007/s13157-014-0589-z>.
- Tufenkji, N., Ryan, J.N., Elimelech, M., 2002. Peer reviewed: the promise of bank filtration. *Environ. Sci. Technol.* 36, 422A–428A. <https://doi.org/10.1021/es022441j>.
- Wang, M., Zhang, D.Q., Dong, J.W., Tan, S.K., 2017. Constructed wetlands for wastewater treatment in cold climate — a review. *J. Environ. Sci.* 57, 293–311. <https://doi.org/10.1016/J.JES.2016.12.019>.
- Wang, Z., Lechner, A., Baumgartl, T., Wang, Z., Lechner, A.M., Baumgartl, T., 2018. Ecosystem services mapping uncertainty assessment: a case study in the Fitzroy Basin Mining Region. *Water* 10, 88. <https://doi.org/10.3390/w10010088>.
- Winfree, R., Gross, B.J., Kremen, C., 2011. Valuing pollination services to agriculture. *Ecol. Econ.* 71, 80–88. <https://doi.org/10.1016/j.ecolecon.2011.08.001>.
- Wischmeier, W.H., Smith, D.D., 1978. *Predicting Rainfall Erosion Losses: A Guide to Conservation Planning*. Agriculture Handbook No. 537. USDA/Science and Education Administration, US. Govt. Printing Office, Washington, DC.
- Yang, P., Yao, Y.-F., Mi, Z., Cao, Y.-F., Liao, H., Yu, B.-Y., Liang, Q.-M., Coffman, D., Wei, Y.-M., 2018. Social cost of carbon under shared socioeconomic pathways. *Global Environ. Change* 53, 225–232. <https://doi.org/10.1016/J.GLOENVCHA.2018.10.001>.
- Zawadzka, J., Mayr, T., Bellamy, P., Corstanje, R., 2015. Comparing physiographic maps with different categorisations. *Geomorphology* 231. <https://doi.org/10.1016/j.geomorph.2014.12.006>.
- Zawadzka, J.E., Corstanje, R., Fookes, J., Nichols, J., Harris, J., 2017. Operationalizing the ecosystems approach: assessing the environmental impact of major infrastructure development. *Ecol. Indic.* 78, 75–84. <https://doi.org/10.1016/j.ecolind.2017.03.005>.
- Zomer, R.J., Trabucco, A., Bossio, D.A., Verchot, L.V., 2008. Climate change mitigation: a spatial analysis of global land suitability for clean development mechanism afforestation and reforestation. *Agric. Ecosyst. Environ.* 126, 67–80. <https://doi.org/10.1016/j.agee.2008.01.014>.
- Zomer, R.J., Trabucco, A., Van Straaten, O., Bossio, D.A., 2006. Carbon, land and water: a global analysis of the hydrologic dimensions of climate change mitigation through afforestation/reforestation. *Water Manage.* <https://doi.org/10.3910/2009.122>.
- Zulian, G., Stange, E., Woods, H., Carvalho, L., Andrews, C., Baró, F., Vizcaino, P., Barton, D.N., Nowel, M., Rusch, G.M., Autunes, P., Fernandes, J., Ferraz, D., Ferreira dos Santos, R., Aszalós, R., Arany, I., Czúcz, B., Priess, J.A., Hoyer, C., Bürger-Patricio, G., Lapola, D., Mederly, P., Halabuk, A., Bezak, P., Kopperoinen, L., Viinikka, A., 2018. Practical application of spatial ecosystem service models to aid decision support. *Ecosyst. Serv.* 29, 465–480. <https://doi.org/10.1016/J.ECOSER.2017.11.005>.