

# Vibration Induced to the Cyclist

## ABSTRACT

Improving comfort in road bicycle design is a paramount concern for cyclists, who are affected by the vibrations caused by constant contact with the road surface. The cycling community has deployed many efforts in the attempt to understand and improve bicycle comfort. However, these attempts have been focused on specific components such as the fork, frame and wheels without knowing their relative influence on vibration induced to the bicyclist (VIB). The objective of this paper is to assess the relative contribution of bicycle components on the VIB at the cyclist's hands and buttocks. A factorial design test comparing the VIB in acceleration, force and power of different bicycle components has already shown that the handlebar and fork are the preponderant components for the VIB measured at the cyclist's hands. At the buttocks, the preponderant components are the wheels and frame.

**Keywords:** *Bicycle Dynamic Comfort, Bicycle Testing, Factorial Design, Vibration Measurement,*

# 1. INTRODUCTION

Road cycling is a sport in which equipment design has a major impact on the cyclist's overall performance and experience. As this sport has progressed over the years, most of improvements in bicycle design have been focused on reducing the bicycle's mass and aerodynamic drag, and on increasing stiffness. More recently however, the ride quality of road bicycles has become a more desirable characteristic for users as well as an important design issue for bicycle manufacturers. If we want the cyclist to "fit" properly on the bicycle, then we need to consider that the quality of the ride is most closely related to the level of vibration transmitted from the road to the cyclist via the various components of the bike.

In the process of increasing the quality of the ride and improving cyclist comfort, the assessment of the vibrations induced to the bicyclist (VIB) is an essential step and an active research topic in sports engineering. This research topic is divided into three parts: (1) developing force transducers, (2) developing excitation techniques, and (3) investigating the characteristics of a bicycle that reduce the VIB.

An important part of research on VIB is the development of bicycle force transducers such as instrumented pedals, stems and seat posts. These transducers measure loads at the contact interface between the cyclist and the bicycle<sup>1-6</sup>. They also enable us to assess a metric to quantify VIB with the ultimate goal of reducing it. Richard et al.<sup>7</sup> used force and energy transmitted to the cyclist measured by an instrumented stem to investigate comfort. Vanwallenghem et al.<sup>8</sup> also used an instrumented handlebar and seat post to measure the absorbed power as a metric for cyclist comfort.

Embedded force transducers and accelerometers have been incorporated on instrumented bicycles to measure VIB with different excitation techniques. The most common excitation technique for a bicycle is to ride on a road<sup>8-12</sup>. The VIB has also been measured using different excitation techniques in the controlled environment of the laboratory. Hastings et al.<sup>13</sup> compared the VIB among three bicycle frames mounted by a cyclist on a treadmill. Thite et al.<sup>14</sup> compared the VIB between two different mountain bike frames and a dummy cyclist excited by a shaker. Lépine et al.<sup>15</sup> developed a test rig that mimics the road excitation in a laboratory in order to compare the VIB between different bicycles. Bicycle component vibration transmissibilities were also compared using an incomplete bicycle assembly. For example, wheel transmissibility was studied via different test rigs; one developed by Petrone et al.<sup>16</sup> and the other developed by Lépine et al.<sup>17</sup>.

Force transducers and excitation techniques allowed some research on the bicycle's characteristics that could reduce VIB. The fork and frame structural damping effect on bicycle vibrational behaviour and VIB were studied<sup>14,18,19</sup>. The modal properties and mode shapes of bicycles were also studied in order to provide a better understanding of bicycle dynamic response to improve comfort<sup>20,21</sup>. The relationship between VIB and wheel set characteristics such as tire pressure, number of spokes, rim material, radial stiffness, etc. has also been studied and discussed in the literature<sup>10,11,16,17,22</sup>.


Several attempts have thus been made to understand the effect of a bicycle's characteristics on vibrational behaviour and to ultimately increase cyclist comfort. However, these studies have been focused on specific components such as the fork, frame and wheels without knowing their relative influence on VIB on a fully assembled bicycle. The objective of this paper is to assess the relative contribution of bicycle components on the VIB at the cyclist's hands and buttocks. This will draw the cycling community's attention to the VIB preponderant components during the selection and assembly of components in order to design more comfortable bicycles.

## 2. METHODOLOGY

The relative contribution of road bicycle components on VIB is determined via a factorial design experiment. This factorial design investigates the effect of all possible combinations of the factor levels on the VIB. In this case, the factors represent the bicycle component categories and are separated into two levels: the lowest (−) and the highest (+) vibration transmitting component. In other words, the bicycle assembly is divided into 5 factors (bicycle component categories): wheels, fork, frame, stem and handlebar. As well, each factor has two different levels (component selection): the components with the lowest (−) and the highest (+) VIB level. The seat post and the brake hood are used as transducers; consequently they were not included in these factors. The method used to measure and compare VIBs between component categories is presented in part (a) of this paper. Part (b) presents how the factor levels are selected to finally perform the factorial design experiments used to quantify the relative contribution of road bicycle component categories on VIB detailed in part (c).

### a) VIB measurement method

In this paper, VIBs are measured on a bicycle in the controlled environment of the laboratory. The bicycle is vertically excited by a road simulator composed of two hydraulic shakers positioned under the wheels (Fig. 1). These shakers reproduce a 30 second excitation simulation of a bicycle at 26 km/h on a granular road as described by Lépine et al. <sup>15</sup>. A cyclist is seated on the bicycle during the measurement. The cyclist's position is controlled by the static force applied by the hands on the handlebar. The hands are resting (not grasping) on the brake hoods and the pedals are set at a horizontal position.

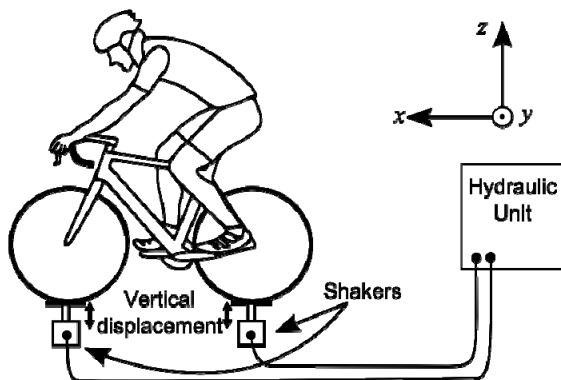

**Fig. 1 Bicycle excitation setup: the road simulator**

VIBs are measured at three different cyclist contact points on the bicycle depending on the test performed: (1) the vertical force and acceleration transmitted via the saddle and to the cyclist's buttocks is measured with a strain gauge instrumented seat post and a PCB 352C65 accelerometer (Fig. 2); (2) the force and the acceleration transmitted via the handlebars to the cyclist's hands is measured with a strain gauge instrumented stem and a PCB 352C68 accelerometer (Fig. 3); (3) the force and the acceleration transmitted to the cyclist's hands is measured with a strain gauge instrumented brake hood and a PCB 352C68 accelerometer under the hands (Fig. 4).

Using instrumented bicycle components, three measurands are used to quantify the level of VIB: (1) the acceleration  $a_{VIB}$ , (2) the force  $F_{VIB}$  and (3) the absorbed power  $P_{VIB}$ . Seat post  $a_{VIB}$  and  $F_{VIB}$  are calculated using the RMS value of the transducer signal filtered with the 2631 ISO standard vertical frequency-weighting curves for whole body transmitted vibrations <sup>23</sup>. The stem and brake hoods  $a_{VIB}$  and  $F_{VIB}$  are

calculated at all contact points with the combination of the force and velocity. The velocity is calculated from the integration of the accelerometer time signal.

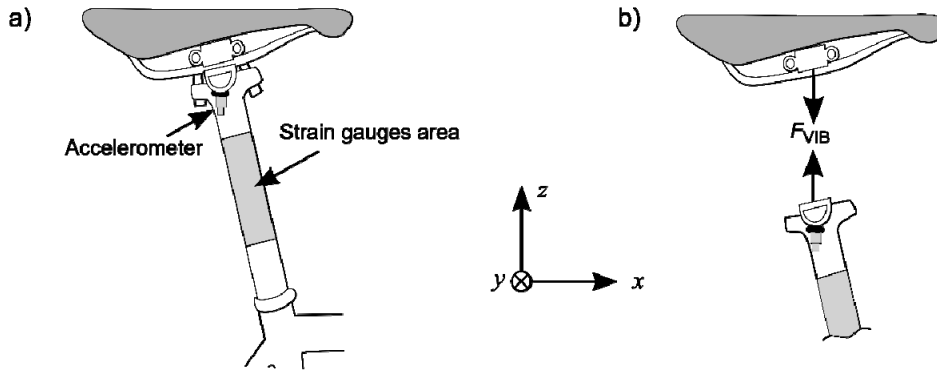


Fig. 2 Instrumented seat post: (a) transducers position; (b) applied position of the measured force

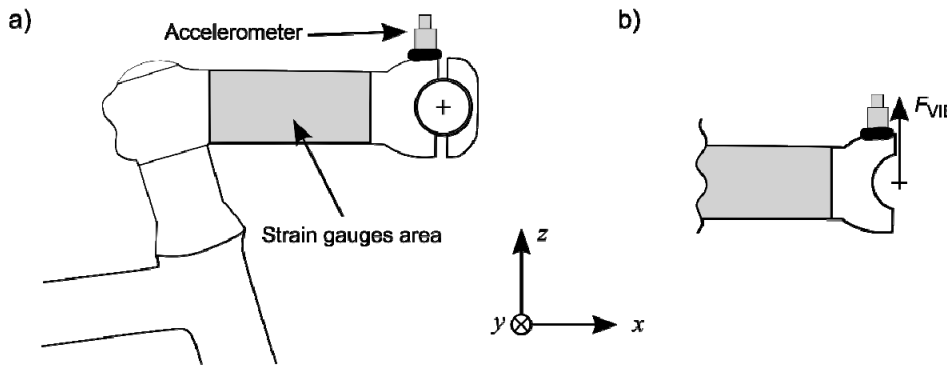


Fig. 3 Instrumented stem: (a) transducers position; (b) applied position of the measured force

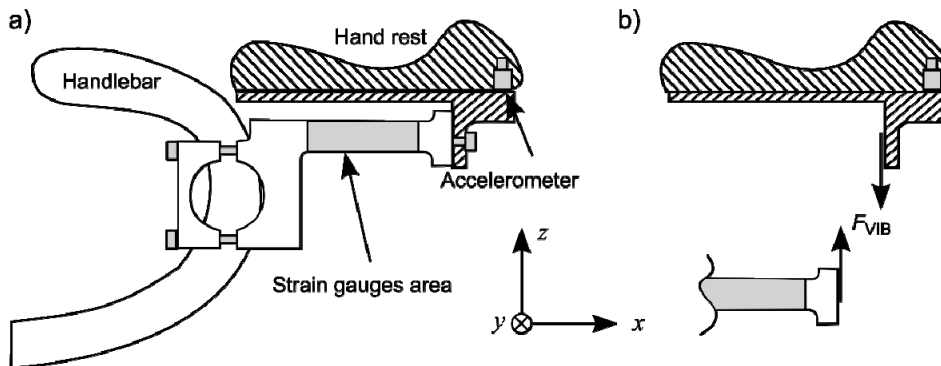


Fig. 4 Instrumented brake hood: (a) transducers position; (b) applied position of the measured force

### b) Factor levels selection

To define the levels of each factor (bicycle component category) used in the factorial design, the VIB level of several components available on the market were compared and ranked. The ranking was done by swapping the component on the same bicycle and measuring the VIB variation in acceleration, force and power. The component with the highest VIB level will be the (+) in its respective category (factor) and vice versa. The list of components and the characteristics of each factor are presented in Table 1-6. The dimensions of the components were selected to keep the cyclist's position as constant as possible.

The wheel set transmission ranking was done by comparing the VIB variation between different front wheels (Table 1). Identical clincher or tubular tires were installed on the rim, i.e. Vittoria Rubino Pro Slick 700x23c with Vittoria inner tube for the clincher tire and Vittoria Corsa CX 21-28' for the tubular tire. The width is the axial length of the rim and the depth is the radial length of the rim. The total mass includes the wheel and the tire but not the skewer.

The Fulcrum 7 rear wheel was installed on the bicycle frame during every comparison. Each wheel was tested 5 times in a random order. The VIBs were measured in force, acceleration and power at the brake hoods for wheel rankings. The same cyclist, frame, fork, stem and handlebar were used for all tests. The tire pressure was set at 8 bars.

Only the front wheels were compared due to wheel set availability. Nevertheless, the factorial design includes both the front and the rear wheels as one factor. The hypothesis is that the front and rear wheel dynamic is similar; the lowest or highest transmitting front wheel should also be the lowest or highest transmitting rear wheel.

**Table 1. Components tested for the wheel factor**

Name	Tire type	Number of spokes	Spoke pattern	Spoke material	Rim material	Rim width (mm)	Rim depth (mm)	Total mass (g)
Fulcrum 7	Clincher	20	Radial	Steel	Aluminum	21.0	25.5	1160
Kinlin XR-200	Clincher	20	Radial	Steel	Aluminum	18.5	23.0	900
Campagnolo NeutronUltra	Clincher	22	Radial	Steel	Aluminum	20.9	19.0	990
Lightweight	Tubular	16	Radial	Carbon	Carbon	20.2	53.0	780
Campagnolo Victory Strada	Tubular	32	Cross	Steel	Aluminum	19.9	11.0	910
Zipp 404 Firecrest	Tubular	16	Radial	Steel	Carbon	24.0	58.0	850
Zipp 202	Tubular	20	Cross	Steel	Carbon	21.5	25.0	810

The fork transmission ranking was done by comparing the VIB variation at the brake hoods between different forks (Table 2). Each fork was tested 6 times in a random order. The same cyclist, frame, wheel set, stem and handlebar were used for all tests. The tire pressure was set at 8 bars.

**Table 2. Components tested for the fork factor**

Name	Steering column material	Blades and crown material	Total mass (g)
Easton EC90SL	Carbon	Carbon	360
Cervélo FK30 SL	Carbon	Carbon	340
Cervélo TT Wolf	Aluminum	Carbon/Aluminum	600
Look HSC 5 SL	Carbon	Carbon	320
Specialized Roubaix FACT	Carbon	Carbon	414

The frame transmission ranking was obtained by comparing the VIB variation at the brake hoods and the seat post using different frames (Table 3). The frame size is the size given by the frame manufacturer. The top

tube length is the horizontal distance between the head tube and top tube junction to the seat tube (or its prolongation). The total mass included the bottom bracket and the seat post clamp.

Each frame was tested 7 times in a random order. The VIBs were measured in force, acceleration and power at the stem and the seat post. The same cyclist, fork, wheel set, stem and handlebar were used for all tests. The tire pressure was set at 8 bars.

**Table 3. Components tested for the frame factor**

Name	Material	Size	Top tube length (cm)	Total mass (g)
Masi Gran Criterium	Steel	56	56.5	2240
Focus Culebro	Aluminum	XL	56.0	1920
Merlin Agilis	Titan	M	55.5	1540
Specialized Comp Roubaix	Carbon	L	56.5	1340
Cervelo R3	Carbon	56	56.4	1070
Cervelo R5ca	Carbon	56	56.4	800

The stem transmission ranking was done by comparing the VIB variation at the brake hoods using different stems (Table 4). The stem length is the distance between the center of the fork and the handlebar attachment. The total mass includes all the stem's screws. Each stem was tested 6 times in a random order. The same cyclist, frame, fork, wheel set and handlebars were used for all tests. The tire pressure was set at 8 bars.

**Table 4. Components tested for the stem factor**

Name	Material	Length (mm)	Total mass (g)
3T ARX-PRO	Aluminum	110	132
3T ARX-LTD	Carbon	110	126
FSA OS-99 CSI	Aluminum wrapped with Carbon	110	141

The handlebar transmission ranking was done by comparing the VIB variation at the brake hoods between different handlebars (Table 5). The width is the overall dimension of the handlebar. Every handlebar was tested 5 times in a random order. The same cyclist, frame, fork, wheel set and stem were used during these tests. The tire pressure was set at 8 bars.

**Table 5. Components tested for the handlebar factor**

Name	Material	Width (cm)	Total mass (g)
3T Ergonova Pro	Aluminum	44	260
FSA K-Wing	Carbon	44	240
3T 4GXL	Aluminum	44	290
3T THE	Aluminum	44	340
3T Ergonova LTD	Carbon	44	190

### c) Factorial design plan

Once the (–) and (+) levels of each factor (bicycle component) were defined, the factorial design was conducted. To assess the relative contribution of the bicycle components, the VIB level for each factor combination is measured. A sample combination is: wheels (–) with the fork (–), frame (+) and handlebar (–). Even though five factors were considered in the selection, only four are included in the factorial design:

wheels, fork, frame and handlebar. The stem is excluded from the factorial design because no significant difference was measured between the tested stems. This exclusion is explained in the factor selection results and analysis (presented in Section 3.a-b).

The factorial design used was a  $2^4$  factorial performed in 4 blocks (measurement session) with 2 replicates completely randomized for a total of 32 combinations (Table 6-7). The experiment design is made of blocks of 8 combinations to ensure that testing can be performed in a relatively short timeframe (about 2 hours including assembly and disassembly). Dividing up the test in this way minimizes the tester's level of fatigue, as well as any natural variations in dynamic behaviour and other time-dependent phenomena that could alter the measurements.

Two techniques are used to increase the degree of freedom of the analysis and therefore increase the statistical power: the combinations are replicated twice and only the main factor and two-factor interactions effect are included in the analysis<sup>25</sup>.

**Table 6. Replicate 1 of the  $2^4$  factorial design in 4 blocks and 2 replicates combination matrix used to assess the relative contribution of bicycle components on VIB**

Run Order	Replicate 1							
	Block 1				Block 2			
	Wheels	Fork	Frame	Handlebar	Wheels	Fork	Frame	Handlebar
1	(-)	(-)	(+)	(-)	(-)	(+)	(-)	(+)
2	(+)	(-)	(+)	(+)	(+)	(+)	(+)	(+)
3	(+)	(-)	(-)	(-)	(+)	(-)	(+)	(-)
4	(-)	(+)	(+)	(+)	(+)	(+)	(-)	(-)
5	(+)	(+)	(-)	(+)	(-)	(-)	(-)	(-)
6	(+)	(+)	(+)	(-)	(+)	(-)	(-)	(+)
7	(-)	(+)	(-)	(-)	(-)	(-)	(+)	(+)
8	(-)	(-)	(-)	(+)	(-)	(+)	(+)	(-)

**Table 7. Replicate 2 of the  $2^4$  factorial design in 4 blocks and 2 replicate combination matrix used to assess the relative contribution of bicycle components on VIB**

Run Order	Replicate 2							
	Block 3				Block 4			
	Wheels	Fork	Frame	Handlebar	Wheels	Fork	Frame	Handlebar
1	(-)	(-)	(+)	(-)	(+)	(+)	(+)	(+)
2	(+)	(+)	(-)	(+)	(-)	(-)	(-)	(-)
3	(-)	(-)	(-)	(+)	(+)	(+)	(-)	(-)
4	(+)	(-)	(-)	(-)	(+)	(-)	(-)	(+)
5	(+)	(+)	(+)	(-)	(-)	(+)	(+)	(-)
6	(+)	(-)	(+)	(+)	(+)	(-)	(+)	(-)
7	(-)	(+)	(+)	(+)	(-)	(-)	(+)	(+)
8	(-)	(+)	(-)	(-)	(-)	(+)	(-)	(+)

### 3. RESULTS AND ANALYSIS

The experimental results are separated in two parts. Part (a) presents the results from the factor level selection tests and these results are analysed in part (b). Part (c) presents the results of the factorial design based on the factor level selection made in part (b). The factorial design results are analysed in Part (d).

#### a) Factors levels selection results

The significant levels ( $p$ -value) of the three measurands are calculated by means of an ANOVA (analysis of variance) at the measurement points for each factor levels selection test (Table 8). When the  $p$ -value is below 0.05, a significant difference of VIB between the bicycle's components tested is concluded.

**Table 8**  $p$ -value of the factor levels selection tests

Factor	Measurement point	$p$ -value for $a_{VIB}$	$p$ -value for $F_{VIB}$	$p$ -value for $P_{VIB}$
Wheel	Left Brake Hood	0.164	0.115	0.000
	Right Brake Hood	0.208	0.084	0.000
Fork	Left Brake Hood	0.280	0.017	0.000
	Right Brake Hood	0.201	0.263	0.000
Frames	Stem	0.000	0.007	0.000
	Seat Post	0.000	0.016	0.003
Stem	Left Brake Hood	0.967	0.644	0.282
	Right Brake Hood	0.611	0.402	0.298
Handlebar	Left Brake Hood	0.115	0.001	0.000
	Right Brake Hood	0.038	0.000	0.000

The key results of Table 8 and Figures 5-10 are:

#### VIB comparison between the front wheels at the right and the left brake hoods (Fig. 5)

- A significant difference is measured for  $P_{VIB}$  at both measurement points.
- Wheel ranking is similar for both brake hoods.

#### VIB comparison between the forks at the right and left brake hoods (Fig. 6)

- A significant difference is measured for  $F_{VIB}$  and  $P_{VIB}$  at the left brake hood but at the right brake hood, a significant difference for only  $P_{VIB}$  is measured.
- Fork ranking is similar for both brake hoods.

#### VIB comparison between the frames at the stem and seat post (Fig. 7 and Fig. 8.)

- A significant difference is measured with all three measurands at both measurement points.


#### VIB comparison between the stems made at the right and the left brake hoods (Fig. 9)

- No significant difference is measured at either brake hoods.


#### VIB comparison between the handlebars made at the right and the left brake hood (Fig. 10)

- A significant difference is measured with all three measurands at both measurement points except for  $a_{VIB}$  measured at the left brake hood.




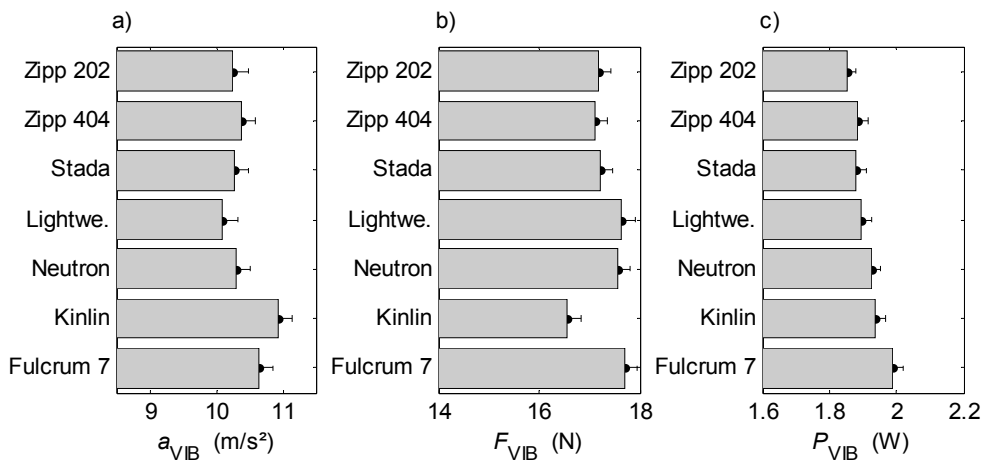

**Fig. 5** Wheel VIB measurements at the right brake hood, uncertainty bars are at a confidence level of 95%

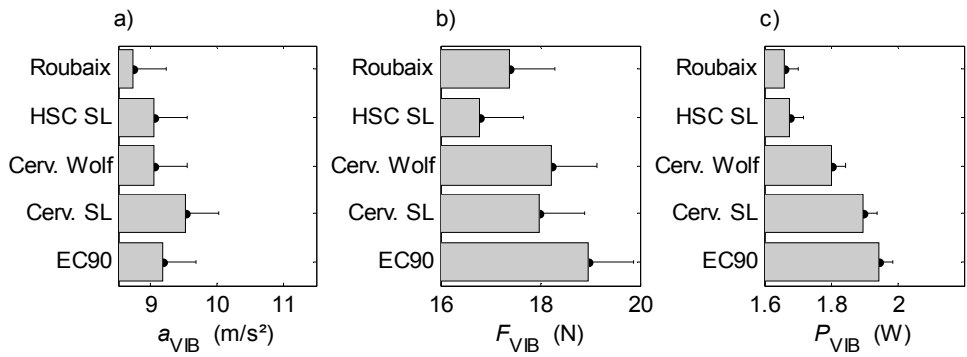

**Fig. 6** Forks VIB measurements at the left brake hood, uncertainty bars are at a confidence level of 95%

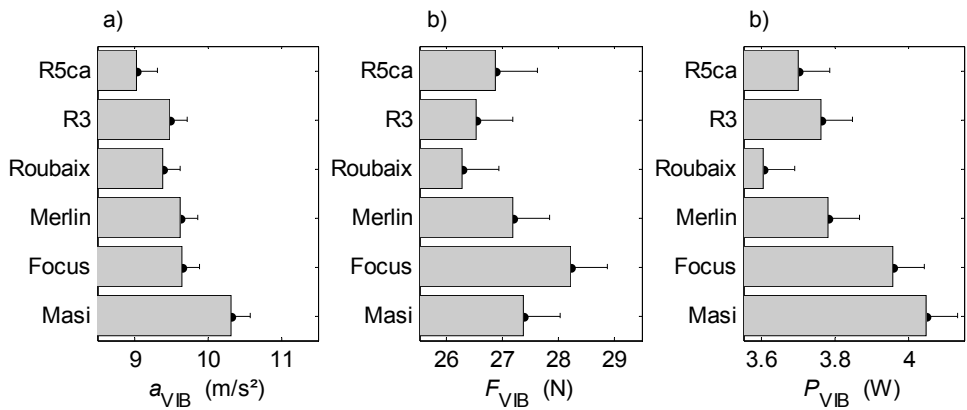

**Fig. 7** Frames VIB measurements at the stem, uncertainty bars are at a confidence level of 95%

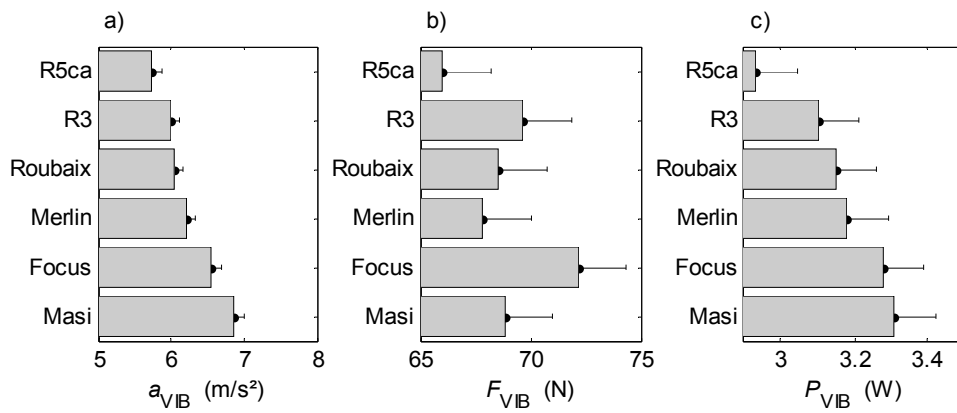


Fig. 8 Frame VIB measurements at the seat post, uncertainty bars are at a confidence level of 95%

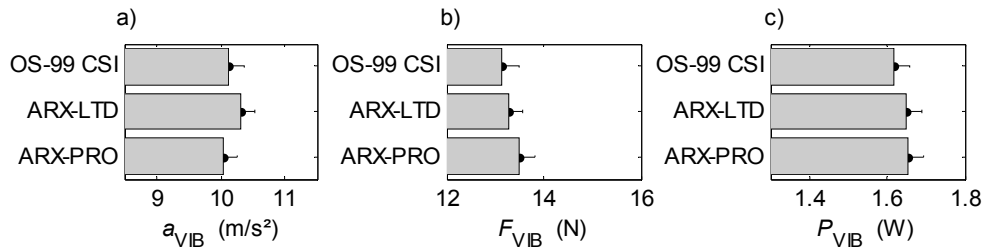


Fig. 9 Stem VIB measurement at the right brake hood, uncertainty bars are at a confidence level of 95%

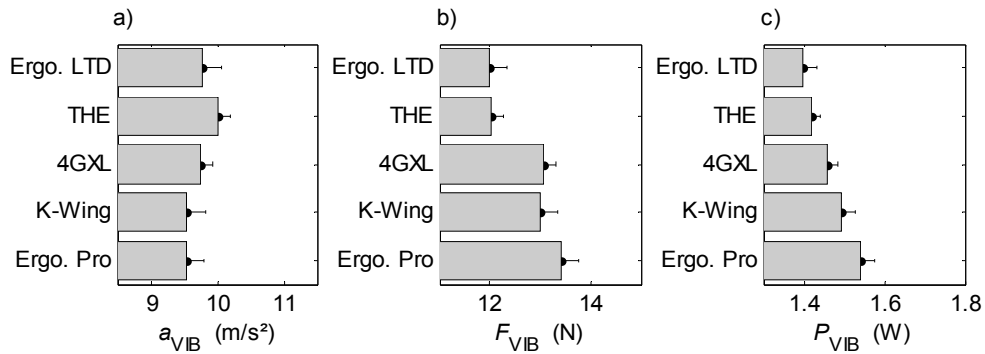


Fig. 10 Handlebar VIB measurements at the right brake hood, uncertainty bars are at a confidence level of 95%

### b) Factors levels selection analysis and discussion

The objective of this section is to select the lowest and highest transmitting component for each factor. These selected components will be respectively the (-) and (+) level. The selection is summarised in Table 9.

The wheel level selection is based on  $P_{VIB}$  values because it is the only measurand that has a significant impact on both measurement points (Table 8). The lowest transmitting wheel is the Zipp 202 and the highest is the Fulcrum 7 (Fig. 5 c).

Like the wheel selection, the fork level selection is based on absorbed power  $P_{VIB}$  values because it is the only measurand that has a significant impact on both measurement points (Table 8). The lowest transmitting fork is the Specialized Roubaix Fact and the highest transmitting fork is the Easton EC90SL (Fig. 6 c).

The frame level selection is based on all three measurands and both measurement points because they all present significant differences (Table 8). As seen on Fig. 7 and Fig. 8, the Cervélo R5ca is the lowest transmitting frame at 4 measurands out of a total of 6 and the Masi Gran Criterium is the highest transmitting frame at 4 measurands out of a total of 6. These frames are therefore the (–) and (+) level for the frame factor.

No significant difference can be made between the tested stems (Table 8). The stem factor is therefore excluded from the factorial design.

The handlebar level selection is based on the measurands presenting a significant difference on both measurement points, i.e.  $a_{VIB}$ ,  $F_{VIB}$  and  $P_{VIB}$  at the right brake hood and  $F_{VIB}$  and  $P_{VIB}$  at the left brake hood (Table 8). The 3T Ergonova LTD and the 3T Ergonova Pro are respectively the lowest and highest transmitting handlebars except for the  $a_{VIB}$  at the right brake hood. They will be respectively the (–) and (+) level for the handlebar factor.

The power absorbed by the cyclist ( $P_{VIB}$ ) seems to be the most consistent measurand because it allows the lower  $p$ -value in the factor levels selection (Table 8). It is also the only measurand that presents the same result at the left and right brake hoods in the factorial design.

**Table 9. Factors level selection**

Factor	(–) level	(+) level
Wheels	Zipp 202	Fulcrum 7
Forks	Specialized Roubaix Fact	Easton EC90SL
Frame	Cervélo R5ca	Masi Gran Criterium
Stem	Excluded from the factorial analysis	
Handlebar	3T Ergonova LTD	3T Ergonova PRO

### c) Factorial design results

The standardized effect of each factor (bicycle component) and component interaction are represented with Pareto charts for each measurand. In these charts it is also possible to assess the VIB variation percentage explained by the sum of the more influent components and their interaction. Discrepancies between the effect of the factors' ranking at the left and right brake hoods are explained by the asymmetric dynamic behaviour of the cyclist. These discrepancies are mainly seen on factors with a lower effect on the VIB.

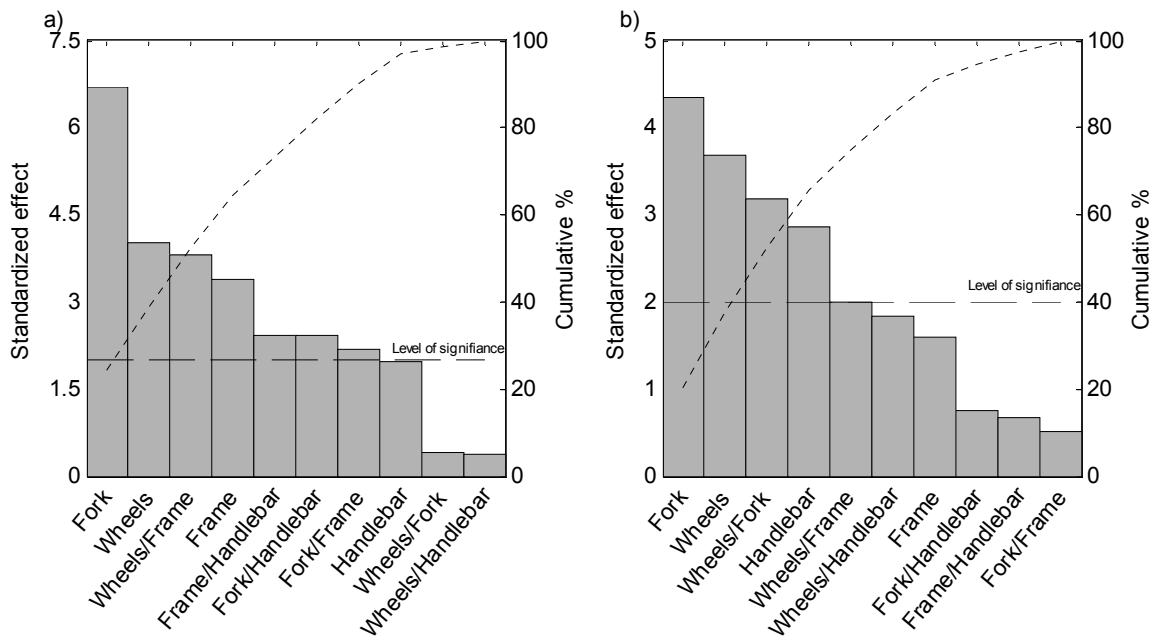


Fig. 111 Pareto Chart, standardized effects and cumulative effects of the bicycle components on  $a_{VIB}$ : a) at the left brake hood; b) at the right brake hood; the factors above the level of significance have a  $p$ -value below 0.05

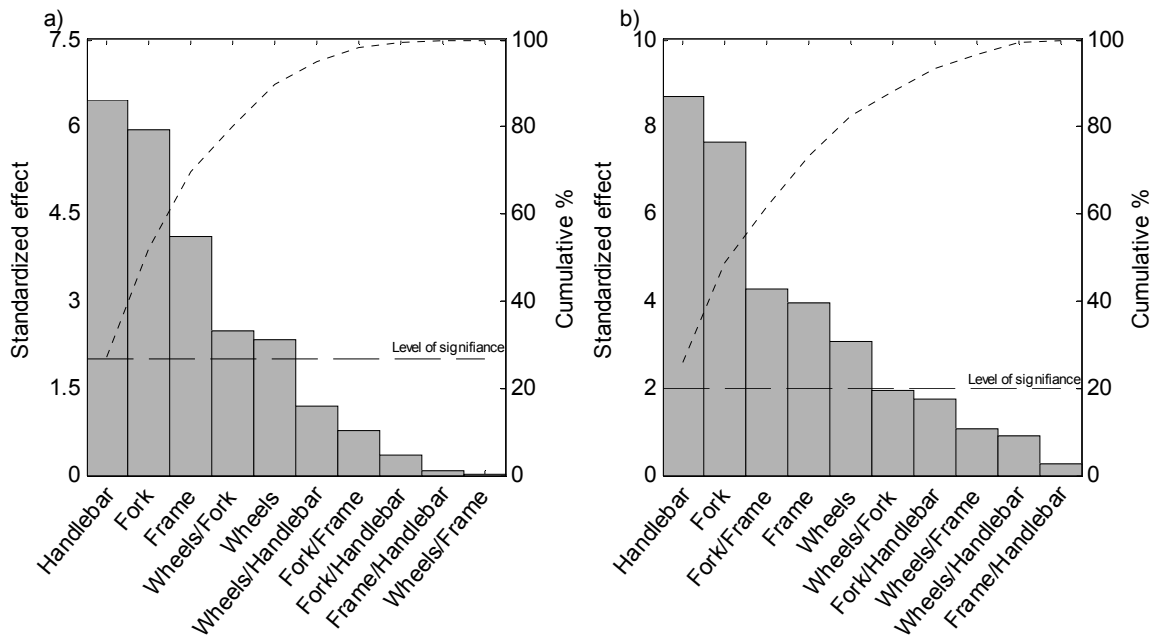


Fig. 12 Pareto Chart, standardized effects and cumulative effects of the bicycle components on  $F_{VIB}$ : a) at the left brake hood; b) at the right brake hood; the factors above the level of significance have a  $p$ -value below 0.05

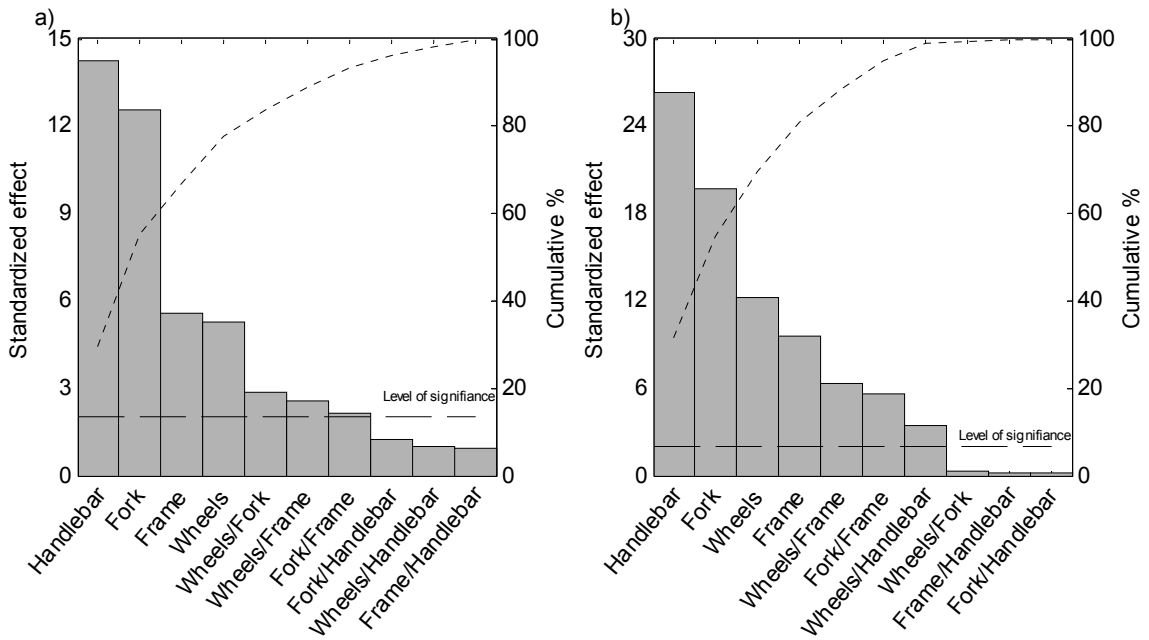


Fig. 13 Pareto Chart, standardized effects and cumulative effects of the bicycle components on  $P_{VIB}$ : a) at the left brake hood; b) at the right brake hood; the factors above the level of significance have a  $p$ -value below 0.05

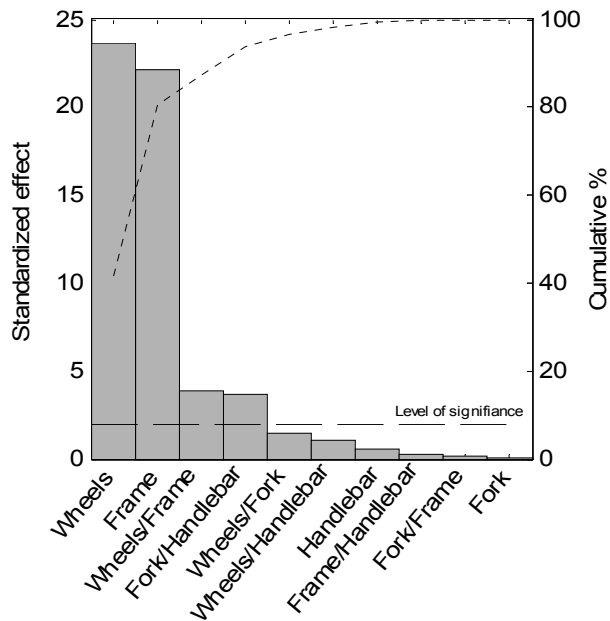


Fig. 14 Pareto Chart, standardized effects and cumulative effects of the bicycle components on  $a_{VIB}$  at the seat post; the factors above the level of significance have a  $p$ -value below 0.05

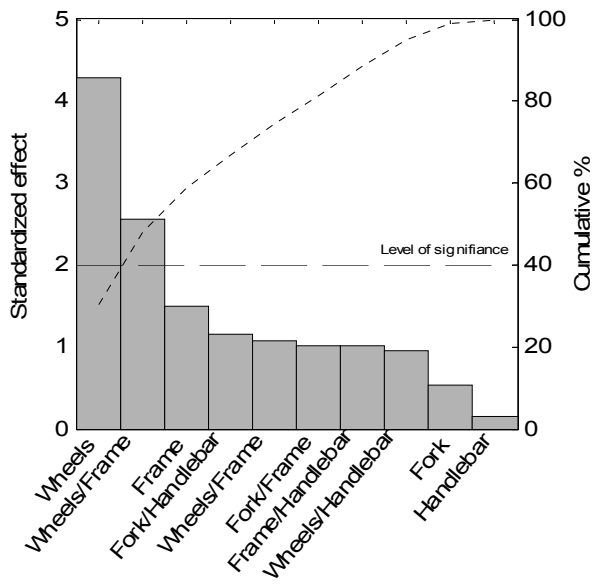


Fig. 15 Pareto Chart, standardized effects and cumulative effects of the bicycle components on FVIB at the seat post; the factors above the level of significance have a p-value below 0.05

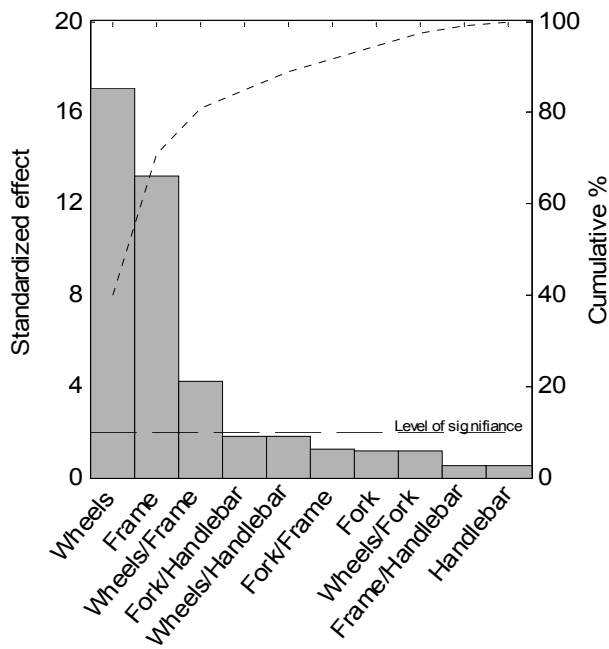


Fig. 16 Pareto Chart, standardized effects and cumulative effects of the bicycle components on PVIB at the seat post; the factors above the level of significance have a p-value below 0.05

**Table 10. Component ranking contribution explaining at least 80 % of the VIB variations at 5 % significance for each measurement point**

Measurement point	$a_{VIB}$			$F_{VIB}$			$P_{VIB}$		
		cumul %	p-value		cumul %	p-value		cumul %	p-value
Left Brake Hood	Fork	24	0.000	Handlebar	27	0.000	Handlebar	29	0.000
	Wheels	39	0.000	Fork	52	0.000	Fork	55	0.000
	Wheels/Frame	52	0.000	Frame	70	0.000	Frame	67	0.000
	Frame	65	0.001	Wheels/Fork	80	0.016	Wheels	78	0.000
	Frame/Handlebar	73	0.019				Wheels/Fork	83	0.006
	Fork/Handlebar	82	0.019						
Right Brake Hood	Fork	20	0.000	Handlebar	26	0.000	Handlebar	31	0.000
	Wheels	37	0.001	Fork	49	0.000	Fork	55	0.000
	Wheels/Fork	52	0.003	Fork/Frame	62	0.000	Wheels	70	0.000
	Handlebar	66	0.006	Frame	73	0.000	Frame	81	0.000
				Wheels	82	0.003			
Seat Post	Wheels	42	0.000	Wheels	30	0.000	Wheels	40	0.000
	Frame	70	0.000	Wheels/Frame	48	0.013	Frame	71	0.000
	Wheels/Frame	87	0.000				Wheels/Frame	81	0.000

The key results of Table 10 and Figures 11-16 are:

**Regarding  $a_{VIB}$  at the brake hoods (Fig. 11)**

- The fork and wheels are the 2 factors with the most influence.
- At the left brake hood, the handlebars, wheels/fork and wheels/handlebar interactions do not have a significant effect on  $a_{VIB}$ .
- The effects of the first 6 factors and interactions (from fork to fork/handlebar, Table 10) account for 82 % of the  $a_{VIB}$  variation measured at the left brake hood.
- At the right brake hood, in addition to the fork and wheels, the wheel/fork interaction and the handlebar have a significant effect on  $a_{VIB}$ .
- These first 4 factors and interaction effects (Table 10) account for 66 % of the  $a_{VIB}$  variation measured at the right brake hood.

**Regarding  $F_{VIB}$  at the brake hoods (Fig. 12)**

- The handlebars and fork are the 2 factors with the greatest influence.
- All factors have a significant effect on  $F_{VIB}$  the interactions do not except for the wheels/fork interaction at the left brake hood and the fork/frame interaction at the right brake hood, which have an effect on  $F_{VIB}$ .
- The effects of the first 4 factors and interaction (from handlebars to wheels/fork, Table 10) account for 80 % of the  $F_{VIB}$  variation measured at the left brake hood.
- The effects of the first 5 factors and interactions (from handlebar to wheels, Table 10) account for 82 % of the  $F_{VIB}$  variation measured at the left brake hood.

**Regarding  $P_{VIB}$  at the brake hoods (Fig. 13)**

- The handlebars and fork are also the 2 most influential factors followed by the other factors.
- At the left brake hood, only the handlebar interactions (fork/handlebar, wheels/handlebar and frame/handlebar) do not have a significant effect on  $P_{VIB}$ .

- The effects of the first 5 factors and interaction (from handlebar to wheels/fork, Table 10) explain 83 % of the  $P_{VIB}$  variation measured at the left brake hood.
- At the right brake hood, the wheels/fork, frame/handlebar and fork/handlebar interactions do not significantly effect  $P_{VIB}$ .
- The effects of the 4 factors (from handlebar to frame, Table 10) account for 81 % of the  $P_{VIB}$  variation measured at the right brake hood.

#### Regarding $a_{VIB}$ at the seat post (Fig. 14)

- The wheels and frame are the 2 factors with the greatest effect.
- In addition to these factors, only the wheels/frame and fork/frame interactions have a significant effect on  $a_{VIB}$ .
- The effects of the 3 first factors and interactions (from wheels to wheels/frame, Table 10) account for 87 % of the  $a_{VIB}$  variation measured at the seat post.

#### Regarding $F_{VIB}$ at the seat post (Fig. 15)

- Wheels and wheels/frame interactions are the 2 factors with the most influence and the only ones with a significant effect on  $F_{VIB}$ .
- The effects of the two factors account for 48 % of the  $F_{VIB}$  variation measured at the seat post (Table 10).

#### Regarding $P_{VIB}$ at the seat post (Fig. 15)

- The wheels and frame are the two factors with the greatest effect.
- In addition to these, the wheel/frame interaction is the only other factor with a significant effect on  $P_{VIB}$ .
- The effects of these first 3 factors account for 81 % of the  $P_{VIB}$  variation at the seat post (Table 10).

### d) Factorial design analysis and discussion

Determining the predominant factors (bicycle components) on the VIB is not trivial because these depend on the measurement point and the measurand considered. At the brake hoods, for example, the fork and wheels are the most influential factors for  $a_{VIB}$ , but for  $F_{VIB}$  and  $P_{VIB}$  it is the handlebar and the fork. Only the fork is one of the most influential factors for each measurand at the brake hoods.

For  $F_{VIB}$  and  $P_{VIB}$  at the brake hoods, the handlebar and the fork account for approximately 50 % of all the variations. This shows their predominance on these measurands. It is only for  $P_{VIB}$  that all 4 factors explain at least 80 % of the variation on  $P_{VIB}$ . This enables us to assume that component interactions can be neglected when the power absorbed by the cyclist is used to measure VIB.

For  $a_{VIB}$  and  $P_{VIB}$  at the seat post, the wheels are always the most influential factors following by the frame. For  $F_{VIB}$ , the wheels/frame interaction is the second most influential factor and this interaction is the third factor for the other measurands.

For  $a_{VIB}$  and  $P_{VIB}$  at the seat post, the wheels and frame account for approximately 70 % of the VIB variation and the wheels/frame interaction only account for 17 % and 10 %, respectively, of the VIB variation. That indicates that the wheels and frame are the predominant factors for these measurands.

Regarding the  $P_{VIB}$  which was the most consistent measurand in the factor selection, two main conclusions can be made: the handlebar and the fork are the predominant bicycle components for the VIB level at the hands (brake hoods); and the wheels and frame are the predominant bicycle components for the VIB level at



the buttocks (seat post). This means it is important to select a lower-transmitting pair of wheels and frame to reduce the VIB at the seat post. But this does not mean that the other bicycle components do not have any effect. It only means that considering the components tested in this study, it is the wheels and the frame that have the greatest effect on the  $P_{VIB}$  at the seat post. The same statement can be made with regard to the brake hood results.

Therefore, to reduce the  $P_{VIB}$  at the brake hoods, it is not useful to change the frame if the bicycle is not already equipped with a lower-transmitting fork and handlebar mount, because changing these two components should have a more significant effect on  $P_{VIB}$  than changing the frame.

## 4. CONCLUSION

The aim of this study was to investigate the relative contribution of the bicycle components on the VIB. To achieve this objective, the bicycle was divided into its 5 main components. Four of these bicycle components were used as factors for a factorial design experiment.

For each bicycle component, the lowest and highest transmitting components were defined and used to establish the level for the factors in the factorial design. The selection and factorial analysis were based on 3 measurement points (left and right brake hood and seat post) and 3 different measurands (acceleration, force and power).

The factor levels selection and factorial design results show that the power absorbed by the cyclist is the most consistent of the three measurands to quantify the VIB. According to the  $P_{VIB}$  it is the handlebar and the fork that have the greatest effect on VIB at the brake hoods whereas the wheels and frame have the greatest effect on the VIB at the seat post. These results provide valuable insight as to which components must be evaluated in order to improve dynamic comfort.

## 5. REFERENCES

1. Alvarez G, Vinyolas J. A new bicycle pedal design for on-road measurements of cycling forces. *J of Appl Biomech.* 1996;12(1):130-142.
2. Rowe T, Hull M, Wang E. A pedal dynamometer for off-road bicycling. *Am Soc of Mec Eng J of Biomed Eng.* 1998;120:160-164.
3. Reiser RF, Peterson ML, Broker JP. Instrumented bicycle pedals for dynamic measurement of propulsive cycling loads. *Sport Eng.* 2003;6(1):41-48.
4. Champoux Y, Vittecoq P, Maltais P, Auger E, Gauthier B. Measuring the dynamic structural load of an off-road bicycle frame. *Exp Tech.* 2004;28(3):33-36.

5. Drouet J, Champoux Y, Dorel S. Development of multi-platform instrumented force pedals for track cycling (P49). In: *The engineering of sport 7*. Springer Paris; 2008:263-271. [http://dx.doi.org/10.1007/978-2-287-09411-8\\_32](http://dx.doi.org/10.1007/978-2-287-09411-8_32). 10.1007/978-2-287-09411-8\_32.
6. Drouet J, Champoux Y. Development of a three-load component instrumented stem for road cycling. *Procedia Engineering*. 2012;34(0):502-507.
7. Richard S, Champoux Y. Development of a metric related to the dynamic comfort of a road bike. . 2006:Society for Experimental Mechanics (SEM).
8. Vanwallegem J, Mortier F, De Baere I, Loccufer M, Van Paepegem W. Design of an instrumented bicycle for the evaluation of bicycle dynamics and its relation with the cyclist's comfort. *Procedia Engineering*. 2012;34(0):485-490.
9. Hölzel C, Höchtl F, Senner V. Cycling comfort on different road surfaces. *Procedia Engineering*. 2012;34(0):479-484.
10. Giubilato F, Petrone N. A method for evaluating the vibrational response of racing bicycles wheels under road roughness excitation. *Procedia Engineering*. 2012;34(0):409-414.
11. Olieman M, Marin-Perianu R, Marin-Perianu M. Measurement of dynamic comfort in cycling using wireless acceleration sensors. *Procedia Engineering*. 2012;34(0):568-573.
12. Vanwallegem J, Mortier F, De Baere I, Loccufer M, Van Paepegem W. Instrumentation of a racing bicycle for outdoor field testing and evaluation of the cyclist's comfort perception. . 2012:637-638.
13. Hastings AZ, Blair KB, Culligan KF. Measuring the effect of transmitted road vibration on cycling performance. . 2004;2:619.
14. Thite AN, Gerguri S, Coleman F, Doody M, Fisher N. Development of an experimental methodology to evaluate the influence of a bamboo frame on the bicycle ride comfort. *Veh Syst Dyn*. 2013:1-18.

15. Lepine J, Champoux Y, Drouet J. A laboratory excitation technique to test road bike vibration transmission. *Exp Tech*. doi 10.1111/ext12058
16. Petrone N, Giubilato F. Comparative analysis of wheels vibration transmissibility after full bicycle laboratory tests. *ALAS*. 2011:147.
17. Lepine J, Champoux Y, Drouet J. Technique to measure the dynamic behavior of road bike wheels. *Conf Proc Soc Exp Mech Ser*. 2012;6:465-470.
18. Richard S, Champoux Y. Evaluating the influence of damping material applied on an aluminum bike fork. . 2007:Society for Experimental Mechanics (SEM).
19. Vanwalleghem J. *Study of the damping and vibration behaviour of flax-carbon composite bicycle racing frames*. [Master]. Universiteit Gent; 2010.
20. Champoux Y, Richard S, Drouet J-. Bicycle structural dynamics. *Sound and Vib*. 2007;41(7):16-24.
21. Wojtowicki J-, Champoux Y, Thibault J. Modal properties of road bikes vs ride comfort. *Proc Int Modal Anal Conf IMAC*. 2001;1:648-652.
22. Petrone N, Giubilato F. Methods for evaluating the radial structural behaviour of racing bicycle wheels. *Procedia Engineering*. 2011;13(0):88-93.
23. ISO 2631-1. Mechanical vibration and shock - evaluation of human exposure to whole-body vibration - part 1: General requirements. . 1997.
24. ISO 5349-1. Mechanical vibration - measurement and evaluation of human exposure to hand-transmitted vibration - part 1: General requirements. . 2001.
25. Montgomery DC. *Design and analysis of experiments*. Hoboken, NJ: Wiley; 2009.