

EVALUATING THE USE OF
LIDAR FOR LANDSLIDE MONITORING ON
OKLAHOMA HIGHWAYS

By

SRIKANTH SAGAR BANGARU

Bachelor of Technology in Civil Engineering

National Institute of Technology Warangal

Warangal, Telangana

2015

Submitted to the Faculty of the
Graduate College of the
Oklahoma State University
in partial fulfillment of
the requirements for
the Degree of
MASTER OF SCIENCE
July, 2017

EVALUATING THE USE OF
LIDAR FOR LANDSLIDE MONITORING ON
OKLAHOMA HIGHWAYS

Thesis Approved:

Dr. Yongwei Shan

Thesis Adviser

Dr. Lantz Holtzower

Dr. Lewis Michael Phil

ACKNOWLEDGEMENTS

I sincerely thank my graduate advisor Dr. Yongwei Shan for his encouragement, guidance, and support throughout this research. I thank my thesis committee members, Dr. Lantz Holtzower and Dr. Lewis Michael Phil for their valuable suggestions and constant encouragement.

I thank Joshua France, support manager of Riegl USA for providing a full license for Multi-Station Adjustment.

I thank Nikhil, Shareef, Balakumar, Saurav, Shubham, Vishal and Brain for helping me in collecting the laser scanning data.

I would like to take this opportunity to thank my friends Akila, Nikhil, Madhu, Karthik, Phani, Yeshwanth, Manikantam, Vishal Boinpally, Ajeeth, Prudhvi, Ravikiran and others for their love, support and encouragement. These people made my life easier in the USA.

Finally, I thank my parents Mr. & Mrs. Hanmanthu Bangaru and my family members for their unconditional love and constant support throughout my life.

Name: SRIKANTH SAGAR BANGARU

Date of Degree: JULY, 2017

Title of Study: EVALUATING THE USE OF LIDAR FOR LANDSLIDE
MONITORING ON OKLAHOMA HIGHWAYS

Major Field: CIVIL AND ENVIRONMENTAL ENGINEERING

Abstract: Landslides cause huge human loss and property damage when they occur near infrastructure such as highways. The current approach for dealing with landslides by the Oklahoma Department of Transportation (ODOT) is primarily reactive because there is no effective monitoring mechanism to assess the risk of landslide properly. When the damage is already done, expensive repairs follows because the repair process is time driven and the use of resources may not be the most cost-effective. Traffic lane closures during the repair increases travels time and road users' cost. This gives an opportunity to look for alternative practices. Several studies have proved that the LIDAR technology can be used to detect the slope changes in mountains, but there is no readily available generalized framework to apply this technology to monitor or assess the risk of landslides. The objectives of this study are 1) to develop a comprehensive workflow to apply this technology, 2) to evaluate registration and vegetation algorithms on the collected data, 3) to assess the displacement change over various seasons, and 4) to assess the impact of vegetation removal and downsampling algorithms on displacement change. For this study, the data was collected from four different sites that include both rock type and soil type slopes on Oklahoma highways, collected in four different seasons (summer, dry, winter and warm seasons) of the year. Then, M3C2 displacement analysis was performed on different seasons' data to identify the displacement change over different seasons. Throughout the entire research process, various technical challenges associated with the application of the LIDAR technology were reported along with recommendations to overcome these challenges. Through M3C2 analysis, it was observed that the largest change was observed during June and September. By considering the current level of registration, no significant change was observed in the majority of the areas. It was also observed from the study that vegetation removal and downsampling have impacts on the result of statistical displacement and significant change analyses. The comprehensive workflow developed in this study can help ODOT to implement the LIDAR technology to monitor and assess the risk of landslides on highways in a cost effective manner.

Keywords: Terrestrial Laser Scanning, Registration, Vegetation Removal, Downsampling, M3C2 Analysis

TABLE OF CONTENTS

| Chapter | Page |
|--|------|
| I. INTRODUCTION..... | 1 |
| 1.1 Problem Statement..... | 1 |
| 1.2 Objectives..... | 2 |
| 1.3 Thesis Organization..... | 2 |
| II. REVIEW OF LITERATURE..... | 4 |
| 2.1 Introduction to Landslides/Rockslides..... | 4 |
| 2.2 Mechanism and Influencing Factors of Landslides/Rockslides..... | 6 |
| 2.3 Evaluation of Landslide Hazards..... | 8 |
| 2.3.1 United State Geological Survey’s Landslide Monitoring Systems..... | 9 |
| 2.3.2 Landslide Monitoring Techniques..... | 9 |
| 2.4 LIDAR Background..... | 12 |
| 2.4.1 Measurement Principle of Laser Scanners or LIDAR..... | 12 |
| 2.4.2 Terrestrial Laser Scanning..... | 14 |
| 2.4.3 Applications of Terrestrial Laser Scanning..... | 15 |
| 2.5 Point Cloud Registration..... | 17 |
| 2.5.1 Target Based Registration..... | 18 |
| 2.5.2 Feature-Based Registration..... | 20 |
| 2.5.3 Iterative Closest Point Registration (ICP)..... | 21 |
| 2.6 Displacement Measurement Techniques..... | 22 |
| 2.6.1 Point Cloud Based Displacement Measurement Techniques..... | 23 |
| 2.6.2 Point-to-Point Displacement Measurement Technique..... | 23 |
| 2.6.3 Cloud-to-Cloud Displacement Measurement Technique..... | 23 |
| 2.6.4 Cloud to Mesh (C2M) and Mesh to Mesh (M2M) Displacement Measurement Technique..... | 24 |
| 2.6.5 Multiscale Model to Model Cloud Comparison (M3C2) Displacement Measurement Technique..... | 24 |
| 2.7 Advantages and Disadvantages of Various Displacement Measurement Technique..... | 27 |
| 2.7.1 Advantages/Disadvantages of P2P..... | 27 |
| 2.7.2 Advantages/Disadvantages of C2C..... | 28 |
| 2.7.3 Advantages/Disadvantages of C2M and M2M..... | 28 |
| 2.7.4 Advantages/Disadvantages of M3C2..... | 29 |
| 2.8 Summary..... | 29 |

| Chapter | Page |
|---|------|
| III. METHODOLOGY | 31 |
| 3.1 Data Collection | 31 |
| 3.1.1 Site Description | 32 |
| 3.1.2 Equipment Used..... | 35 |
| 3.1.3 Field Scanning | 36 |
| 3.2 Data Processing..... | 37 |
| 3.2.1 Registration..... | 37 |
| 3.2.1.1 Coarse Registration..... | 38 |
| 3.2.1.2 Fine Registration..... | 39 |
| 3.2.1.3 Merging and Aligning..... | 41 |
| 3.2.1.4 Registration Error Analysis..... | 41 |
| 3.2.1.5 Segmentation..... | 42 |
| 3.2.2 Downsampling | 42 |
| 3.2.3 Vegetation Removal..... | 43 |
| 3.2.4 Displacement Analysis..... | 43 |
| 3.3 Research Workflow | 45 |
| IV. RESULTS AND DISCUSSIONS | 47 |
| 4.1 Registration Results | 48 |
| 4.1.1 Coarse Registration..... | 50 |
| 4.1.2 Fine Registration..... | 51 |
| 4.1.3 Evaluation of Other Registration Algorithms | 53 |
| 4.1.4 Results Registration Error Analysis..... | 54 |
| 4.1.5 Technical Challenges and Recommendations for Point Cloud Registration | 56 |
| 4.2 Results of M3C2 Analysis | 56 |
| 4.2.1 M3C2 Analysis on original Patch..... | 56 |
| 4.2.1.1 M3C2 Analysis of June and September Scans | 57 |
| 4.2.1.2 Comparison of Displacement Change Over Various Seasons | 59 |
| 4.3 M3C2 Analysis on Soil Type Location (Location 3)..... | 61 |
| 4.3.1 CANUPO Vegetation Classification on Location 1 and 3..... | 62 |
| 4.4 Impact of Vegetation Removal on M3C2 Analysis..... | 62 |
| 4.5 Impact of Downsampling on M3C2 Analysis | 64 |
| 4.6 Technical Challenges and Recommendations | 64 |
| 4.7 Generalized Workflow | 65 |

| | |
|--------------------|----|
| V. CONCLUSION..... | 68 |
| REFERENCES | 71 |
| APPENDICES | 78 |

LIST OF TABLES

| Table | Page |
|--|------|
| Table 1. Summary of Landslide Monitoring Vital Signs (Wieczorek and Snyder 2009). | 10 |
| Table 2. Summary of Typical Range and Precision of Landslide Monitoring Techniques (Shao-tang Liu and Wang 2008) | 11 |
| Table 3. Applications of LiDAR in Landslides Investigation (Jaboyedoff et al. 2012) ... | 16 |
| Table 4. Specifications of the Data Collection Sites..... | 31 |
| Table 5. The Corresponding Data Collection Dates for Each of the Locations | 34 |
| Table 6. Technical Specifications of RIEGL VZ-400 Laser Scanner (from www.riegl.com)..... | 36 |
| Table 7. Number of scan positions (SP) used for scanning and number of scan positions used for registration..... | 37 |
| Table 8. MSA Parameters and Their Values for Three Iterations | 40 |
| Table 9. Various Combinations for Displacement Analysis..... | 44 |
| Table 10. M3C2 Displacement Analysis Parameter Values for Locations 1 and 3..... | 45 |
| Table 11. Number of Point Pairs, Standard Deviation Error for Coarse and Fine Registration for Location 1 | 49 |
| Table 12. Registration, Alignment, and Total Errors for Location 1..... | 54 |
| Table 13. Shows Statistics of M3C2 Analysis of All Seasons for Location 1..... | 59 |

LIST OF FIGURES

| Figure | Page |
|---|------|
| Figure 1. Landslide Incidence and Susceptibility Map (USGS Landslides) | 5 |
| Figure 2. Landslide Susceptibility Map of Oklahoma (Amy B. Cerato et al. 2014) | 5 |
| Figure 3. Rockslide on I-35 near Davis, Oklahoma (Source: News Channel 4, KFORD.com) | 7 |
| Figure 4. Seismicity Map of Earthquakes in the State of Oklahoma (USGS Earthquakes OK 2016) | 8 |
| Figure 5. Principle of Laser scanner or LiDAR, Showing Example of Terrestrial Laser Scanner (TLS) (Jaboyedoff et al. 2010) | 13 |
| Figure 6. Commonly used targets for terrestrial laser scanning | 18 |
| Figure 7. C2C Measurement Technique with Nearest Point (a) and Local Height Function (b) from (Lague et al. 2013) | 23 |
| Figure 8. C2M Measurement Technique (Lague et al. 2013)..... | 24 |
| Figure 9. Principle of M3C2 Displacement Measurement Technique (Lague et al. 2013) | 25 |
| Figure 10. Location of Study Areas in Oklahoma area | 32 |
| Figure 11. Location 0 & Location 1 on I35 | 32 |
| Figure 12. Location 2 & Location 3 on US 82 | 33 |

| | |
|---|----|
| Figure 13. Pictures of the Slopes of All Four Locations..... | 33 |
| Figure 14. Equipment Used for Scanning..... | 35 |
| Figure 15. Coarse Registration Using RiSCAN Pro..... | 38 |
| Figure 16. Parameter Values for Plane Patch Filter to Create Polydata in Multi-Station Adjustments (MSA)..... | 40 |
| Figure 17. Shows Main Parameters of M3C2 Distance Analysis..... | 45 |
| Figure 18. Research Methodology..... | 46 |
| Figure 19. Scans Before (Left) and After (Right) Coarse Registration..... | 48 |
| Figure 20. Shows Coarse Registered (on the left) and Fine Registered (on the right) Using RiSCAN Pro for Location 1..... | 50 |
| Figure 21. Shows Coarse Registered (on left) and Fine Registered (on right) using ICP (CloudCompare) for Location 1..... | 52 |
| Figure 22. Shows Fine Registered Scans using CloudCompare for Location 3..... | 52 |
| Figure 23. Shows Results of NDT Algorithm..... | 53 |
| Figure 24. Significance of Change for June – September Scans..... | 57 |
| Figure 25. Displacement Heat Map of June - September Scans for Location 1 Along X- Axis with Scale of 10cm..... | 58 |
| Figure 26. Displacement Heat Map of June - September Scans for Location 1 Along Y- Axis with a Scale of 10cm..... | 58 |
| Figure 27. Displacement Heat Map of June - September Scans for Location 1 Along Z- Axis with a Scale of 10cm..... | 59 |
| Figure 28. Displacement Change Over Different Seasons..... | 60 |

| | |
|--|----|
| Figure 29. Displacement Heat Map for Location 1 Along X-Axis for Various Seasons (Scale-10cm)..... | 60 |
| Figure 30. Significant Change (Left) and Displacement Heat Map (Right) for June and September Scans of Location 3 | 61 |
| Figure 31. Vegetation and Land Classification of Location 1 (Left) and Location 3 (Right)..... | 62 |
| Figure 32. Significant Change (Top) and Displacement Heat Map (Bottom) of Original Patch (Left) and Vegetation Removed Patch (Right)..... | 63 |
| Figure 33. Displacement Heat Maps of Original (Left) and Downsampled (Right) Patch | 64 |
| Figure 34. Generalized Workflow | 65 |

CHAPTER I

INTRODUCTION

1.1 Problem Statement

Landslides that occur on major highways endanger drivers and surrounding properties. Oklahoma Department of Transportation's (ODOT's) current practice in dealing with landslides is reactive. Cleaning and repairs are undertaken after the fact, which results in costly repairs and a longer period of road closures causing an inconvenience for road users. Monitoring the fill/cut slopes change over the time along the roads that pass through the mountainous area can be an effective approach to assessing the risk of a landslide properly and proactively deploy prevention, mitigation measures, or emergency response to reduce the impact of landslides. To address this issue, the use of terrestrial Light Detection and Ranging (LiDAR) technology was examined by a plethora of previous studies (Abellán et al. 2006; Mukupa et al. 2017; Reshetyuk 2010) and it was found that terrestrial LiDAR is a technically feasible solution for landslide monitoring. However, there is no generalized workflow that can guide potential users to apply this technology for landslide monitoring on highways. In addition to the development of the generalized framework, this study also focuses on the documentation of technical challenges encountered while applying this technology as well as the documentation of the recommendations to address these technical challenges.

1.2 Objectives

The overarching goal of this study is to develop a comprehensive workflow to apply terrestrial LiDAR technology to monitor landslides on highways by evaluating the existing workflow identified in the literature through a case study of four slopes on Oklahoma highways. This study has several secondary objectives, as follows:

Specific objectives include:

- To evaluate various processes such as data collection, registration, downsampling, vegetation removal and displacement analysis to identify technical challenges in the current workflow and provide recommendations to overcome these challenges.
- To determine the impacts of various factors such as vegetation removal, downsampling, registration error, etc. on displacement analysis.
- To develop a comprehensive workflow to apply LiDAR technology for landslide monitoring on highways.
- To determine the displacement change over various seasons of the year.

1.3 Thesis Organization

This thesis is made up of five chapters:

- Chapter-1 introduces the problem statement and summarizes the overall objective of the research.
- Chapter-2 includes general introduction of landslides/rockslides and provides background information about the landslide monitoring techniques, principles of laser scanning technology, applications of terrestrial laser scanners, registration techniques, displacement analysis and comparison of various displacement analysis.

- Chapter-3 summarizes the site characteristics and data collection process. It also briefly explains all the data processing steps and tools used in this research. In the end, it describes the research workflow used for this study.
- Chapter-4 presents the result of registration, displacement analysis and comparison of displacement analysis over various seasons. It reports technical challenges and recommendations for registration process and displacement analysis. It also presents the generalized workflow to apply terrestrial laser scanning technology.
- Chapter-5 summarizes all the findings of the research and explains the limitations of the research and future research in this area.

CHAPTER II

REVIEW OF LITERATURE

2.1 Introduction to Landslides/Rockslides

Landslides are one of the natural catastrophes that result from the downward movement of the earth mass (Whittow 1984). They affect both the built environment and the natural environment directly or indirectly. They also cause human loss and huge property damage (Fernandez Merodo et al. 2004). In mountainous areas, many road sections bear certain risks of landslide/rockslide or falling rock causing blockage or damage of the roadway (Pfeiffer et al. 1993). According to the United States Survey Fact Sheet 2004-3072, landslides cause loss of life and billions of dollars in property damage each year (USGS 2004).

S. Falemo & Andersson-Sköld (2011) developed a framework to quantify and visualize consequences of landslides using existing data and GIS-based weighted linear combination models. As a result, a map showing the geographical distribution of anticipated losses and landslide susceptibility was developed. Figure 1, shows relative landslide incidence and susceptibility across the United States.

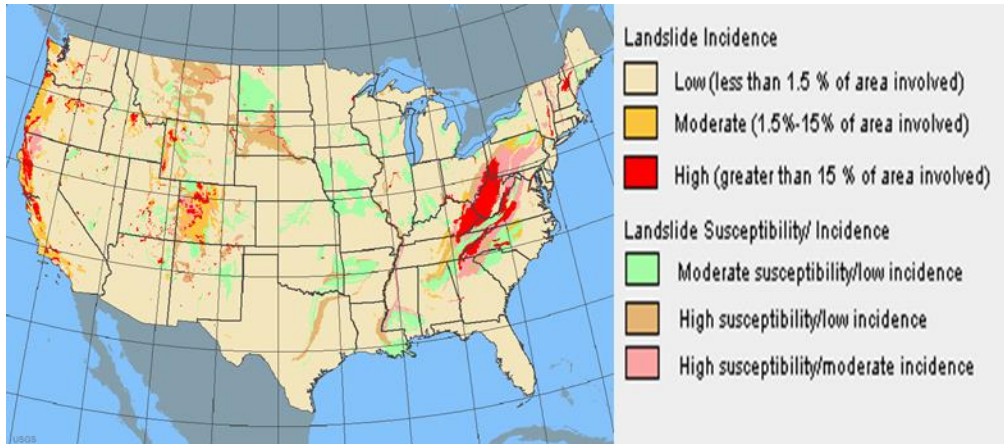


Figure 1. Landslide Incidence and Susceptibility Map (USGS Landslides)

Similarly, Amy B. Cerato et al. (2014) performed a real-time monitoring of slope stability in the Oklahoma region. They proposed a landslide susceptibility map of Oklahoma by combining soil texture layer, slope derived from Digital Elevation Models (DEM), land cover from United State Geological Survey (USGS), etc. From this research, they concluded that the southeastern corner of Oklahoma is highly susceptible to landslides. Figure 2 shows the landslide susceptibility of Oklahoma and the landslide events based on USGS and ODOT's data inventory.

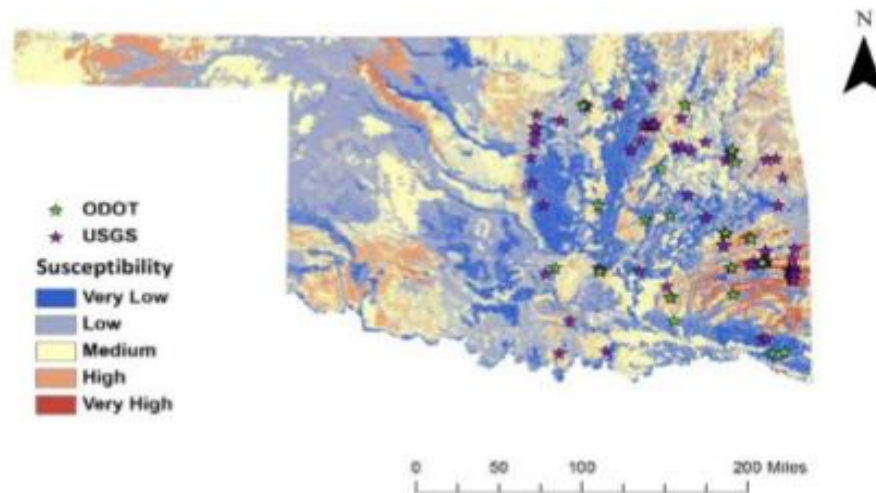


Figure 2. Landslide Susceptibility Map of Oklahoma (Amy B. Cerato et al. 2014)

2.2 Mechanism and Influencing Factors of Landslides/Rockslides

Landslides occur when a slope changes from a stable condition to an unstable condition over time. These changes in slopes are caused by fluctuations in the effective stresses and changes in the material properties or variation of the geometry (FEMA 2017). These changes are triggered by various factors like groundwater fluctuations, erosion, seismic activities, volcanic eruptions, heavy rainfall, freeze-thaw and human activities such as deforestation, blasting, earthworks, etc. (Wold and Jochim 1989). There are various types of landslides based on nature of the material involved and triggering mechanism. Rockslides are the fastest landslides (Varnes 1984), which are induced by rock failure where the bedding plane of failure travels through intact rock from a cliff or other steep slope and causes the rock's instability, resulting in a massive blocks collapse (Bates and Jackson). As the blocks slide downslope, they can collide with other rocks and loosen other rocks on their way. Due to the gravity force, the broken pieces of rocks gain very high speed on the slope and travel a long distance, causing destructive damage to the properties and traveling traffic located on the path.

An increased incidence of extreme weather as a result of climate change can become a critical factor that triggers a landslide. Among extreme weather conditions, heavy rain is a common cause of landslide (FEMA 2017). For instance, because of excessive rains during June 2015, a rockslide occurred in Oklahoma's Arbuckle Mountains along the Interstate 35 (I-35) (Figure 3). Approximately 15,000 to 20,000 tons of fallen rocks were removed, which caused a few weeks of lane closures at part of I-35 North, costing ODOT nearly one million dollars to repair (NewsOn6 June 22 2015).



Figure 3. Rockslide on I-35 near Davis, Oklahoma (Source: News Channel 4, KFORD.com)

Moreover, an earthquake is an emergent factor in Oklahoma that may contribute to landslides. As per the Oklahoma Geological Survey (OGS 2017) earthquake report, 2,325 earthquakes of magnitudes 3.0 or above were reported as of June 24th, 2016. Figure 4 shows the distribution of earthquakes over the Oklahoma region. From the map, it can be concluded that the central and southeastern regions are more susceptible to earthquakes. Over the last five years, the number of felt earthquakes has quadrupled. Increased extreme weather conditions in Oklahoma, such as floods, tornados, and drastic temperature fluctuation, may induce more occurrences of landslides in the mountainous areas of Oklahoma.

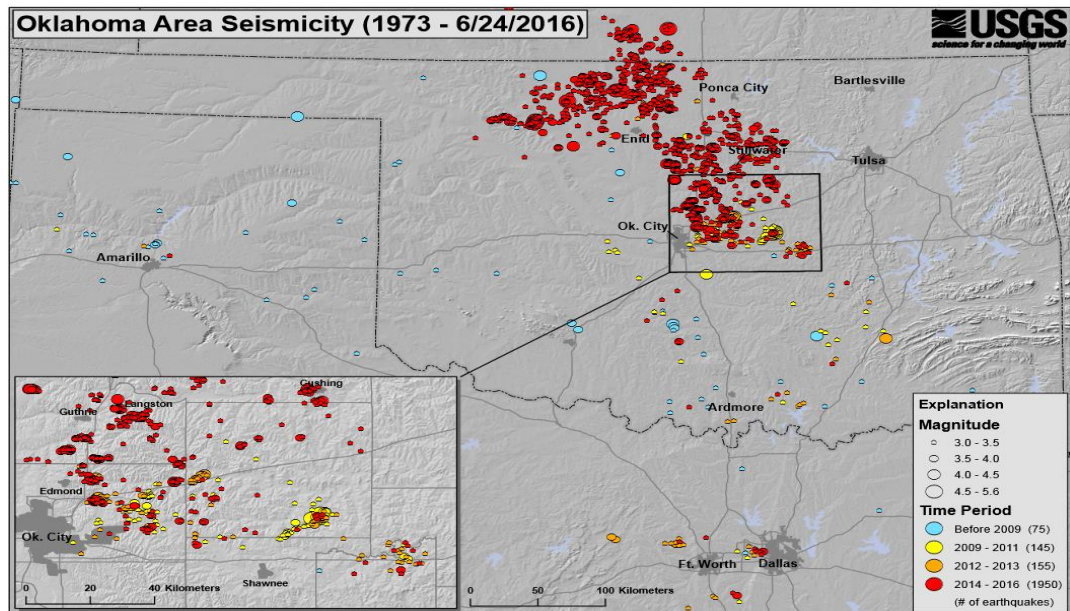


Figure 4. Seismicity Map of Earthquakes in the State of Oklahoma (USGS Earthquakes OK 2016)

2.3 Evaluation of Landslide Hazards

Landslide prediction is very challenging (Wieczorek and Snyder 2009). Detailed instrumental monitoring is valuable for evaluation and the prediction of landslides, but challenges exist because of a lack of expertise or insufficient funds to purchase instrumentation and subsurface exploration. The major challenge in the instrumental monitoring is a selection of the particular small area for intensive investigation. For the selection of potentially hazardous areas, information regarding historical landslide events and current observations have to be studied. The slope movements in a region can be assessed by incorporating indicators like seismic activity, rainfall intensity, groundwater level, etc., but some of the landslides cannot be predictable by triggering event because they are occurred due to subsurface failures (Wieczorek and Snyder 2009).

2.3.1 United State Geological Survey's Landslide Monitoring Systems

Monitoring fill/cut slopes is an essential step to model the landslide behavior as well as to predict landslide occurrence (USGS 2017). Triggering mechanics and physics of landslides are a complex problem; research in these areas is still an ongoing process. Learning about landslides is a data-driven process. Therefore, scientists at the United State Geological Survey (USGS) Landslide Hazards Program installed monitoring stations in ten selected sites that have frequent landslides to acquire more data to study the behavior of landslide. Various sensors and instruments were installed onsite to monitor and measure the metrics that constitute good predictors of landslides, such as rainfall, ground-water pressure, soil water content, soil temperature, etc. Modeling and forecasting landslides is a continuous research effort for the USGS. In this effort, ten monitoring sites across the nation were selected and equipped with cameras, sensors, and gauging instruments to provide either real-time or periodic monitoring data (USGS 2017). Different sites may have different monitoring purposes. For example, while the monitoring site at Poplar Cove, Nantahala National Forest, North Carolina was established to support the research on hydrologic factors that influence landslide initialization; Colby Fire Monitoring Site in California was established to gain understanding of post-fire runoff, erosion, and debris-flow generation to help National Weather Service's decision makings in sending out warnings. Among those monitoring sites, slope movement or change over time is often collected because the process of slope change occurs slowly over a long period of time and slope change is a good indicator of the risks of potential landslides/rockslides.

2.3.2 Landslide Monitoring Techniques

Wieczorek and Snyder (2009) have proposed five basic steps for monitoring slope movement. These basic steps include: (1) identification of types of landslides, (2) monitoring causes of landslides, (3) identification of materials involved in landslides, (4) determination of landslide

displacement, and (5) landslide regional risk assessment. Each one of these five vital signs includes three monitoring methods. Comparisons of these vital signs and monitoring methods based on technical needs, relative costs, and labor intensity are summarized in Table 1.

Table 1. Summary of Landslide Monitoring Vital Signs (Wieczorek and Snyder 2009)

| Vital Signs | Methods | Expertise | Technical needs | Relative costs* | Personnel | Labor intensity [#] |
|---------------------------------------|---|-----------|-----------------|-----------------|------------|------------------------------|
| Types of landslides | 1. Identification | Volunteer | No | A | Individual | Medium |
| | 2. Measurement | Volunteer | Yes | B | Group | Medium |
| | 3. Imagery | Scientist | Yes | C | Individual | High |
| Landslide triggers and Causes | 1. Online Data | Volunteer | No | A | Individual | Medium |
| | 2. Climatic and Seismic instruments | Volunteer | No | B | Individual | High |
| | 3. Subsurface sampling and testing | Scientist | Yes | C | Group | High |
| Geologic materials in landslides | 1. Examination | Volunteer | No | A | Individual | Medium |
| | 2. Surface sampling | Scientist | Yes | B | Group | High |
| | 3. Subsurface sampling and testing | Scientist | Yes | C | Group | High |
| Measurement of landslide movement | 1. Tapes and GPS | Volunteer | Yes | A | Individual | High |
| | 2. Extensometers | Scientist | Yes | B | Group | High |
| | 3. Aerial photos, LiDAR and InSAR | Scientist | Yes | C | Group | High |
| Assessing landslide hazards and risks | 1. Inventory | Scientist | No | A | Individual | High |
| | 2. Volume, velocity and travel distance | Scientist | Yes | B | Individual | High |
| | 3. Modeling | Scientist | Yes | C | Individual | High |

Note: GPS—Global Positioning System; LiDAR—Light Detection and Ranging; InSAR—interferometric synthetic aperture radar* Relative Costs (in US\$): A—up to \$1,000; B—>\$1,000–\$10,000; C—>\$10,000
[#]Labor intensity: low = <few hours; medium= <full day; high =>full day

Liu and Wang (2008) have classified landslide monitoring techniques into three basic type: visual monitoring; instrumentation monitoring, and surveying. Visual monitoring techniques involve inspection using photographs and human inspection. Instrumentation techniques include installation of equipment such as piezometers, inclinometers for periodic or continuous data

collection. A surveying technique involves physical measurement to detect surface movements. In the past, devices such as metal tapes or invar wire, levels, theodolites, Electromagnetic Distance Measurement (EDM) and total stations were used. In recent years, the use of aerial or terrestrial photogrammetry is widespread. In addition, other monitoring techniques include Global Positioning System (GPS), Interferometric Synthetic Aperture (InSAR), Light Detection and Ranging (LiDAR). These techniques also support monitoring landslide initiation and continuous movement. Table 2 summarizes typical range and precision for various monitoring techniques.

Table 2. Summary of Typical Range and Precision of Landslide Monitoring Techniques (Shaotang Liu and Wang 2008)

| Method/Technique | Results | Typical range | Typical precision |
|---------------------------------------|------------------------------|---------------------------|--------------------------|
| Precision tape | Distance change | <30 m | 0.5 mm/30 m |
| Fixed wire extensometer | Distance change | <10-80 m | 0.3 mm/30 m |
| Rod for crack opening | Distance change | <5 m | 0.5 mm |
| Offsets from baseline | Coordinates differences (2D) | <100 m | 0.5–3 mm |
| Triangulation | Coordinates differences (2D) | Variable <300 - 1000m | 5–10 mm |
| Traverse/polygon | Coordinates differences (2D) | Variable, usually <100 m | 5–10 mm |
| Leveling | Height change | Variable, usually <100 m | 2–5 mm/km |
| Precise leveling | Height change | Variable, usually <50 m | 0.2–1 mm/km |
| EDM (Electronic Distance Measurement) | Distance change | Variable, usually 1-14 km | 1–5 mm + 1–5 ppm |
| Terrestrial photogrammetry | Coordinates differences (2D) | Ideally < 100 m | 20 mm from 100 m |
| Aerial photogrammetry | Coordinates differences (2D) | H flight <500 m | 10 cm |
| Clinometer | Angle change | ±10degree | ±0.01–0.1degree |
| Precision theodolite | Angle change | Variable | ±10 |
| GPS survey | Coordinates differences (2D) | Variable | 2–5 mm + 1–2 ppm |

Wang (2011) have used permanently mounted GPS for monitoring landslide movements by analyzing changes in the GPS units. It is also proved that landslide movement can be measured within 2 mm, 6 mm in horizontal and vertical direction, respectively. But the main disadvantage of using this technique is a huge cost involved in installing permanent GPS units. This technique is very suitable for monitoring landslides in highly populated areas.

Interferometric Synthetic Aperture Radar (InSAR) technique uses phase change between radar photographs to measure landslide movement. Rosen et al. (2000) have explained how vegetation cover reduces correlation between radar photographs due to the volumetric scattering which affects the results of InSAR technique. Therefore, it is very difficult to apply InSAR in the densely forested environment.

2.4 LIDAR Background

Since the last few decades, advancement in the fields of electronics, photogrammetry, and computer vision has made it possible to develop consistent, high resolution, and accurate laser scanners or LiDAR. The laser scanners are non-contact 3D measurement instruments used to capture or record the geometry and sometimes textural information of visible surfaces of the objects or sites in 3D digital representation - point cloud (Conner and Olsen 2014).

2.4.1 Measurement Principle of Laser Scanners or LIDAR

LiDAR works on the principle of measuring the time delay caused by the laser pulse traveling from source to the target surface and back to the instrument, which provides an easy way to evaluate the distance and angles (Vosselman and Maas 2010) (see Figure 5). Scanners are a line of sight technology: if the complete laser pulse reflects from an object, no points are detected behind the object, creating an occlusion (shadow). When only part of the laser pulse reflects back from a small object, the remaining light continues, multiple X, Y, and Z coordinates (returns) can be obtained

from one laser pulse (Renslow 2012). Multiple returns enable improved penetration of vegetation canopies compared to many other techniques.

The terrestrial laser scanners use the light transit time estimation measurement technique. In this technique, measurement of time delay is generated when the light travels from source to target and back to the source, which provides a method to evaluate the distance. Such systems are also known as time-of-flight measurement systems (Vosselman and Maas 2010). Light transit estimation measurement systems can also be realized by phase measurement technique, where laser systems emit a continuous wave to measure the time delay by determining the phase difference between transmitted and received signals.

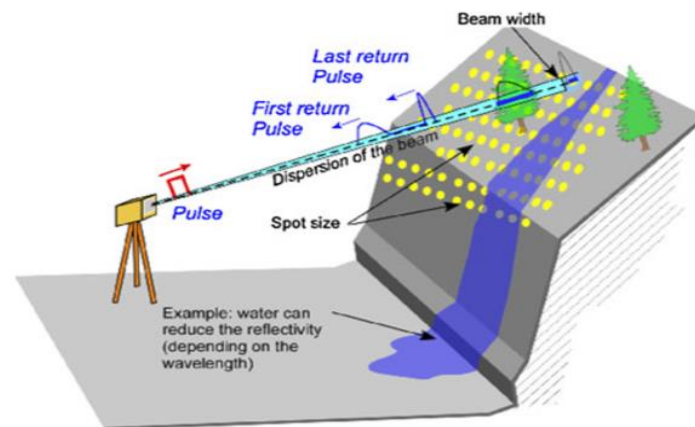


Figure 5. Principle of Laser scanner or LiDAR, Showing Example of Terrestrial Laser Scanner (TLS) (Jaboyedoff et al. 2010)

Based on the measurement techniques, lasers are classified as pulsed lasers and continuous wave (CW) lasers. In both pulsed and CW laser systems, the position of the reflecting surface or object is relative to the scanner position which is known as a local coordinate system. Georeferencing transfers data from local coordinate system to global coordinate system (Conner 2013). By comparing the range resolution of pulsed and CW-lasers, it is observed that pulse laser system resolution is dependent on the resolution of time interval measurement. Whereas in CW lasers, the resolution depends on the frequency of the actual ranging signal. It is proved that, with an increase

in frequency, higher range resolution can be achieved with CW systems. Wehr & Lohr (1999) through various system analysis and calculation have proved that, if centimeter level of ranging accuracy is considered, pulse systems have higher accuracy than CW systems, in spite of high peak power. But to achieve sub-centimeter level accuracy, CW systems with high frequency have to be used (Wehr and Lohr 1999). CW systems have very high data rates (up to 1 Million 3D points per second for amplitude modulated CW systems) and a limited operating range generally less than 100 meters. On the other hand, pulse based time-of-flight system is characterized by lower data rates but longer operational between 160 – 16000 meters (Vosselman and Maas 2010).

Time-of-flight systems measure more than one pulse echo due to multiple returns that are caused by object or site characteristics, particularly when vegetation is scanned. Wehr et al. (1999) also concluded that laser power is required when ranging is performed on non-cooperative targets. Therefore, the number of echoes measured depends on the type of scanner and target (Hofton et al. 2000). Usually, time-of-flight receivers can record four echoes per pulse. Time-of-flight scanners are often used in the following three main areas of topographic mapping: (I) Terrestrial laser scanning (TLS), (II) Airborne Laser Scanning (ALS), and (III) Mobile Laser Scanning (MLS).

2.4.2 Terrestrial Laser Scanning

Terrestrial laser scanners (TLS) are used in various applications, including agricultural and vegetation analysis, catastrophic mapping and analysis, terrain modeling, and industrial and structural modeling (Vosselman and Maas 2010). Compared to Airborne Laser Scanning (ALS) and Mobile Laser Scanning (MLS) systems, TLS systems have higher accuracy and precision. This is mainly because TLS systems are mostly used for smaller area data collection, typically less than few miles (Conner 2013) and absence of real-time inertial and position measurements. Airborne laser scanner requires only one scanning direction, whereas another direction is provided by

moving aircraft, but in the case of terrestrial laser scanners are equipped with a 2D scanning device, which can rotate 360 degrees.

As discussed above in the LiDAR section regarding the range measurement principles, it was concluded that pulsed laser measurement systems provide high range capacity whereas phase measurement based continuous wave (CW) systems deliver high accuracy and data rate. Phase measurement based terrestrial laser scanners work with a range of 20 – 80 m and a range accuracy of 1 – 3 mm while pulsed laser based terrestrial laser scanners have a range of 250 – 1000 m with a maximum measurement accuracy of 5 -10 mm (Vosselman and Maas 2010).

TLS systems are usually operated on a tripod or bollard in a static position. Unlike ALS and MLS systems, TLS systems don't require vibration dampening system. Scanning is performed at a fixed position. Multiple scan positions are necessary to capture all components of an object or scene. The camera integrated with the terrestrial laser scanners are used to capture digital photographs of the scene, which can be registered to the point cloud data to add texture or color values to the point cloud. With the integrated bundle adjustment that involves fusion of data from all measurement devices such as a scanner, camera, and panoramic camera, a digital camera may also help in self-calibration of the laser scanner (Schneider and Maas 2007).

2.4.3 Applications of Terrestrial Laser Scanning

LiDAR has been widely used in a variety of areas in the field of civil infrastructure systems, including survey, site development design, urban planning, construction documentation, and asset condition assessment. For instance, Jaselskis et al. (2005) conducted a series of case studies and proved the effectiveness of using LiDAR in the area of soil and rock volume calculation and 3D as-built drawing creation. Kinzel et al.(2007) conducted an experiment on surveying a shallow, braided, sand-bedded river using LiDAR and compared the results with conventional survey methods. The research findings showed that the accuracy is comparable to conventional methods

but that the productivity with LiDAR is an advantage over traditional surveying methods. Priestnall et al.(2000) demonstrated the possibility of using airborne LiDAR to create a Digital Elevation Model (DEM) by removing the extracted surface features from a 3D surface model created by LiDAR. Chen et al.(2013) investigated the use of LiDAR for the evaluation of bridge damage due to vehicle collisions, surface erosions, and reinforcement corrosion and the information captured by LiDAR provides a specific measurement for damage analysis, which otherwise cannot be acquired by photogrammetry or plan photographic techniques. LiDAR can accomplish many tasks that would otherwise be difficult to perform with traditional survey instruments. It not only increases the productivity of surveyors by reducing the number of persons but also reduces the chance of exposing surveyors to safety hazards from traffic. Table 3 shows the different applications of LiDAR in landslide investigation.

Table 3. Applications of LiDAR in Landslides Investigation (Jaboyedoff et al. 2012)

| Applications | Landslides | Rockfall | Debris flow |
|---|---|---|--|
| Detection and characterization of mass movements | Mapping of geomorphic features | Rock face imaging and characterization, calculating discontinuity orientation | Detection of mobilizable volumes, hydromorphone characterization |
| Hazard assessment and susceptibility mapping | Mainly as support for mapping | Some attempts for susceptibility and hazard mapping (not yet achieved) | Input for mapping hazard based on geomorphologic approach |
| Modelling | Classical modeling tools are not able yet to handle huge 3D information density; High-resolution DEM allow more accurate landslide modeling by improving geometrical characterization | High-resolution DEM for trajectory modeling | Input for spreading modeling |
| Mapping | Monitoring of surface displacement and volume budget | Monitoring of surface displacement, detection of pre-failure displacements, quantification of rockfall activity | Sediment budget, monitoring of morphologic changes in channels |

2.5 Point Cloud Registration

Point cloud data registration is the crucial step of the entire data processing phase. Since terrestrial laser scanners are line-of-sight equipment, capturing the whole scene from a single scan position is often not adequate. It is required to record from multiple viewpoints to generate models of larger areas. Point cloud data from each scan position is in the scanner's local coordinate system. In order to combine different point clouds, it is necessary to transform different scans into a common coordinate system by estimating shifts and rotations between the scans. The process of determining the parameters of this transformation is known as registration.

During the last few years, many methods have been proposed for registration of LiDAR data. Most of these techniques assume that data is homogenous where data is compatible regarding point quality and density. These techniques result in inappropriate alignment parameters if the assumption is false, this is mainly due to improper weighting ratios of points. With advancements in laser scanning technologies, it is very important to address the registration of heterogeneous laser scans where the data is incompatible regarding point density and accuracy due to changes in the scanning mechanism and the mounting platform. The main reason for the motivation behind a registration process is to meet the need of aligning multiple scans from different scan positions into the common coordinate system to cover all the features of interest. For example, point cloud data acquired using tripod mounted LiDAR equipment are on the scanner's coordinate system. Since scans from different positions are usually used to cover complex objects or larger areas, each of the required scans must be registered into the common coordinate system before processing the data.

Various registration methods are available today, which vary in theory and implementation. The selection of a registration technique depends on the scanning mechanism and dataset. All these registration methods could be classified into three main categories: target-based registration,

feature-based registration, and iterative closest point (ICP) based registration techniques. These techniques are discussed in the following subsections.

2.5.1. Target Based Registration

Static TLS can be used to monitor landslide displacements by installing targets on a landslide mass. Because of the robustness and accuracy, target based registration is more reliable compared to other registration methods. Typically, targets are highly reflective machined geometric entities (such as a disc, plate or sphere) mounted on a stable platform. For terrestrial scans, these are usually 10 cm in radius. Becerik-Gerber et al. (2011) explained the advantages and disadvantages of various targets, and also provided a study on the achievable accuracy of different targets. The figure 6 shows some of the 3D laser scanner targets used in the target-based registration technique.



Figure 6. Commonly used targets for terrestrial laser scanning

Even though using targets is more reliable, it is very expensive. It also requires a lot of preparation on site to setup them properly. In addition, these targets have to be positioned strategically between scanner positions (Reshetyuk 2010). Depending on the site, it may not be possible to place the targets at desired locations. Moreover, processing of such data requires manual effort to identify the same target in each scan and may depend on feature detection algorithms to detect these targets. In the case of heterogeneous data where data is collected at various times, using targets is not feasible. This is because it is not possible to maintain targets on site for a long period of time. In this case, it fails to setup common targets to perform heterogeneous point cloud data registration.

2.5.2 Feature-Based Registration

For the feature-based registration, a higher level of primitives is established to remove cost and extra labor associated to set up the signalized targets properly and to recognize the distinct points. Strategies that depend on a pre-preprocessing step to concentrate components of interest for the request to create conjugate elements for the registration fall normally under the class of feature-based registration. Planar patches (Huang et al. 2012) created through a segmentation method can be used in the registration of overlapping scans. Rabbani et al. (2007) utilized planar components alongside barrel, circle, and torus that are basic elements in the industrial sites. They proposed two strategies, direct and indirect techniques utilizing previously mentioned geometric components. The indirect technique is fused for surmised registration through minimization of an aggregate of squares of contrasts in parameters of models. Direct technique proposes concurrent registration of different scans by limiting the sum of the square distance of the points from the relating model surface utilizing the outcomes from the primary method as estimated values. Dold and Brenner (2006) suggested a computerized registration procedure of terrestrial laser filtering information utilizing extracted planar patches as a geometric imperative. To avoid the lack of planar patches with different orientations and to enhance the registration outcomes, image data gathered from a hybrid sensor was integrated as additional information. This demonstrates a probability to

incorporate extra information for the laser scanning data registration additionally. (Canaz 2012) fused photogrammetric data to enroll terrestrial laser scanning information with the least overlapping area. This work gave a relative evaluation of terrestrial laser scanning information registration utilizing both linear and planar components. Linear features (Chang et al. 2008) are extremely helpful for the registration of laser scans in urban regions since they can be inferred with a high level of automation. These linear features can be retrieved from the intersection of planar objects which produce a line. On the other hand, the linear feature could likewise be pulled out from building edges in spite of the fact that they are known to create degraded accuracies because of the discrete way of LiDAR at break-lines, for example Catenaries lines. Power lines in urban areas have likewise been investigated as a source of control for covering LiDAR information for mobile mapping frameworks (MMS) adjustment (Chan et al. 2013) and enlistment of overlapping datasets. The great capability of utilizing objects features has been demonstrated in few studies. The feature primitive is derived using a large number of LiDAR points which results in a high confidence in the feature in a scene. Therefore, linear features are very reliable. In any case, utilizing linear and planar features stays restricted to scenes that contain such primitives. Likewise, extraction of such features is sometimes yielded to blunders in the information (i.e., if not demonstrated appropriately) and occlusions (Rodrigues et al. 2002). Likewise, segmentation issues, for example, over-segmentation, and under-segmentation - if not settled - may prompt mistakes in the extracted features, which then are passed to the registration step, thus debasing the overall registration quality. The initial estimation of the transformation parameters among the features is also challenging and remains a subject of recent research (Al-Durgham et al. 2013).

2.5.3 Iterative Closest Point Registration (ICP)

The ICP is the most popular technique in use. There are many ICP variants, and all of them assume that there exists an initial approximation between scans. Examples of the variants included in the studies presented by (Bae and Lichti 2008; Besl and McKay 1992; Rusinkiewicz and Levoy 2001).

The algorithm consists of mainly point-to-point matching procedure. Due to the assumption of point-to-point correspondence which is usually not true, final transformation parameters can be biased.

A primitive alternator representation is that one of the point clouds is undisturbed, whereas another cloud is converted to a higher order (e.g. triangles, planes). Although the model can be complex and takes more time to execute, the expected surface registration accuracy is higher (Beinat et al. 2006; Beinat et al. 2007; Boström et al. 2008; Habib et al. 2011). For instance, a variant of the ICP algorithm (Habib et al. 2010) which uses triangular primitives in one input scan and the normal distance between points of the first scan and triangulated surface's second scan is then minimized. In feature-based registration algorithm, the use of object primitives is even more complex, as illustrated in the work done by (Rabbani et al. 2007). The first step is the segmentation of point clouds to obtained useful objects (like cylinders). The next two steps are to fit the model and correspondence specification. To make sure that a good amount of geometric configuration information is obtained, a thorough check needs to be undertaken. Finally, the sum of squares of perpendicular distances along points and objects are minimized to get final registration. The obstacle one may find is that it is challenging to identify a feature in heterogeneous data due to the continuously changing level of difficulty and sampling of the overlapping scans. Since this registration method performs differently as compared to ICP and applies the different algorithm, it is called irregular of ICP.

In general, ICP-Variant is sub-grouped in three categories: Point-to-point, point-to-surface, and point-to-object. ICPatch and ICPP algorithms presented by Al-Durgham et al. (2013) belong to point-to-surface.

2.6 Displacement Measurement Techniques

One of the common data which is used to analyze landslide motion is LiDAR data. There is no such a method that analyzes the raw point data cloud and measures the 3D displacement field. A narrow list of methods was required based on qualitative metrics before performing any detailed

performance tests. In order to identify the available methods, an in-depth literature review was performed. A preliminary evaluation was conducted to eliminate any poor performance techniques. In order to find an appropriate technique for landslide displacement analysis, a survey of different techniques was conducted, and advantages and disadvantages of each technique are discussed below.

2.6.1 Point Cloud Based Displacement Measurement Techniques

Displacements can be measured using multi-temporal point cloud data. Landslide velocities and displacements can also be measured using these methods. Various available displacement measurement techniques are discussed in this section:

2.6.2 Point-to-Point Displacement Measurement Technique

This is a technique where each and every point measurement is made. The distance between two points (i.e. a point in compared cloud and a point in reference cloud) is measured. Point snapping and direct-measuring tools are used to measure in point cloud processing software manually. P2P is a common method used for rock mass characterization as well as rockfall analysis, but no landslide studies that utilized this technique in the literature were found. For obtaining geometric parameters of surface features and analyzing temporal changes in the object, P2P is an excellent technique, and it has many applications in fields, such as mechanical and structural engineering for measuring spot movements.

2.6.3 Cloud-to-Cloud Displacement Measurement Technique

P2P and cloud-to-cloud (C2C) are similar in principle, but C2C uses shortest-path distance. The distance between two points (i.e. a point in reference cloud and its nearest neighbor in the compared cloud), is measured (Figure 7a). Local model or height function can also be used to measure C2C distances – to represent the reference cloud's surface (Figure 7b). The local model is a best-fit planar surface centered at an arbitrary, pre-defined location in the reference cloud and interpolated

using the points that fall within a pre-defined radius of that center point. Then the distance to the nearest point in the compared cloud is then computed in the direction normal to the local model.

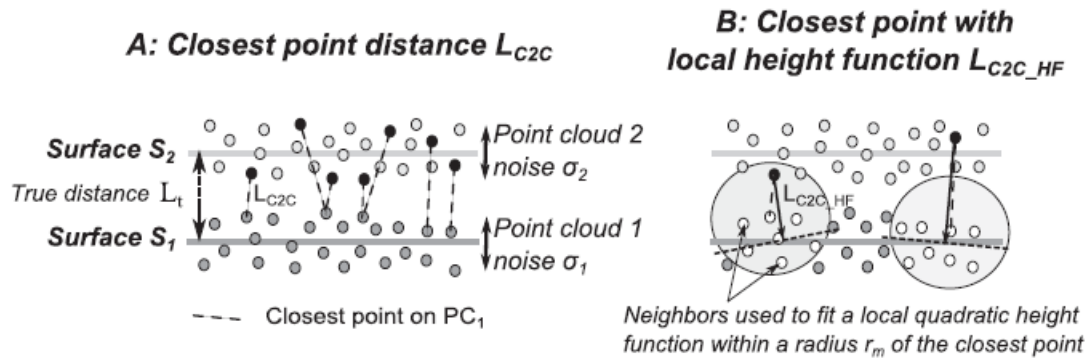


Figure 7. C2C Measurement Technique with Nearest Point (a) and Local Height Function (b)

from (Lague et al. 2013)

2.6.4 Cloud to Mesh (C2M) and Mesh to Mesh (M2M) Displacement Measurement Technique

C2M and M2M are similar measuring techniques that work on the same principles as that of the local version of C2C method except that they utilize globally fit surfaces instead of locally fit surfaces for their functioning and for interpolating the surfaces, many methods are used such as kriging, inverse distance weighted averaging, Delaunay triangulation, etc. and each carries their own advantages and disadvantages. The key difference between the local and global interpolation is that, in the local interpolation, the point cloud data “fits” more closely but fails to capture the large-scale topography, whereas in the global models the data is “smooth” and designed to represent large-scale topography trends.

In C2M, the global surface is used to represent the reference cloud. It measures the distance to the nearest point in the compared cloud in the direction of the surface normal vector at given spacing (Figure 8). M2M uses the global models for both clouds and measures the distance between the reference and compared surface at some given spatial interval and direction.

C : Point to mesh distance L_{C2M}

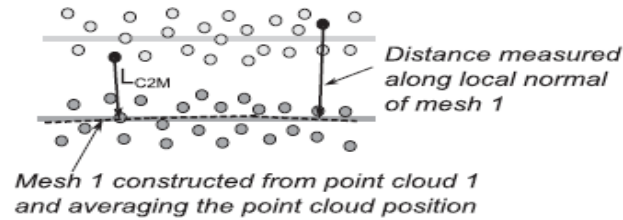


Figure 8. C2M Measurement Technique (Lague et al. 2013)

The M2M has two forms, the most widely used is known as DEM-of-Difference technique (DEMoD). This method interpolates the both reference and compared clouds elevation (z) values, such that raster data pattern is created called the Digital Elevation Model (DEM). The compared surface is then subtracted from the reference, and a new surface is generated with values that correspond to the difference in surface elevation. Generally, DEMoD is used in a landslide, slope stability, and rockfall analyses to calculate volumes of displaced material and analyze slope movement (Baldo et al. 2009; Casson et al. 2005; Daehne and Corsini 2013; Dewitte et al. 2008). The second most common form of M2M is the slope normal method. This model can be of any form of surface model that represents the cloud geometry in a triangulated irregular network. The distance between the models is measured along the direction normal to the surface of the plane, usually with the positive direction of the Z -axis. This method hasn't been applied to landslides but is used in mechanical and structural engineering for getting area based displacement measurements.

2.6.5 Multiscale Model to Model Cloud Comparison (M3C2) Measurement Technique

The M3C2 model was developed to track displacements using time series laser scans in natural environments (Lague et al. 2013). This technique measures the distance between point clouds in a surface normal direction (Figure 9). The surface normal is calculated using a local model fitted to the points within a certain radius around each point in the reference point cloud. The radius can be set to a rough estimated value or can be set depending on the user based experience. Another smaller radius is drawn in the plane of the local model. It is the extended in the direction of the normal at a

specified distance to form a cylindrical domain. All points from each cloud that fall within this domain are selected, and the average position of each set of points along the axis of the cylinder is identified. The average locations are considered as the position of the “surface” in each cloud, and the distance between them is the surface displacement measurement. The radii, cylinder length, and types of average used are user-defined.

a Principle of the Multiscale Model to Model Cloud Comparison M3C2

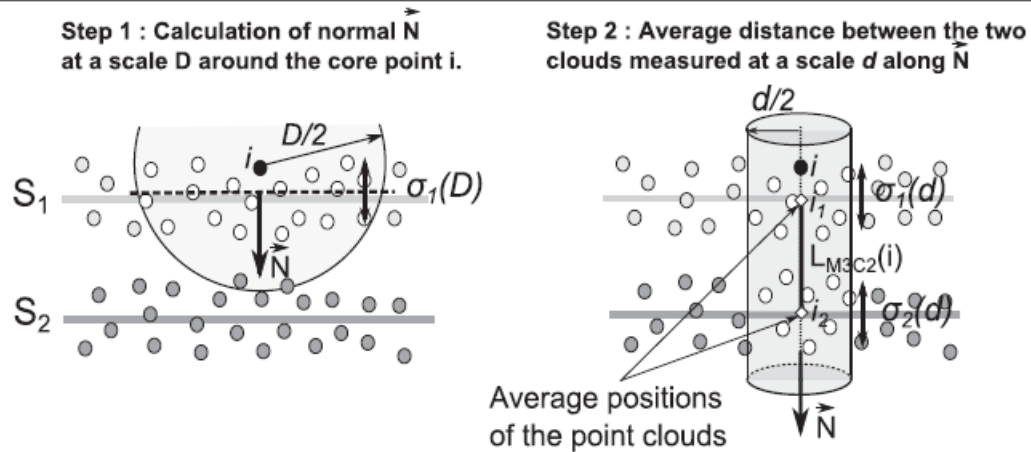


Figure 9. Principle of M3C2 Displacement Measurement Technique (Lague et al. 2013)

The methodology for M3C2 is summarized as follows:

- From initial point cloud, a set of points is chosen as subsample to perform the measurement. Subsampling is an optional step; it is performed only to reduce the calculation time.
- A surface normal vector is defined for each core point i by defining a plane which fits a set of points. The points NN_i are within a sphere of radius $D/2$ of i . Where D is a normal scale. These vectors are oriented in the direction of user-defined orientation
- Roughness of the point cloud around i is calculated as standard deviation of distance between points on scale D
- The second step includes defining a cylinder with a radius $d/2$ where d is defined as projection scale. The axis of cylinder passes through the point i . The cylinder is extended

both the direction of the axis to a maximum depth which manually defined. The cylinder intersects both the clouds and generated subset of points n_1 and n_2

- The mean distance between two point clouds is calculated along surface normal using n_1 and n_2 which are defined as i_1 and i_2 . The M3C2 distance between two point clouds is the distance between i_1 and i_2 .

The normal and projection scale have to be chosen based on the data roughness and point density. Higher the normal radius more smooth is surface, hence surface roughness has less impact on the distance measurement.

The other attribute of M3C2 analysis is Level of Detection (LOD), which is calculated using surface roughness of both the point clouds and registration uncertainty. The M3C2 analysis also calculates the distance uncertainty based on Level of Change Detection (LOD_{95%}). If LOD_{95%} calculated to be more than the measured distance, then the change is considered as ‘non-significant’ and conversely, if the LOD_{95%} is less than the measured distance, then the measured value is considered as significant at 95% confidence interval.

2.7 Advantages and Disadvantages of Various Displacement Measurement Techniques

A comprehensive literature review has been performed, and a summary of advantages and disadvantages of various displacement measurement techniques is presented in this section:

2.7.1 Advantages/Disadvantages of P2P

The primary advantage of P2P is that it helps the user to pick a precise measurement point and allow for the true point displacements. P2P doesn't depend on the surface modeling or interpolated point locations. The user can choose from individual data points and select the most appropriate points in each cloud (Haugen 2016).

The Disadvantage of P2P is that it is not accurate when small displacements are taken into account. The displacement measurements are not reliable and could be greater or smaller than the actual displacements when they are small (Haugen 2016).

2.7.2 Advantages/Disadvantages of C2C

The advantage of C2C is that it can generate measurements for the entire point cloud. It also successfully accounts for the local model for data variance. Thus the data spread on displacement measurements minimize errors which are associated with global surface interpolation (Haugen 2016).

The primary disadvantage of C2C is that actual or true surface displacements cannot be measured by this technique. The point the only version measures the motion along the distance vector, and it can successfully measure true landslide displacement if the landslide movement occurs in the direction normal to the surface. The reality, landslides rarely exhibit such perpendicular phenomenon (Haugen 2016).

2.7.3 Advantages/Disadvantages of C2M and M2M

The primary advantage of C2M and M2M lies in the computational speed and usability. The simplicity with which the raster and the global surface can be interpolated and measured with accurate displacements using a variety of software programs (Haugen 2016).

The primary disadvantages of C2M and M2M methods are errors arising from surface interpolation and spatial averaging. The spatial averaging occurs when point cloud data are smoothed due to global surface creation. The LiDAR point cloud data shows a spread of points around the actual surface, this surface may have some irregularities at a smaller scale than data spread. Moreover, surface interpolation is required for the point spacing of the data. Surface morphologies are clearly observed in zones at this scale. Point clouds with low or no density produce erroneous interpolation data as compared to the actual surface. Even the most advanced algorithms for interpolation fails to generate surface morphologies if the data obtained is below a certain specified threshold (Aguilar et al. 2010; Hodgson and Bresnahan 2004). Therefore, C2M and M2M measurements are not reliable if the point spacing is large (Haugen 2016).

2.7.4 Advantages/Disadvantages of M3C2

The primary advantage of the M3C2 technique is that it utilizes statistical methods to measure the position of the ground surface in the reference and compared clouds. It can also fit variation in scale and magnitude of surface roughness of a local model to the data spread. Thus validating both the variance in point cloud data and morphological surface changes in the generated data spread. This helps to make computation process much simpler and easier for the optimal cylinder radius selection (Haugen 2016).

The primary disadvantage of the M3C2 method is that it uses a surface-normal displacement process, which is computationally intensive and less reasonable. Surface-normal displacement motion in landslides may or may not be accurate measures of slope movement. The assumption that the majority of movement will occur in the direction normal to the slope may be valid in the case of vertical or near-vertical slopes but is not valid for shallower slopes both horizontal and vertical movement may exist (Haugen 2016).

2.8. Summary

Although predicting landslides is a challenging task because the triggering mechanism of landslides is complex, various studies have proved that terrestrial laser scanning can be used to monitor the landslides and assess the risk of landslide/rockslides. However, there is not a readily available generalized workflow that guides practitioners to apply this technology to landslide monitoring. The literature says target based registration is more reliable registration technique, but it may not be true in all cases, which was observed in this study. This means there is a gap in addressing all the challenges in applying this technology, particularly the technical challenges encountered when applying this technology to different sites that have different geotechnical properties. None of the research focuses on providing the requirements in choosing the algorithm for data processing. From the various displacement measurement comparisons, it was observed that M3C2 technique has

more advantages compared to other techniques. The only disadvantage of the M3C2 technique is that the results are influenced by surface roughness and normal scale. In order to overcome the influence of surface roughness, it was also explained in the literature that higher normal surface values would smoothen the surface and prevents the disorientation of Normals. To the research team's best knowledge, there is no generalized workflow to apply the LiDAR technology for landslide monitoring on highways and also none of the research reported the challenges of applying this technology.

CHAPTER III

METHODOLOGY

The application of 3D Laser Scanning/ LiDAR technology for landslide monitoring on highways involves mainly two steps:

- Data Collection
- Data Processing

This section explains each of these steps in detail.

3.1 Data Collection

Since slope change is of major interest in this study, LiDAR was used to perform data acquisition on the slope/s of selected locations. LiDAR scanning is a very efficient and non-intrusive surveying method that does not require traffic closure during the survey. However, safety measures have to be taken by using road work signs, road safety cones, and safety vests to avoid accidents due to moving traffic. Climate impacts play a significant role in the slope movement that may trigger a landslide or rockslide (FEMA 2017). In the state of Oklahoma, freeze-thaw, rain, and earthquakes are believed to be the factors that can significantly influence the slope change (OGS 2017). In order to understand the effect of weather scenarios on slope change, data collection is performed at each selected location during four different times of the year:

- 1) summer season (June 2016), 2) dry season (September 2016), 3) winter season (December 2016),
- 4) warm season (April 2017).

3.1.1 Site Description

For this study, four road sections with potential landslide risks have been chosen by consulting the geotechnical experts in Oklahoma Department of Transportation (ODOT). Two of these locations are on Interstate 35 (I-35) near Davis, Oklahoma and other two locations are on US 82 near Lequire, Oklahoma. They were named as Locations 0 to 3. Figure 10 shows the geographical location of the four sites. Figures 11 and 12 are a close-up look at the sites. Figure 13 shows the pictures of four sites taken during data collection. Various characteristics of the sites are shown in Table 4 below.

Table 4. Specifications of the Data Collection Sites

| Sl. No. | Location Code | Location on Highway | Slope Type | Length of Road Section (m) | Height of Cliff (m) |
|----------------|----------------------|----------------------------|-------------------|-----------------------------------|----------------------------|
| 1 | Location-0 | I-35 | Rock | 209 | 25 |
| 2 | Location-1 | I-35 | Rock | 250 | 23 |
| 3 | Location-2 | US-82 | Soil | 240 | 22 |
| 4 | Location-3 | US-82 | Soil | 150 | 30 |

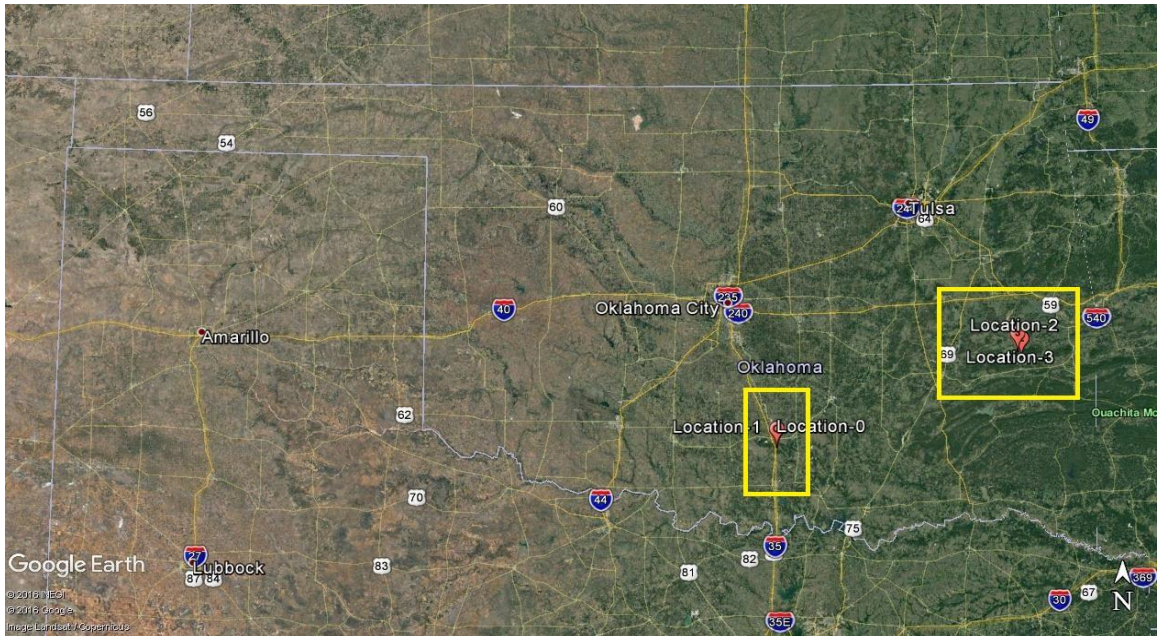


Figure 10. Location of Study Areas in Oklahoma area

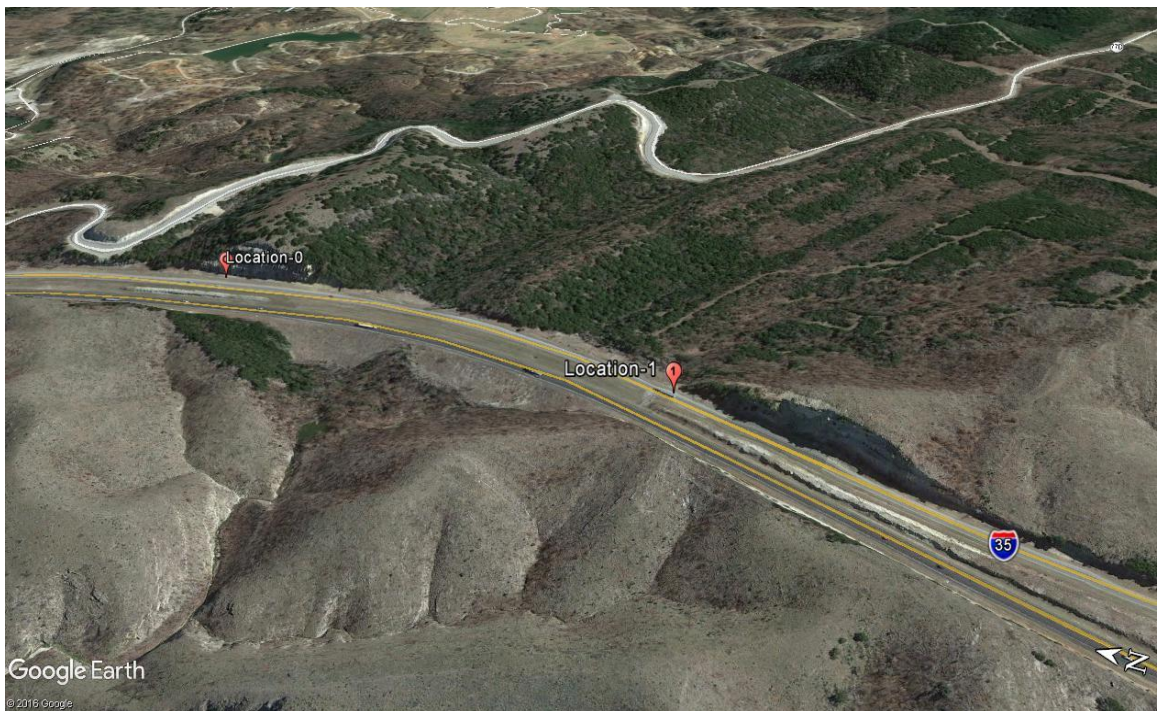


Figure 11. Location 0 & Location 1 on I35

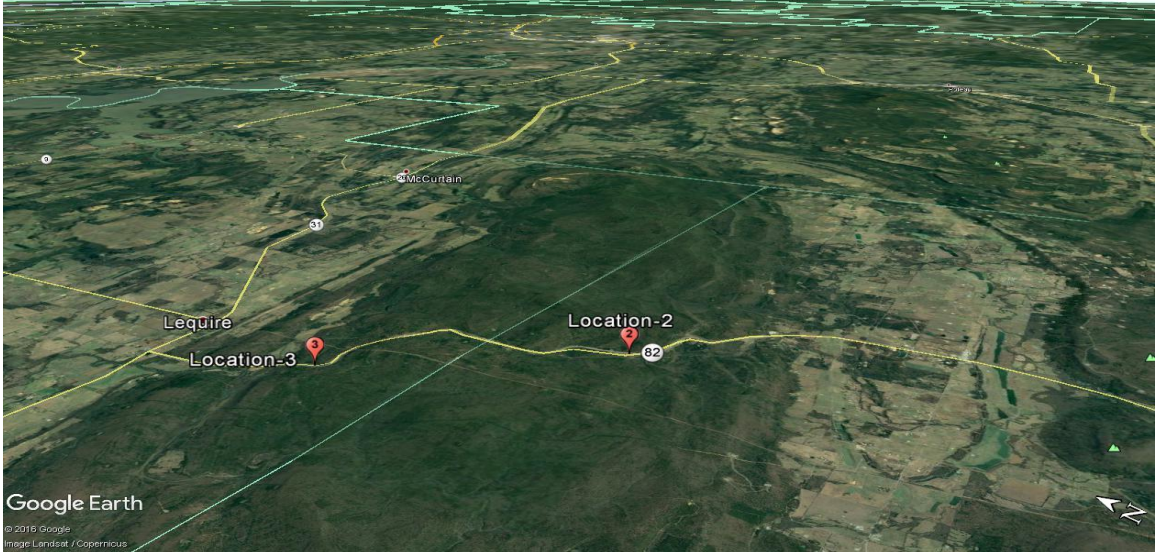


Figure 12. Location 2 & Location 3 on US 82

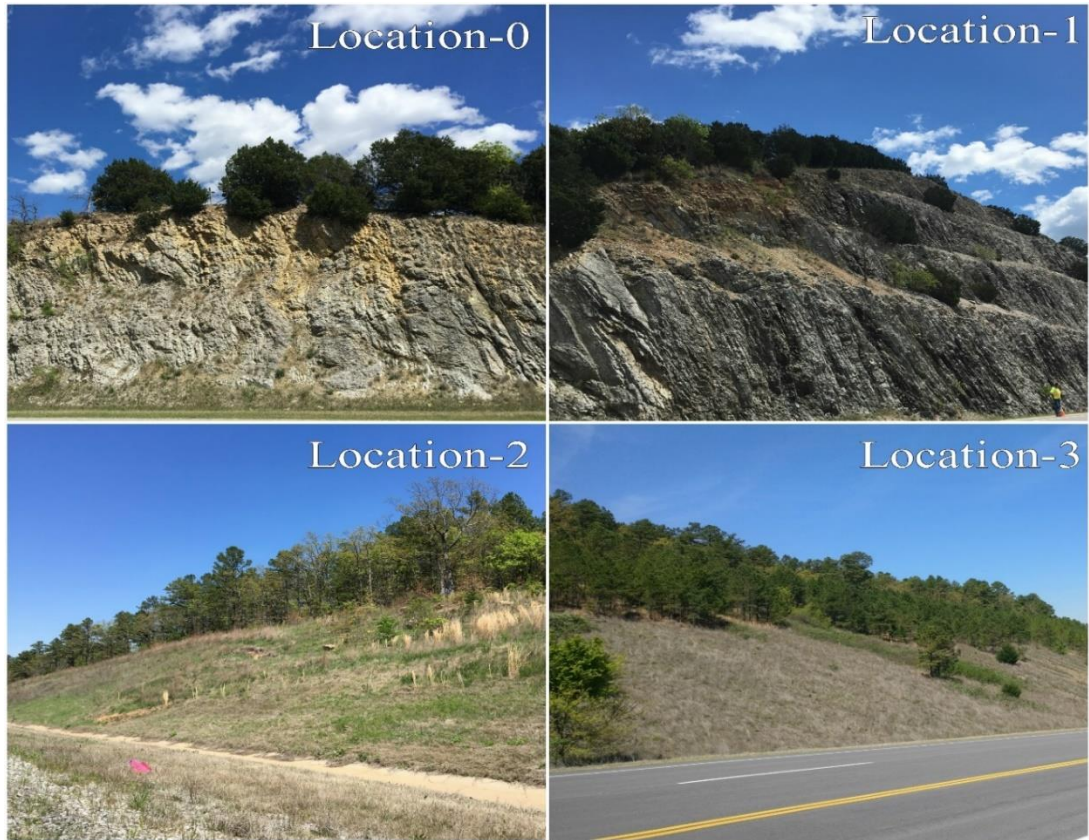


Figure 13. Pictures of the Slopes of All Four Locations

Four data collections were performed on each of the location, and each data collection was undertaken in one season (Table 5).

Table 5. The Corresponding Data Collection Dates for Each of the Locations

| Sl. No. | Location Code | Scanning Dates | | | |
|---------|---------------|----------------|-----------------|-------------------|--------------|
| | | June (Summer) | September (Dry) | December (Winter) | April (Warm) |
| 1 | Location 0 | 6/23/2016 | 9/27/2016 | 12/6/2016 | 4/5/2017 |
| 2 | Location 1 | 6/23/2016 | 9/27/2016 | 12/6/2016 | 4/5/2017 |
| 3 | Location 2 | 6/20/2016 | 9/30/2016 | 12/13/2016 | 4/7/2017 |
| 4 | Location 3 | 6/20/2016 | 9/30/2016 | 12/13/2016 | 4/7/2017 |

3.1.2 Equipment Used

Compared to the traditional surveying methods, very few equipment is required for this application. Only the LiDAR equipment is used during data acquisition, and it is not needed to be left at the site unattended for continuous monitoring. Following equipment (Figure 14) was used throughout our data collection process:

1. RIEGL VZ-400 Laser Scanner
2. Laptop with RiSCAN Pro software installed (Optional)
3. Tripod for scanner
4. Battery for the scanner



Figure 14. Equipment Used for Scanning

The Riegl VZ-400 terrestrial laser scanner was used for data acquisition (the instrument specifications are listed in Table 6). To record RGB values, a calibrated Nikon D700 digital SLR camera was used. At the time of data acquisition, the scanner was always mounted on a tripod. A high capacity battery that supplies power to the scanner throughout the scanning process was used. Using a laptop is optional. The Riegl VZ-400 laser scanner supports stand-alone operation with an integrated Human-Machine interface. It supports internal storage up to 32GB and external storage via USB 2.0. The main advantages of using a laptop with a software package installed are a user-friendly interface, a 3D object view on the site, and easy access to all settings. Except for Locations 2 and 3 during June, all the other data collection was performed using a laptop.

Table 6. Technical Specifications of RIEGL VZ-400 Laser Scanner (from www.riegl.com)

| Parameter | Long Range Mode | High-Speed Mode |
|---|------------------------------------|------------------------------------|
| Laser Pulse Repetition Rate | 100 kHz | 300kHz |
| Effective Measurement Rate | 42,000 meas./second | 125,000 meas./second |
| Max Measurement Range (natural targets, $\rho \geq 90\%$, highly reflective) | 600 m | 300 m |
| (natural targets, $\rho \geq 20\%$, less reflective) | 280 m | 160 m |
| Minimum Range | 1.5 m | 1.5 m |
| Accuracy (1σ) | 5 mm | 5 mm |
| Precision (1σ) | 3 mm | 3 mm |
| Angular Measurement Resolution | Better 0.0005° (1.8 arcsec) | Better 0.0005° (1.8 arcsec) |
| Beam Divergence | 0.3 mrad | 0.3 mrad |

3.1.3 Field Scanning

During data collection for each location, multiple scans from different scan positions were performed to ensure the scans cover the entire scene from different angles. Table 7 shows a total number of scan positions for each data collection. For every data collection trip for each site, a RiSCAN Pro project was created and saved in .rsp file format. This project contains scans of all scan positions. Whereas in the case of the scanner alone, it creates a .rxp file for each scan position. These .rxp files were used to recreate a RiSCAN Pro project. Whereas in the case of using a laptop, it is not required to recreate a RiSCAN Pro project. This is another advantage of using a laptop to operate the scanner. The scanner was always operated in a high-speed mode with standard panorama settings (i.e., resolution = 0.08). Each scan on an average collected 3 million points per scan position resulting in approximately 30 million points for each location per trip.

3.2 Data Processing

Data collected from all the four collections using the Riegl scanner were processed to obtain the landslide displacement. Data processing involves data registration, data down sampling, data filtering and displacement analysis. The following subsections explain these processes:

3.2.1 Registration

The first and important step of data processing involves registration and merging of scans acquired at multiple scan positions for each location. All the registration algorithms used in this research study are considered pairwise registration scenario. Due to some disturbances in the scans which were because of obstruction of a digital camera by the antenna or obstruction of the scanner by humans or traffic. Scans from these scan positions were not considered for the registration. In addition, scans without planar features were also ignored. The importance of the planar features is explained in the later sections. Table 7 shows an actual number of scan positions used for scanning and number of scan positions used for registration for all data collection.

Table 7. Number of scan positions (SP) used for scanning and number of scan positions used for registration

| Location Code | June | | September | | December | | April | |
|---------------|-----------|---------|-----------|---------|-----------|---------|-----------|---------|
| | Actual SP | Used SP | Actual SP | Used SP | Actual SP | Used SP | Actual SP | Used SP |
| Location 0 | 5 | 4 | 9 | 9 | 12 | 12 | 10 | 9 |
| Location 1 | 6 | 5 | 10 | 10 | 13 | 9 | 10 | 9 |
| Location 2 | 4 | 4 | 6 | 3 | 12 | 5 | 10 | 3 |
| Location 3 | 4 | 4 | 9 | 5 | 11 | 11 | 10 | 10 |

From Table 7, it is observed that Location 2 uses very few scan positions for registration, this is due to the absence of planar features. Since the data was collected without using targets or GPS, feature-based registration or the iterative closest point (ICP) technique were used to register this

data. In this project, all the scans of each data collection were registered using the scanner manufacturer's data processing software, RiSCAN Pro with Multi-Station Adjustment (MSA) plugin. The data registered using this technique was used for further processing. The following subsections explain all the registration techniques used in this project.

3.2.1.1 Coarse Registration

Coarse registration is the first step of the registration process which involves manual alignment of scans as close as possible which can be performed using coarse registration tool in RiSCAN Pro or CloudCompare (open source software used to process 3D point cloud or mesh data). This process involves picking a pair of corresponding points in each scan (Figure 15). Most of the points were picked from the sign boards available on the highways. Coarse registration is performed using RiSCAN Pro throughout this project (See Appendix for the process).

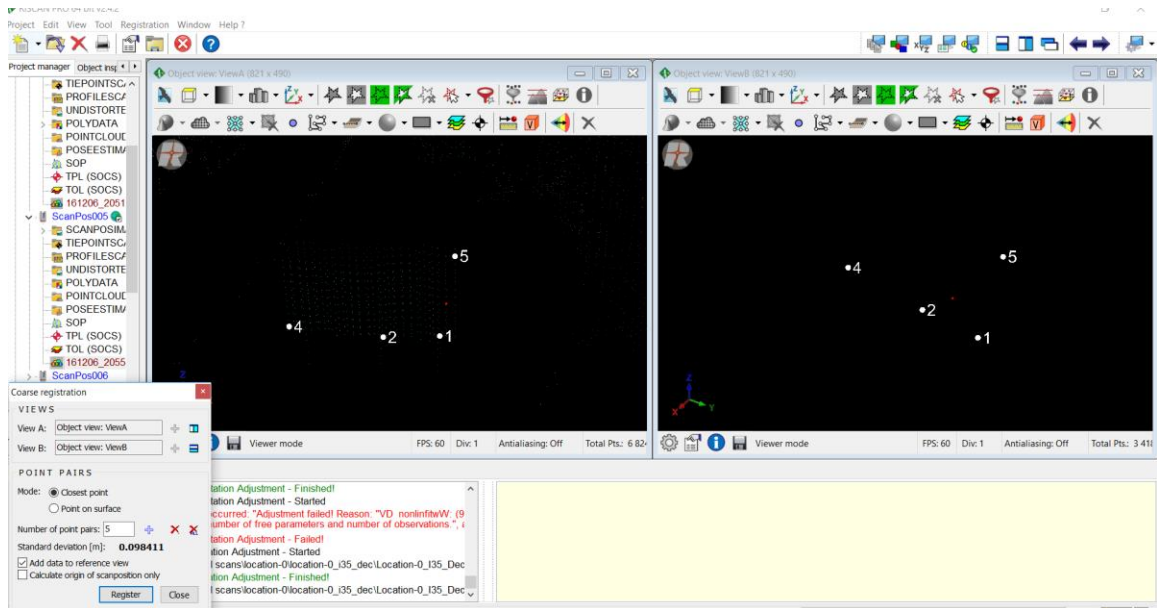


Figure 15. Coarse Registration Using RiSCAN Pro

3.2.1.2 Fine Registration

Fine registration involves refining the scans obtained in the coarse registration. In this project, the RiSCAN Pro Multi-Station Adjustment (MSA) algorithm was used for fine registration (See Appendix for the MSA process). MSA algorithm uses polydata which is the filtered version of each scan to perform the plane patch registration process. A plane patch filter was used to create polydata. Various parameters have to be defined for plane patch filter. Parameters and their values are shown in Figure 16. A plane patch filter identifies and triangulates planar areas (plane patches) in each scan. The MSA algorithm then identifies a common planar patch from each scan and shifts the scan until the best match is obtained. These adjustments were performed in three iterations. The parameters required for MSA and values of parameters for three iterations are shown in Table 8. All the scans aligned using MSA were exported into ASCII or .pcd format and merged into a single scan using CloudCompare for each data collection. This merged scan was used for further processing. In addition to MSA, other registration algorithms like ICP (using CloudCompare) and Normal Distribution Transformation (NDT) (using Point Cloud Libraries) were tested for this data. All these methods required coarse registration.

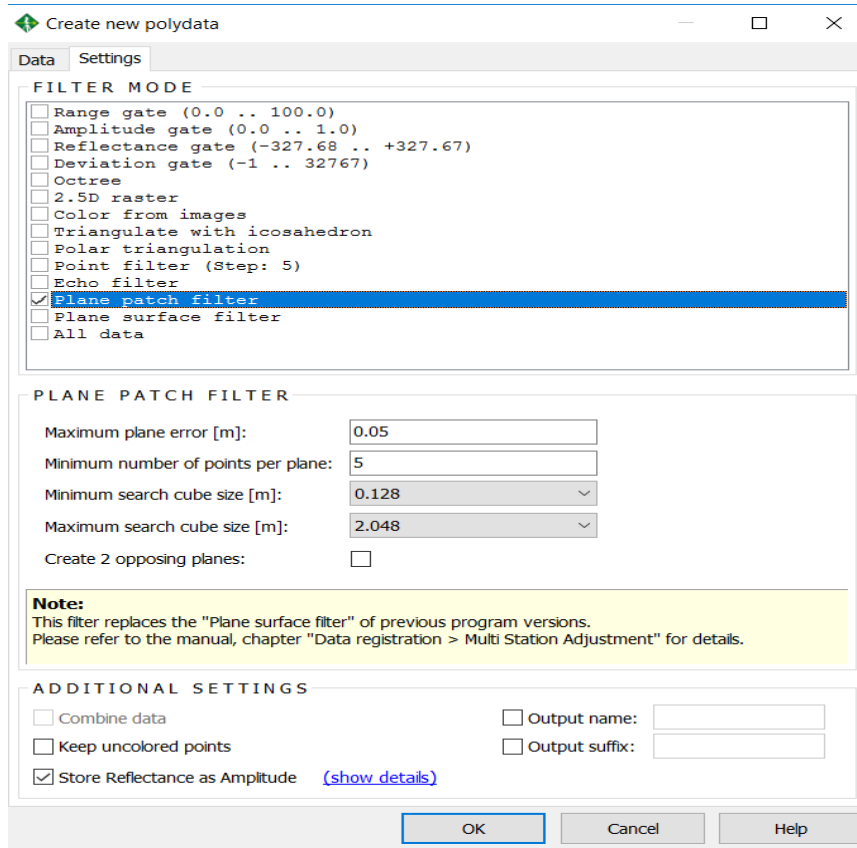


Figure 16. Parameter Values for Plane Patch Filter to Create Polydata in Multi-Station Adjustments (MSA)

Table 8. MSA Parameters and Their Values for Three Iterations

| Parameter | First Iteration | Second Iteration | Third Iteration |
|-----------------------------------|----------------------|----------------------|----------------------|
| Mode | all nearest points | all nearest points | all nearest points |
| Search radius(m) | 0.5 | 0.2 | 0.1 |
| Max tilt angle(deg) | 5 | 5 | 5 |
| Min. change of error 1 (m) | 0.1 | 0.1 | 0.1 |
| Min. change of error 2 (m) | 0.05 | 0.005 | 0.005 |
| Outlier threshold | 2 | 2 | 2 |
| Calculation mode | least square fitting | least square fitting | least square fitting |
| Update display | seldom | seldom | seldom |

3.2.1.3 Merging and Aligning

For each data collection, scans registered using MSA were exported into ASCII or .pcd files. These scans were merged into a single scan for each data collection using CloudCompare. For each season a single merged scan is obtained. Merged scans of each season were aligned using CloudCompare and are used for further processing. Each of these registration processes involves error, which is discussed in the later sections. The error obtained during this registration and the aligning process is considered for displacement analysis.

3.2.1.4 Registration Error Analysis

Since coarse registration is a manual process, it incorporates some error during the registration process which is carried throughout the data processing. As explained in the literature review section, systematic and random errors can be modeled mathematically and eliminated through system calibration procedures. However, it is difficult to model the registration error (Brodu and Lague 2012). In this project, errors obtained due to various registration steps were used to calculate a total error using the additive RMS error analysis which was proposed by (Collins et al. 2009). The error calculated through this technique was used to identify the significance of the changes measured between two point clouds. The (Collins et al. 2009) equation is modified for this study.

$$E_{total} = \sqrt{E_{reg}^2 + E_{alg}^2} \quad \text{Eq. 1}$$

Where E_{reg} was the error associated with registration of scans using RiSCAN Pro and E_{alg} was the error associated with registration of scans using CloudCompare. E_{reg} includes registration errors of all the scans involved in the displacement measurement. For instance, for the displacement analysis of June and September, the total error can be described as Equation 2 is as follows:

$$E_{reg} = \sqrt{E_{June}^2 + E_{Sep}^2} \quad \text{Eq. 2}$$

3.2.1.5 Segmentation

To focus on the area of the mountain which is highly prone to landslides, this part of the entire location was segmented using the interactive segmentation tool in CloudCompare. This was an edge-based segmentation. In order to segment similar patch from all seasons point cloud for a particular location, all these point clouds were aligned, and a patch was segmented using polygon edition mode by defining a 2D polygon on the selected point clouds. During this process, unwanted features and outliers were removed.

3.2.2 Downsampling

The size of the final merged scan of each data collection was huge. The large files slow down the data processing. In some cases, due to large file size, the CloudCompare shuts down. In this study, since we were working only on a particular area of the mountain which was usually lower in size, downsampling was not preferred, so downsampling of the point cloud was not a mandatory task. To compare the displacements results of original and downsampled point cloud, various algorithms such as VoxelGrid filter (using Point Cloud Libraries) and subsampling (using CloudCompare) were used. The VoxelGrid filter (Libraries) creates a 3D voxel grid (basically 3D boxes in the space) over the input point cloud. In each voxel, all the points were approximated with respect to their centroid. Whereas in the case of subsampling using CloudCompare point cloud was downsampled just by picking a random point and flagging all the points around it to be removed. For this process, CloudCompare provides various methods such as space (minimum distance between points is specified), random (remaining points are specified), and octree (subdivision octree level is specified).

3.2.3 Vegetation Removal

Prior to the displacement comparison, vegetation removal was performed to reduce the noise due to vegetation. Similar to the downsampling, vegetation removal was an optional task depending on the characteristics of the site. Vegetation removal is required for Locations 2 and 3 since they have thick vegetation which adds a lot of noise to the displacement measurement. Whereas for Locations 0 and 1 vegetation removal was not compulsory because both locations are rock type and have less vegetation. Sometime vegetation removal may even remove part of rock portion of the mountain, which may provide inaccurate results. To compare the displacement results of both vegetation removed and original point cloud, multiscale dimensionality classification vegetation removal algorithm (Brodu and Lague 2012) was used. Multiscale dimensionality classification algorithm was applied to the point cloud using CloudCompare qCANUPO plugin where classifiers were obtained from (Lague et al. 2013)

3.2.4 Displacement Analysis

After analyzing the advantages and disadvantages of various displacement analysis algorithms, Multiscale Model-to-Model Cloud Comparison (M3C2) displacement analysis was chosen for this study. Since M3C2 algorithm measures the distance between two point clouds along the surface normal direction, this gives a proper understanding of the landslide. Lague et al. (2013) explains all the characteristics of the M3C2 algorithm and also its application to Rangitikei River data. In the current study, the M3C2 algorithm was applied using CloudCompare. The concept of M3C2 analysis is explained in the literature review section. In order to compare the displacement results, the analysis was performed on the vegetated surface (original patch), non-vegetated surfaces (vegetation removed patch) and downsampled (downsampled patch) point cloud. In order to obtain the accurate displacement, the analysis was performed only on a patch of the mountain which is more prone to landslides. In order to perform M3C2 analysis, two points clouds are required, the

reference cloud which is considered as a reference to measure the displacement and data cloud which is used to measure the distance from reference to data cloud. In this project, four data collection trips were performed between June 2016 and April 2017. Displacement change between different seasons was calculated pairwise. The combinations for the displacement comparison are shown in Table 9 below.

Table 9. Various Combinations for Displacement Analysis

| Seasons | Duration | Reference Cloud | Data Cloud |
|----------------|-----------------|------------------------|-------------------|
| Summer-Dry | June-Sep | June | Sep |
| Dry-Winter | Sep-Dec | Sep | Dec |
| Winter-Warm | Dec-April | Dec | April |
| Summer-Warm | June-April | June | April |

For a detailed understanding of landslide displacement change, the displacement was calculated in X, Y and Z orientations. For Normals diameter in the main parameters section of M3C2 analysis (Figure 17), Normals for the reference cloud (Cloud#1) were calculated using “Normals Compute” in all three orientations. Based on a range of guess parameter (an option which predicts a range of values for the parameters based on the data) values, specific values were assigned to the parameters, such as projection scale and maximum depth. The values for Locations 1 and 3 are shown in Table 10; these values were maintained same for all seasons comparison. The core points are the subsample of reference cloud (cloud#1), where minimum distance between the points was chosen as 10 cm. The registration error calculated in the registration error analysis was included here. The direction of displacement measurement was along the Normals orientation. Apart from the displacement analysis, a significant change was also calculated. Significant change highlights areas in the 3D where the measured change is significant. Usually, change is considered statistically significant if the level of change detection ($LOD_{95\%}$) is smaller than the measured change.

Table 10. M3C2 Displacement Analysis Parameter Values for Locations 1 and 3

| Parameters | Location 1 | Location 3 |
|------------------|------------|------------|
| Normal Scale | 0.5 | 13 |
| Projection Scale | 0.5 | 5 |
| Max Depth | 6 | 9 |
| Subsample | 0.01 | 0.01 |

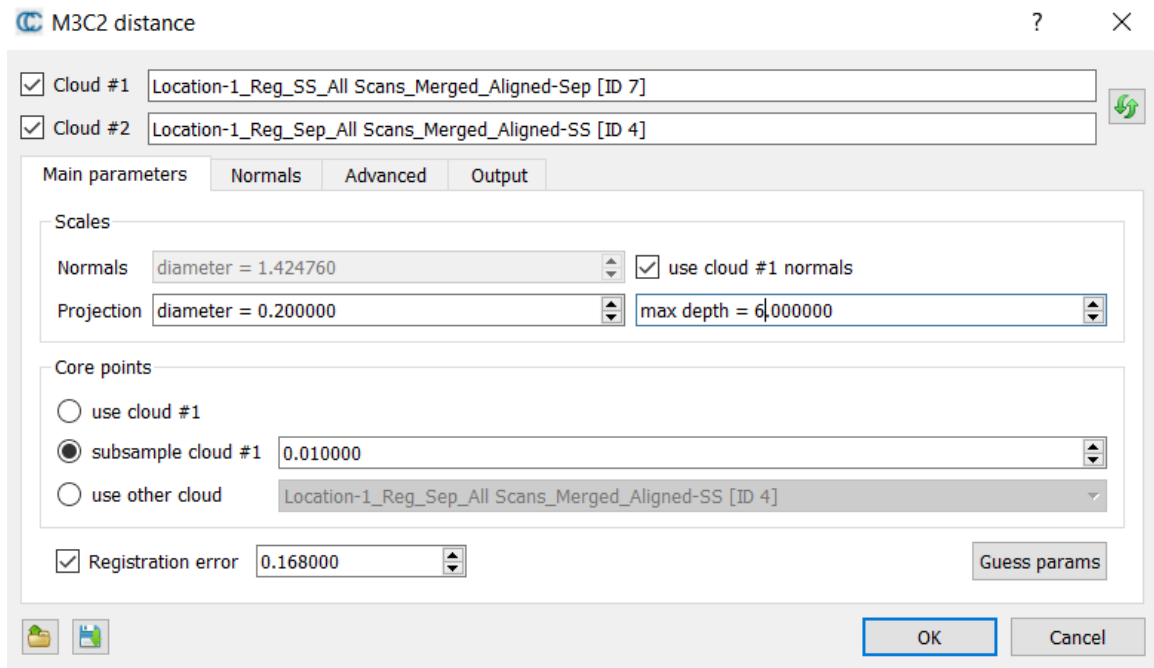


Figure 17. Shows Main Parameters of M3C2 Distance Analysis

3.3 Research Workflow

The Figure 18 below shows the workflow used for this research.

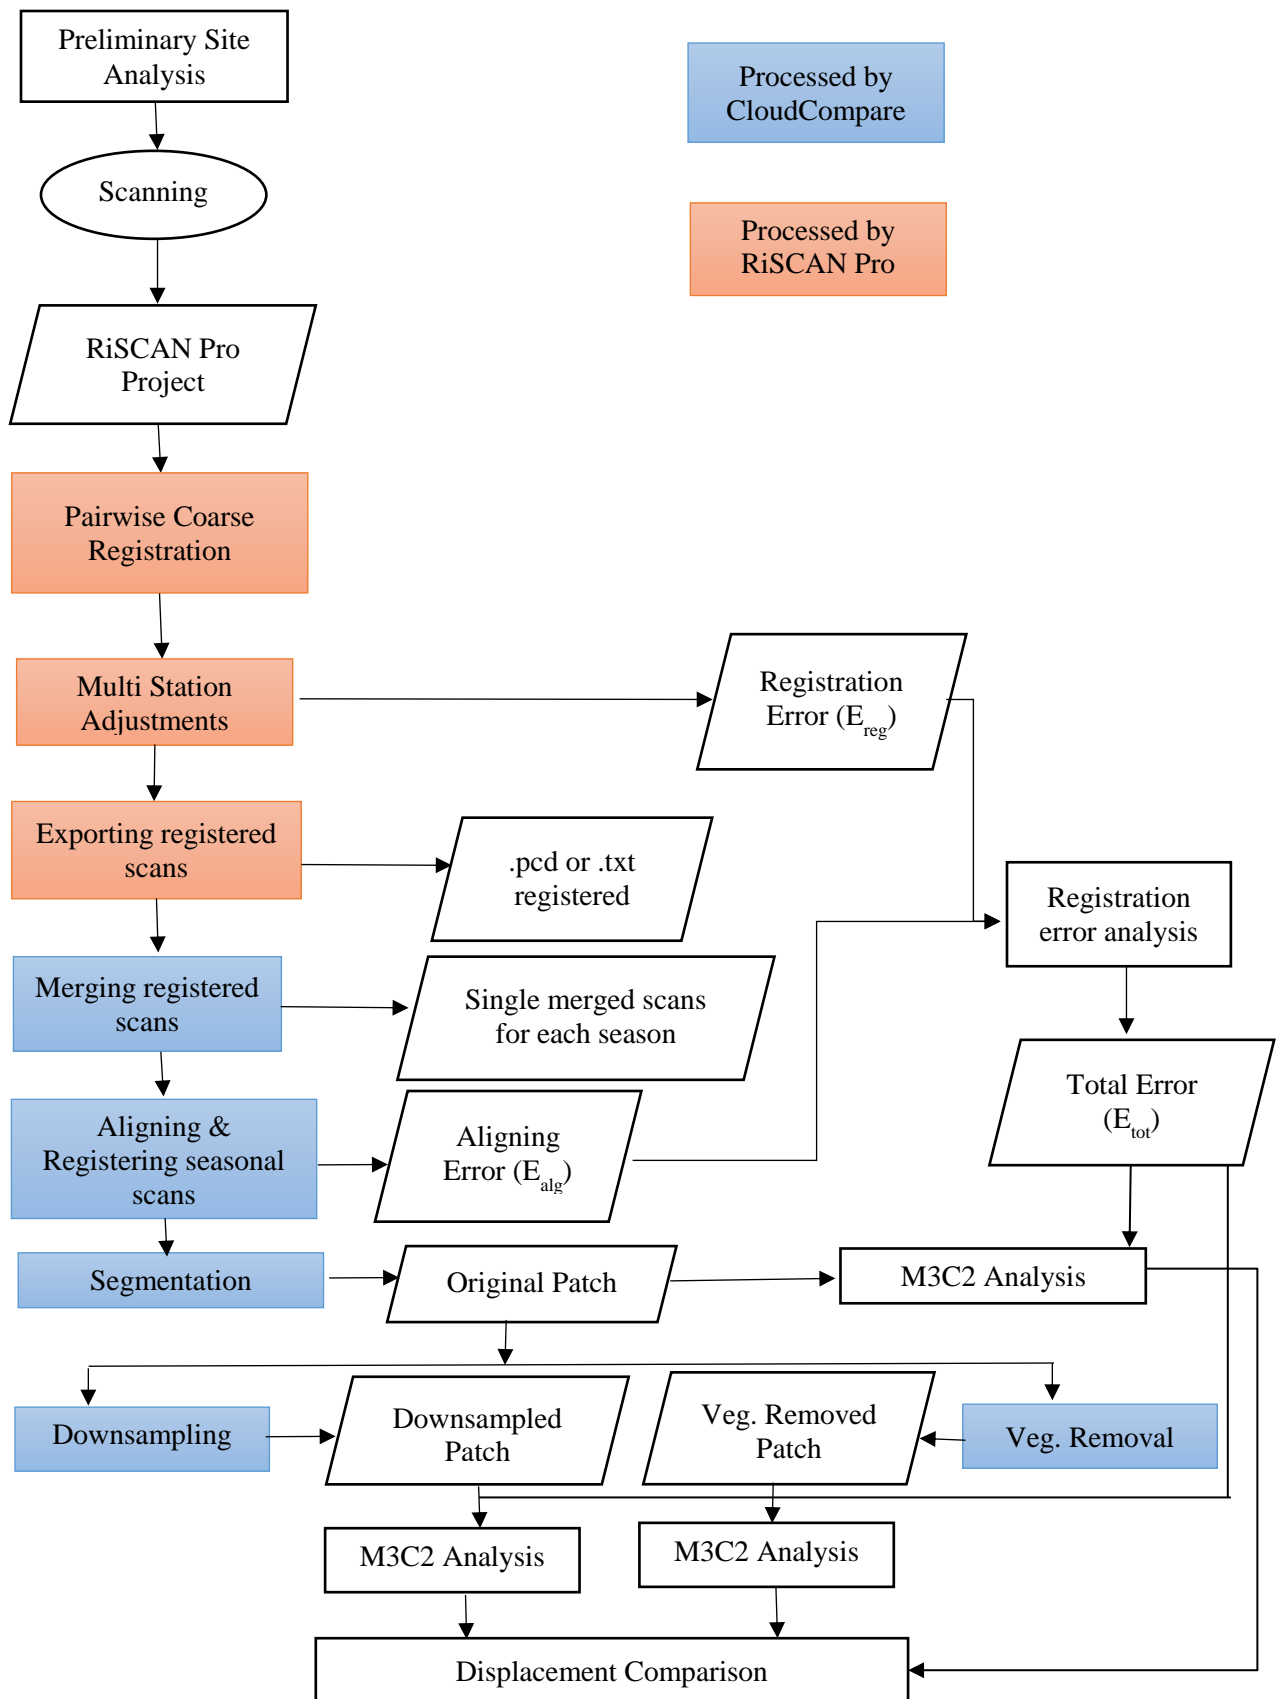


Figure 18. Research Methodology

CHAPTER IV

RESULTS AND DISCUSSIONS

In order to achieve proposed objectives, various experiments were performed on sites described in the previous section. This section presents results of all experiments. As mentioned earlier, this research deals with four locations, namely Locations 0, 1, 2, and 3. Among these locations, Locations 0 and 1 are rock type slopes and Locations 2 and 3 are soil type slopes. For simplicity, results of one rock type slope (Location 1) and one soil type slope (Location 3) are presented in this section.

4.1 Registration Results

As mentioned in the methodology section, RiSCAN Pro software with Multi-Station Adjustment (MSA) plugin was used to register various scan positions for each data collection to obtain a single merged point cloud of the location for each data collection. Along with RiSCAN Pro, other registration algorithms such as Iterative Closest Point (ICP) and Normal Distribution Transformation (NDT) were evaluated on this data. Along with the registration results of these algorithms, a visual comparison was performed on the results of various registration algorithms.

4.1.1 Coarse Registration

Coarse registration is an essential step before applying multi-station adjustments using RiSCAN Pro. Coarse registration is the process of manual alignment of scans by picking corresponding points in two separate scans. Through various experiments, it was observed that the accuracy of coarse registration depends on the closeness of the corresponding points chosen but not on the number of points. A weak correlation of 0.003 was observed between a number of points and the standard deviation of coarse registration. The results of coarse registration are shown below. Figure 19 shows the orientation of two scan positions of Location 1 before and after coarse registration. The number of points used for coarse registration and standard deviation error of coarse registration is shown in Table 11.

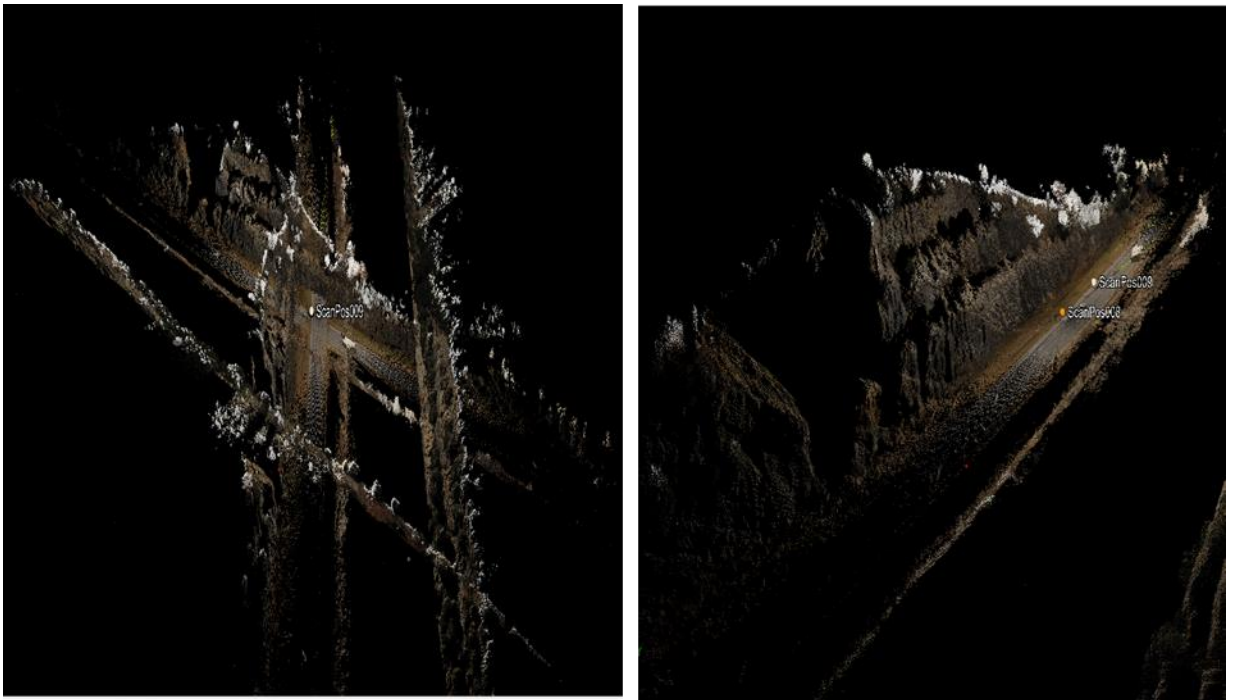


Figure 19. Scans Before (Left) and After (Right) Coarse Registration

From the above figures, it can be observed that coarse registration helps in aligning the scans more or less along the same orientation. Through various experiments and visual comparison, it was

concluded that the accuracy of fine registration depends on the quality of the initial alignment of two point clouds through coarse registration.

Table 11. Number of Point Pairs, Standard Deviation Error for Coarse and Fine Registration for Location 1

| Location 1-June | Number of Point Pairs | Standard Deviation Error | |
|-----------------------------|-----------------------|--------------------------|---------------------------|
| | | Coarse Registration | Multi-Station Adjustments |
| Registration of SP 1-3 | 6 | 0.130 | 0.013 |
| Registration of SP 3-4 | 8 | 0.090 | 0.014 |
| Registration of SP 4-5 | 7 | 0.069 | 0.021 |
| Registration of SP 5-6 | 8 | 0.069 | 0.018 |
| Location 1-September | | | |
| Registration of SP 1-2 | 9 | 0.047 | 0.017 |
| Registration of SP 2-3 | 11 | 0.073 | 0.018 |
| Registration of SP 3-4 | 11 | 0.038 | 0.016 |
| Registration of SP 4-5 | 11 | 0.046 | 0.015 |
| Registration of SP 5-6 | 9 | 0.059 | 0.013 |
| Registration of SP 6-7 | 8 | 0.043 | 0.015 |
| Registration of SP 7-8 | 8 | 0.066 | 0.015 |
| Registration of SP 8-9 | 9 | 0.109 | 0.016 |
| Registration of SP 9-10 | 8 | 0.057 | 0.017 |
| Location 1-December | | | |
| Registration of SP 1-2 | 11 | 0.093 | 0.017 |
| Registration of SP 2-3 | 11 | 0.084 | 0.015 |
| Registration of SP 3-4 | 11 | 0.081 | 0.015 |
| Registration of SP 4-5 | 13 | 0.129 | 0.015 |
| Registration of SP 5-6 | 10 | 0.139 | 0.014 |
| Registration of SP 6-7 | 10 | 0.081 | 0.014 |
| Registration of SP 7-8 | 10 | 0.054 | 0.015 |
| Registration of SP 8-9 | 10 | 0.126 | 0.015 |
| Location 1-April | | | |
| Registration of SP 1-2 | 9 | 0.112 | 0.017 |
| Registration of SP 2-3 | 11 | 0.051 | 0.014 |
| Registration of SP 3-4 | 12 | 0.049 | 0.014 |
| Registration of SP 4-5 | 10 | 0.050 | 0.012 |
| Registration of SP 5-6 | 13 | 0.158 | 0.014 |
| Registration of SP 6-7 | 13 | 0.135 | 0.016 |

4.1.2 Fine Registration

After the coarse registration had been performed, multi-station adjustments were applied to the scans. Multi-station adjustments refine scans and reduce the registration error. A similar procedure was followed for all the locations. For simplicity, only results of Location 1 are presented here. See Appendix for the results of other locations. Figure 20 shows the registration results of both coarse and fine registration for Location 1.

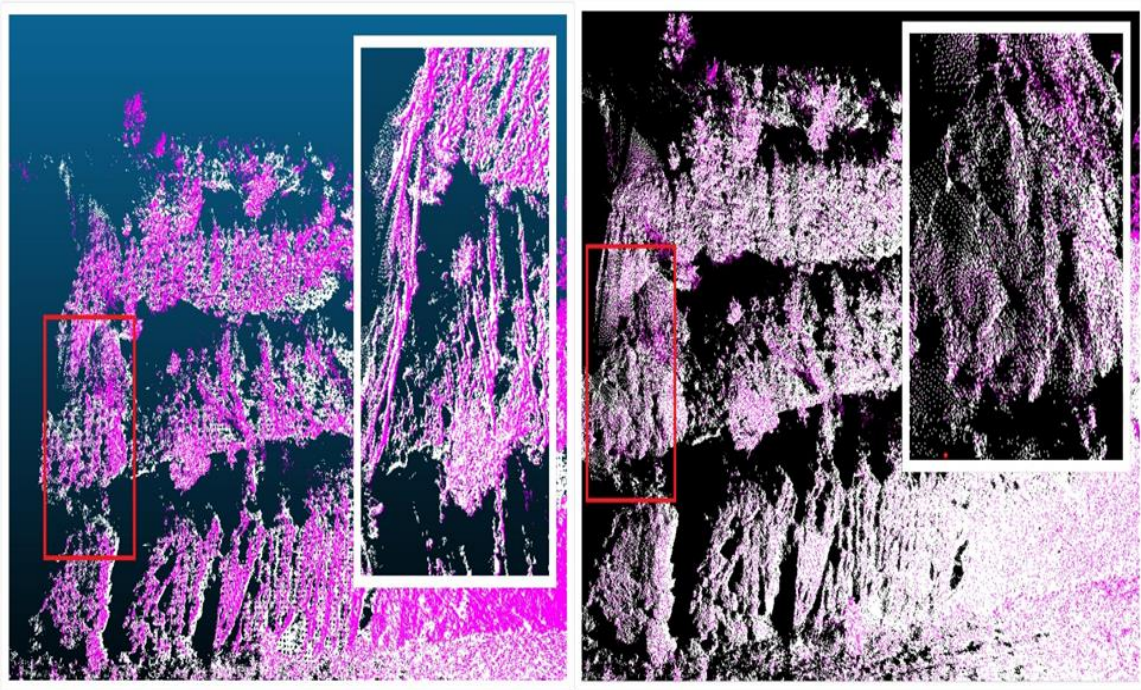


Figure 20. Shows Coarse Registered (on the left) and Fine Registered (on the right) Using RiSCAN Pro for Location 1

From the results, it can be observed that, after the coarse registration, the scans were aligned approximately in the same orientation but are not completely overlapped. After applying multiple iterations of MSA, scans were finely aligned, and error was minimized (see Table 11). It was assumed that the MSA standard deviation error of fewer than 0.02 meters was desirable (Mapping 2013). Table 11 presents point pairs used for coarse registration, error in standard deviation for

coarse registration and MSA. It is to be noted that the standard deviation error of MSA corresponds to the final iteration of MSA.

4.1.3 Evaluation of Other Registration Algorithms

For each data collection, once all the scans were registered they were exported and merged into single scan for each season. For every location, we have four single merged scans, which correspond to four different seasons (summer, dry, winter and warm). In order to measure and compare the displacement change over various seasons, displacement analysis was performed on two scans collected in two different seasons each time. In order to compute the displacement between two scans, two scans have to be aligned and registered. Since RiSCAN Pro doesn't support working with scans from two different projects (i.e. it is not possible to merge two RiSCAN Pro projects), and neither does it support importing single merged scans into the RiSCAN Pro software. So to register scans from different seasons, other registration algorithms such as ICP (using CloudCompare) and Normal Distribution Transformation (NDT) (using Point Cloud Libraries) were evaluated. In order to compare the accuracy of the above-mentioned algorithms, registration was performed on coarse registered scans of Location 1 of June month which were exported from RiSCAN Pro.

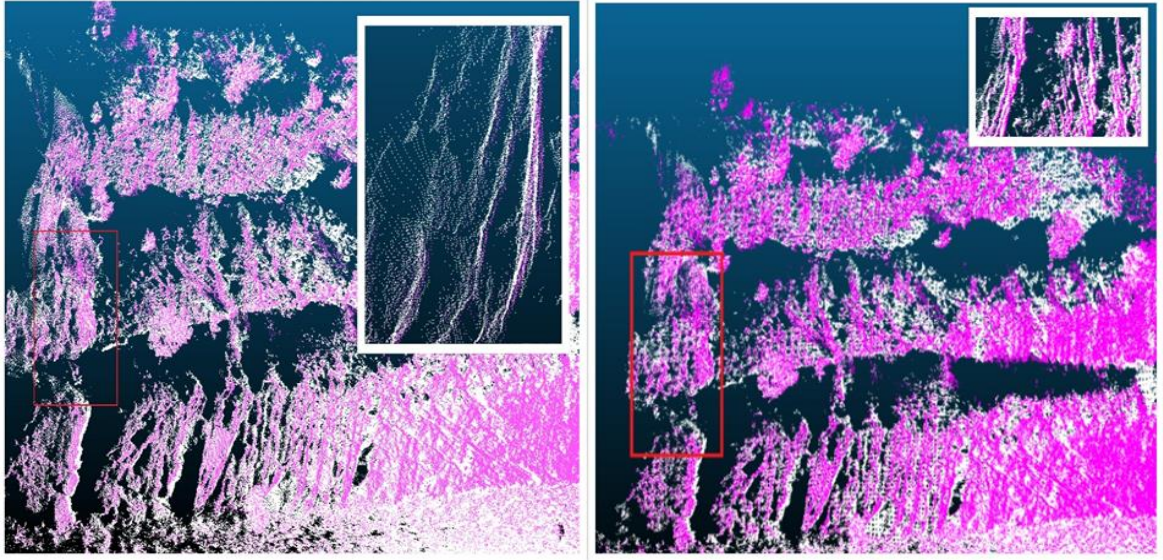


Figure 21. Shows Coarse Registered (on left) and Fine Registered (on right) using ICP (CloudCompare) for Location 1

The RMS (Root Mean Squared) error obtained from the ICP algorithm is much higher compared to the error from MSA. In the case of this example, the error obtained through ICP was 0.853 for 20 iterations whereas in the case of MSA it was 0.015. It was also observed that with an increase in the number of iterations for ICP, the RMS error was increased. This technique was efficient for rock type locations compared to soil type. For Locations 2 and 3, the error was too high, and the scans were not aligned properly through visual check (Figure 22). This was mainly because of the absence of planar features and heavy vegetation.

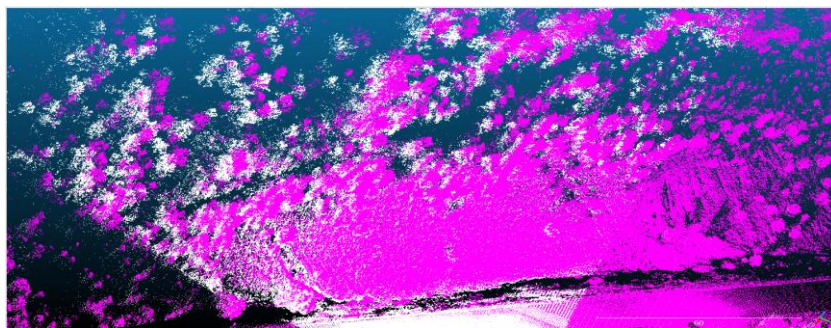


Figure 22. Shows Fine Registered Scans using CloudCompare for Location 3

On applying the NDT algorithm for coarse registered scans, the scans were completely misaligned (Figure 23). Multiple trials were performed, but similar results were obtained. It can be concluded that NDT registration algorithm cannot be used for our data.

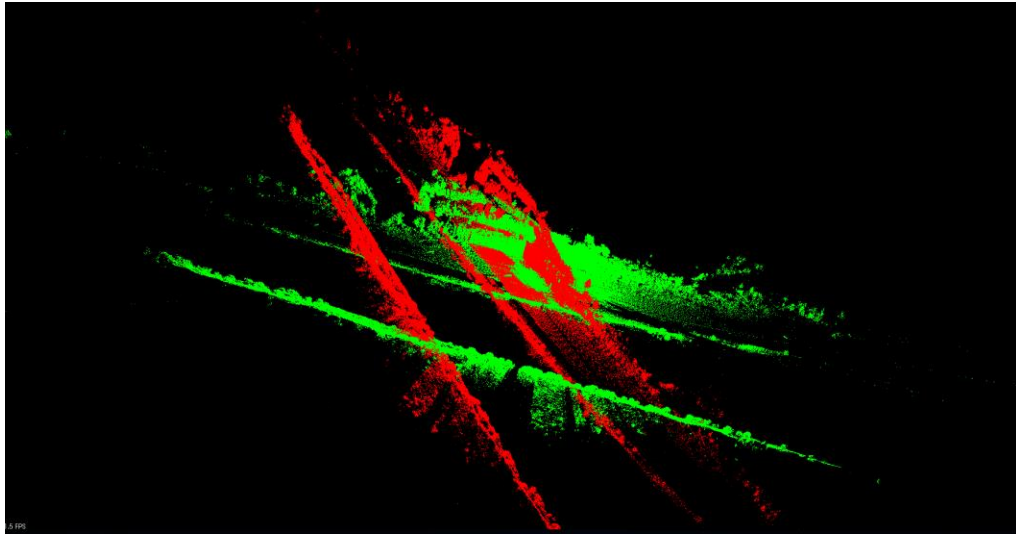


Figure 23. Shows Results of NDT Algorithm

4.1.4 Results Registration Error Analysis

All the registration processes performed above involve errors, which are carried to the point cloud displacement analysis. Therefore, the M3C2 displacement analysis should take registration errors into account. As explained in the Section-3.2.1.5, Equation-1 was used to calculate the total registration error. The major registration errors include registration error due to RiSCAN Pro MSA (standard deviation of MSA iteration-3) and alignment error due to CloudCompare (RMS error during registration of two season scans). Table 12 shows the registration errors for Location 1. A similar analysis was performed for all the other locations. See Appendix for other location results.

Table 12. Registration, Alignment, and Total Errors for Location 1

| Seasons | Registration Error |
|--------------------|---------------------------|
| June | 0.034 |
| September | 0.047 |
| December | 0.042 |
| April | 0.043 |
| | |
| Seasons | Alignment Error |
| June-September | 0.158 |
| September-December | 0.114 |
| December-April | 0.118 |
| June-April | 0.088 |
| | |
| Seasons | Total Error |
| June-September | 0.168 |
| September-December | 0.130 |
| December-April | 0.133 |
| June-April | 0.104 |

As mentioned earlier, alignment error is much higher compared to registration error. The total error obtained through this analysis was used later in the M3C2 analysis.

4.1.5 Technical Challenges and Recommendations for Point Cloud Registration

The following are the major challenges experienced and lessons learnt from the above results and site experiences during registration process.

- Georeferencing was not possible due to the absence of high precision GPS unit for the scanner which prevented us from using reflector based registration. Because of this problem various registration techniques were evaluated to choose the best algorithm that suits this data. Among all the registration techniques, feature-based registration (using plane patch filter in MSA) was effective. But this algorithm was not majorly successful in the case of locations with soil slopes; this was due to the presence of fewer planar surfaces and heavy vegetation. In order to prevent the above-mentioned situation, a preliminary site

analysis is required before the start of scanning. This analysis helps in identifying various features available on site and helps in choosing the registration algorithm to be used for future data processing.

- From the Table 7, it can be observed that, for Locations 2 and 3, few scan positions were used in registration. This was because the signboards that were used for coarse registration were not properly scanned from those scan positions. The reason for this problem was that the sign boards are either not in the visible range of the scanner or occluded by traffic, the antenna of the equipment, or humans. This problem can be solved by choosing scan positions considering various factors such as distance, orientation from the reflectors/targets/planar surfaces. The study avoided disturbances at the time of scanning and visually verify the scan at the end of scanning for each scan position.
- In some cases, it was observed that the registration was poor (scans were completely misaligned) despite very low error values. This was purely random. Therefore, a visual “sanity check” is very important after every registration step.
- Due to the lack of full license for RiSCAN Pro, various tools had to be used for different processes. Using multiple tools may result in the following problems: losing the data, time-consuming and file format incompatibilities. A decision on the processing tools should be made in the preliminary site analysis stage based on the site characteristics and available resources.
- Even though there was no GPS unit, reflectors were used during the scanning process in order to use reflectors for coarse registration. But it was not unsuccessful; this is because the reflectors were not scanned completed or they were not clearly visible. The reasons were due to incorrect selection of reflectors and choice of wrong reflector positions on site. A visual check for initial scans is required.

- The values for the parameters of plane patch filter and MSA are obtained through trial and error which is a challenging task.

4.2 Results of M3C2 Analysis

One of the major objectives of this research study is to analyze the displacement change of slope during various seasons. Registered scans obtained from the registration step were used for this analysis. In order to obtain more accurate results and a good understanding of displacement change, the analysis was performed only on the portion of the slope which was more susceptible to landslide. The M3C2 analysis was also performed on vegetation removed data (vegetation removed patch) and downsampled data (downsampled patch) to understand the impact of vegetation removal and downsampling. The results of the M3C2 analysis are presented in this section. For simplicity, the M3C2 analysis results of Location 1 and 3 are discussed in the later sections.

4.2.1 M3C2 Analysis on Original Patch

The data for analysis are in scanner's coordinate system. According to the scanner's coordinate system, Y- Axis represents the horizontal component, Z-Axis as a vertical component, and X-Axis acts as a depth component. In order to obtain a detailed understanding of displacement change, the M3C2 analysis was performed on reference data along X, Y and Z Normals orientation. The analysis was performed between scans each time, where one is considered as reference and other as a model. The distance is always measured from reference to the model. M3C2 analysis for Location 1 was performed using the values of the parameters mentioned in Table 10. The analysis results of Location 1 are shown below. The M3C2 analysis also includes significant change in scalar field which represents the significance of displacement change. In the significant change result, the red color portion corresponds to statistically significant change, and gray color corresponds to insignificant change. The displacement change was presented with a blue-to-red heat map. The negative values of M3C2 distance were shown in blue and positive values in red. In

order to identify the slope movement at centimeter level, the scale of M3C2 distance was adjusted between 5 and 10 cm. In addition, Gaussian Statistics were also calculated for each analysis.

4.2.1.1 M3C2 Analysis of June and September Scans

The analysis was performed on the June (Summer) and September (Dry) seasons data, where the June scan was considered as reference and the September scan was considered as a model. The results of this analysis are presented along X, Y and Z orientations (Figures 25, 26, 27). The significant change remains same along all orientations (Figure 24).

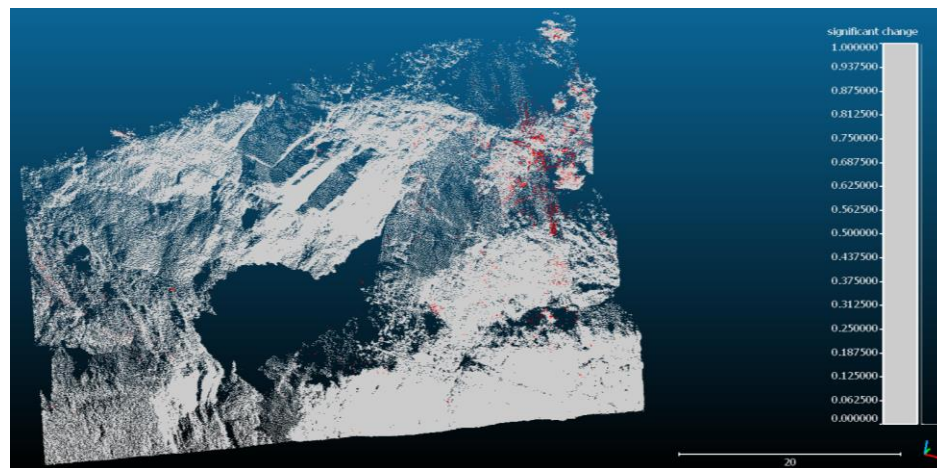


Figure 24. Significance of Change for June – September Scans

From Figure 24 it can be observed that only a small portion on the top right has a significant change. The change was approximately 0.55 meters. This is partly due to vegetation available in that portion. It was also observed that most of the displacement is insignificant, which is due to large registration error in the data in relation to the magnitude of displacement obtained. After tweaking the parameter of registration error in the M3C2 analysis for multiple times, it was concluded that by lowering the registration error, more portions of the slope would show significant change.

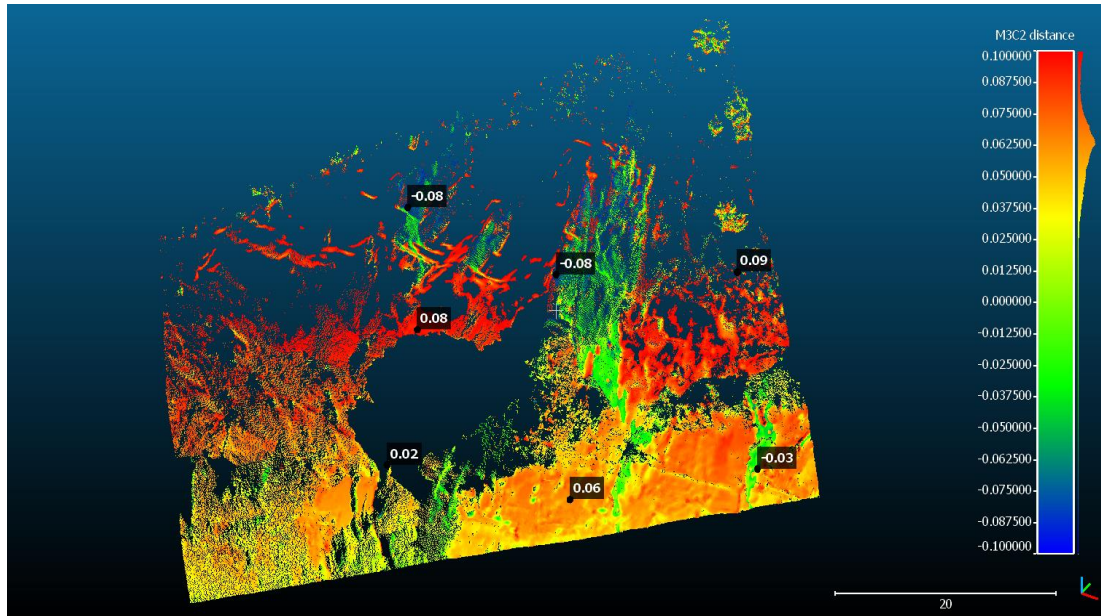


Figure 25. Displacement Heat Map of June - September Scans for Location 1 Along X-Axis with Scale of 10cm

A mean change of 0.055 meters with a standard deviation of 0.03 was obtained along the X-Axis. The positive value of displacement along the X-Axis may be interpreted as a swelling in those portions.

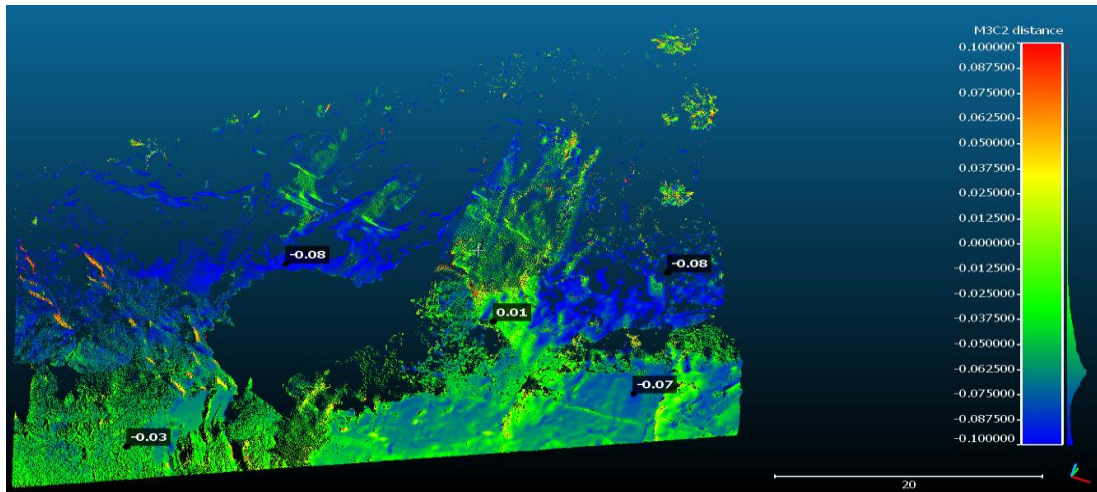


Figure 26. Displacement Heat Map of June - September Scans for Location 1 Along Y-Axis with a Scale of 10cm

A mean change of -0.057 meters with a 0.024 standard deviation along Y-Axis. The negative value of displacement along the Y-Axis represents the movement in the horizontal direction.

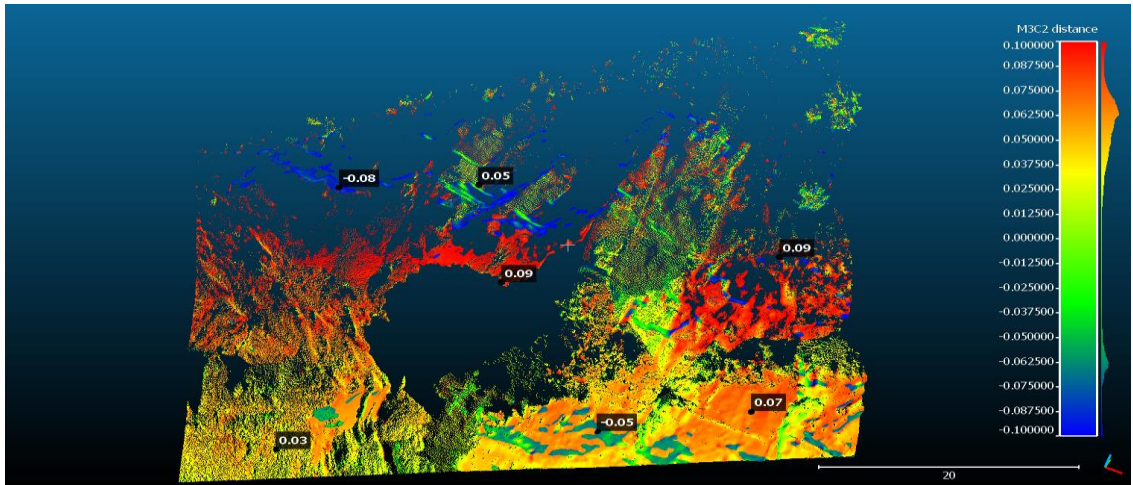


Figure 27. Displacement Heat Map of June - September Scans for Location 1 Along Z-Axis with a Scale of 10cm

A mean change of 0.033 meters with 0.053 standard deviation along the Z-Axis is observed. The positive value of displacement along the Z-Axis represents the movement in the vertical direction.

4.2.1.2 Comparison of Displacement Change Over Various Seasons

Similarly, the M3C2 analysis was performed on June-September, September-December and December-April scans and results are shown in the Appendix. Table 13 shows mean and standard deviation results of each analysis for Location 1.

Table 13. Shows Statistics of M3C2 Analysis of All Seasons for Location 1

| Seasons | X-Axis | | Y-Axis | | Z-Axis | |
|---------------------------|--------|-------|--------|-------|--------|-------|
| | Mean | SD | Mean | SD | Mean | SD |
| June-September | 0.055 | 0.030 | -0.057 | 0.024 | 0.033 | 0.053 |
| September-December | 0.005 | 0.014 | 0.008 | 0.013 | -0.007 | 0.013 |
| December-April | -0.017 | 0.023 | -0.025 | 0.012 | 0.021 | 0.019 |
| June-April | -0.019 | 0.026 | -0.026 | 0.020 | 0.021 | 0.025 |

From Figure 28, it can be observed that the major change in distance was observed between June and September scans. The least change was observed between September and December. Even though there was a change, the change was not significant. This is due to higher registration error, and the relatively smaller mean distance between scans.

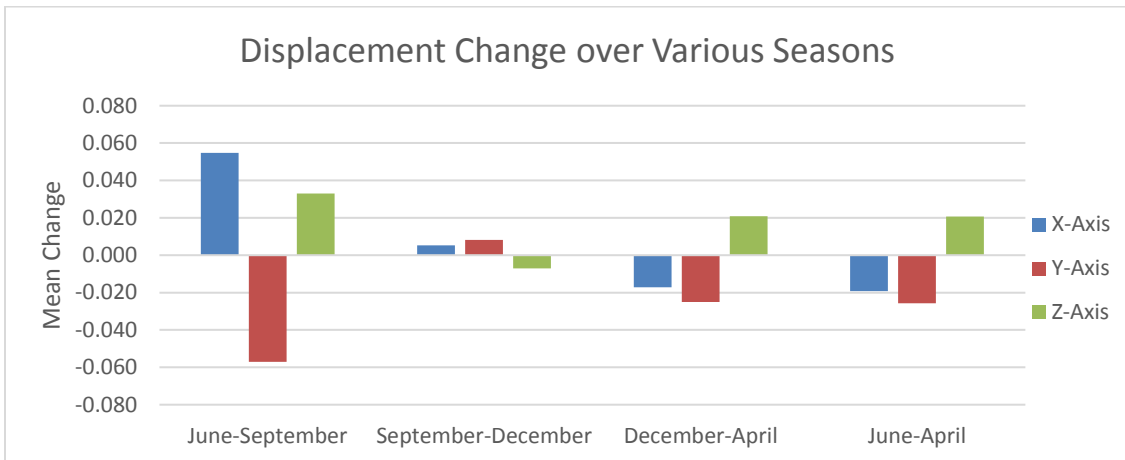


Figure 28. Displacement Change Over Different Seasons

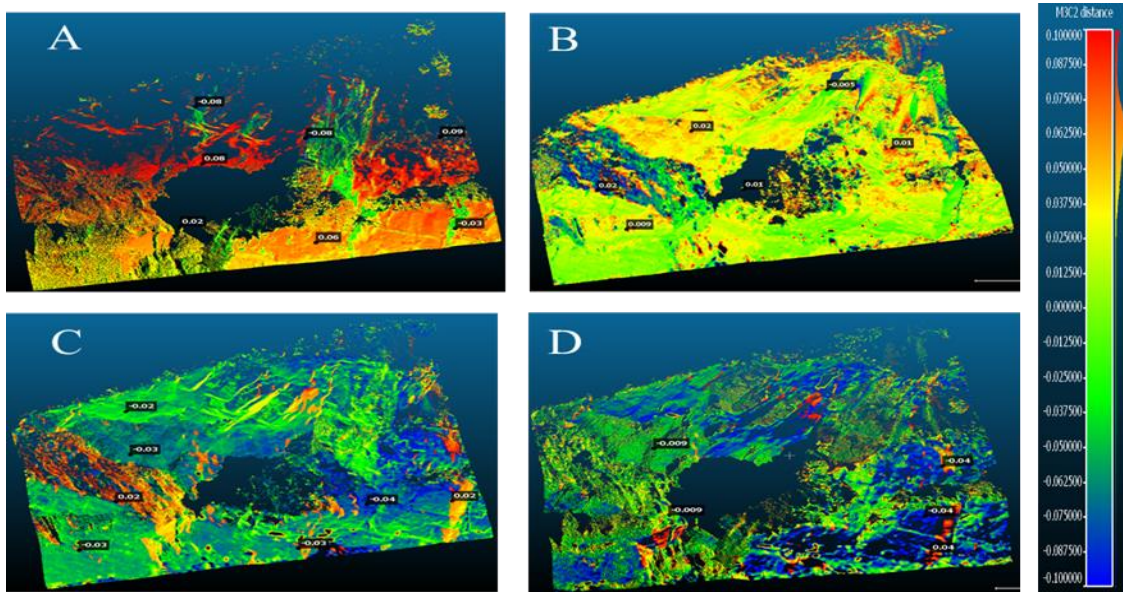


Figure 29. Displacement Heat Map for Location 1 Along X-Axis for Various Seasons (Scale-10cm)

A. June-September B. September-December C. December-April D. June-April

Note: The values in each heat map represents the displacement change (i.e. M3C2 distance) at that point.

4.3 M3C2 Analysis on Soil Type Location (Location 3)

Due to the presence of heavy vegetation and fewer planar surfaces, it was very difficult to register two different season scans for Location 3. Compared to other seasons, better results were obtained for June and September scans with an error of 0.75. By considering this error, the M3C2 analysis was performed on the June and September scans, and the results are shown below (Figure 30). From the results, it can be concluded that most of the displacement change measured was not significant (Figure 30). This is because of the presence of trees and a thick layer of grass on the surface. Several attempts were made to remove the vegetation, but the CANUPO algorithm didn't provide effective results for Location 3 compared to Location 1. This is due to the presence of a thick layer of grass; no land portion was classified. Vegetation classification results of both locations are shown below (Figure 31). But the author was not able to perform any meaningful analysis on other seasons' data because of large registration error.

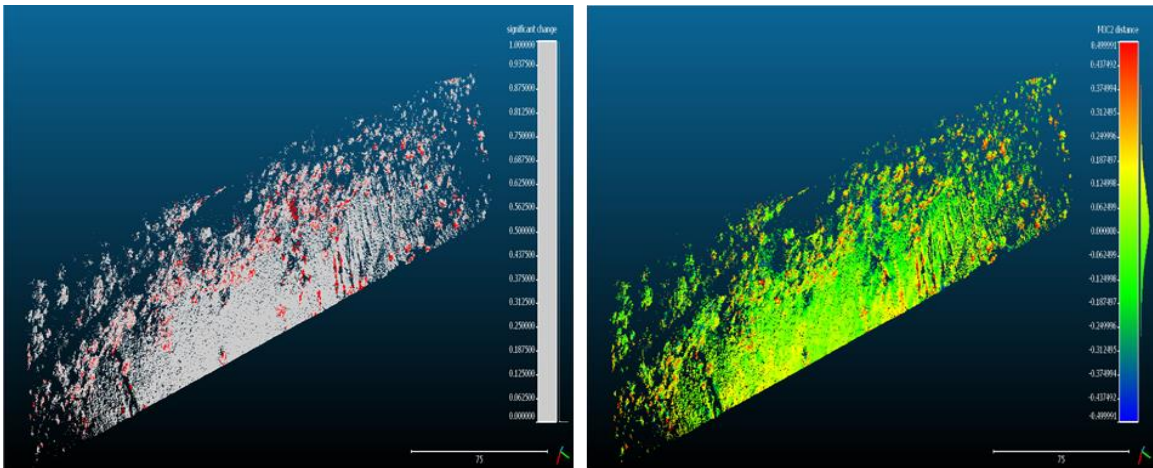


Figure 30. Significant Change (Left) and Displacement Heat Map (Right) for June and September Scans of Location 3

The above-shown heat map (Figure 30) is the result of M3C2 analysis with Normals oriented along the X-Axis. A mean change of 0.028 meters with a standard deviation of 0.156 was observed along the X-Axis. The significant change (red portion) shown in the above Figure 30 is due to the vegetation. So the change is not considered as significant, and results in the change in other orientations are not shown here.

4.3.1 CANUPO Vegetation Classification on Location 1 & 3

From the Figure 31, it can be observed that for Location 1 the land portion and vegetation were classified perfectly. Whereas for Location 3 even the vegetation was classified as land. The impacts of vegetation removal are discussed in the later section.

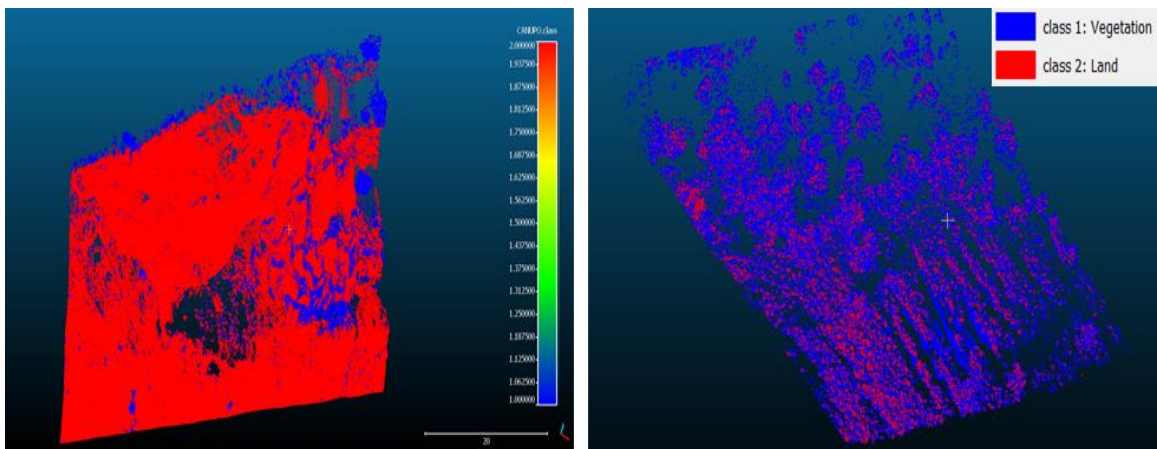


Figure 31. Vegetation and Land Classification of Location 1 (Left) and Location 3 (Right)

4.4 Impact of Vegetation Removal on M3C2 Analysis

In order to study the impact of vegetation removal on the M3C2 analysis results, the vegetation removal was applied to Location 1. The results of original and vegetated removed data were compared. The figure shows significant change analysis results and displacement heat map for the both original and vegetation removed data.

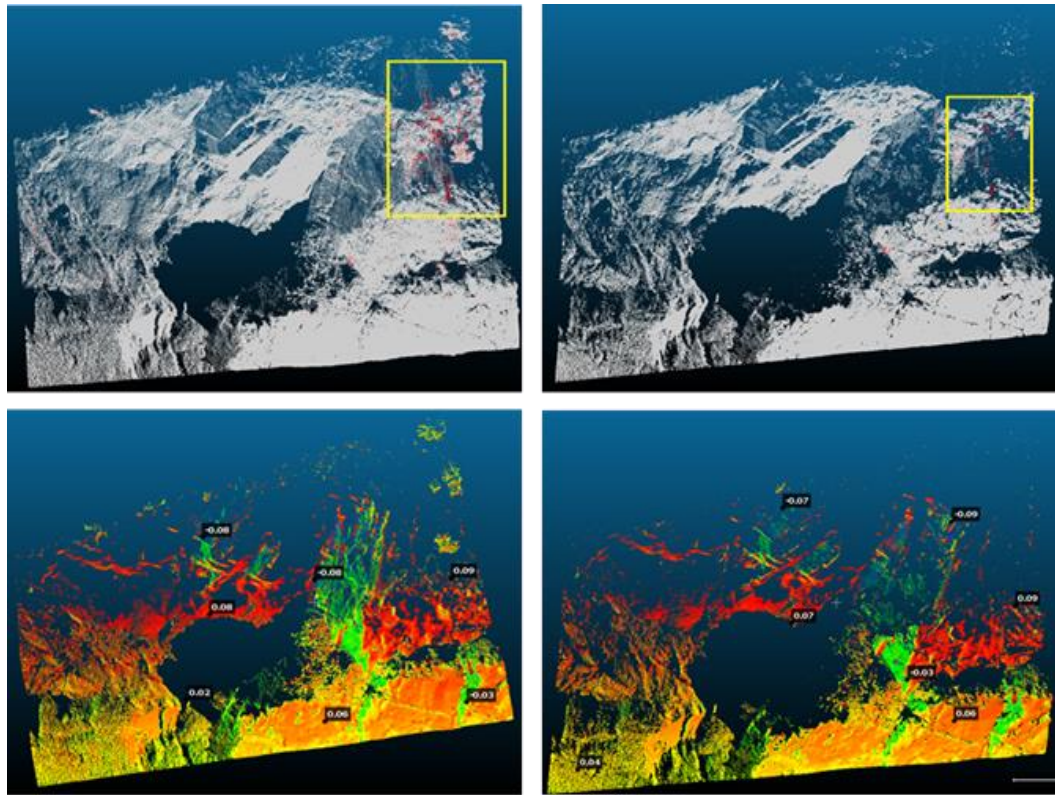


Figure 32. Significant Change (Top) and Displacement Heat Map (Bottom) of Original Patch (Left) and Vegetation Removed Patch (Right)

From the above figure, it can be concluded that there is not much change in the displacement heat map and also the Gaussian Statistics are almost similar in the case of Location 1. But change can be observed in the significant change result. The significant change is represented in red; it can be observed that there is a less red portion in the vegetation removed patch compared to original patch. The smaller red portion is due to the removal of change because of vegetation. In other words, the noise due to the vegetation in the significant change analysis was removed after vegetation removal. The significant change obtained in the case of vegetation removed data is a better representation of change. Whereas in the case of Location 3, if vegetation removal is achieved, there might be considerable difference both in significant change analysis and statistical results.

4.5 Impact of Downsampling on M3C2 Analysis

The impact of downsampling was studied on Location 1. The results of M3C2 on original and downsampled data are shown in Figure 33. The downsampling was performed on the data based on the spacing between the points using CloudCompare. The mean of the M3C2 distance of original data was 0.055 meters whereas for the downsampled data was 0.0183 meters. From this, it can conclude that downsampling affects statistical results of the analysis. Usually, downsampling is preferred when the data size is large. If downsampling is performed on smaller size data, the results would be similar to the one shown in Figure 33. The downsampled results on smaller size data are too sparse and hardly possible for visualization.

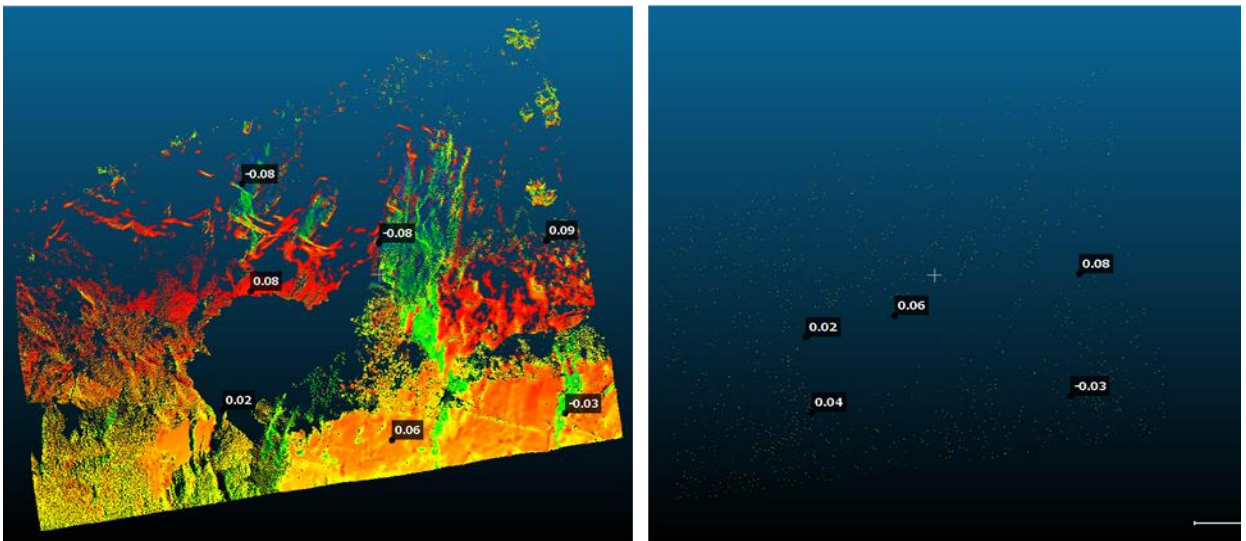


Figure 33. Displacement Heat Maps of Original (Left) and Downsampled (Right) Patch

4.6 Technical Challenges and Recommendations for M3C2 Analysis

The following are the major challenges experienced, and lessons learned from the above results and site experiences during displacement change analysis.

- The most important step before applying M3C2 analysis is registration of scans collected in two different seasons. The global registration error must be as minimum as possible to

obtain accurate displacement results. Large portions of significant slope change were not able to be detected at 95% confidence level because of high registration errors. The registration error was relatively higher for Locations 2 and 3 compared to Locations 1 and 2. This is due to the absence of planar surfaces and presence of thick vegetation in Locations 2 and 3. In order to overcome the registration challenge, suitable reflectors have to be used which improves the registration.

- The M3C2 analysis was performed on Location 3 for the June and September scans, but it was not possible with the data collected during other seasons because of poor registration results. Better registration was possible in case of June and September scans because ICP algorithm was applied twice. Once for the whole scene after coarse registration, and later for a patch of the mountain considered for analysis. When tried to repeat the similar procedure for other seasons, the results were neither consistent nor desirable.
- The presence of a thick layer of grass resulted in poor M3C2 results for Location 3. In the case of rock type location, the CANUPO algorithm worked very well since there was no layer of grass. Whereas in the case of soil slope (Location 3), the algorithm yielded only few ground points. The alternative algorithm has to be implemented which is not the scope of this study.
- Mean change of the displacement analysis cannot be used as the only measure for slope over various seasons because the total registration error has an effect on the analysis. Therefore, both displacement heat maps and significant change analysis have to be jointly evaluated to get a clear picture of the slope change.

4.7 Generalized Workflow

Previous studies have used different workflows to apply terrestrial laser scanning technology to landslide monitoring. Basically, application of this technology needs to be customized, i.e., different tasks of processing are determined based on the characteristics of the site. Based on the

above analysis, a generalized workflow was developed for the application of laser scanning technology to measure the slope change for the sake of assessing the risk of landslide. The most important step of the generalized workflow is preliminary site analysis; this is performed to obtain travel plan to locations, labor required, and a list of scanning and safety equipment. Apart from these, some of the features such as planar surfaces, reflecting objects of the site are analyzed which can be used to decide on registration algorithm used later to process the data. For this step, Google maps, Google earth, site specifications and pictures can be used. Moreover, personal trips to the sites need to be made. One of the major steps of the generalized framework is visual check (VC). In visual check-1 the original patch is verified for the registration, alignment, and vegetation. If there is thick vegetation or data is large in size, the data should go through a downsampling or vegetation removal process. After the data is processed with downsampling or vegetation removal, the data is visually checked (VC-2) to confirm whether vegetation is removed or not. Then, the processed data is subjected to M3C2 analysis. If VC-2 is failed, then the original patch has to retreat with the other algorithms and process is repeated.

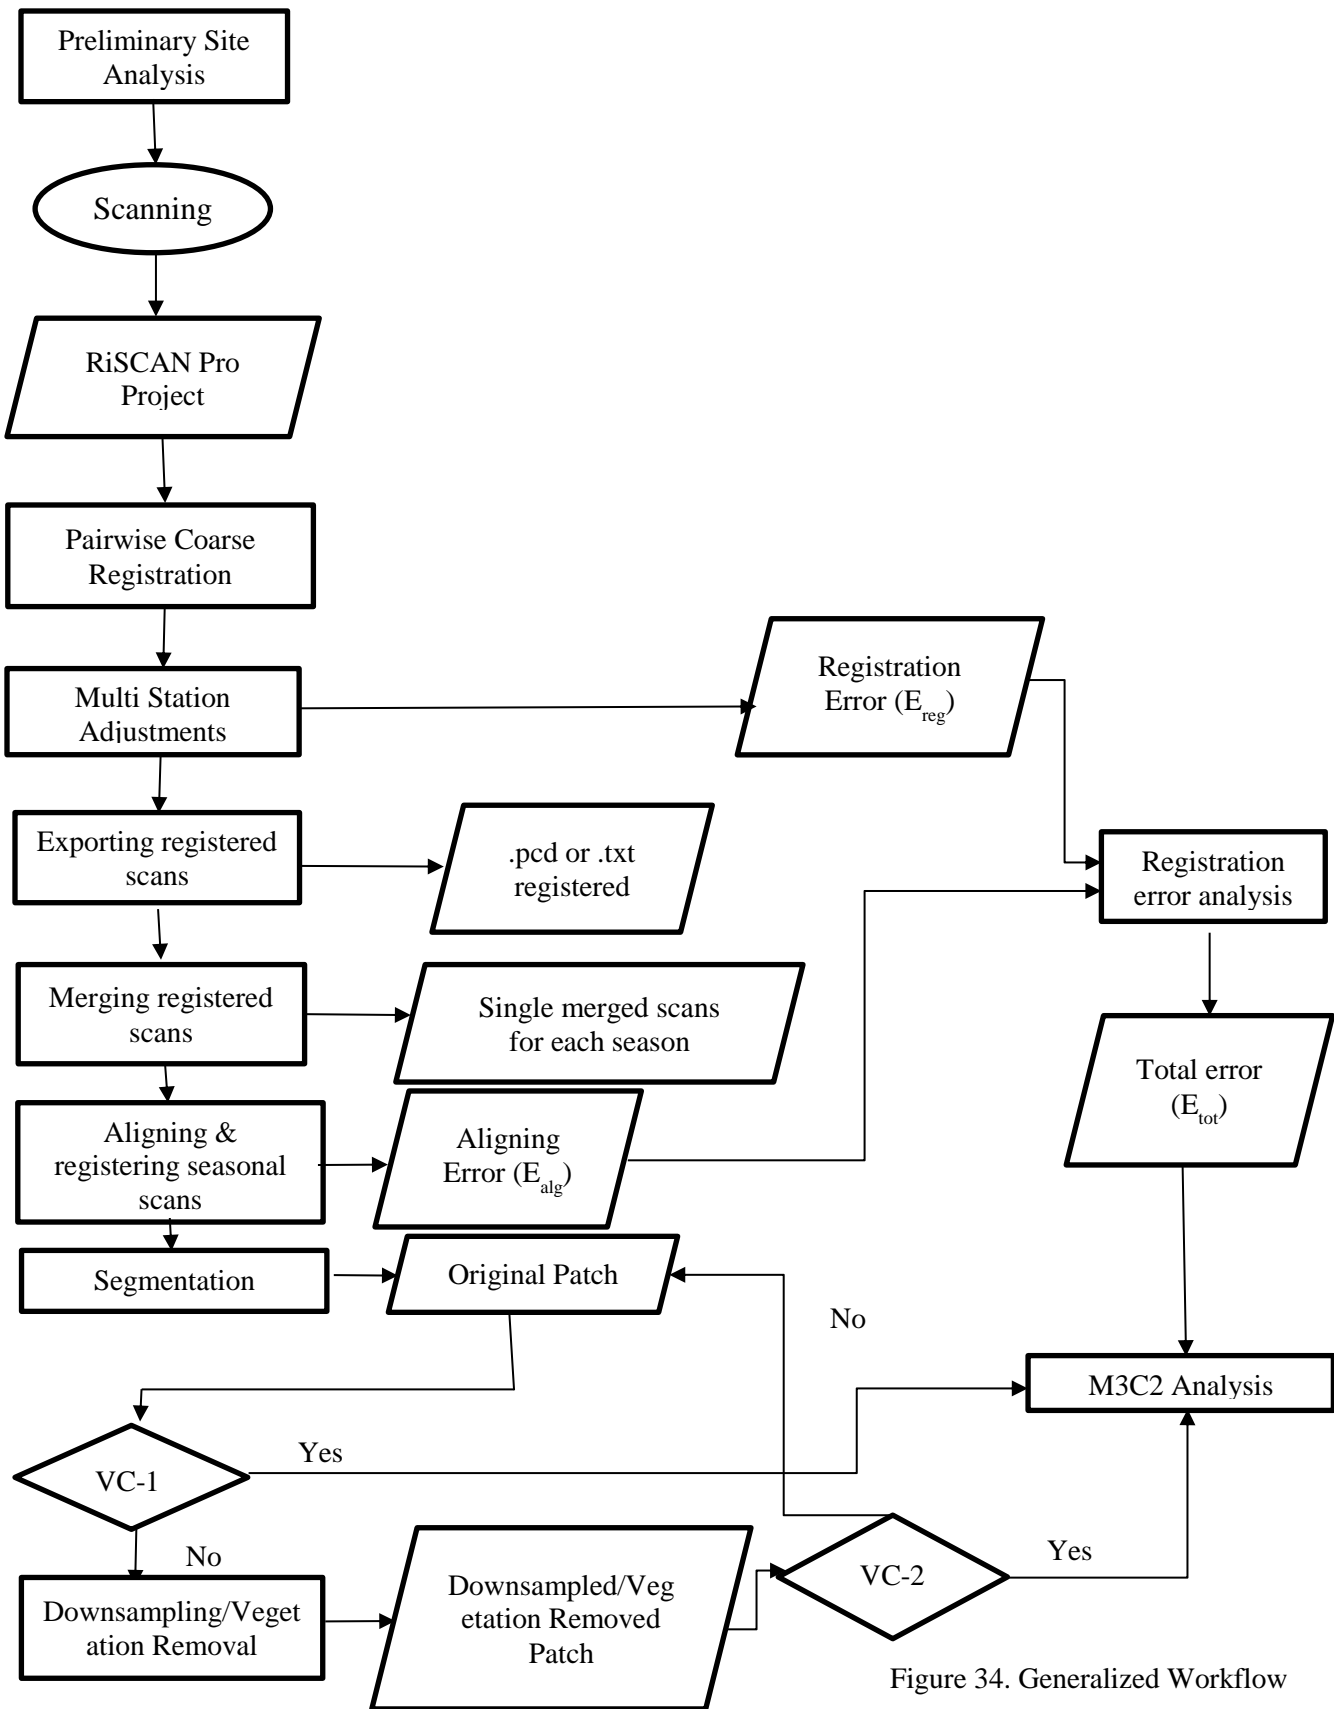


Figure 34. Generalized Workflow

CHAPTER V

CONCLUSION

This research has studied the use of terrestrial laser scanning to monitor the landslide movement on the Oklahoma highways in the mountainous region. Through this study, a generalized workflow to apply terrestrial laser scanning technology to landslide monitoring on highways was developed, which can be applied to any site. During the process of developing a generalized framework, various data processing steps such as registration, displacement analysis were evaluated. It can be concluded from the study that the registration algorithm has to be decided during the preliminary site analysis step based on the features (such as planar surfaces, reflecting objects) available on site. From the above registration algorithm evaluation analysis, it was observed that Multi-Station adjustment (MSA) with plane patch filter produced best results for a location (e.g. Locations 0 & 1) with more planar surfaces. In the case of Locations 2 and 3 MSA results were not effective compared to results of Location 0 and 1, but they were better compared to the results of ICP or NDT algorithms. This is because of the presence of less number of planar surfaces and thick vegetation. It is also observed from this study that we cannot solely rely on the statistical results and the visual check is very important at every stage of data processing. For example, in the case of ICP registration even though the RMS error is very small, the scans were completely misaligned. For Locations 2 and 3, registration of two different scans obtained in different seasons using the

ICP algorithm was difficult due to the presence of vegetation and a layer of thick grass on the surface.

The M3C2 analysis provided a detailed understanding of the displacement change of the landslide. For Location 1, there was a high displacement change during June-September when compared to other seasons. But it was observed that the change observed was not significant because of a larger registration error. Whereas for soil type (Location 3) landslides, the displacement results were not meaningful. This is due to the presence of a thick layer of grasses and trees on the surface. Several attempts were made to filter vegetation, but it yielded very few ground points. Unfiltered data was used, and the displacement results were not significant, which is one of the limitations of this study.

The impact of vegetation removal on displacement analysis proved that the results were improved due to the vegetation removal. Due to the vegetation removal, the change observed due to vegetation noise was removed. Because of which more accurate a significant change was observed. Through this study, it is recommended that a visual check is required after the vegetation removal to make sure that all land portion of the data is retained or not. The study of downsampling impact on the displacement analysis proved that the statistical results of displacement vary greatly due to downsampling. Therefore, it is recommended that downsampling should only be performed on large data sets.

Since the slope is not statistically significant over the period of this research study, a single year of monitoring is not sufficient to assess the risk of landslide/rockslide. These sites have to be continuously monitored for a few years. In addition, the displacement analysis should be used in conjunction with geological characteristics of the site to assess the risk of landslides/rockslides

This generalized framework and challenges reported by this study will help the Department of Transportation (DOT) to apply laser scanning technology to monitor and assess the landslide risk on highways more effectively. Various challenges reported through this study not only helps in

understanding the feasibility of this technology for monitoring landslides on highways but also directs researchers to address these issues.

The future work of this study includes the use of GPS units for registration and compares the registration errors with the current process. There is a need for a robust algorithm for the registration of scans with no planar surfaces. In addition, there is need to develop a tool using the proposed generalized workflow which can help in the real-time processing of the data.

REFERENCES

- Aguilar, F. J., Mills, J. P., Delgado, J., Aguilar, M. A., Negreiros, J., and Pérez, J. L. (2010). "Modelling vertical error in LiDAR-derived digital elevation models." *ISPRS Journal of Photogrammetry and Remote Sensing*, 65(1), 103-110.
- Al-Durgham, K., Habib, A., and Kwak, E. "RANSAC approach for automated registration of terrestrial laser scans using linear features." *Proc., ISPRS Annals of Photogrammetry, Remote Sensing and Spatial Information Sciences: ISPRS Workshop Laser Scanning 2013*, 11-13.
- Amy B. Cerato, P. D., P.E. , Yang Hong, P. D., He, X. Y. X., and Tabe, W. (2014). "Real Time Monitoring of Slope Stability in Eastern Oklahoma." Oklahoma Department of Transportation
- Bae, K.-H., and Lichti, D. D. (2008). "A method for automated registration of unorganized point clouds." *ISPRS Journal of Photogrammetry and Remote Sensing*, 63(1), 36-54.
- Bates, R. L., and Jackson, J. A. "1987." *Glossary of geology (third edition): Alexandria, Virginia, American Geological Institute.*

- Abellán, A., Vilaplana, J., and Martínez, J. (2006). "Application of a long-range Terrestrial Laser Scanner to a detailed rockfall study at Vall de Núria (Eastern Pyrenees, Spain)." *Engineering geology*, 88(3), 136-148.
- Aguilar, F. J., Mills, J. P., Delgado, J., Aguilar, M. A., Negreiros, J., and Pérez, J. L. (2010). "Modelling vertical error in LiDAR-derived digital elevation models." *ISPRS Journal of Photogrammetry and Remote Sensing*, 65(1), 103-110.
- Al-Durgham, K., Habib, A., and Kwak, E. "RANSAC approach for automated registration of terrestrial laser scans using linear features." *Proc., ISPRS Annals of Photogrammetry, Remote Sensing and Spatial Information Sciences: ISPRS Workshop Laser Scanning 2013*, 11-13.
- Amy B. Cerato, P. D., P.E. , Yang Hong, P. D., He, X. Y. X., and Tabe, W. (2014). "Real Time Monitoring of Slope Stability in Eastern Oklahoma." Oklahoma Department of Transportation
- Bae, K.-H., and Lichti, D. D. (2008). "A method for automated registration of unorganised point clouds." *ISPRS Journal of Photogrammetry and Remote Sensing*, 63(1), 36-54.
- Baldo, M., Biccocchi, C., Chiochini, U., Giordan, D., and Lollino, G. (2009). "LIDAR monitoring of mass wasting processes: The Radicofani landslide, Province of Siena, Central Italy." *Geomorphology*, 105(3), 193-201.
- Bates, R. L., and Jackson, J. A. "1987." *Glossary of geology (third edition): Alexandria, Virginia, American Geological Institute.*
- Becerik-Gerber, B., Jazizadeh, F., Kavulya, G., and Calis, G. (2011). "Assessment of target types and layouts in 3D laser scanning for registration accuracy." *Automation in Construction*, 20(5), 649-658.
- Beinat, A., Crosilla, F., and Sepic, F. (2006). "Automatic morphological pre-alignment and global hybrid registration of close range images." *International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, 36(part 5), 25-27.

- Beinat, A., Crosilla, F., Visintini, D., and Sepic, F. (2007). "Automatic non parametric procedures for terrestrial laser point clouds processing." *International Archives of Photogrammetry, Remote Sensing and Spatial Information Sciences*, 36(3), W49B.
- Besl, P. J., and McKay, N. D. "Method for registration of 3-D shapes." *Proc., Robotics-DL tentative*, International Society for Optics and Photonics, 586-606.
- Boström, G., Gonçalves, J. G., and Sequeira, V. (2008). "Controlled 3D data fusion using error-bounds." *ISPRS Journal of Photogrammetry and Remote Sensing*, 63(1), 55-67.
- Brodu, N., and Lague, D. (2012). "3D terrestrial lidar data classification of complex natural scenes using a multi-scale dimensionality criterion: Applications in geomorphology." *ISPRS Journal of Photogrammetry and Remote Sensing*, 68, 121-134.
- Canaz, S. (2012). "Planar and linear feature-based registration of terrestrial laser scans with minimum overlap using photogrammetric data." University of Calgary.
- Casson, B., Delacourt, C., and Allemand, P. (2005). "Contribution of multi-temporal remote sensing images to characterize landslide slip surface? Application to the La Clapière landslide (France)." *Natural Hazards and Earth System Science*, 5(3), 425-437.
- Chan, T. O., Lichti, D. D., and Glennie, C. L. (2013). "Multi-feature based boresight self-calibration of a terrestrial mobile mapping system." *ISPRS journal of photogrammetry and remote sensing*, 82, 112-124.
- Chang, Y.-C., Datchev, I., and Habib, A. "A Photogrammetric system for 3D reconstruction of a scoliotic torso." *Proc., Proceedings of the ASPRS 2009 Annual Conference*.
- Chen, S.-E., Liu, W., Bian, H., and Smith, B. (2013). "3D LiDAR scans for bridge damage evaluations." *Forensic Engineering 2012: Gateway to a Safer Tomorrow*, 487-495.
- Collins, B. D., Minasian, D. L., and Kayen, R. (2009). "Topographic change detection at select archeological sites in Grand Canyon National Park, Arizona, 2006-2007." US Geological Survey.
- Conner, J. C. (2013). "Quantification of landslide movement in a forested environment."

- Conner, J. C., and Olsen, M. J. (2014). "Automated quantification of distributed landslide movement using circular tree trunks extracted from terrestrial laser scan data." *Computers & Geosciences*, 67, 31-39.
- Daehne, A., and Corsini, A. (2013). "Kinematics of active earthflows revealed by digital image correlation and DEM subtraction techniques applied to multi-temporal LiDAR data." *Earth Surface Processes and Landforms*, 38(6), 640-654.
- Dewitte, O., Jasselette, J.-C., Cornet, Y., Van Den Eeckhaut, M., Collignon, A., Poesen, J., and Demoulin, A. (2008). "Tracking landslide displacements by multi-temporal DTMs: A combined aerial stereophotogrammetric and LIDAR approach in western Belgium." *Engineering Geology*, 99(1), 11-22.
- Dold, C., and Brenner, C. (2006). "Registration of terrestrial laser scanning data using planar patches and image data." *International Archives of Photogrammetry, Remote Sensing and Spatial Information Sciences*, 36(5), 78-83.
- FEMA, F. E. M. A. (2017). "Causes and Types of Landslides." <http://www.fema.gov/media-library-data/20130726-1440-20490-6324/fema_182_chapter3_part1.pdf>. (June 10, 2017).
- Fernandez Merodo, J. A., Pastor, M., Mira, P., Tonni, L., Herreros, M. I., Gonzalez, E., and Tamagnini, R. (2004). "Modelling of diffuse failure mechanisms of catastrophic landslides." *Computer Methods in Applied Mechanics and Engineering*, 193(27-29), 2911-2939.
- Habib, A., Kersting, A. P., Bang, K. I., and Lee, D.-C. (2010). "Alternative methodologies for the internal quality control of parallel LiDAR strips." *IEEE Transactions on Geoscience and Remote Sensing*, 48(1), 221-236.
- Habib, A., Kwak, E., and Al-Durgham, M. (2011). "Model-based automatic 3d building model generation by integrating lidar and aerial images." *Archiwum Fotogrametrii, Kartografii i Teledetekcji*, 22.

- Haugen, B. D. (2016). *Qualitative and quantitative comparative analyses of 3D lidar landslide displacement field measurements*, Colorado School of Mines.
- Hodgson, M. E., and Bresnahan, P. (2004). "Accuracy of airborne lidar-derived elevation." *Photogrammetric Engineering & Remote Sensing*, 70(3), 331-339.
- Hofton, M. A., Minster, J. B., and Blair, J. B. (2000). "Decomposition of laser altimeter waveforms." *IEEE Transactions on geoscience and remote sensing*, 38(4), 1989-1996.
- Huang, T., Zhang, D., Li, G., and Jiang, M. (2012). "Registration method for terrestrial LiDAR point clouds using geometric features." *Optical Engineering*, 51(2), 021114-021111-021114-021115.
- Jaselskis, E. J., Gao, Z., and Walters, R. C. (2005). "Improving transportation projects using laser scanning." *Journal of Construction Engineering and Management*, 131(3), 377-384.
- Kinzel, P. J., Wright, C. W., Nelson, J. M., and Burman, A. R. (2007). "Evaluation of an experimental LiDAR for surveying a shallow, braided, sand-bedded river." *Journal of Hydraulic Engineering*, 133(7), 838-842.
- Lague, D., Brodu, N., and Leroux, J. (2013). "Accurate 3D comparison of complex topography with terrestrial laser scanner: Application to the Rangitikei canyon (NZ)." *ISPRS Journal of Photogrammetry and Remote Sensing*, 82, 10-26.
- Libraries, P. C. "VoxelGrid Filter." <<http://pointclouds.org/>>. (05/18/2017).
- Mapping, D. L. (2013). "RiSCAN PRO Data Registration Guide." <https://s3-eu-west-1.amazonaws.com/3dlmsitecontent/police/documents/RiSCAN_PRO_DataRegistrationGuide_v2_low-res.pdf>. (06/12/2017).
- Mukupa, W., Roberts, G. W., Hancock, C. M., and Al-Manasir, K. (2017). "A review of the use of terrestrial laser scanning application for change detection and deformation monitoring of structures." *Survey Review*, 49(353), 99-116.

- NewsOn6 (June 22 2015). "Rockslide Continues To Hold Up Traffic Near Davis." <http://www.newson6.com/story/29380996/rockslide-continues-to-hold-up-traffic-near-davis>.
- OGS (2017). "O. G. S. Earthquake Information." <https://earthquakes.ok.gov/>. (feb 21 2017).
- Pfeiffer, T. J., Higgins, J. D., Andrew, R. D., Barrett, R. K., and Beck, R. B. (1993). *Colorado Rockfall Simulation Program: Version 3.0 User's Manual*, Colorado Department of Trans.
- Priestnall, G., Jaafar, J., and Duncan, A. (2000). "Extracting urban features from LiDAR digital surface models." *Computers, Environment and Urban Systems*, 24(2), 65-78.
- Rabbani, T., Dijkman, S., van den Heuvel, F., and Vosselman, G. (2007). "An integrated approach for modelling and global registration of point clouds." *ISPRS journal of Photogrammetry and Remote Sensing*, 61(6), 355-370.
- Renslow, M. S. (2012). *Manual of airborne topographic lidar*.
- Reshetyuk, Y. (2010). "Direct georeferencing with GPS in terrestrial laser scanning." *Zeitschrift für Geodäsie, Geoinformation und Landmanagement*, 135(3), 151-159.
- Reshetyuk, Y. (2010). "Direct georeferencing with GPS in terrestrial laser scanning." *Z f V-Zeitschrift für Geodäsie, Geoinformation und Landmanagement*, 135(3), 151-159.
- Rodrigues, M., Fisher, R., and Liu, Y. (2002). "Special issue on registration and fusion of range images." *Computer Vision and Image Understanding*, 87(1-3), 1-7.
- Rosen, P. A., Hensley, S., Joughin, I. R., Li, F. K., Madsen, S. N., Rodriguez, E., and Goldstein, R. M. (2000). "Synthetic aperture radar interferometry." *Proceedings of the IEEE*, 88(3), 333-382.
- Rusinkiewicz, S., and Levoy, M. "Efficient variants of the ICP algorithm." *Proc., 3-D Digital Imaging and Modeling, 2001. Proceedings. Third International Conference on, IEEE*, 145-152.
- S. Falemo, and Andersson-Sköld, Y. (2011). "Landslide consequence analysis – mapping expected losses in the Göta river valley." *ISGSR, Bundesanstalt für Wasserbau*.

- Schneider, D., and Maas, H.-G. "Integrated bundle adjustment with variance component estimation-fusion of terrestrial laser scanner data, panoramic and central perspective image data." *Proc., Proceedings ISPRS Workshop Laser Scanning and SilviLaser*, Citeseer, 373.
- Shao-tang Liu , and Wang, Z.-w. (2008). "Choice of surveying methods for landslides monitoring."
- USGS (2004). "Landslide Types and Processes." <<https://pubs.usgs.gov/fs/2004/3072/fs-2004-3072.html>>.
- USGS (2017). "Landslide Hazards Program." <<http://landslides.usgs.gov/monitoring/>>. (Feb 22 2017).
- Varnes, D. J. (1984). *Landslide hazard zonation: a review of principles and practice*.
- Vosselman, G., and Maas, H.-G. (2010). *Airborne and terrestrial laser scanning*, Whittles Publishing.
- Wang, G. (2011). "GPS landslide monitoring: single base vs. network solutions—a case study based on the Puerto Rico and Virgin Islands permanent GPS network." *Journal of Geodetic Science*, 1(3), 191-203.
- Wehr, A., and Lohr, U. (1999). "Airborne laser scanning—an introduction and overview." *ISPRS Journal of photogrammetry and remote sensing*, 54(2), 68-82.
- Whittow, J. B. (1984). "The Penguin dictionary of physical geography." Penguin books Hamondsworth.
- Wieczorek, G. F., and Snyder, J. B. (2009). "Monitoring slope movements." *Geol. Monit*, 245-271.
- Wold, R. L., and Jochim, C. L. (1989). "Landslide loss reduction: A guide for state and local government planning." *Earthquake Hazards Reduction Series*, US Federal Emergency Management Agency (FEMA).

APPENDICES

Coarse and Fine Registration Using RiSCAN Pro

The link below explains coarse registration and Multi-Station Adjustments using RiSCAN on Location 1 data.

[Link for Coarse and Fine Registration using RiSCAN Pro](#)

<https://drive.google.com/open?id=0B0W26tsi2OuVT1IyZTZSZDBCMEk>

M3C2 Analysis of September and December Scans for Location 1

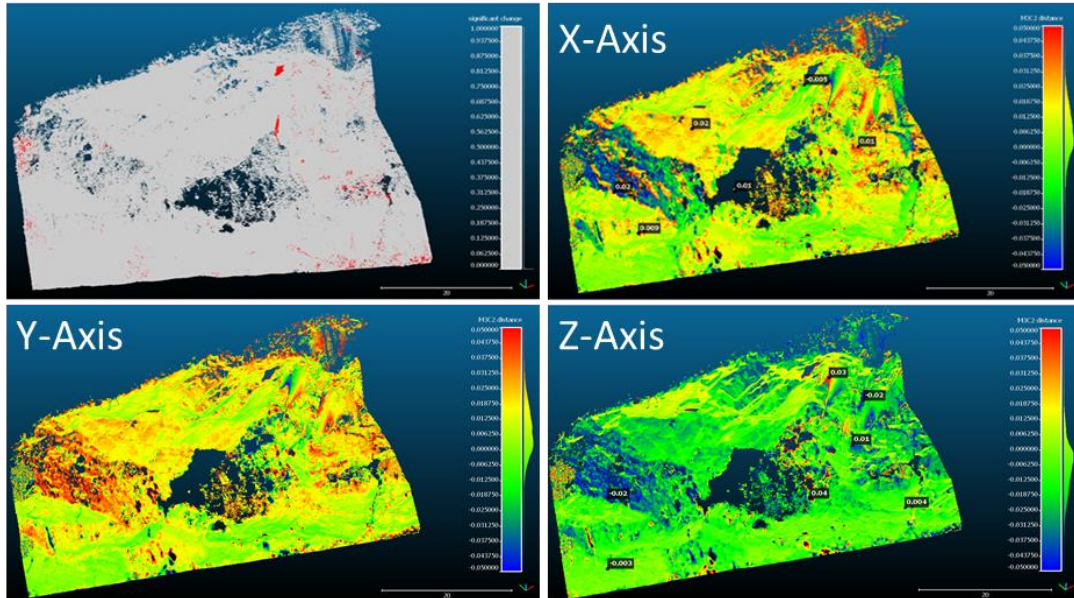


Figure A-1. Significant Change and Displacement Heat Map of September and December Scans of Location 1 Along X, Y and Z Axis (Scale 5cm)

M3C2 Analysis of December and April Scans for Location 1

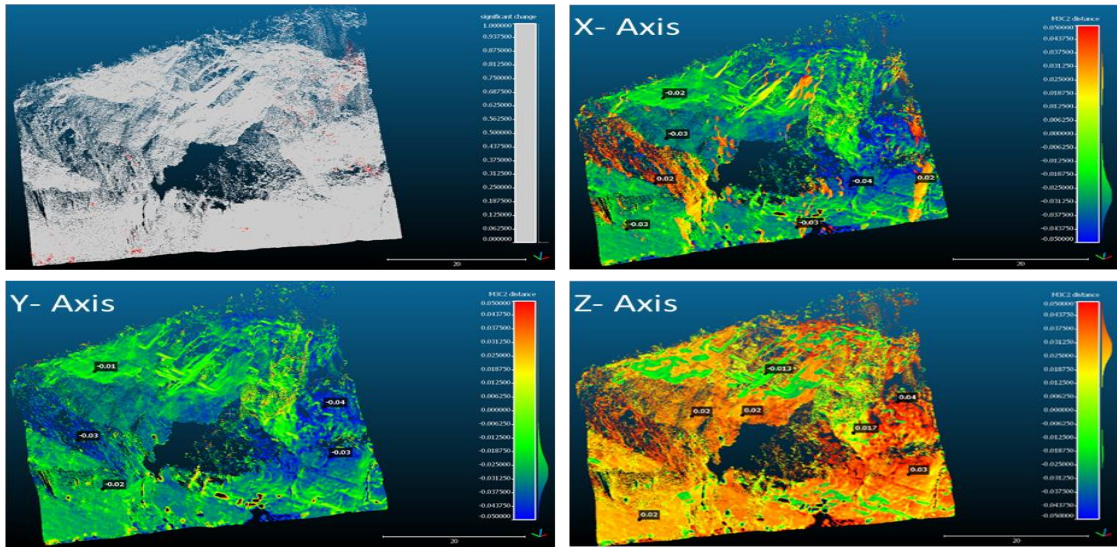


Figure A-2. Significant Change and Displacement Heat Map of December and April Scans of Location 1 Along X, Y and Z Axis (Scale 5cm)

M3C2 Analysis of December and April Scans for Location 1

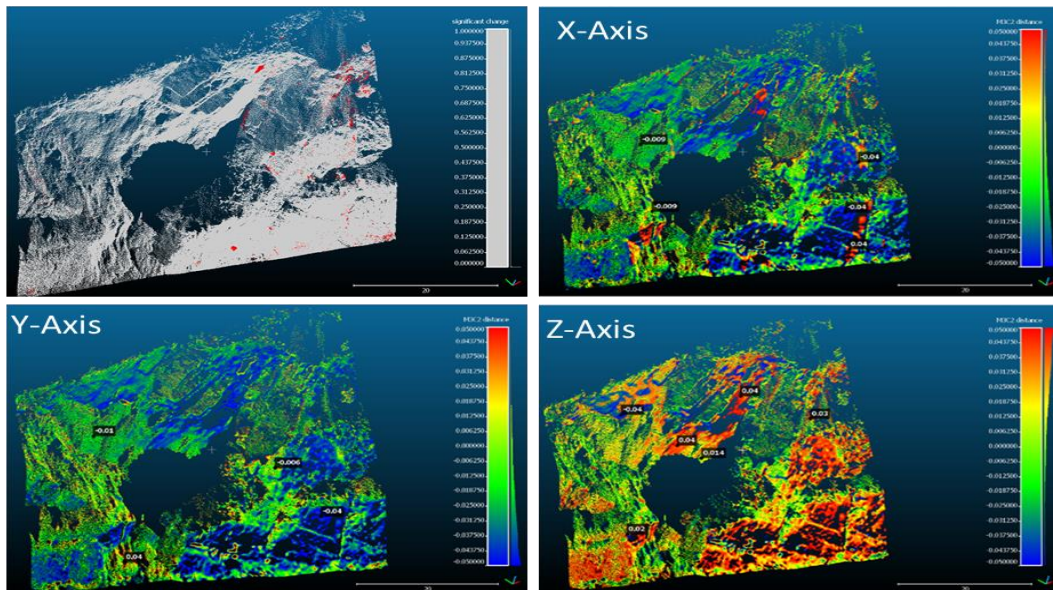


Figure A-3. Significant Change and Displacement Heat Map of June and April Scans of Location 1 Along X, Y and Z Axis (Scale 5cm)

VITA
SRIKANTH SAGAR BANGARU

Candidate for the Degree of

Master of Science

Thesis: EVALUATION AND GUIDE TO USE LIDAR FOR LANDSLIDE
MONITORING ON OKLAHOMA HIGHWAYS

Major Field: Civil and Environmental Engineering

Biographical:

Education:

Completed the requirements for the Master of Science in Civil and
Environmental Engineering at Oklahoma State University, Stillwater, Oklahoma
in July 2017.

Completed the requirements for the Bachelor of Technology in Civil
Engineering at National Institute of Technology-Warangal, Warangal,
Telangana, India in 2015.

Experience:

Graduate Research Assistant: Jan 2016 – Jul 2017

Construction Management Intern: May 2013 – Jul 2013

Civil Engineering Intern: April 2013 – May 2013

Professional Memberships:

American Society of Civil Engineers

LEED Green Associate

Detailed Profile: [LinkedIn: Srikanth Sagar Bangaru](#)