



BNL-91050-2010-CP

***Beam-energy and laser beam-profile monitor
at the BNL LINAC***

**R. Connolly, B. Briscoe, C. Degen, L. DeSanto, W. Meng,
R. Michnoff, M. Minty, S. Nayak, D. Raparia, T. Russo**

Presented at the 2010 Beam Instrumentation Workshop (BIW10)
Los Alamos National Laboratory, Santa Fe, New Mexico
May 2-6, 2010

Collider-Accelerator Department

Brookhaven National Laboratory

P.O. Box 5000
Upton, NY 11973-5000
www.bnl.gov

Notice: This manuscript has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the manuscript for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government purposes.

This preprint is intended for publication in a journal or proceedings. Since changes may be made before publication, it may not be cited or reproduced without the author's permission.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

BEAM-ENERGY and LASER BEAM-PROFILE MONITOR at the BNL LINAC*

R. Connolly, B. Briscoe, C. Degen, L. DeSanto, W. Meng, R. Michnoff, M. Minty, S. Nayak, D. Raparia and T. Russo
Brookhaven National Lab
Upton, NY, USA

Abstract

We are developing a non-interceptive beam profile and energy monitor for H^+ beams in the high energy beam transport (HEBT) line at the Brookhaven National Lab linac. Electrons that are removed from the beam ions either by laser photodetachment or stripping by background gas are deflected into a Faraday cup. The beam profile is measured by stepping a narrow laser beam across the ion beam and measuring the electron charge vs. transverse laser position. There is a grid in front of the collector that can be biased up to 125kV. The beam energy spectrum is determined by measuring the electron charge vs. grid voltage. Beam electrons have the same velocity as the beam and so have an energy of $1/1836$ of the beam protons. A 200MeV H^+ beam yields 109keV electrons. Energy measurements can be made with either laser-stripped or gas-stripped electrons.

INTRODUCTION

In 2002 we reported on a project at BNL to develop a beam profile monitor for H^+ beams using photoneutralization by a laser beam directed perpendicular to the ion beam [1]. That effort was in support of the Spallation Neutron Source being built at Oak Ridge National Lab [2]. In 2008 we reported on a prototype profile and energy monitor developed at BNL for Fermi National Lab [3] to use on the High Intensity Neutrino Source project [4]. Based on the success of the Fermi device we received funding from the BNL Linac Isotope Producer (BLIP) facility [5] to build a detector to measure beam energy and transverse profiles in the linac HEBT.

An H^+ ion has a first ionization potential of 0.75eV and can be neutralized by the 1eV photons from a Nd:YAG laser ($\lambda=1064\text{nm}$). To measure beam profiles, a narrow laser beam is stepped across the ion beam, removing electrons from the portion of the H^+ beam intercepted by the laser. These electrons are deflected into a Faraday cup by a magnetic field. To measure the energy distribution of the electrons, the laser position is fixed and the voltage on a screen in front of the Faraday cup is raised in small steps.

*Work performed under Contract #DE-AC02-98CH10886 under the auspices of the US Department of Energy.

At the time of this writing, the laser platform is not yet installed. However we found that accurate energy measurements can be made on high-current beams ($>5\text{mA}$) by measuring the electrons stripped from the beam by background gas. Electrons are stripped by the residual gas in the beamline at a rate of $\sim 1.5 \times 10^{-8}/\text{cm}$ at 1×10^{-7} torr. In this detector a 30mA beam produces about 40nA of electron current.

In this paper we describe the detector and show results from the gas-stripped energy measurements.

DETECTOR

Figure 1 is a cutaway diagram of the detector from the side showing the signal-electron path. The neutralization chamber is a six-way cross with the laser beam passing through viewports either horizontally or vertically. An optics plate with the laser head and scanning optics is mounted on this chamber. The 100mJ/pulse, Q-switched Nd:YAG laser neutralizes 70% of the beam it intercepts during the 10ns pulse. The laser beam is scanned across the ion beam by reflecting it from a 45° mirror mounted on a linear translation stage.

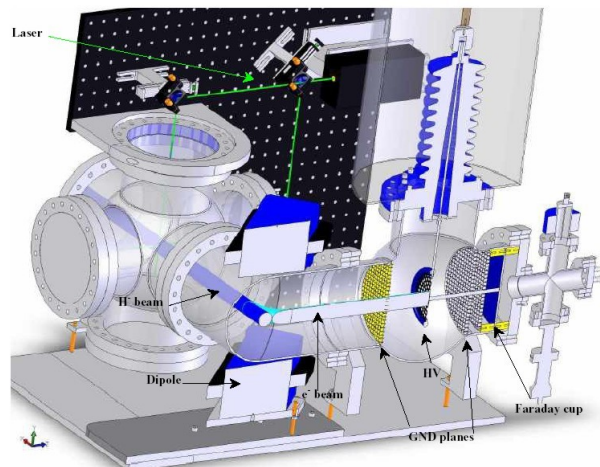


Figure 1: Cutaway schematic. Electrons from the H^+ beam are deflected by a magnet through a HV grid into the Faraday collector.

Downstream a dipole magnet deflects the signal electrons 90° into the retarding grid and Faraday cup assembly. A corrector magnet upstream keeps the ion

beam straight. A voltage grid in front of the collector provides secondary-electron suppression. The electron signal is transported from the tunnel over 1/4" heliac cable and digitized by a LeCroy LT584L oscilloscope. Figure 2 shows the detector installed in the HEBT beamline.

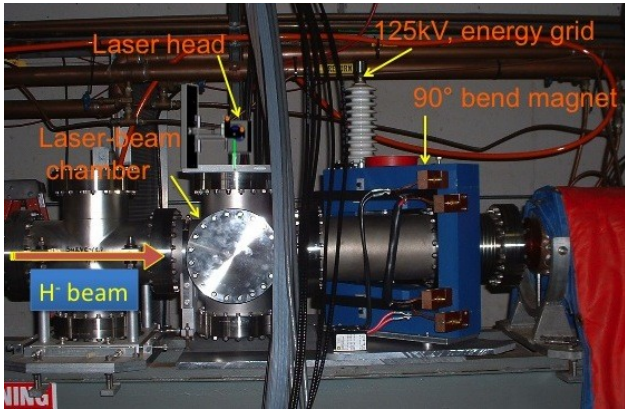


Figure 2: HEBT installation. The ion beam travels left to right. The laser chamber is left of the cable bundle and the deflector magnet is right. Electrons are deflected back through the grid and into the electron collector.

The control system is a Labview program running on a dedicated PC with digital and analog I/O through a National Instruments USB-6229 BNC. The maximum firing rate of the laser is 20Hz so only one data point can be obtained per linac cycle (6.6Hz). A measurement cycle is initiated by a timing pulse from the linac which triggers the laser. The laser outputs a Q-switch synchronous pulse which triggers the scope. The signal pulse from the Faraday cup is passed through a 10MHz low-pass filter into the scope which does a baseline subtraction and integrates the pulse. Upon completion of this process, the scope signals the computer which reads the pulse.

ENERGY MEASUREMENTS

When the 2009-10 beam run started, the optics plate and enclosure were not finished. The high radiation levels in the HEBT during the run prevents us from completing installation until the 2010 summer shutdown. However the BLP program is primarily interested in beam-energy measurements which we provide without the laser by using the gas-stripped-electron signal.

We estimate from ref. 6 a gas-stripping cross section of $\sigma \approx 4 \times 10^{-18} \text{ cm}^2/\text{atom}$. At the HEBT pressure of $\sim 1 \times 10^{-7}$ torr, the one meter drift from the upstream quad to our chamber produces about 40nA of electron current from a 30mA beam. About half of this current is lost to the four grids the signal electrons pass through. The signal current is amplified by 10^7 V/A resulting in a full-beam signal of $\sim 200 \text{ mV}$ into the oscilloscope.

An energy measurement starts with a scan of the deflector magnet current to center the electron beam on the collector. The electron signal is integrated over each linac pulse of $400 \mu\text{s}$ which gives data in units of volt*second. Figure 3 is the Labview screen showing the results of a magnet scan done with a 117MeV beam.

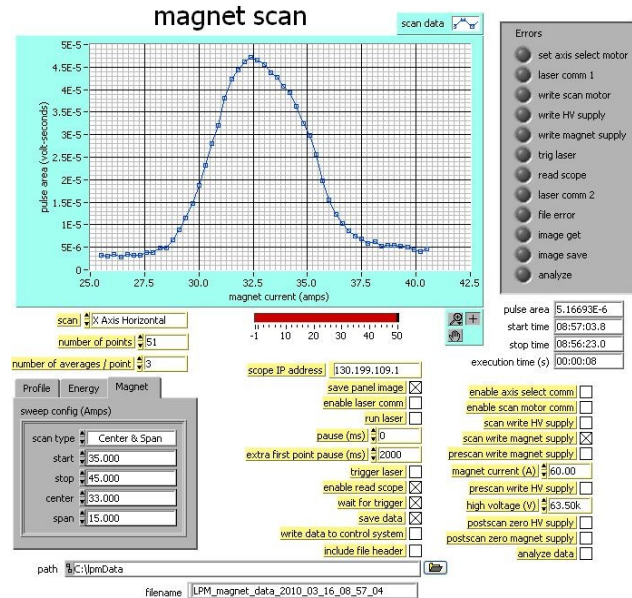


Figure 3. A magnet scan showing electron signal vs. deflector magnet current.

Figure 4 shows an energy scan that resulted in a measured beam energy of 117.06MeV. This data set was produced by sampling 51 grid voltages over a range of 62.0kV to 63.8kV. Each point is averaged over 3 machine pulses. A sigmoid function is fitted to the data and the half-value point is taken as the electron center energy. Here the center electron energy is $E_c = 63.760 \text{ keV}$.

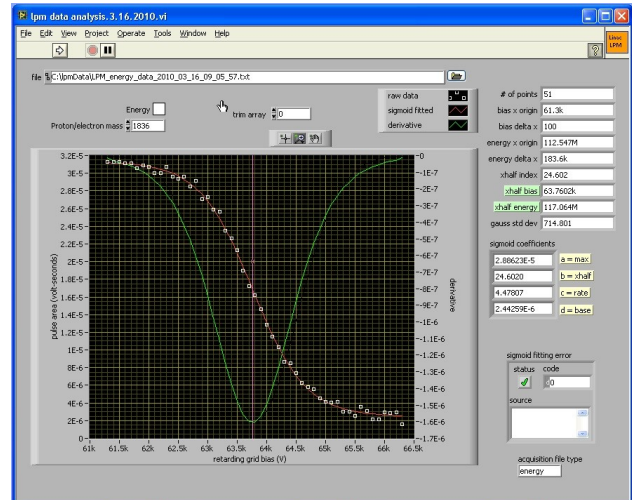


Figure 4. The analyzed data from an energy scan on with a 117.06MeV beam.

The Gaussian-like curve is the derivative of the sigmoid. From this we get the energy spread of the electrons. Most of this energy spread is from the space-charge potential spread in the bunched beam, fig. 5.

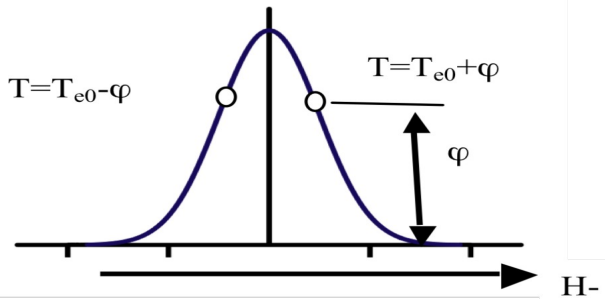


Figure 5: Illustration showing space-charge energy spread. Electrons in back of bunch lose the space-charge potential, ϕ , and those in front gain ϕ .

We did a series of energy measurements over one hour at five different beam currents. The results are below. Several measurements made at each current are averaged showing an rms measurement repeatability of about 0.03%.

BEAM CURRENT	FILE	MEASURED ENERGY (MeV)
40mA	09-03-43	116.99
	09-05-57	117.06
	09-07-11	117.06
	09-08-29	117.1
	09-10-20	117.01
	Average	117.04±0.04
35mA	9-16-05	117.12
	9-17-31	117.11
	9-18-59	117.11
	9-20-19	117.07
	Average	117.10±0.02
25mA	09-24-27	117.14
	09-25-38	117.14
	09-26-51	117.13
	09-28-01	117.07
	Average	117.12±0.03
15mA	09-42-01	117.17
	09-43-46	117.11
	09-45-21	117.21
	Average	117.16±0.05
5mA	09-52-54	117.01
	09-54-34	117.3
	09-56-07	117.04
	Average	117.12±0.16

DISCUSSION

When completed this detector will provide both energy and transverse-profile measurements of H⁻ beams with energies up to 200MeV and beam currents of 0.2-40mA. During this beam run we are getting accurate energy measurements from the beam electrons produced by background-gas stripping. The gas-stripped-electron measurement has been demonstrated with beam currents as low as 5mA. Measurements on the 200μA polarized proton beam will probably require the laser, but we are testing new amplifier schemes.

ACKNOWLEDGEMENTS

The authors thank Cyrus Biscardi, Tony Curcio, and Vinnie LoDestro for their many contributions.

REFERENCES

- [1] R. Connolly *et al.*, "Laser Beam-Profile Monitor Development at BNL for SNS," Proc. 2002 Linac Conf., Gyeongju.
- [2] S. Assadi *et al.*, "SNS Transverse and Longitudinal Laser Profile Monitors Design, Implementation and Results," EPAC 2006, Edinburgh.
- [3] R. Connolly, *et al.*, "Laser-based Profile and Energy Monitor for H⁻ Beams," Proc. 2008 Linac Conf., Vancouver.
- [4] <http://www-td.fnal.gov/projects/hins.html>
- [5] http://www.bnl.gov/medical/Isotope_Distribution/Isodistoff.htm
- [6] George H. Gillespie, Phys. Rev. A., Vol. 16, No. 3, 1977.