

University of New Orleans

ScholarWorks@UNO

---

Pontchartrain Institute Reports and Studies

Pontchartrain Institute for Environmental  
Sciences (PIES)

---

1-2009

## Louisiana Barrier Island Comprehensive Monitoring Program (BICM) Volume 3: Bathymetry and Historical Seafloor Change 1869-2007 Part 1: South-Central Louisiana and Northern Chandeleur Islands, Bathymetry Methods and Uncertainty Analysis Final Report

Michael Miner

*University of New Orleans Pontchartrain Institute for Environmental Sciences*

Mark Kulp

*University of New Orleans Pontchartrain Institute for Environmental Sciences*

Shea Penland

*University of New Orleans Ponchartrain Institute for Environmental Sciences*

Dallon Weathers

*University of New Orleans Pontchartrain Institute for Environmental Sciences*  
Follow this and additional works at: [https://scholarworks.uno.edu/pies\\_rpts](https://scholarworks.uno.edu/pies_rpts)

 Jeffrey P. Motti  
Part of the [Environmental Sciences Commons](#)

*University of New Orleans Pontchartrain Institute for Environmental Sciences*

---

### Recommended Citation

See next page for additional authors

Miner, Michael; Kulp, Mark; Penland, Shea; Weathers, Dallon; Motti, Jeffrey P.; McCarty, Phil; Brown, Michael; Martinez, Luis; Torres, Julie; Flocks, James G.; Dewitt, Nancy; Ferina, Nick; and Reynolds, B J., "Louisiana Barrier Island Comprehensive Monitoring Program (BICM) Volume 3: Bathymetry and Historical Seafloor Change 1869-2007 Part 1: South-Central Louisiana and Northern Chandeleur Islands, Bathymetry Methods and Uncertainty Analysis Final Report" (2009). *Pontchartrain Institute Reports and Studies*. Paper 10.

[https://scholarworks.uno.edu/pies\\_rpts/10](https://scholarworks.uno.edu/pies_rpts/10)

This Report is brought to you for free and open access by the Pontchartrain Institute for Environmental Sciences (PIES) at ScholarWorks@UNO. It has been accepted for inclusion in Pontchartrain Institute Reports and Studies by an authorized administrator of ScholarWorks@UNO. For more information, please contact [scholarworks@uno.edu](mailto:scholarworks@uno.edu).

---

**Authors**

Michael Miner, Mark Kulp, Shea Penland, Dallan Weathers, Jeffrey P. Motti, Phil McCarty, Michael Brown, Luis Martinez, Julie Torres, James G. Flocks, Nancy Dewitt, Nick Ferina, and B J. Reynolds



**Louisiana Barrier Island Comprehensive Monitoring Program (BICM)**  
**Volume 3: Bathymetry and Historical Seafloor Change 1869-2007**  
Part 1: South-Central Louisiana and Northern Chandeleur Islands,  
Bathymetry Methods and Uncertainty Analysis

Final Report  
January 2009

Michael Miner, Mark Kulp, Shea Penland, Dallon Weathers, Jeffrey P. Motti, Phil McCarty, Michael Brown, Luis Martinez, and Julie Torres  
University of New Orleans, Pontchartrain Institute for Environmental Sciences,  
2000 Lakeshore Dr., New Orleans, LA 70148

James G. Flocks, Nancy Dewitt, Nick Ferina, and B.J. Reynolds  
U.S. Geological Survey Florida Integrated Science Center,  
600 4th St. South, St. Petersburg, FL 33701

Dave Twichell, Wayne Baldwin, Bill Danforth, Chuck Worley, and Emile Bergeron  
U.S. Geological Survey, Woods Hole Science Center,  
384 Woods Hole Road, Quissett Campus, Woods Hole, MA 02543-1598



**US Army Corps  
of Engineers®**

**Louisiana Barrier Island Comprehensive Monitoring Program (BICM)**

**Volume 3: Bathymetry and Historical Seafloor Change 1869-2007**

**Part 1: Methods and Error Analysis for Bathymetry**

Final Report  
January 2009

Michael Miner, Mark Kulp, Shea, Penland, Dallon Weathers, Jeffrey P. Motti, Phil McCarty, Michael Brown, Luis Martinez, and Julie Torres  
University of New Orleans, Pontchartrain Institute for Environmental Sciences, 2000 Lakeshore Dr., New Orleans, LA, 70148

James Flocks, Nancy Dewitt, Nick Ferina, and B.J. Reynolds  
U.S. Geological Survey, Florida Integrated Science Center, 600 4th St. South, St. Petersburg, FL 33701

David Twichell, Wayne Baldwin, Bill Danforth, Chuck Worley, and Emile Bergeron  
U.S. Geological Survey, Woods Hole Science Center, 384 Woods Hole Road, Quissett Campus, Woods Hole, MA, 02543-1598

Funding for this project was provided by the LCA Science & Technology Program, a partnership between the Louisiana Department of Natural Resources (LDNR) and the U.S. Army Corps of Engineers, through LDNR Interagency Agreement No. 2512-06-06.

## Conversion Factors

### Inch/Pound to SI

Multiply	By	To obtain
Length		
inch (in.)	2.54	centimeter (cm)
inch (in.)	25.4	millimeter (mm)
foot (ft)	0.3048	meter (m)
mile (mi)	1.609	kilometer (km)
mile, nautical (nmi)	1.852	kilometer (km)
yard (yd)	0.9144	meter (m)
Area		
acre	4,047	square meter (m <sup>2</sup> )
acre	0.4047	hectare (ha)
acre	0.4047	square hectometer (hm <sup>2</sup> )
acre	0.004047	square kilometer (km <sup>2</sup> )
square foot (ft <sup>2</sup> )	929.0	square centimeter (cm <sup>2</sup> )
square foot (ft <sup>2</sup> )	0.09290	square meter (m <sup>2</sup> )
square inch (in <sup>2</sup> )	6.452	square centimeter (cm <sup>2</sup> )
section (640 acres or 1 square mile)	259.0	square hectometer (hm <sup>2</sup> )
square mile (mi <sup>2</sup> )	259.0	hectare (ha)
square mile (mi <sup>2</sup> )	2.590	square kilometer (km <sup>2</sup> )
Volume		
cubic inch (in <sup>3</sup> )	16.39	cubic centimeter (cm <sup>3</sup> )
cubic inch (in <sup>3</sup> )	0.01639	cubic decimeter (dm <sup>3</sup> )
cubic inch (in <sup>3</sup> )	0.01639	liter (L)
cubic foot (ft <sup>3</sup> )	28.32	cubic decimeter (dm <sup>3</sup> )
cubic foot (ft <sup>3</sup> )	0.02832	cubic meter (m <sup>3</sup> )
cubic yard (yd <sup>3</sup> )	0.7646	cubic meter (m <sup>3</sup> )
cubic mile (mi <sup>3</sup> )	4.168	cubic kilometer (km <sup>3</sup> )
acre-foot (acre-ft)	1,233	cubic meter (m <sup>3</sup> )
acre-foot (acre-ft)	0.001233	cubic hectometer (hm <sup>3</sup> )

**SI to Inch/Pound**

<b>Multiply</b>	<b>By</b>	<b>To obtain</b>
<b>Length</b>		
centimeter (cm)	0.3937	inch (in.)
millimeter (mm)	0.03937	inch (in.)
meter (m)	3.281	foot (ft)
kilometer (km)	0.6214	mile (mi)
kilometer (km)	0.5400	mile, nautical (nmi)
meter (m)	1.094	yard (yd)
<b>Area</b>		
square meter (m <sup>2</sup> )	0.0002471	acre
square centimeter (cm <sup>2</sup> )	0.001076	square foot (ft <sup>2</sup> )
square meter (m <sup>2</sup> )	10.76	square foot (ft <sup>2</sup> )
square kilometer (km <sup>2</sup> )	0.3861	square mile (mi <sup>2</sup> )
<b>Volume</b>		
cubic meter (m <sup>3</sup> )	0.0002642	million gallons (Mgal)
cubic centimeter (cm <sup>3</sup> )	0.06102	cubic inch (in <sup>3</sup> )
cubic decimeter (dm <sup>3</sup> )	61.02	cubic inch (in <sup>3</sup> )
liter (L)	61.02	cubic inch (in <sup>3</sup> )
cubic decimeter (dm <sup>3</sup> )	0.03531	cubic foot (ft <sup>3</sup> )
cubic meter (m <sup>3</sup> )	35.31	cubic foot (ft <sup>3</sup> )
cubic meter (m <sup>3</sup> )	1.308	cubic yard (yd <sup>3</sup> )
cubic kilometer (km <sup>3</sup> )	0.2399	cubic mile (mi <sup>3</sup> )
cubic meter (m <sup>3</sup> )	0.0008107	acre-foot (acre-ft)

## **INTRODUCTION**

It is widely recognized and well documented that barrier islands and deltaic headland shorelines of the Louisiana Coastal Zone are rapidly retreating landward and degrading (e.g. LCA, 2004). High rates of delta plain subsidence, ongoing eustatic sea-level rise, and processes such as storm impacts collectively contribute to this shoreline loss as shoreline sediment is eroded or becomes inundated by marine waters (Penland and Ramsey, 1990). The amount of shoreline retreat along coastal Louisiana has been shown to be as much as 23 m/yr locally (Williams et al., 1992), and has been a contributing factor to the more than 100 km<sup>2</sup> of annual land loss that has been documented for some select historic time frames across the region (Barras et al., 2003).

### **PURPOSE**

To more effectively identify the magnitude, rates, and processes of shoreline change a Barrier Island Comprehensive Monitoring program (BICM) has been developed as a framework for a coast-wide monitoring effort. A significant component of this effort includes documenting the historically dynamic morphology of the Louisiana nearshore, shoreline, and backshore zones. This aspect of the program is designed to complement other more area-specific monitoring programs that are currently underway through the support of agencies such as the Louisiana Department of Natural Resources and U.S. Army Corp of Engineers.

The advantage of BICM over current project-specific monitoring efforts is that it will provide long-term morphological datasets on all of Louisiana's barrier islands and shorelines; rather than just those islands and areas that are slated for coastal engineering projects or have had construction previously completed. BICM additionally specifically provides a larger proportion of unified, long-term datasets that will be available to monitor constructed projects, plan and design future barrier island projects, develop operation and maintenance activities, and assess the range of impacts created by past and future tropical storms. The development of coastal models, such as those quantifying littoral sediment budgets, and a more advanced knowledge of mechanisms forcing coastal evolution becomes increasingly more regionally feasible with the availability of BICM datasets. These factors constitute critically important elements of any effort that is aimed at effective coastal restoration, sediment nourishment, or management.

## **CURRENT BICM GOALS AND TASKS**

Data for BICM tasks will be collected and compiled for all of the barrier island systems and shorelines with similar approaches and methodologies. The resulting data will be more comparable, consistent, accurate, and complete than currently available barrier island geomorphology datasets that have been piece-meal constructed and are generally area specific. In order to achieve the goals of BICM and develop a range of usable, stand-alone datasets the entire effort has been broken into several research and analysis tasks. These currently include: 1) the compilation of videography and photography of the 2005 hurricane impacts, 2) the construction of a unified historic shoreline change database for the Louisiana coastal zone, and 3) the development of a historical bathymetric database with up-to-date 2006 bathymetric analysis that provides a current seafloor change for the shoreline extending from Sandy Point to Raccoon Island and the northern Chandeleur Islands, and 4) Light Detection and Ranging (LiDAR) surveys for the sandy shorelines of the coastal zone. This report describes the methodologies of constructing a historical bathymetric database, the acquisition and results of regional 2006 bathymetric survey data, and provides rates of seafloor change derived for a range of time frames along the Louisiana Coastal Zone study areas (Fig. 1).

## **PREVIOUS STUDIES**

Prior to the implementation of BICM the only available, regionally consistent documentation for bathymetry and seafloor change was presented in a United States Geological Survey (USGS) and Louisiana Geological Survey (LGS) atlas on seafloor change (List et al., 1994). This atlas provided historical bathymetric data from the 1880's, 1930's, and 1980's for the central Louisiana coastal zone. Patterns and rates of seafloor change (e.g. erosion and deposition) were identified by an inter-comparison of bathymetry for designated time periods (e.g. 1880's-1930's and 1930's --1980's) along the south-central Louisiana coastline from Raccoon Island to Sandy Point. This seminal effort by List et al. (1994) has been invaluable in attempting to document the regional coastal evolution across multi-decadal time scales. Since the acquisition of regional data in 1980 and development of the USGS atlas no comparable, comprehensive effort has been undertaken to document the shallow, nearshore bathymetry and more recent seafloor change. Moreover, prior to the establishment of the BICM priorities there had been no single comprehensive database of bathymetry and/or seafloor change for the Chandeleur Islands.



## THIS REPORT

Contained within this report are the results of a year-long effort to assimilate into one database an array of known historical bathymetric datasets, to develop the most regionally comprehensive, high-resolution bathymetric dataset available, and to derive patterns and rates of seafloor within the study areas on the basis of the existing bathymetric datasets. The first part of the report documents the sources of pre-2006 bathymetric data and the methods used to create, from these sources, digital data that is based on common vertical and horizontal reference frames. This section includes the development of historical datasets derived from paper maps that are as old as the late 1880's. The second part of this report presents the approach and methods used to develop a high-resolution bathymetric dataset for the aforementioned study area, whereas the third part of the report describes the methods utilized to derive seafloor change data across multiple time frames that end with the 2006 bathymetric data.



**Figure 1.** Base map of the Louisiana coastline showing the study areas of Sandy Point to Racoon Island (A) and the northern Chandeleur Islands (B).

## METHODS

### 2006 BATHYMETRIC DATA COLLECTION

During the summer of 2006 the University of New Orleans (UNO) and USGS completed high-resolution bathymetric surveys along two primary geographical provinces: 1) from the western edge of Raccoon Island, Isles Dernieres to Sandy Point along the Plaquemines Parish shoreline, and 2) the northern Chandeleur Islands (Figs. 2 and 3). The cooperative surveys of June, July, and August of 2006 resulted in approximately 4,762 line-km of bathymetric data along the shoreline and bays of the areas extending from Sandy Point westward to Raccoon Island. Approximately 3,240 line-km of surveying were completed around the northern Chandeleur Islands. Surveys began in June along the south-central shoreline but then moved to the northern Chandeleur Islands before completing the surveying along the south-central shoreline in late July. The piecemeal coverage of the study areas was the result of logistical constraints related to lodging and a function of weather during the summer field season.

For the purpose of these survey efforts, the boundary of the barrier island and nearshore "systems" was initially defined as extending from depth of closure (DoC; ~15-foot isobath), across islands and back barrier marshes, and to a 4-ft water depth or a maximum of 2,500 linear feet into the back bays. On the basis of information provided by List et al. (1994) describing past coastal evolution it was decided during the planning stages of the 2006 survey to develop a more expansive and scientifically justifiable survey that resulted in an expansion of the original survey limits in a seaward direction.

### Planned Tracklines

#### *Sandy Point to Raccoon Island*


For the Sandy Point to Raccoon Island survey area, shore-perpendicular, survey lines were spaced at every 457 m (1,500 ft) for a shoreline to gulfside distance of 2 km (6,561 ft). Beyond 2 km offshore distance, the shore-normal transect spacing was expanded to 1.4 km (4,593 ft), resulting in the development of a 7 km-long (22,965 ft) offshore transect approximately every third shore normal survey transect. A series of shore-parallel tie lines were also acquired. The locations where these shore-parallel lines cross the shore perpendicular lines provide an important quality check for consistency in sounding values at the line crossings.

These shore parallel transects were completed as close to the shoreline as conditions allowed (~1m water depth), at 1 km (3,280 ft) offshore, and 4km offshore (13,123 ft). Turns by survey vessels during a change of trackline direction along shore perpendicular transects provided additional shore parallel coverage at 2 km and 7 km offshore. In the backbarrier, shore perpendicular lines were extended from the backbarrier shoreline to 2 km in the backbarrier-bay direction. Shore parallel tie lines were obtained as close to the backbarrier shoreline as was possible, generally along the marsh platform edge where washover platforms were absent, and at approximately 1 (3,280 ft) and 2 km (6,561 ft) distance from the backbarrier shoreline. Additional seafloor measurements were acquired where appropriate, such as in and around highly dynamic features (e.g. inlets, spits, and washover platforms). Because multiple vessels were used to collect the data a substantial effort was undertaken in the field to provide overlapping survey coverage around the inlets flanking barrier islands (Fig. 2).


#### *Northern Chandeleur Islands*

Along the northern Chandeleur Islands a surveying approach similar to that outlined above for Raccoon Island to Sandy Pass was undertaken. One notable difference however was that much of the gulfside of the barrier system was surveyed with a swath bathymetric system onboard the *R/V Acadiana*. Along the northern Chandeleur Islands bathymetric coverage extended from the shoreline to 7 km (22,965 ft) offshore on the eastern gulfside of the barrier island system and for 5 km (16,404 ft) into the back barrier from the backbarrier shoreline on the western side.

On the backside of the islands and where the swath coverage did not extend to the south (Fig. 3), grid coverage included shore perpendicular lines 1 km apart, and shore normal lines 1 km (3,280 ft) apart out to 4 km (13,123 ft). Additional lines were acquired as close to the gulf side shoreline as conditions would allow, and through small inlets around the islands. In addition to the single-beam fathometer survey coverage, a dense grid of interferometric and sidescan sonar data was collected along a swath covering the Gulf side of the Chandeleur Islands from 1 to 2 km offshore to 5 to 7 km offshore (Fig. 3).

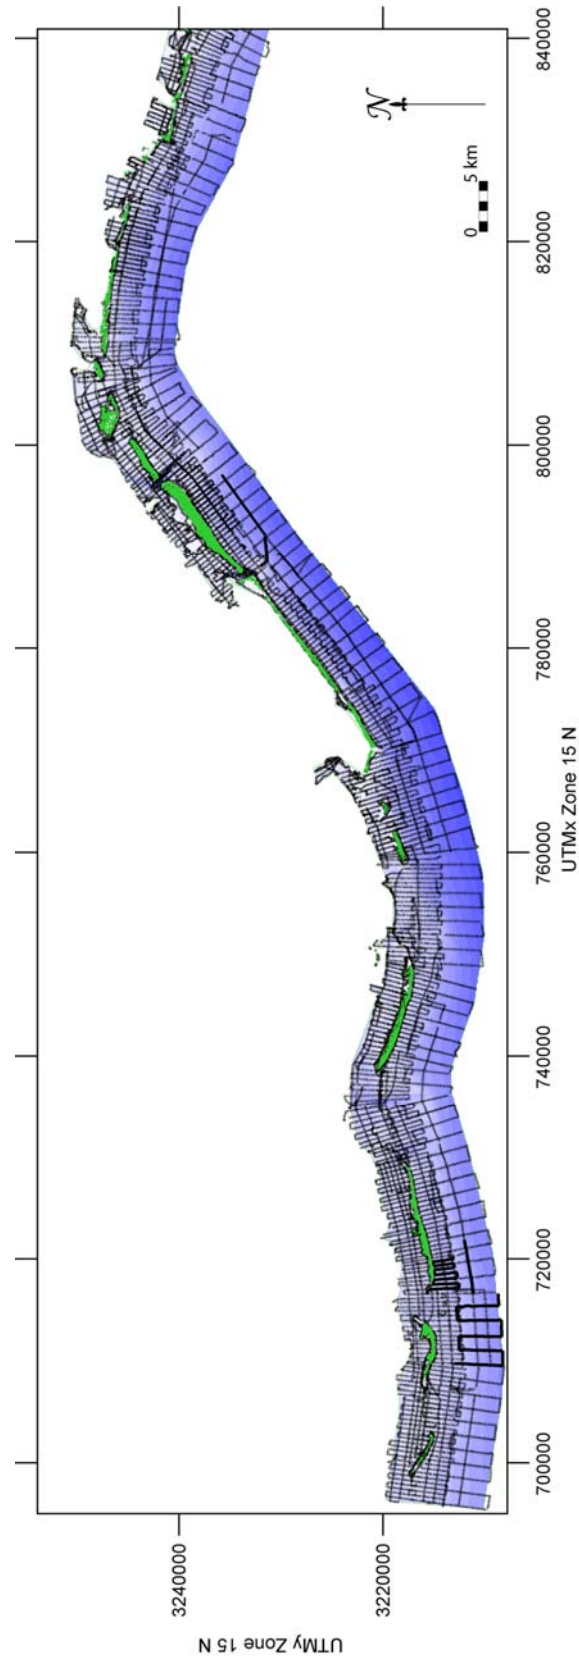

**Figure 2.** Base map showing the distribution of bathymetric survey tracklines between Sandy Point and Raccoon Island. Approximately 4,762-km were surveyed using the research vessels *Mudlump*, *Streeterville*, and *G.K. Gilbert*.

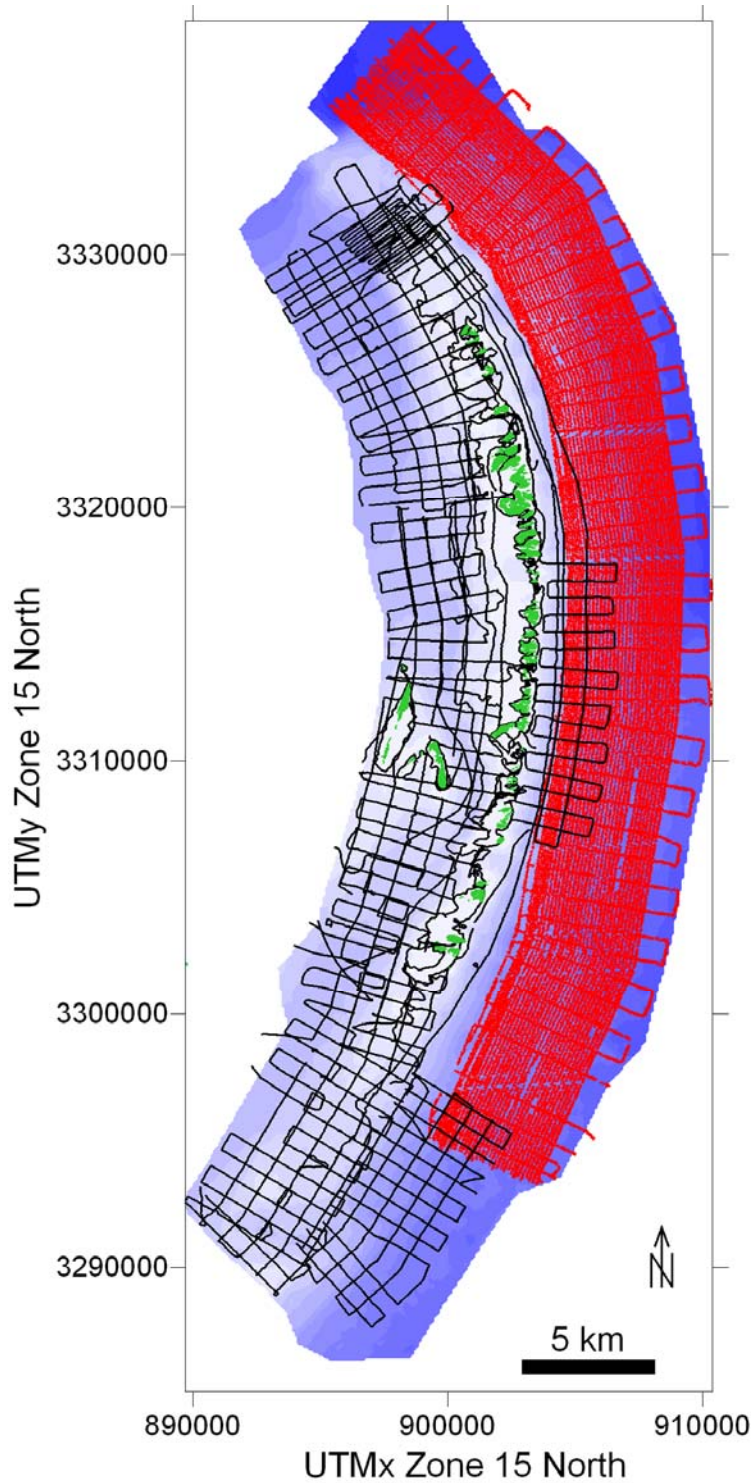

**Figure 3.** Base map of the northern Chandeaur Islands with the distribution of bathymetric survey tracklines along the Gulf and Breton Sound side of the barrier island system. The black lines indicate single-beam bathymetry coverage and the red lines indicate swath bathymetry coverage. Approximately 3,240-km were surveyed using the research vessels *Mudlump*, *Streeterville*, *G.K. Gilbert*, and *Acadiana*.

## **Bathymetric Survey: Single-Beam Data Acquisition**

Except for the northern Chandeleur swath surveys the surveys of 2006 were completed using the System for Accurate Nearshore Depth Surveying (SANDS). SANDS was developed by the USGS Center for Coastal and Watershed Studies in St. Petersburg, Florida and provides an overall framework within which to collect and process bathymetric data. SANDS, a single beam acoustic (sounding) GPS-based hydrographic system has two components, data acquisition and data processing (Fig. 4).


### *Basics of Data Acquisition*

The position of a survey vessel and the corresponding seafloor elevation relative to a vertical datum at that location are the two fundamental pieces of information collected during a bathymetric survey using the SANDS approach. In order to ensure the most precise and accurate records of position and elevation a systematic use of hardware and survey tactics was undertaken within the SANDS methodology. As a vessel is conducting a SANDS bathymetry survey, Global Positioning System (GPS) referencing information is collected by a GPS receiver on the moving survey vessel (rover) and simultaneously at a nearby stationary benchmark, which are referred to as base stations. The collection of the position and elevation GPS data for each provides the opportunity to tightly constrain, through post processing, the position and elevation of bathymetric soundings during the survey.

### *Base Station: Hardware and GPS Data Collection*

Base stations in the SANDS method gather positioning and elevation information at benchmarks and provide a static GPS dataset within the area of survey coverage. In this fashion the rover GPS data that is collected on any one day can be referenced to a GPS dataset that has been collected on the same day at a base station. During any surveying days the stationary base stations were set up on a survey tripod above geographic benchmarks that were located within 15 km of areas that were being surveyed. When intended areas of surveying extended beyond the 10-km limit, additional stationary benchmarks were set up to provide seamless base-station coverage on survey areas completed within a day. Thus, the full extent of the survey areas shown in figures 2 and 3 were completed by sequentially linking together coverages that were obtained within benchmarked GPS base stations. GPS data was continuously recorded at the base stations using an Ashtech Z-Xtreme © GPS receivers, choke-ring antennae, and datalogger with internal data card storage. This receiver and antennae combination recorded 12-channel full-carrier

phase positioning signals (L1/L2) from the GPS network satellites. Elevation of the antennas was typically placed at 2 m above the benchmark and in areas free of obstructions in order to reduce the likelihood of multipathing GPS signals (Fig. 5). Satellite information positioning and health was collected continuously at 1s intervals, and both receiver and benchmarks were checked and data downloaded on a daily basis or as was necessary.

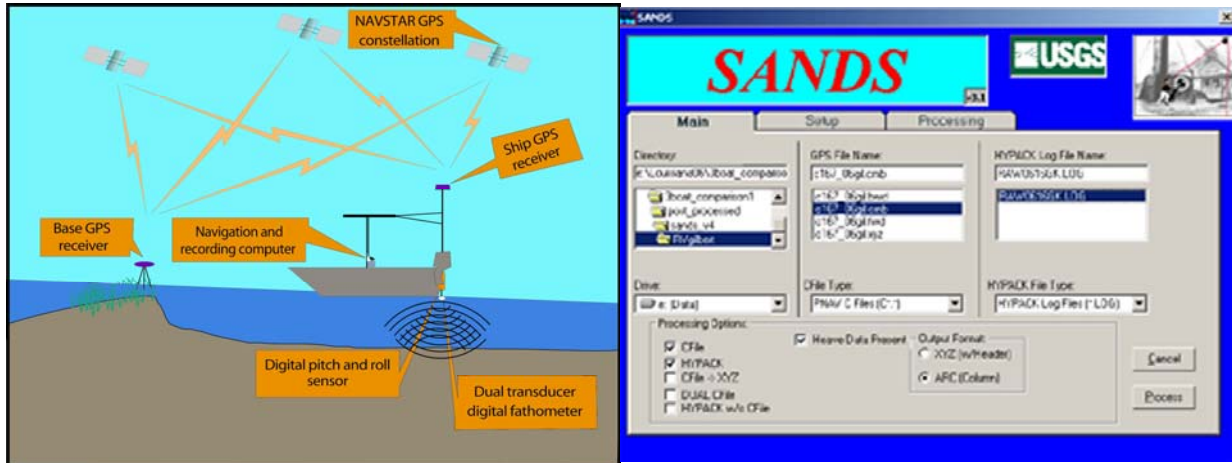

**Figure 4.** Schematic figure showing the relationship between the variety of datasets collected in the field, including a stationary benchmark collecting GPS information, and a mobile vessel collecting roving GPS, bathymetric data, and vessel orientation. Diagram to the right shows a screen shot of some the SANDS data processing system, which acts to unite these pieces of information into usable datasets.

#### *Rover: Surveying Hardware, Software, and Data Collection*

In order to develop regional bathymetric coverage the rover vessels, which were recording seafloor elevation while underway with surveying, relied upon three fundamental pieces of hardware: 1) a GPS system, 2) a motion sensor that recorded heave, pitch, and roll of the vessel, and 3) and an echo sounder and transducer system that measured the distance between the base of the transducer and the seafloor. In order to reduce potential systematic errors associated with hardware position offsets the transducer, GPS antennae and motion sensor were mounted in line on a rigid pole for each survey vessel. In this configuration the transducers of a survey vessel are located just below the waterline, the motion sensor is housed in a water tight steel container mounted above the transducers, and a GPS choke-ring antenna is mounted at the top of the pole to which the transducers and motion sensor are attached (Fig. 4).

On each survey vessel a GPS hardware set up was used that was similar to the base stations. This consisted of an Ashtech Z-Xtreme © GPS receiver and choke-ring antennae that was capable of simultaneously recording 12-channel full-carrier phase positioning signals

(L1/L2) from the NAVSTAR GPS satellites. Similar to the base station recording frequency the rover receiver recorded position information at 1-second recording intervals throughout surveying.


Throughout the surveying of both study areas the three primary survey vessels (*R/V's Mudlump, Steeterville, and G.K. Gilbert*) were equipped with single beam acquisition systems (Fig. 5). In general each of these systems consisted of a transducer and fathometer unit that controlled the rate of pinging from the transducer and processed output and returned transducer signals into meaningful linear measurements of water depth. The fathometer systems of each vessel were all set to similar sound velocities ( $1500 \text{ m s}^{-1}$ ) and recording rates of soundings (50 ms) but their hardware configurations were different because of the availability of fathometer systems. The details of each vessels fathometer system are provided in subsequent sections. In addition to the single beam coverage, swath bathymetry data was acquired seaward of the Chandeleur Islands and a detailed methodology of acquiring these data is also presented in subsequent sections.

In order to compensate for motion of the rover vessel during surveying all bathymetric data was real time corrected for heave, pitch, and roll using a TSS DMS-05 sensor, which recorded the orientation of the inline GPS antennae and transducer at 50ms intervals. Boat pitch and roll measurements from the sensor were utilized by SANDS in post-processing of the data. Heave motion is a major component of potential depth errors and although modern-day motion sensors can reasonably compensate for vessel motion, they are still subject to constant drifts, and require visual monitoring (via readout) during survey and in post-processing. In SANDS, the heave motion from the TSS is not used, but more accurately represented by using the GPS component.

The data strings from the GPS receiver, motion sensor, and fathometer, were streamed in real time to an onboard laptop computer running a Windows operating system. The acquisition software package that was used is HYPACK MAX v4.3A © (HYPACK, INC.), a marine surveying, positioning, and navigation software package. The acquisition software combines the data streams from the various components into a single raw data file, with each device string referenced by a device identification code and timestamp to the nearest millisecond. The software also manages the planned-transect information, providing real-time navigation, steering, correction, data quality, and instrumentation-status information to the boat operator. Additionally



it provides a real time record of data quality and serves as a basis for noting any errors that might arise in the hardware and software configurations while surveying.

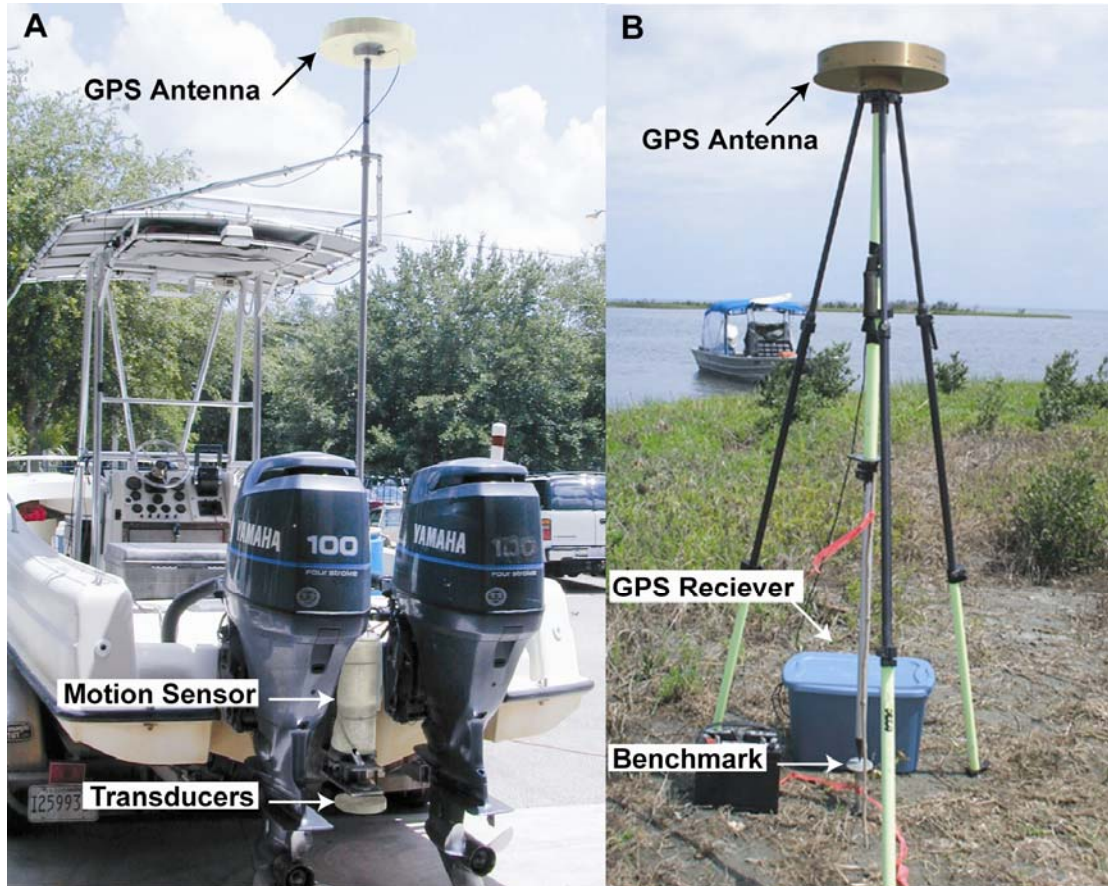

**Figure 5.** Examples of the hardware components that were used on the survey vessels *Mudlump*, *Steeterville*, and *G.K. Gilbert* (rover) (A), and at the base stations that were positioned above a benchmark (B).

#### *R/V Steeterville*

The *R/V Steeterville* is a 22-ft Boston Whaler with dual outboard motors. The vessel is capable of operating in 46 cm of water and provides a stable platform for daylight, nearshore surveying operations. Depth soundings were recorded at 50 ms intervals using a *Marimatech* ESea-103© echo sounder system, with dual 208 kHz transducers. Designed for shallow water work, one transducer generates a sound pulse while the other one receives the bottom returned signal. The transducer generates a narrow 4-degree “beam” sound pulse, which produces a small sonar footprint for higher resolution and accuracy.

#### *R/V Mudlump*

The *R/V Mudlump* (UNO) carried a bathymetric survey set up that consists of an *Odom Hydrographics* Hydrotrac single-beam, 200kHz shallow-water fathometer with a vertical

resolution of 0.01 meters. The fathometer collected depth soundings at 50 ms intervals through a side-mounted *Odom Hydrographics* 200 kHz transducer with a beam width of 3°.

#### *R/V G.K. Gilbert*

The *G.K. Gilbert* is a 50-ft long, shallow draft (3 ft) research vessel that was equipped with a *Knudsen Engineering Limited* © 320BP echosounder. The system operated a dual frequency (28/200 kHz) transducer, pole-mounted midway along the side of the vessel at 1 m below the water surface. An Ashtech Z-Xtreme GPS receiver system was mounted in-line with the transducer, and a CodaOctopus F190 motion sensor recorded heave, pitch and roll of the vessel while surveying.

### **Bathymetric Survey: Interferometric Swath Data Acquisition**


In addition to the single-beam coverage, the USGS conducted a swath bathymetry survey seaward of the northern Chandeluer Islands. The Louisiana Marine Consortium (LUMCON) vessel *R/V Acadiana* surveyed ~ 218 km<sup>2</sup> of sea floor using interferometric-sonar, towed sidescan-sonar, and chirp seismic-reflection geophysical systems. The survey covered a swath ~ 45 km long, extending from ~ 1 to 2 km seaward of the shoreline to ~ 5 to 7 km offshore (see Figure 3). Survey track lines were planned on a dense grid designed to provide 100% coverage with towed sidescan-sonar data. The towed sidescan sonar system produced a wider swath width (~ 200 m) than the other systems, which allowed for maximum areal coverage within the allotted survey period. Shore-parallel lines were spaced ~ 100 m apart inshore of the 6-m depth contour, and approximately 150-m apart offshore of the 6-m depth contour. Shore-perpendicular lines were spaced at approximately 1-km along the length of the barrier island system survey.

Bathymetric data were acquired using a *SEA Ltd. Submetrix* 2000 series interferometric sonar, that operated at a frequency of 234 kHz. The instrument was mounted on a rigid pole, along the starboard side of the vessel, at approximately 1.5 m below the sea surface. *SEA Ltd. SwathPlus* acquisition software was used to fire the system at a 0.25-s ping rate and digitally log the data at a 1.5 K sample rate. Vessel motion (heave, pitch, roll, and yaw), which was used to rectify bathymetric soundings during post-processing, was recorded continuously using a TSS DMS 2-05 Motion Reference Unit (MRU) mounted directly above the sonar transducers. Additionally, a Sound Velocity Profiler (SVP) was deployed at ~ 8 hr intervals to record the sound velocity structure of the water column in the comparatively deeper gulf side survey area.

Ship position was recorded through the use of Differential Global Positioning System (DGPS) navigation. The DGPS antenna was positioned atop the side-mount pole, directly above the sonar transducers and MRU. The planned track-line spacing resulted in data gaps between adjacent interferometric-sonar swaths. The width of data gaps varied as a function of track line spacing, water depth, and avoidance of nautical obstructions. Gap widths ranged from 0 to 60 m inshore of the 6 m contour, and 20 to 200 m between the 6 m contour and the seaward edge of the survey.

Swath bathymetric data were rectified for tidal fluctuations using Discrete Tidal Zoning (DTZ), provided by the National Oceanic and Atmospheric Administration – National Ocean Service’s Hydrographic Planning Team (Fig. 6; NOAA – NOS HPT, <http://www.tidesandcurrents.noaa.gov/hydro.html>). This approach was taken because Real Time Kinematic – Differential Global Positioning System (RTK – DGPS) height corrections were not available for the entire survey period. DTZ utilizes a series of GIS polygons (Fig. 6) that relate offshore tidal characteristics to water level data recorded at one or more tide gauges within the NOAA – NOS National Water Level Operating Network ([http://www.tidesandcurrents.noaa.gov/station\\_retrieve.shtml?type=Tide+Data](http://www.tidesandcurrents.noaa.gov/station_retrieve.shtml?type=Tide+Data)). DTZ time and height corrections were applied to water level data observed at the Gulfport Harbor, MS tide station (ID# 8745557) after applying the vertical offset used to reference the station to NAVD88 (NOAA – National Geodetic Survey, [http://www.ngs.noaa.gov/cgi-bin/ngs\\_opsd.prl?PID=BH0867&EPOCH=1983-2001](http://www.ngs.noaa.gov/cgi-bin/ngs_opsd.prl?PID=BH0867&EPOCH=1983-2001)).

The interferometric-sonar system acquires acoustic backscatter and depth data across a continuous swath to each side of the survey vessel. Accurate depth solutions are typically provided across a swath that is 7 to 10 times the water depth. For example, in 3 m water depths the system could yield a swath width of as much as 30 m (15 m to each side of the vessel). Within the Chandeleur Islands survey area, swath widths ranged from 20 to 115 m, in 3 to 16 m depths. Horizontal resolution of the bathymetric data, dictated by DGPS accuracy, was  $\pm 1 - 2$  m, and vertical resolution was  $\sim 1\%$  of water depth, which conforms to the International Hydrographic Organization (IHO, <http://www.ihp.shom.fr/>) standard requirement of 0.3 m accuracy in  $< 30$  m water depths.

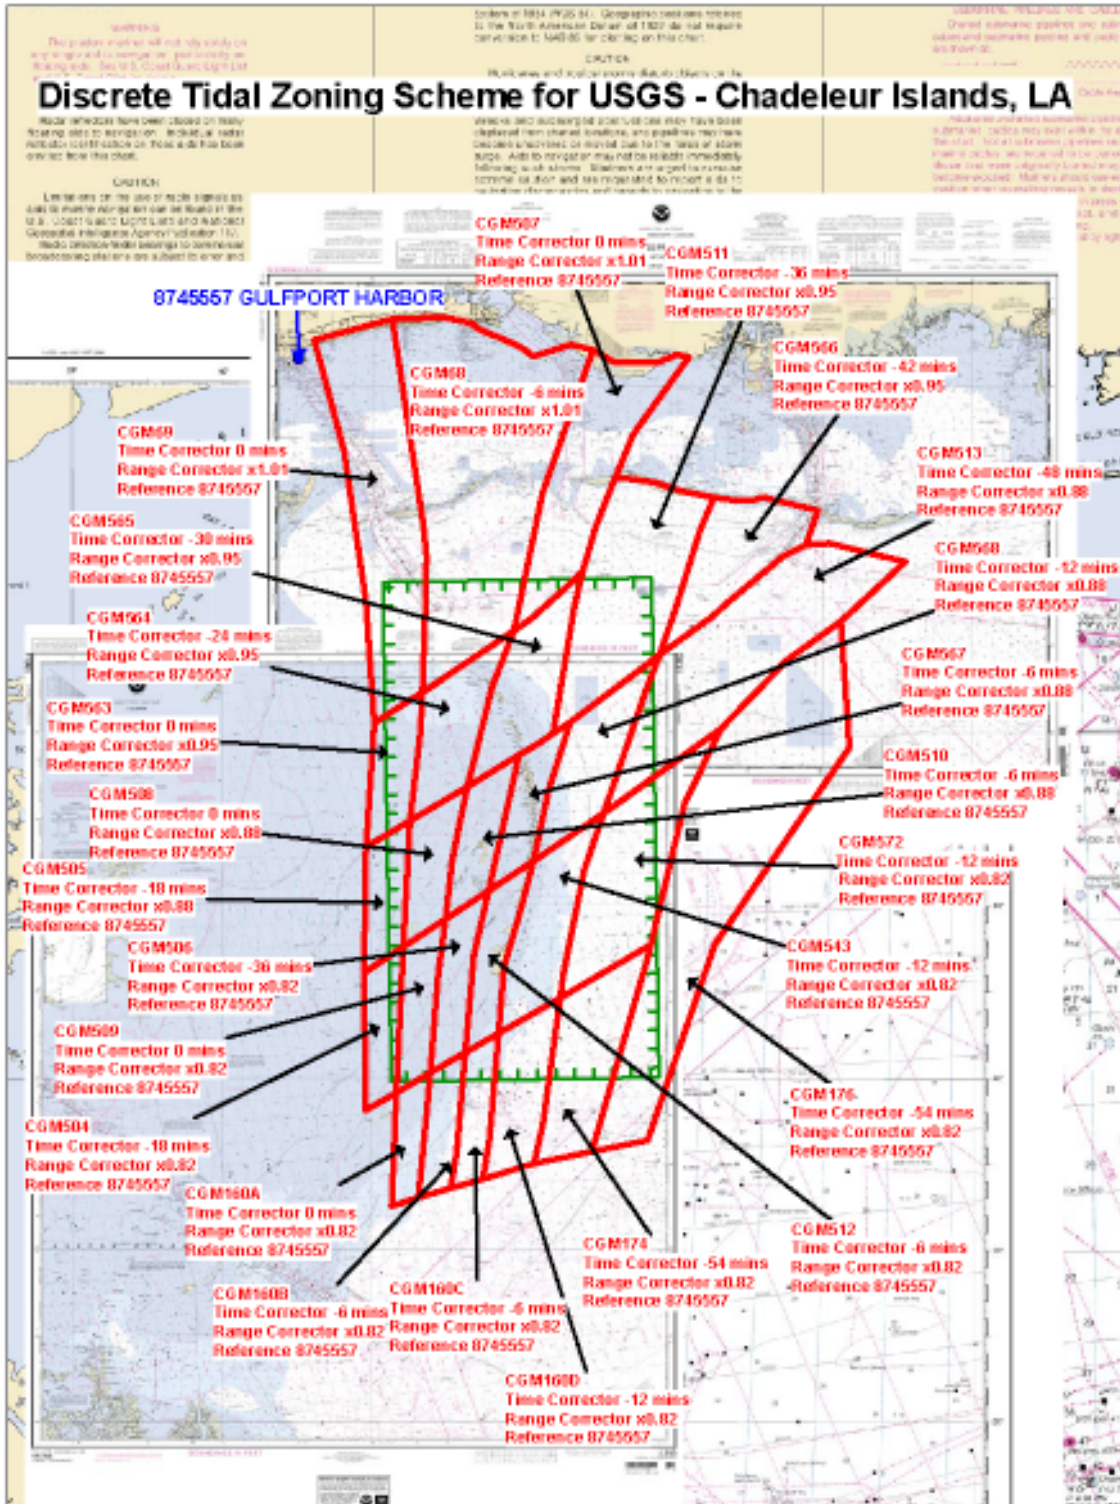


**Figure 6.** Schematic diagram of the Discrete Tidal Zoning scheme used to rectify interferometric-sonar bathymetric soundings for tidal fluctuations. Polygonal zones identify the spatial distribution of time and height corrections that were applied to water level data recorded at the Gulfport Harbor, MS tide gauge.

The linux-based software, SwathEd, developed by the University of New Brunswick – Ocean Mapping Group (<http://www.omg.unb.ca/omg/>), was used to post-process the interferometric-sonar data. Navigation data were inspected and edited, sounding data were rectified for ship motion, changes in sound velocity within the water column, and DTZ corrections, and spurious soundings were eliminated. Sounding data were gridded at a 5 m cell size and exported to an XYZ format that could be used as an input for generation of the interpolated, area-wide, 100 m cell size bathymetric model.

### Post-processing of Single Beam Bathymetric Data

A generalized work-flow diagram of data collection and processing is shown in Figure 7. The diagram outlines the sequence of the various inputs and processing components that result in finished map products and data archive. Post-processing consists of three main steps: 1) determination static GPS 3D position of each base station, 2) kinematic GPS processing for rover positioning, and 3) integration of depth soundings with post-processed kinematic rover position. The software components used in post-processing are described in the following section.

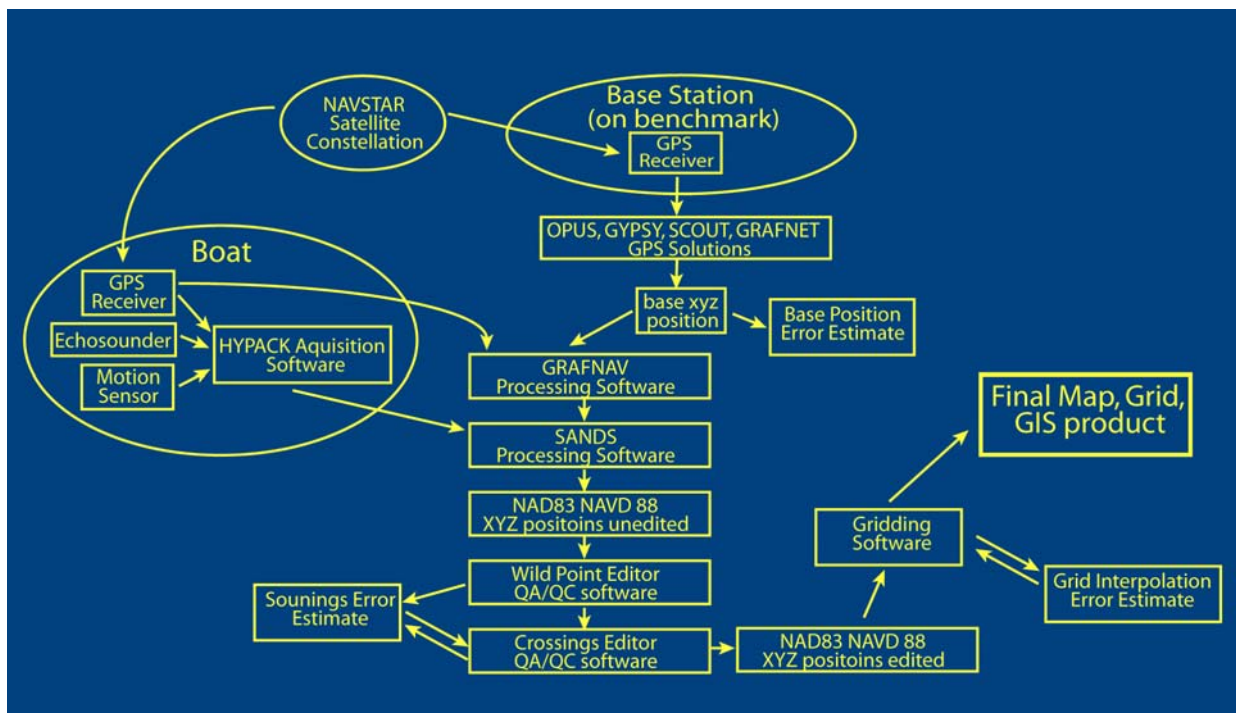

**Figure 7.** Data acquisition and processing work flow, showing the various software components used to derive a bathymetric map and other data products.

### *Static Base Station Data Processing*

During the survey, static GPS data logged at base stations are submitted to three, independent GPS autonomous processing software services (OPUS, Auto GYPSY, and SCOUT) are used to establish position. Through an online submittal service, these automated programs process the long-duration time-series GPS data recorded by the base station receiver and return a corrected position relative to constellation conditions on the day of data acquisition.

NOAA and NGS provides the On-Line Positioning User Service (OPUS), which uses three Continuously Operating Reference Stations (CORS) reference sites to average three distinct single-baseline solutions computed by double-differenced, carrier phase measurements. The locations of the three most suitable CORS stations are based upon a series of tests that OPUS performs to select suitable stations for use in calculations to provide a location accuracy of 1 to 3 cm.

Automated GPS-Inferrred Positioning System (Auto GIPSY), a service provided by NASA's Jet Propulsion Laboratory, is applied when the base location cannot be tied to an established network such as that of the National Geodetic Survey (NGS). Automated GIPSY software computes base station coordinates by accurately modeling the orbital trajectories of the NAVSTAR GPS satellites, and provides a base coordinate that can be converted to the NAD 83 and the NAVD 88 datums. Horizontal resolution of the GIPSY output can be less than 1-cm root-mean square (RMS). The Scripps Coordinate Uppdate Tool (SCOUT) uses the nearest three International GPS service stations (IGS) to derive a position with similar accuracy to OPUS.

Results from the three processing services are entered into a spreadsheet program for error analysis and averaging. In order to maintain consistency with LDNR terrestrial surveying methods and prevent the introduction of errors associated with comparing various statistical techniques used to derive positions, it was decided that OPUS would be used exclusively for final base station positions and that SCOUT and GYPSY solutions would be used for validation only.

The OPUS results are mathematically weighted relative to overall occupation time. The weighting factor improves accuracy by stressing the significance of longer base station duration times. Outliers are removed based upon an iterative process of reviewing and eliminating bad data sessions based on various quality control criteria. The first step is to eliminate any sessions that have a vertical peak to peak value (OPUS error assessment) greater than 0.04 meters. Next,

any sessions having unusually high deviations from the average ellipsoid height are reviewed and excluded based upon their influence on the mean ellipsoid. The goal is to have all inclusive sessions to be <0.020 m from the average ellipsoid height. The final 3D position for the base station is the weighted average of all sessions that were not excluded due to high peak to peak or deviations from the average ellipsoid height. Final base station positions are included as Appendix 1 in this report.

#### *Kinematic GPS Processing for Rover Position*

Waypoint Inc. *GrafNav* software is a static/kinematic baseline processing engine designed to achieve accuracies down to the centimeter level with the ability to incorporate multiple base station data. In *GrafNav* output from OPUS are used for kinematic processing of the rover GPS data to produce a single output of precise boat position and quality control information at 1-second intervals.

#### *SANDS*

An in-house processing program merges the data output (rover kinematic position) from the *GRAFNAV* program with the bathymetric data from the *Hypack* output and performs geometric corrections of the depth values caused by boat motion, time, and antennae to transducer offsets. The corrected depth is calculated as follows:

$$D = \frac{1}{2}(v * t) + k + dS + dRP(\text{roll,pitch}) + dGPS$$

Where: v= average velocity of sound in water column

t = measured elapsed time from transducer to bottom and back to transducer

k = system index constant (constant fathometer bias)

dS = offset from transducer face to GPS antenna center

dRP = geometric correction applied due to boat roll/pitch motion

dGPS = GPS ellipsoid height relative to the GPS antenna center


The final output from *SANDS* produces a 3D position for each sounding referenced vertically to NAVD88 2004.65 using the NGS GEOID03 revised 10/2005 version for south Louisiana and horizontally to NAD83 2007 in UTM Zone 15.

### **Quality control of Single-Beam Data**

#### *Sound velocity*

In shallow water surveys, the high sound velocity to depth ratio, and assumed mixing of the water, tend to decrease the significance of sound velocity variations due to salinity and

temperature gradients in the water column. For these reasons, the use of an average sound velocity is suitable within the depth range of surveying. A fixed “bar check” is an accepted method used to correct for sound velocity variations and index variability that is recorded by the fathometers. Bar checks during the 2006 surveying followed similar procedures for each vessel. An aluminum pipe with a top plate was suspended 1.0 m below the transducer (Fig. 6). This known distance is compared to the distance determined by the sounding system, using an assumed average sound velocity of  $1500 \text{ m s}^{-1}$ . This check is conducted on a daily basis, and any deviation between the depth of the reference bar and the measured depths is used to correct subsequent recorded soundings for that day during post processing. In shallow water operations, depth deviations are usually minimal in proportion to sound velocity and the short distance of signal travel.

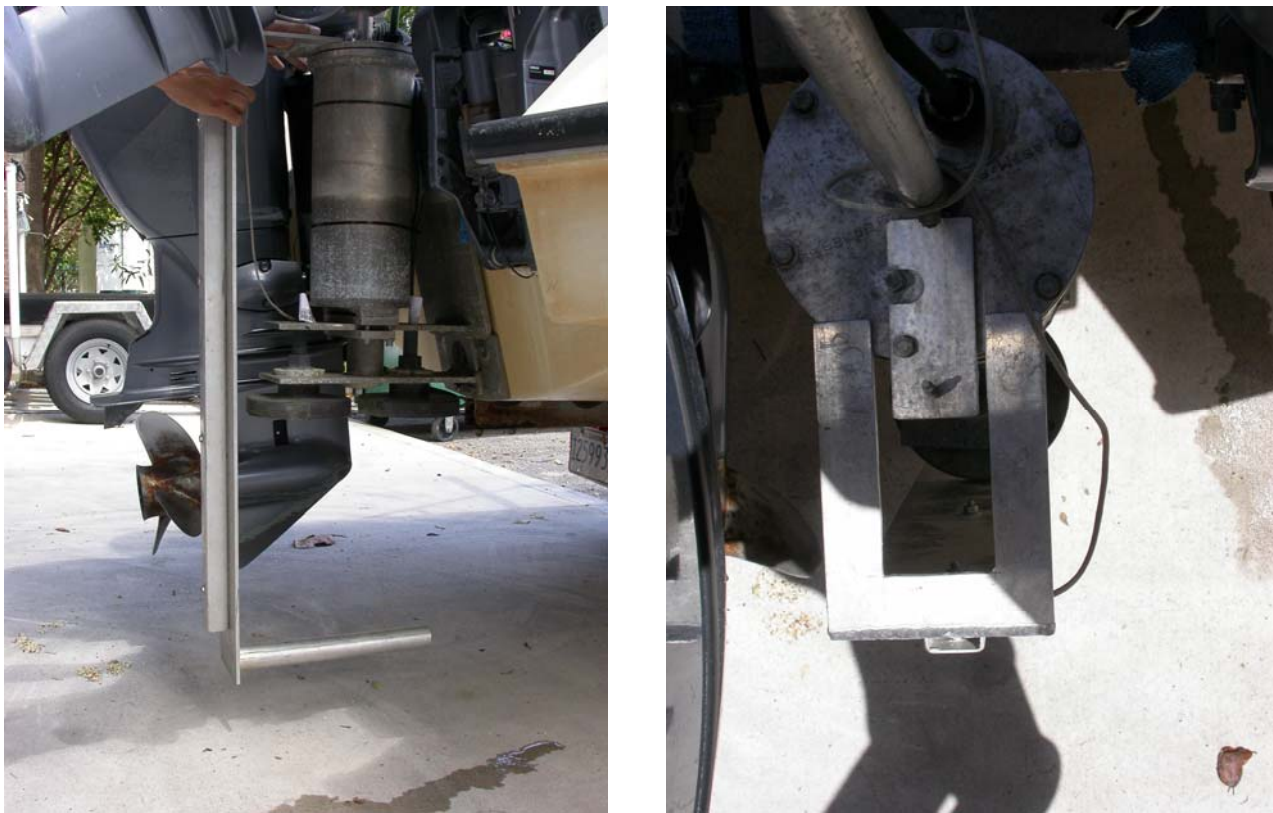

**Figure 8.** “Bar check” system, from side view (left) and top view (right) that is used to monitor fathometer accuracy and precision. Any offset between the distance to the bar recorded by the fathometer and the known length of the bar are recorded on a daily basis and incorporated during post-processing in SANDS.



### *GPS Percent Dilution of Position and Root Mean Square Error*


The GPS antennae receive position information from the NAVSTAR satellite constellation, which includes the Percent Dilution of Position (PDOP). PDOP is a measurement of the relative signal strength of the GPS satellite configuration, measured internally by the GPS system and displayed as a value typically between 1 and 4. The PDOP is a proxy for position error, the lower the value the higher the accuracy. When PDOP readings exceeded a value of 3, operations were halted, or data was removed from the dataset during post-processing.

During post-processing, GrafNav determines a root mean square (RMS) error for each point based on GPS cycle slips, PDOP, satellite health, and base station RMS. Any RMS values greater than 0.14 m were removed during quality control and assessment. After removing outliers, the final mean RMS value was 0.07 m.

### *Wild-Point Editor*

In order to ensure data quality, a graphically interactive wild-point editor was devised (Weathers, 2008). During this first step of quality control, the bathymetric data are split into individual survey lines so that each profile represents the planned survey line run by an individual boat on a single day. Figure 9 shows a screenshot of the wild point editor taken after an edit session. Four axes panels show plots of different aspects of the data that are useful in assessing data quality and identification of erroneous data points or groups of points. The axes to the left show the profile plotted with the processed survey elevation, in NAVD88, versus time. Time was used as a proxy for distance traveled, as the survey speed was slow and consistent, rarely exceeding 6 knots, and the time, unlike the distance traveled, always moves forward. The upper profile window is the primary editing window and can be interactively panned and zoomed to inspect the data, while the lower profile window serves as an index profile where a moving box shows the zoomed area of interest. The zoomed area of interest is also indicated by point color on the axes on the left side of the screen. The upper right axes show the ship track on plan view. Finally the lower right panel shows a plot of Z1 against Z2, where the Z1 value is the elevation in NAVD88 and the Z2 is raw depth from the echosounder. This plot is useful to identify GPS errors, which usually show up as sharp deviations from the otherwise linear trend in the data (Figure 9). Using these four plots together, the data were visually evaluated and manually edited through the selection of points that were not representative of the local trend in the data set. Errant points in the dataset were likely the result of poor GPS signal quality, sea

conditions, boat maneuvering, echosounder returns from below the seabed or from objects within the water column, such as marine life or air bubbles.

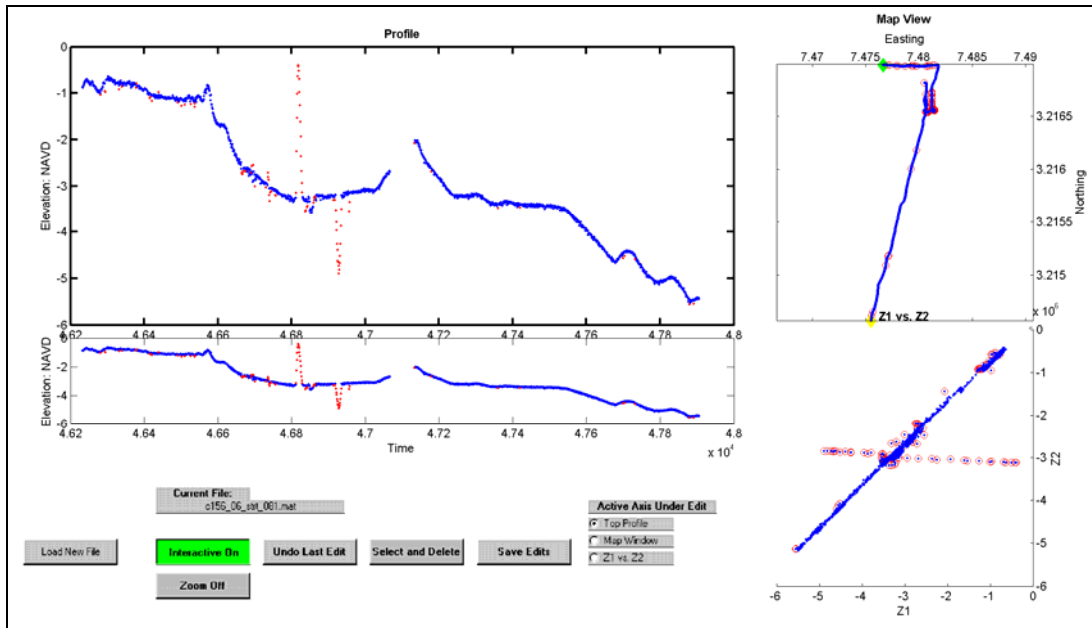

**Figure 9.** Screen capture of the wild-point editor program. The two plots on the left show the soundings in profile as elevation versus time. The upper one is editable through graphical user interface. The upper right plot shows the map view of the survey transect. The lower right plot shows Z1 (GPS elevation) versus Z2 (depth from echosounder only). Points that do not plot along the Z1 vs Z2 linear trend contain GPS errors and are removed from the dataset.


### *Data validation through crossline check*

During the survey, shore-parallel lines trending perpendicular to the shore-perpendicular transects were surveyed, providing an opportunity to assess consistency of elevation measurement throughout the study. At each location where a survey vessel crossed itself or another survey vessel, the difference in elevation (DZ) is calculated (Fig. 10). Ideally, the processed elevation at any given crossing point should be identical (DZ=0). However, this is rarely the case. An ideal crossing would have two boat paths acquiring a measurement at the exact same position (Northing and Easting). However, this was also rarely, if ever, the case, so comparative elevation measurements were conducted by proximity. A script is then run to: 1) identify all crossings, 2) interpolate the elevation for each survey line at the XY location of that crossing, and 3) calculate the DZ between survey lines. The general mechanics of this script are described below.


For a crossing analysis run, each survey line was compared against all others. If the paths crossed, an intersection point was interpolated from the four nearest survey measurements: two from each line. From the interpolated crossing position, a representative elevation measurement

was interpolated for each boat path using an average of the measured Z (elevation) within a given search radius of 5 m. This local averaging technique was employed in order to remove any exaggerated DZ discrepancy that could result from an erratic Z measurement associated with any of the four survey points used to determine the crossing position.

Boat crossing analysis is an iterative process whereby the crossing results are analyzed. Analysis suggests problems with parts of the dataset, i.e. a miss-edited survey day, and in turn, a way to amend this problem. The cycle of crossing analysis repeats until the data set has desirable statistical qualities, that is, a mean DZ near 0 m and a narrow standard deviation, as this provides an estimate of overall error in the survey point elevations. Generally, crossings identify problems at three levels: the gross scale, the boat scale, and finally, the micro scale. The gross scale identifies large discrepancies, those where the DZ at crossing is greater than 1 meter. These errors are generally the result of missed edits and the like. At the boat scale, survey boat pairs have a single mode in their DZ values; however, this value is not zero. At this scale, static shifts are applied to the Z values in the dataset per each boat such that the DZ modes of boat pairs all approach zero. Finally, the micro scale is where spatial trends in crossing are identified. At this scale, individual survey days may show a general elevation difference with the rest of the dataset that they intersect and are vertically shifted to reach better agreement.

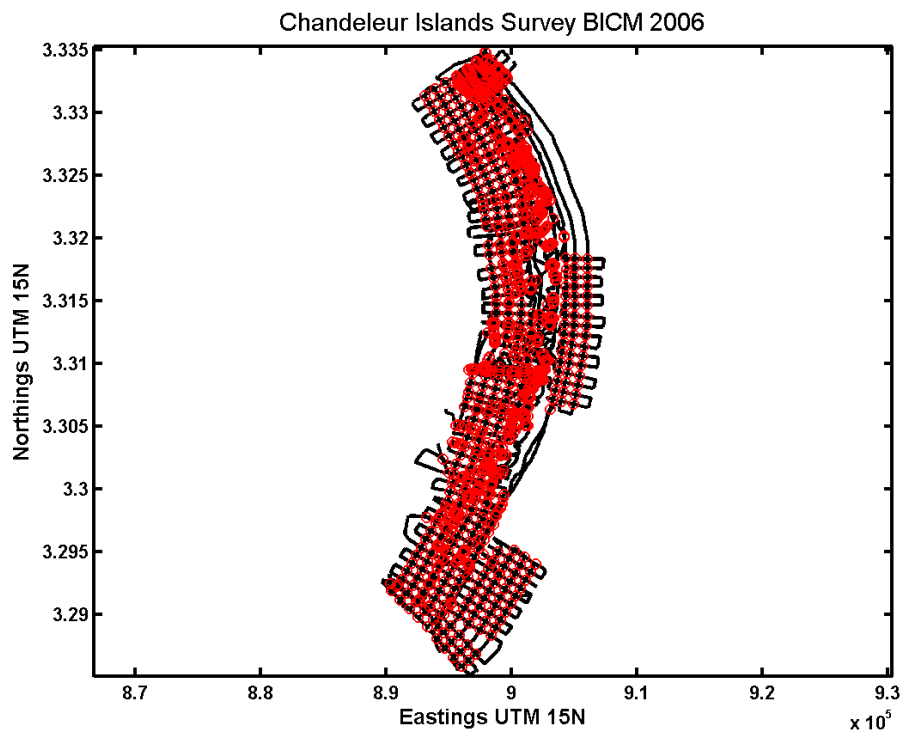

**Figure 10.** Screen capture of the crossings editor program for the northern Chandeleur Islands study area. The map shows single-beam survey tracklines (black) and line crossing locations (red circles).

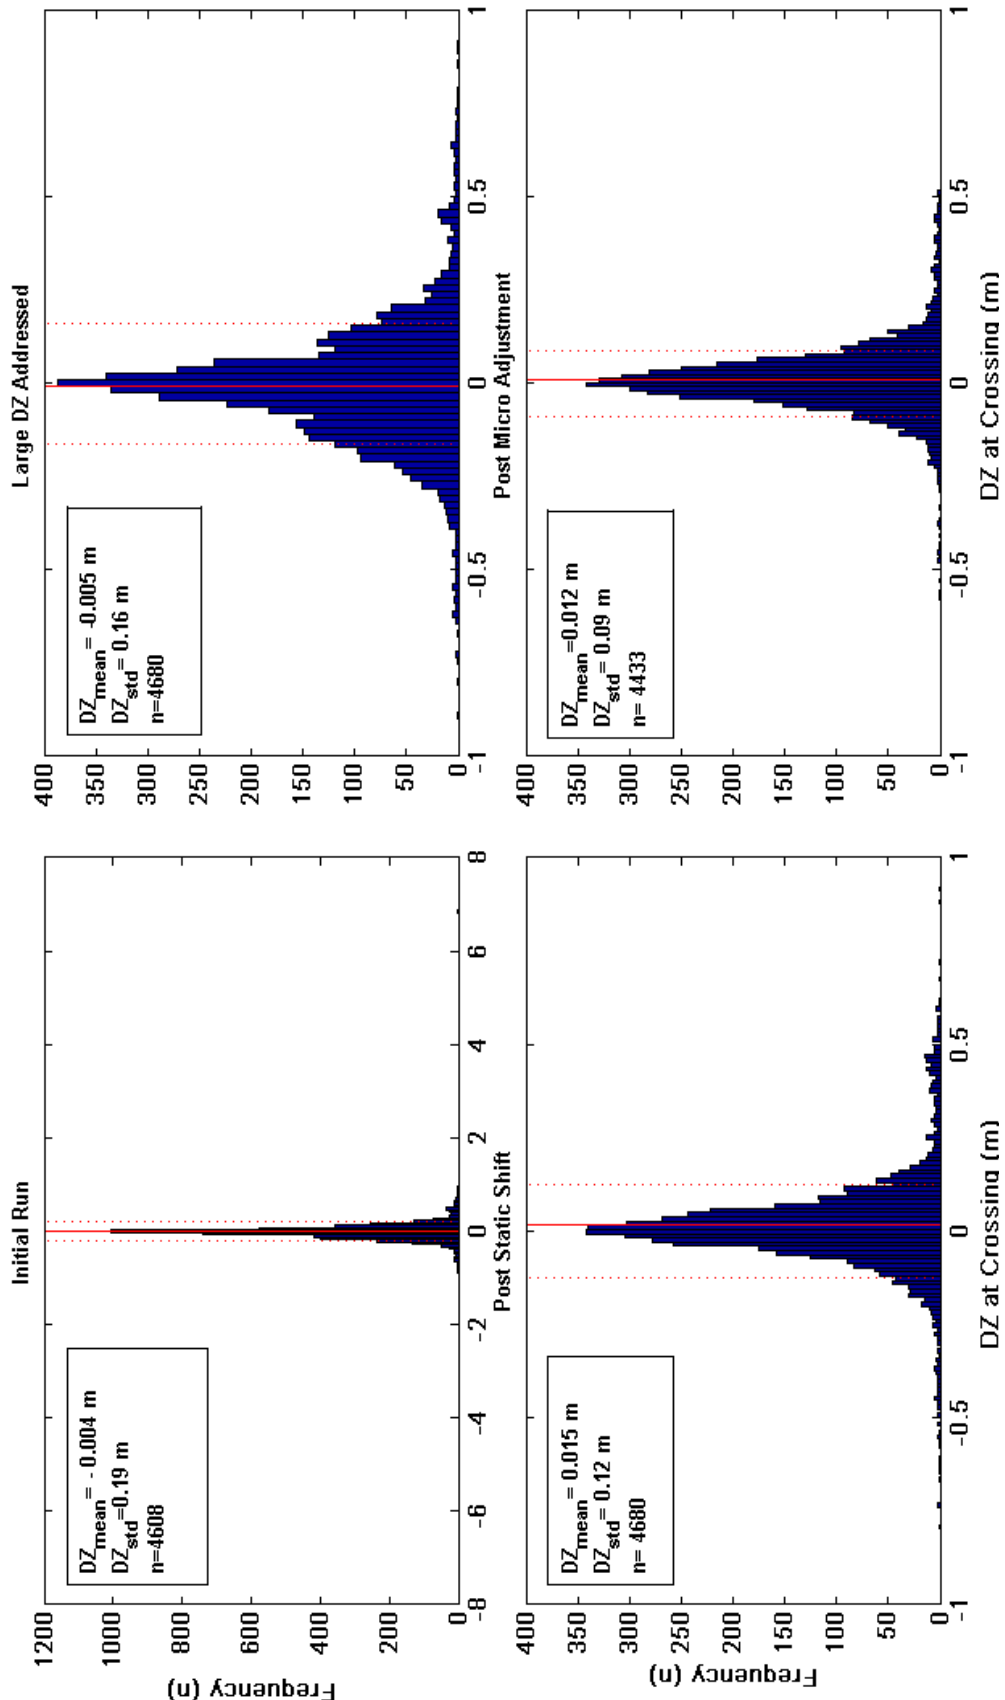

**Figure 11.** Histograms output at various stages during the QA/QC using line crossings for the Raccoon Point to Sandy Point study area. Initial run graph (top left) includes all crossings prior to any static shift (note that both x and y scales are larger here than on subsequent graphs). Large DZ Removed (top right) graph shows distribution of all single beam crossings for all three boats prior to any static shift. Only line crossing elevation differences greater than 1m have been addressed. The results at this stage, as presented in Table 1, are used to determine the most precise boat, and the value for which to shift less precise boats to agree with the most precise boat. Post Static Shift (lower left) histogram is the distribution of crossing values after the static shifts have been applied. Post Micro Adjustment (lower right) graph shows the final distribution of DZ values after addressing small errors that are line or survey day specific.

Crossing Pair	mean DZ (m)	std DZ (m)	number of crossings
Gilbert-Gilbert	0.007	0.39	363
Gilbert-Mudlump	-0.03	0.14	112
Gilbert-Streeterville	-0.204	0.15	751
Mudlump-Mudlump	-0.008	0.08	1138
Streeterville-Mudlump	0.139	0.09	912
Streeterville-Streeterville	0.037	0.12	1157
<b>Total</b>	<b>-0.010</b>	<b>0.162</b>	<b>4433</b>


**Table 1.** Crossings statistics for Raccoon Point to Sandy Point subsequent to removal of Dz values > 1 m. These values were used to determine the static shift (if any) that would be applied to each boat and which boat the data would be shifted to.

Boat	Static Shift
Streeterville	SZ - 0.16 m
Gilbert	SZ + 0.03 m

**Table 2.** Static adjustments applied to R/Vs Streeterville and Gilbert to meet R/V Mudlump in the Raccoon Point to Sandy Point study area. These values were determined through the crossings analysis results presented in Table 1. R/V Mudlump was selected as the reference boat because it had the lowest standard deviation value when crossing itself.

Crossing Pair	mean DZ (m)	std DZ (m)	number of crossings
Gilbert-Gilbert	0.004	0.11	363
Gilbert-Mudlump	0.02	0.10	112
Gilbert-Streeterville	0.004	0.10	751
Mudlump-Mudlump	0.001	0.07	1138
Streeterville-Mudlump	0.01	0.08	912
Streeterville-Streeterville	0.02	0.10	1157
<b>Total</b>	<b>0.011</b>	<b>0.09</b>	<b>4433</b>

**Table 3.** Final crossings values after removal of static adjustment and micro adjustments were applied. This final standard deviation at crossing values of 0.09 m is the vertical uncertainty (+/- 0.09 m) at each X,Y elevation for the Raccoon Point to Sandy Point dataset.

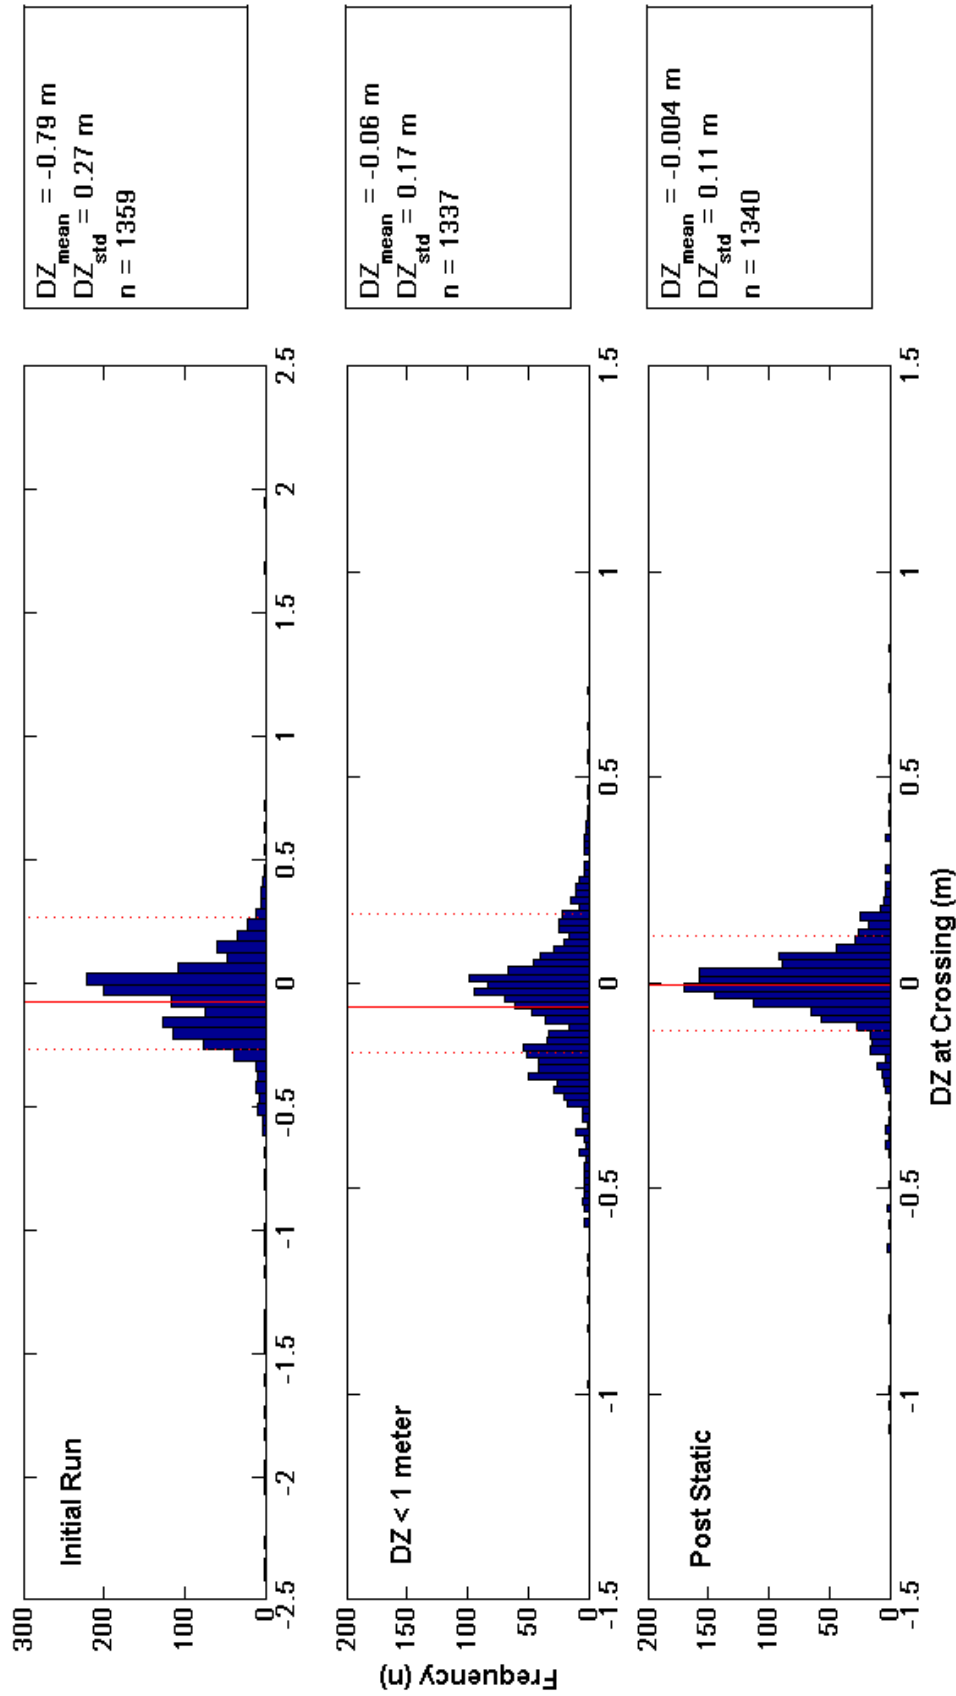

**Figure 12.** Histograms output at various stages during the QA/QC using line crossings for southern Chandeleur Islands study area. Initial run graph includes all crossings prior to any static shift (note that both x and y scales are larger here than on subsequent graphs).  $DZ < 1$  meter graph shows distribution of all single beam crossings for all three boats prior to any static shift. Only line crossing elevation differences greater than 1m have been addressed at this stage. The results at this stage, as presented in Table 4, are used to determine the most precise boat, and the value for which to shift less precise boats to agree with the most precise boat. Post Static histogram is the distribution of crossing values after the static shifts have been applied.

Crossing Pair	mean DZ (m)	std DZ (m)	number of crossings
Gilbert-Gilbert	-0.08	0.199	174
Gilbert-Mudlump	0.034	0.124	67
Gilbert-Streeterville	-0.070	0.192	242
Mudlump-Mudlump	0.017	0.078	129
Streeterville-Mudlump	0.188	0.104	395
Streeterville-Streeterville	-0.001	0.103	333
<b>Total Single Beam (weighted)</b>	<b>0.06</b>	<b>0.17</b>	<b>1340</b>
Single Beam-Acadiana	-0.16	0.11	98867

**Table 4.** Crossings statistics for northern Chandeleur Islands subsequent to removal of Dz values > 1 m. These values were used to determine the static shift (if any) that would be applied to each boat and which boat the data would be shifted to.

Boat	Static Shift
Gilbert	-0.03
Streeterville	-0.19
Acadiana	-0.16

**Table 5.** Static adjustments applied to R/Vs Streeterville and Gilbert to meet R/V Mudlump for the northern Chandeleur Islands study area. These values were determined through the crossings analysis results presented in Table 1. R/V Mudlump was selected as the reference boat because it had the lowest standard deviation value when crossing itself.

Crossing Pair	mean DZ (m)	std DZ (m)	number of crossings
Gilbert-Gilbert	0.003	0.07	174
Gilbert-Mudlump	0.004	0.12	67
Gilbert-Streeterville	0.011	0.12	242
Mudlump-Mudlump	0.017	0.08	129
Streeterville-Mudlump	-0.0001	0.11	395
Streeterville-Streeterville	-0.008	0.13	333
<b>Total Single Beam (weighted)</b>	<b>0.004</b>	<b>0.11</b>	<b>1340</b>
Single Beam-Acadiana	-0.002	0.11	98867

**Table 6.** Final crossings values after removal of static adjustment and micro adjustments were applied. This final standard deviation at crossing values of 0.11 m is the vertical uncertainty (+/- 0.11 m) at each X,Y elevation for the Chandeleur Islands dataset.

For the Chandeleur Islands portion of this study, there was additional multi-beam survey data. This data was processed differently than the GPS based survey data, so comparison for elevation agreement was paramount. The single beam surveys had geodetic control from GPS, so they were used as the control to which the multi-beam was compared. The nature of multi-beam data does not lend itself to crossing analysis per se, so another elevation comparison technique was employed. For every single beam survey point, a different comparison technique was employed. If any multi-beam data were within a 5 m radius of a single beam survey point, analysis went further to compare the difference in elevation ( $DZ_{\text{mean}}$ ) between the mean elevation of single beam points in that search radius and the mean elevation of any multi-beam survey points in the same radius.

The offsets between the three single-beam vessels and offset between the single-beam vessels and swath bathymetry from R/V *Acadiana* are reported in Tables 1-6.

### **Surface Grid and Contouring**


Subsequent to the completion of QA/QC procedures described above, the final XYZ data were used to construct surface "grids" for the study area. Gridding is the process of taking irregularly spaced XYZ data and producing a grid file that contains a regularly spaced array of Z data at locations called grid nodes (Golden Software, Inc, 2002).

#### *Grid node spacing*

Optimum grid node spacing was determined for the combined bathymetric dataset by comparing interpolated profiles to actual sounding measurements at decreasing grid resolutions. The area where the survey grid had the largest line spacing was selected as a lowest common denominator for the entire survey. This area is found along the southern portion of the Chandeleur Islands survey (Fig. 13a), where the *R/V Gilbert* collected a survey grid at 1 km spacing. A bathymetric grid was interpolated using the convergent algorithm provided by a gridding-software package (CPS-3), at various grid-node spacing between 500 m and 30 m (Fig. 13b). A survey line central to the survey area was then removed and the bathymetric grid was re-interpolated using the same resolutions. From this second grid-set, a two-dimensional profile along the missing line was compared to the actual soundings, and to a similar profile when the removed line was present. The graphs show similar interpolative capabilities at grid node spacings between 300 and 100 m, with not a dramatic increase in profile accuracy at spacing less than 100 m. However, Figure 13b



shows a distinct increase in accuracy between the same range when data is present. This suggests that a grid node spacing of 100 m is sufficient to capture the sea floor features present within the study area using the available single-beam data.

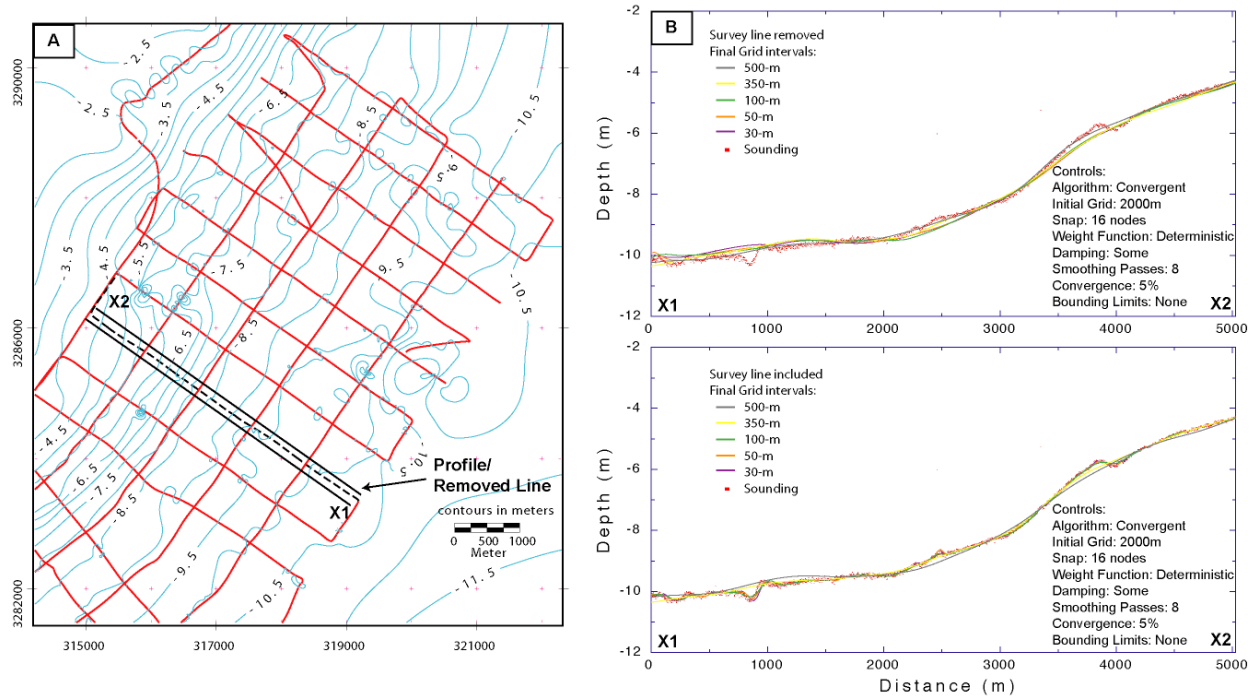

**Figure 13.** A) Location of survey lines along the northern Chandeleur islands that were used to determine optimum grid-spacing for contouring algorithm. B) Comparison of interpolated profiles at various grid-spacing resolutions, with actual sounding line removed prior to gridding (top), and with sounding line included during gridding (bottom).


Because the XYZ data consists entirely of elevations below the intertidal zone and in order to prevent interpolation across islands (between offshore to backbarrier) during gridding, shoreline representing 0.5 m elevation was included in the bathymetric dataset to constrain the grid algorithm. The shoreline was digitized from a mosaic of USGS digital ortho-quarter quadrangles (DOQQ) and/or NOAA Coast Survey T-Sheets, acquired at a time period comparable to each bathymetric data set (see Martinez et. al, 2008). A grid of regularly spaced depth values was generated from the processed tracklines using a convergent-grid algorithm used by Schlumberger CPS-3 software. A similar analysis was carried out using Golden Software Surfer 8 gridding and contouring software. A final grid-node spacing of 100 m was used. Comparisons of these grids were then used for bathymetric change analysis described below.

Final grids for both historical and newly acquired bathymetric data were created in Surfer 8 and interpolated by Kriging with a 100 m grid node spacing. Kriging is a geostatistical algorithm that uses a distance weighting, moving average and takes into account naturally occurring regional variables that are continuous from place to place (such as a linear bar or inlet channel), and assigns optimal weights based on the geographic arrangement of data point Z values taken from a variogram (Davis, 1986; Krajewski and Gibbs, 2003). Kriging was determined to be the most appropriate contouring method because it takes into account spatial characteristics of the local geomorphology and provides the best linear estimate that can be obtained from an irregular arrangement of data samples. A linear variogram model with no nugget effect was used.

For grid file size manageability and optimal scale necessary for visualization in 11"x17" paper format, Raccoon Island to Sandy Point study area was broken into four separate, overlapping regions: Isles Derniere, Timbalier, Barataria, and Plaquemines (Fig. 14). A single grid file covers the northern Chandeleur Islands study area. Table 7 summarizes the extent of each grid boundaries in this report.

Grid Name	UTM 15N X <sub>min</sub>	UTM 15N X <sub>max</sub>	UTM 15N Y <sub>min</sub>	UTM 15N Y <sub>max</sub>
IDER	690000	739000	3208000	3228000
TIMB	725000	774000	3208000	3228000
BARA	760000	809000	3213000	3250000
PLAQ	795000	844000	3223000	3250000
CHAN	889700	910400	3285100	3339200

**Table 7.** Grid extents for the study areas. IDER, TIMB, BARA, and PLAQ are within the Raccoon Point to Sandy Point study area and CHAN is the entire northern Chandeleur Islands study area. The extent of these grid divisions for Raccoon Point to Sandy Point study area are delineated in Figure 1.

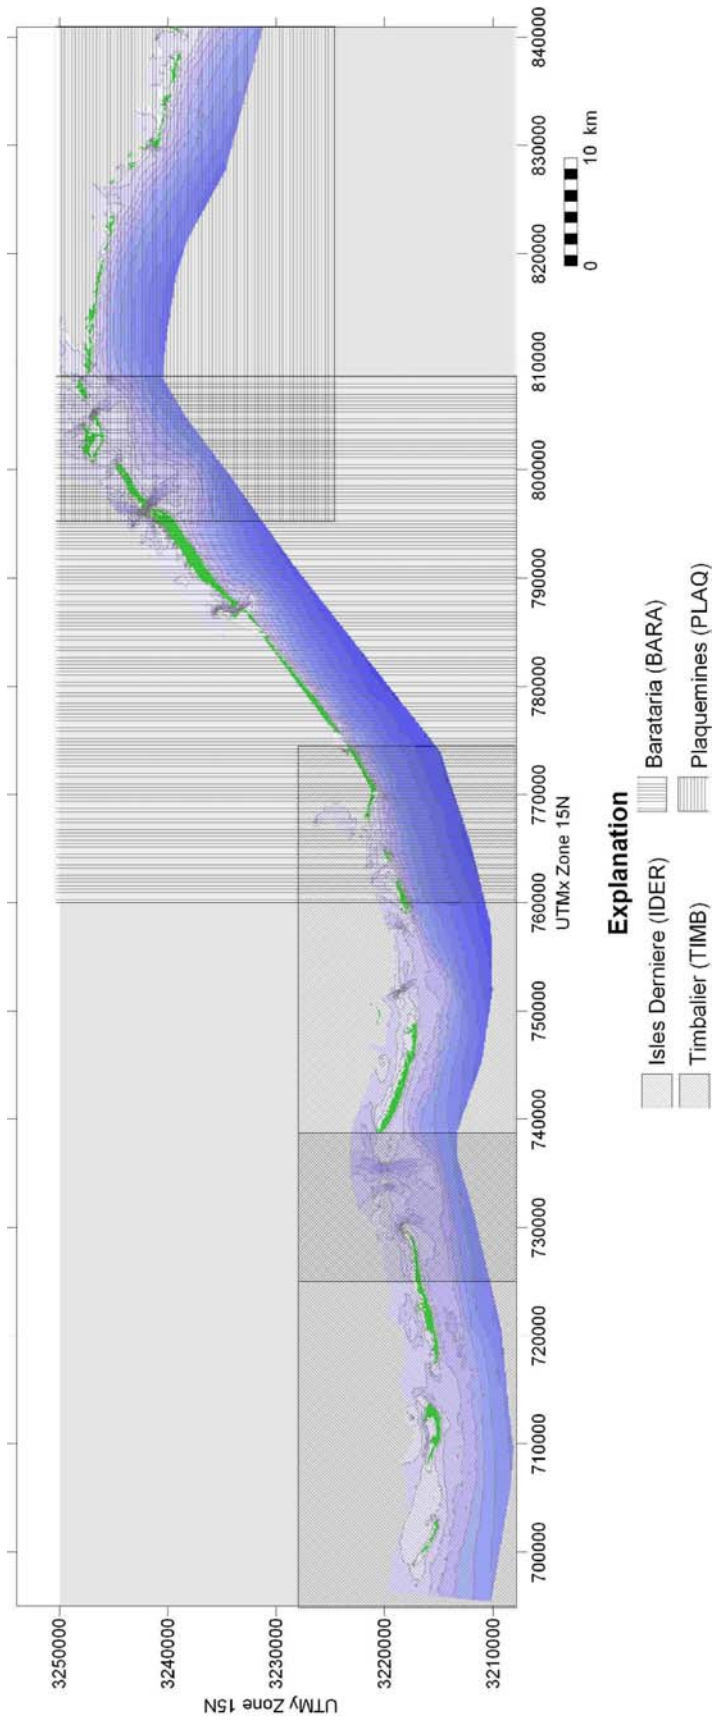

**Figure 14.** Extent of grid limits for the Raccoon Point to Sandy Point study area. The area was broken down into four, overlapping subregions for grid file manageability and optimal scaling for presentation in 11 x 17 paper format.

## **HISTORICAL BATHYMETRIC DATA COLLECTION**

### **Northern Chandeleur Islands**

*1873 - 1885*

U.S. Coast and Geodetic Survey (USCGS) hydrographic survey smooth sheets or H-sheets were acquired through the Hydrographic Survey Division of NOAA's Office of Coast Survey as high-resolution scanned image files (.tif and .jpg). H-sheets used for this analysis consist of H01171 (1873) and H01654 (1885). The H-sheets were originally referenced to a geographical (latitude/longitude) coordinate system based on the Clarke 1866 ellipsoid model. NAD27 control points were added to the sheets by the USCGS in the 1930's. The depth soundings are reported relative to MLW at the time of the survey, and are therefore referenced to an arbitrary vertical datum. Horizontal positioning for the soundings was accomplished by means of recording sextant angles from the ship to known landmarks, recording theodolite angles to the survey vessel from the shoreline positions, and dead reckoning (estimation of position based on ship speed and heading) (List et al., 1994).

In order to project the H-sheet images for digitizing, a grid to a known datum (NAD27) had to be overlain on the image. The geographic coordinate grid from the original H-sheet was traced in Adobe Illustrator. The traced coordinate grid was then shifted to match the NAD27 control point on the H-sheet. The shifted coordinate grid overlain on the H-sheet was saved as a single layer tif file. ERDAS IMAGINE software was then used to establish a series of geographic control points at the coordinate grid intersections in order to georectify the image for projection in GIS software applications. Over 65 control points for each H-sheet were digitized in NAD27 using ERDAS IMAGINE's Geographic Control Point (GCP) tool. On each H-sheet, an outline of the shoreline that was traced from a USCGS Topographic Survey smooth sheet (T-sheet) was compared to a shoreline polygon in ESRI ArcGis 9.2 that had been previously digitized from a T-sheet and was acquired from NOAA. This served as a quality assessment of digitizing and projection accuracy.

The bathymetric soundings on each projected and rectified h-sheet were then digitized on-screen using ESRI ArcGis 9.2. After digitizing, the soundings were converted from feet and fathoms into meters. Horizontal data was converted from geographic NAD27 into UTM Zone 15 North NAD83 using CORPSCON 6.0. Files in XYZ format were then produced for gridding.

### *1917-1922*

The 1920 data was acquired digitally from the Hydrographic Survey Division of NOAA's Office of Coast Survey. Surveys used to produce the bathymetric maps included H04000 (1917), H04171 (1920), H04212 (1921-1922), and H04219 (1922). The smooth sheets associated with these surveys were digitized between 2001 and 2004 by a NOS contractor. The data was downloaded as an XYZ file referenced to NAD83 with soundings expressed in meters relative to MLW at the time of the survey.

Horizontal positioning was achieved by using a system of triangulation based on a series of towers (up to 100 ft high) and base stations located along the Chandeleur Islands. Beyond the limit of sight from the shoreline, buoys located using cuts and fixes from the shore signal were placed at the outer limit of the planned survey lines. Soundings were acquired using sextant three-point fixes for horizontal positioning when in sight of the positioning signals, and dead reckoning when signals were out of sight. A hand lead was used to a depth of 15 fathoms. From the 15 fathom to the 25 fathom depth a trolley rig consisting of a leadline with copper core. In depths greater than 25 fathoms, a mechanical sounding machine was used. A tidal staff at the Chandeleur Island light, along with automatic tide gauges at Bay St. Louis and Biloxi, Mississippi and Ft. Morgan, Alabama were used to correct soundings to a common datum of MLW (Summarized from USCGS, 1917; 1920; 1922; Hawley, 1931).

### **Raccoon Point to Sandy Point**

Historical bathymetric data was acquired in digital form from the USGS and was published by the USGS and Louisiana Geological Survey titled *Louisiana Barrier Island Erosion Study: Atlas of Seafloor Changes from 1878 to 1989* by List et al. (1994). Jaffe et al. (1991) and List et al. (1994) discuss extensively the methods employed for data collection, cartographic production, and seafloor change analysis. The data for this region is broken down into three time periods; the 1880's, 1930's, and 1980's.

The historical data acquired for this region was horizontally referenced to NAD27 a conversion to NAD83 was necessary. This was done using CORPSCON6 transformation software available from USACE. The vertical datum in which these data were referenced to was MLW or MLLW at the time of each survey. In order to bring these data into a comparable


vertical reference frame, they were shifted to NAVD88. This transformation process is discussed in the following section.

### **ADJUSTMENT OF HISTORICAL VERTICAL DATA TO NAVD88**

A subsequent report (BICM Vol. 3, Part 3) will include a seafloor change analysis by comparing grids from two different time periods in order to determine erosion and accretion patterns and sediment transport trends. In order to compare surfaces from two different time periods, they must be referenced to a common vertical datum. This proposed a problem in the study area because much of the historical data is referenced to an arbitrary datum, mean low water (MLW) at the time of the survey. Because relative sea level rise (RSLR) rates are so high in the study area, the MLW elevation is constantly increasing. This problem was encountered by List et al. (1994) when attempting to perform seafloor change analysis in Louisiana. The reader is referred to Jaffe et al. (1991) and List et al. (1994) for extensive discussion on the methods employed for accounting for RSLR in Louisiana. The 1880's and 1930's bathymetric data in this study, is shifted for RSLR using a correction determined by Jaffe et al. (1991). This method involved the identification of a area of seafloor, seaward of the shoreface, that undergoes relatively no erosion or accretion, and therefore the bathymetric change in that area is the result of RSLR. The surface for each year (1880's and 1930's) was shifted based on the RSLR estimated from the area of no seafloor change. The shift for each year, as determined by Jaffe et al. (1991) was 0.33 m between 1930 and 1980, and 0.27 m between 1880 and 1930 (Table 8).

For the seafloor change portion of this study, all of the historical data was shifted to reference an elevation relative to NAVD88 for comparison to the 2006 bathymetry. There were two steps to this process. The first involved shifting each bathymetric dataset to a common datum that also takes into account the RSLR that occurred between each time period. Each of the historical datasets were shifted to MLLW at Grand Isle for the 1983-2001 tidal epoch. This involved a using the shifts determined by Jaffe et al. (1991) and List et al. (1994) for the 1880's and 1930's, plus a shift applied to the 1980's data for comparison to 2006. The RSLR rate for the 1980-2006 time period was determined from the long-term rate of RSLR based on the Grand Isle tide gauge (0.92 cm/yr for the period from 1947-2006; Fig. 15). This shift was then applied to all of the historical data, plus any shift previously determined for each year by Jaffe et al. (1991) and List et al. (1994) to arrive at MLLW for 2006. The second part of the process involved

converting from MLLW to NAVD88 and can become quite complex because it involves a shift from a tidal datum (i.e. MLLW) to a terrestrial datum (i.e. NAVD88). The Grand Isle tide gauge shows a 0.14 m difference between MLLW and NAVD88, therefore each RSLR adjusted dataset was converted to NAVD88 by a 0.14 m downward shift (MLLW at Grand Isle is higher in elevation than NAVD88). Table 2 summarizes adjustments made to each historical dataset for the seafloor change analysis. (At the time of publication of this report the National Oceanic and Atmospheric Association was in the process of updating the NAVD88 value at the Grand Isle gauge due to subsidence in the region.) Details of issues encountered during this study that are associated with comparing orthometric heights from derived from GPS and depths referenced to a tidal datum are discussed in detail in Miner and Weathers (2008).

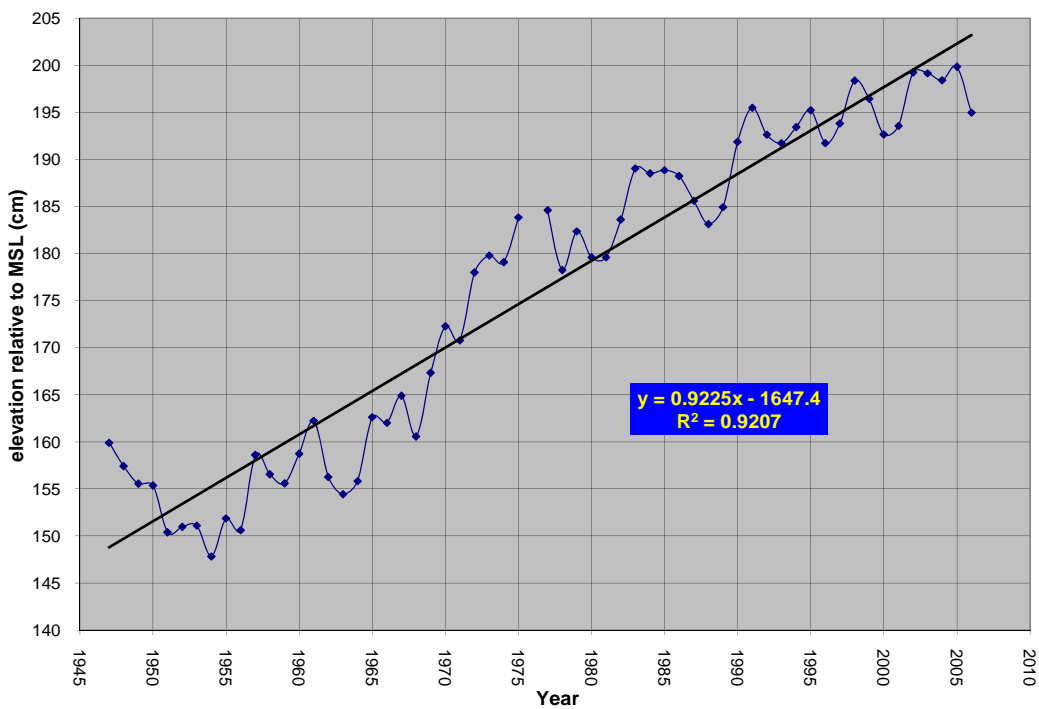

**Figure 15.** Relative sea-level curve for Grand Isle based on NOAA tide gauge (# 8761724) data for the period from 1947 – 2006. The plot shows the annual mean sea level for each year (curved line and diamonds) and a best-fit trend line. Plotted values are relative to the 1983 – 2001 mean sea-level datum.

Time Period	RSLR (m) (List et al., 1994)	RSLR (1988-2006, tide gauge)	MLLW to NAVD88	Total Adjustment
1880's	-0.60 m	-0.17 m	0.14 m	-0.63 m
1930's	-0.33 m	-0.17 m	0.14 m	-0.36 m
1980's	na	-0.17 m	0.14 m	-0.03 m

**Table 8.** Adjustments made to historical bathymetric data for seafloor change analysis. Note that a negative value results in an increased depth because the bathymetry is expressed as an elevation relative to NAVD88.

After adjusting historical datasets to account for RSLR and reference to NAVD88, grids were created for each time period. The grids were produced using the same methods and parameters described above for the 2006 bathymetry. After creation of the grids, grid math was performed in Surfer 8 by subtracting the earlier grid from the later grid to produce a bathymetric change grid. The product is a grid that quantifies erosion (negative values) and accretion (positive values).

Bathymetric contour maps and seafloor change maps for the Raccoon Island to Sandy Point and northern Chandeleur Islands were produced for each time period and are included in Volume II of this report. For grid file size manageability and optimal scale necessary for visualization in 11"x17" paper format, Raccoon Island to Sandy Point study area was broken into four separate, overlapping regions: Isles Derniere, Timbalier, Baratavia, and Plaquemines. Ongoing research includes bathymetric surveying of the southern Chandeleur Islands and the western Louisiana Chenier Plain coastline in the summer of 2007. Once a complete bathymetric dataset for the Chandeleur Islands chain exists, historical seafloor change analysis will be conducted for that area and western Louisiana in a forthcoming report.



## REFERENCES

- Barras, J., Beville, S., Britsch, D., Hartley, S., Hawes, S., Johnston, J., Kemp, P., Kinler, Q., Martucci, A., Porthouse, J., Reed, D., Roy, K., Sapkota, S., and Suhayda, J., 2003, Historical and Projected 39 p. (Revised January 2004).
- Davis, J. C., 1986, *Statistics and Data Analysis in Geology*, Second Edition: New York, John Wiley and Sons, 646 p.
- Golden Software, Inc., 2002, *Surfer 8 Contouring and 3D Surface Mapping for Scientists and Engineers User's Guide*: Golden, Colorado, Golden Software, Inc., 640 p.
- Hawley, J. H., 1931, *Hydrographic Manual*: Washington, D.C., Department of Commerce, U.S. Coast and Geodetic Survey, Special Publication no. 143, 170 p.
- Jaffe, B., List, J., Sallenger, A., Jr., and Holland, T., 1991, Louisiana Barrier Island Erosion Study: Correction for the Effect of Relative Sea Level Change on Historical Bathymetric Survey Comparisons, Isles Derniere Area, Louisiana: Reston, Virginia, U.S. Geological Survey, Open-file report 91-276, 33 p.
- Krajewski, S. A. and Gibbs, B. L., 2003, *Understanding Computer Contouring*: Boulder, Gibbs and Associates, poster, 1 sheet.
- List, J. H., Jaffe, B. E., Sallenger, A. H., Jr., Williams, S. J., McBride, R. A., and Penland, S., 1994, Louisiana Barrier Island Erosion Study: Atlas of Seafloor Changes from 1878 to 1989: Reston, Virginia, U.S. Geological Survey and Louisiana State University, Miscellaneous Investigations Series I-2150-A, 81p.
- Louisiana Coastal Area, 2004, Louisiana Coastal Area, Louisiana Ecosystem Restoration Study, Final Report, 4 volumes with appendices, [http://www.lca.gov/final\\_report.aspx](http://www.lca.gov/final_report.aspx), accessed June 2008.
- Martinez, L., Penland, S., Fernley, S., O'Brien, S., Bethel, M., and Guarisco, P., 2009, Louisiana Barrier Island Comprehensive Monitoring Program (BICM), Volume 2: Shoreline Changes and Barrier Island Land Loss 1800's-2005: Pontchartrain Institute for Environmental Sciences, University of New Orleans, New Orleans, Louisiana, Report Submitted to Louisiana Department of Natural Resources, 5 parts and appendices.
- Miner, M. D. and Weathers, H. D., in press, Adjustment of Tidally-Referenced Water Depths for Comparison to GPS-Derived Orthometric Heights in the Louisiana Coastal Zone: Pontchartrain Institute for Environmental Sciences, Technical Report no. 003-2008, University of New Orleans, New Orleans, Louisiana, p
- Penland, S. and Ramsey, K. E., 1990, Relative Sea Level Rise in Louisiana and the Gulf of Mexico; 1908-1988: *Journal of Coastal Research*, v. 6, 323 -342.

- U.S. Coast and Geodetic Survey, 1917, Descriptive Report for Hydrographic Survey Sheet No. 4000, Gulf of Mexico, Mississippi Sound: Washington, D.C., Department of Commerce, U.S. Coast and Geodetic Survey, 7 p.
- U.S. Coast and Geodetic Survey, 1920, Descriptive Report for Hydrographic Survey Sheet No. 4171, Gulf of Mexico, Mobile Bay Entrance to Chandeleur Islands Offshore: Washington, D.C., Department of Commerce, U.S. Coast and Geodetic Survey, 13 p.
- U.S. Coast and Geodetic Survey, 1922, Descriptive Report for Hydrographic Survey Sheet No. 4219, Chandeleur Sound, North, Freemason, and Old Harbor Islands: Washington, D.C., Department of Commerce, U.S. Coast and Geodetic Survey, 9 p.
- Weathers, H. D., *in press*, Graphical Interface Method for Editing GPS-Derived Bathymetric Data Points: Pontchartrain Institute for Environmental Sciences, Technical Report no. 003-2009, University of New Orleans, New Orleans, Louisiana.
- Williams, S. J., Penland, S., and Sallenger, A. H., Jr., 1992, Louisiana Barrier Island Erosion Study, Atlas of Shoreline Changes in Louisiana from 1853 to 1989: Reston, Virginia, U.S. Geological Survey and Louisiana State University, Miscellaneous Investigations Series I-2150-A, 103 p.

## APPENDIX A: GLOSSARY

**Benchmark** A fixed solid reference point with a precisely determined published elevation

**CORS (Continually Operating Reference Station)** An NGS maintained GPS station that is part of a the larger CORS network. The CORS network provides carrier phase and code range measurements in support of 3-dimensional positioning activities throughout the United States.

**Cut** The measurement down from a grade mark

**Datum** A fixed reference for horizontal and vertical measurements (i.e. NAD83 or NAVD88)

**Dead Reckoning** The process of estimating position based upon a previously determined position (fix) and advancing that position based upon known speed, elapsed time, and course.

**Ellipsoid** A mathematically-defined surface that approximates the geoid.

**Fix** A position derived from measuring external reference points.

**Geographic Information System (GIS)** A system for storing, analyzing, and managing data which are spatially referenced to Earth

**Geoid** A surface that is approximately represented by mean sea level is the equipotential surface of the Earth's gravity field.

**Global Positioning System (GPS)** A ground positioning (X, Y, and Z) technique based on the reception and analysis of NAVSTAR satellite signals.

**Grid** a file that contains a regularly spaced array of Z data at locations called grid nodes developed by interpolating between irregularly spaced XYZ data.

**H-Sheet** Term for a U.S. Coast and Geodetic Survey hydrographic sheet that show soundings from a hydrographic survey.

**Interferometric Swath Bathymetry** A sonar system that is used to measure the depth in a line extending outwards from the sonar transducer. Data is acquired in a swath at right angles to the direction of vessel motion. In contrast to traditional multibeam echo sounders 'interferometry' is generally used to describe swath-sounding sonar techniques that use the phase content of the sonar signal to measure the angle of a wave front returned from a sonar target. When backscattered sound energy is received back at the transducer, the angle return ray of acoustic energy makes with the transducer is measured. The range is calculated from the two-way travel time. The angle is determined by knowing the spacing between elements within the transducer, the phase difference of the incoming wave front, and the wavelength (Submetrix 2000 Series Training Pack, 2000, Submetrix Ltd., Bath, U.K.).

**Kriging** a geostatistical algorithm that uses a distance weighting, moving average and takes into account naturally occurring regional variables that are continuous from place to place (such as a linear bar or inlet channel), and assigns optimal weights based on the geographic arrangement of data point Z values taken from a variogram

**Mean High Water (MHW)** A tidal datum defined by the average of all the high water heights observed over a tidal epoch.

**Mean Low Water (MLW)** A tidal datum defined by the average of all the low water heights observed over a tidal epoch.

**Mean Lower Low Water (MLLW)** A tidal datum defined by the average of the lower low water height each tidal day observed over a tidal epoch.

**NAVSTAR** A set of orbiting satellites used in navigation and positioning.

**North American Datum 1927 (NAD27)** A geodetic horizontal datum based on the Clarke 1866 Ellipsoid.

**North American Datum 1983 (NAD83)** A geodetic horizontal datum based on the GRS80 Ellipsoid

**North American Vertical Datum 1988 (NAVD88)** Vertical control datum established in 1991 by the minimum constraint adjustment of geodetic leveling observations in North America.

**Online Position User Service (OPUS)** A web-based GPS solution engine hosted by the National Geodetic Survey (NGS). GPS files can be submitted to the NGS and each file is processed with respect to three CORS sites. A position is then reported back to the user via email. <http://www.ngs.noaa.gov/OPUS/>

**Orthometric Height (H)** The distance from the geoid surface to the ground surface. Also known as elevation.

**Kinematic GPS Survey** A GPS survey that consists of a base station and roving unit occupying a 15-km or less baseline.

**Sextant** A measuring instrument that is used to measure the angle of elevation of a celestial object above the horizon. The angle and time when it was measured can be used to calculate a position line on a nautical chart.  
Side Scan Sonar

**Single-Beam Bathymetry** depth sounding that uses a high frequency acoustic pulse directed downward in the water column. Acoustic energy is reflected off of the seafloor beneath the survey vessel and recorded at the transceiver. A continuous recording of water depth below the vessel produces high resolution measurements along the survey transect.

**T-Sheet** Term for a U.S. Coast and Geodetic Survey topographic sheet that shows shoreline position and land elevation based on a topographic survey.

**Theodolite** An instrument for measuring both horizontal and vertical angles as used in triangulation networks.


**Tidal Inlet** A channel that is flanked by barrier islands and is a conduit for daily tidal exchange between the lagoon or marsh and the open ocean (Gulf). Tidal inlet channels are maintained by tidal currents by flushing sand transported into the channel by wave processes.

**Tidal Staff** A portable water level measuring device used to determine local tidal datums.

**Triangulation** A control survey in which the coordinates and distance to a point are determined by calculating the length of one side of a triangle, given measurements of angles and sides of the triangle formed by that point and two other known reference points using the law of sines.

**Variogram Model** mathematically specifies the spatial variability of the dataset and the resulting grid file.

**Appendix B:**  
**GPS Base Station Session Results and Positions Used for this Study**

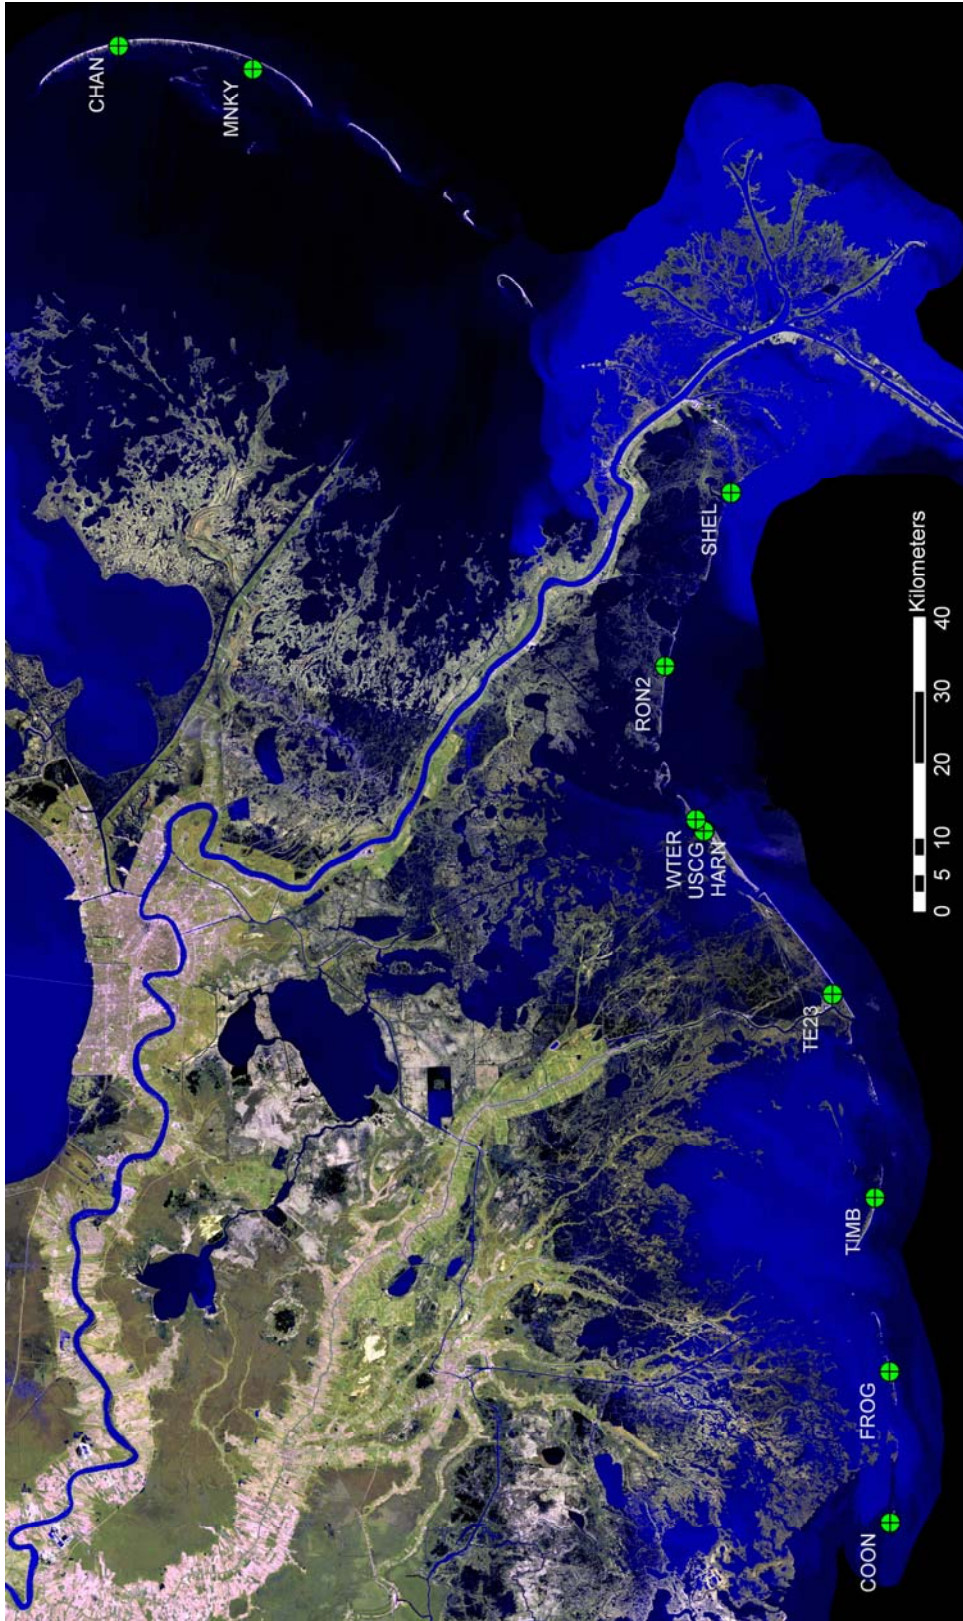

Location of benchmarks occupied for post-processed kinematic GPS static base station control for this study. Base station geometry and vertical error estimates are presented on the following page.

