



Theoretical modelling and experimental demonstration of a mid-infrared femtosecond upconversion system

A.S, Ashik; O'Donnell, Callum F.; Chaitanya Kumar, S.; Ebrahim-Zadeh, M.; Tidemand-Lichtenberg, Peter; Pedersen, Christian

Publication date:
2019

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
A.S, A., O'Donnell, C. F., Chaitanya Kumar, S., Ebrahim-Zadeh, M., Tidemand-Lichtenberg, P., & Pedersen, C. (2019). Theoretical modelling and experimental demonstration of a mid-infrared femtosecond upconversion system. Abstract from CLEO/EUROPE-EQEC 2019, Munich, Germany.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Theoretical modelling and experimental demonstration of a mid-infrared femtosecond upconversion system

A. S. Ashik¹, Callum F. O'Donnell^{2,3}, S. Chaitanya Kumar^{2,3}, M. Ebrahim-Zadeh^{2,3,4}, Peter Tidemand-Lichtenberg¹, Christian Pedersen¹

1. DTU Fotonik, Technical University of Denmark, DK-4000 Roskilde, Denmark

2. Radiantis, Edifici RDIT, Mediterranean Technology Park, 08860 Castelldefels, Barcelona, Spain

3. ICFO-Institut de Ciències Fotòniques, The Barcelona Institute of Science and Technology, 08860 Castelldefels, Barcelona, Spain

4. Institució Catalana de Recerca i Estudis Avançats (ICREA), Passeig Lluís Companys 23, 08010 Barcelona, Spain

Mid-infrared (mid-IR) imaging and spectroscopic techniques have been rapidly evolving in recent years, primarily due to a multitude of application within diverse fields like biomedical imaging, chemical sensing and cancer diagnostics [1]. Most complex chemicals have unique spectral signatures in the mid-IR region, facilitating unambiguous identification based on their absorption features. Owing to the limitations of conventional detectors in the mid-IR spectral range, sum frequency generation (SFG) in a second order nonlinear crystal can be used to convert the mid-IR signal to the visible/near-IR, enabling easy detection using silicon-based detectors. Ultrashort-pulsed upconversion is of particular interest for performing pump-probe experiments and studies of fast relaxation dynamics of chemicals and molecules [2].

In this work, we report the first demonstration of femtosecond mid-IR upconversion imaging using SFG in the Fourier plane of a $4f$ imaging setup. The theory developed in [3] is not valid in the short-pulsed regime (below approximately 1 picosecond) because it does not account for the reduced interaction length in the crystal (temporal walk-off between the interacting pulses) due to group velocity mismatch (GVM). We develop a theoretical model to describe femtosecond upconversion imaging, considering the broad spectrum associated with femtosecond pulses and reduced interaction length associated with GVM. This model enables the calculation of key parameters of a short-pulsed upconversion imaging system. We find a significant increase in angular and spectral acceptance bandwidth for mid-IR signal in the short-pulsed regimes, due to drastic reduction in interaction length, resulting in exceptionally large upconversion imaging field of view (FoV) as depicted in Fig 1 (a). The resolution of the system is studied experimentally by illuminating a USAF resolution target with a mid-IR signal followed by detection of the upconverted signal. An example of an upconverted image is shown in Fig 1 (b), where a resolution of 14.2 line pair/mm is obtained.

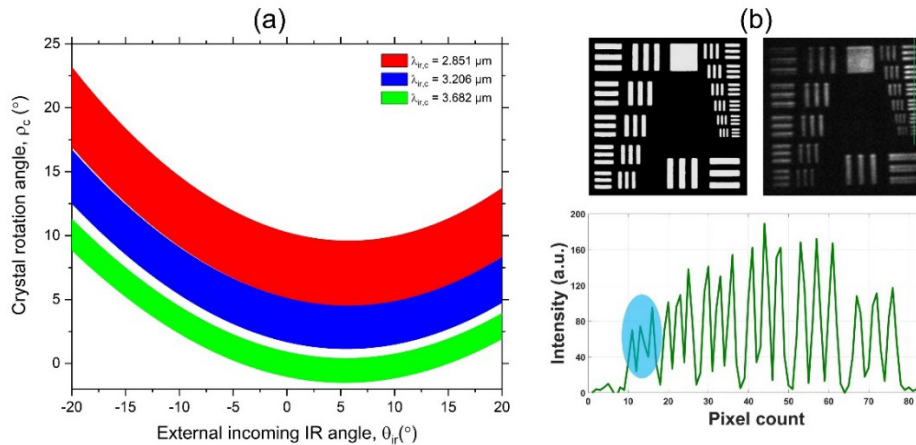


Fig. 1 (a) Theoretical calculation of phase matching curve indicating a large FoV associated with short-pulsed upconversion system. Three colours represent three mid-IR regions used for the experiment. The graph is obtained by simultaneously solving the energy conservation and phase matching condition considering the broad nonlinear spectral acceptance width (indicated by the thickness of each colour). For a ρ_c of 9.5° , we have FoV of more than 30° for the central mid-IR wavelength of $2.851 \mu\text{m}$. (b) The upconverted image (right) of the USAF resolution target (left). The intensity plot containing the smallest feature (highlighted) is shown at the bottom. The smallest feature in the resolution target is clearly resolved.

Broad spectral and angular acceptance widths enables large FoV spectroscopy and single shot imaging (eliminates the need to adjust the phase-match condition). The developed theory is in good agreement with the experimental observations and can thus be used to derive the properties of a short-pulsed upconversion system.

References

- [1] S. Kumar, C. Desmedt, D. Larsimont, C. Sotiriou, and E. Goormaghtigh, "Change in the microenvironment of breast cancer studied by FTIR imaging", *Analyst*, **138**, 4058-4065 (2013).
- [2] M. F. Kropman and H. J. Bakker, "Femtosecond mid-infrared spectroscopy of aqueous solvation shells", *J. Chem. Phys.* **115**, 8942 (2001).
- [3] H. Maestre, A. J. Torregrosa, and J. Capmany, "IR Image upconversion using band-limited ASE illumination fiber sources", *Opt. Express*, **24**, 8581-8593 (2016).