

Building Technology Educator's Society

Volume 2019

Article 49

6-2019

BENCH: Biorhythmic Evaporative-cooling Nano-TeCH

Aletheia Ida

University of Arizona, aida@u.arizona.edu

Follow this and additional works at: <https://scholarworks.umass.edu/btes>



Part of the [Architectural Technology Commons](#)

Recommended Citation

Ida, Aletheia (2019) "BENCH: Biorhythmic Evaporative-cooling Nano-TeCH," *Building Technology Educator's Society*: Vol. 2019
Caryn Brause, Peggi L. Clouston, Naomi Darling (Eds.), Amherst, MA, 2019. <https://doi.org/10.7275/m9g8-sh83>
Available at: <https://scholarworks.umass.edu/btes/vol2019/iss1/49>

This Poster is brought to you for free and open access by ScholarWorks@UMass Amherst. It has been accepted for inclusion in Building Technology Educator's Society by an authorized editor of ScholarWorks@UMass Amherst. For more information, please contact scholarworks@library.umass.edu.

BENCH: Biorhythmic Evaporative-cooling Nano- TeCH

 Aletheia Ida

University of Arizona, School of Architecture

Jialiang Ye

University of Arizona, School of Architecture Nick

Giambianco

University of Arizona, School of Architecture

Zechariah Fung


University of Arizona, School of Architecture

Abstract

The Biorhythmic Evaporative-cooling Nano-TeCH (BENCH) system is conceived as a novel building skin for architectural enclosures responsive to human interactions for thermal comfort in hot-arid climate conditions. The membrane system concurrently integrates natural ventilation cooling and modulations in daylighting transmission for inhabitant wellbeing and multi-sensory phenomena experience. The BENCH demonstration prototype combines CNC shaped and stained laminated plywood with all wood joinery for the structure of a small covered seating area with atmospheric effects. The soft skin membrane encloses the structure with embedded hydrogels that are actuated with water pumping into the mesh pod modules through clear microbore tubing. Each gel pod module expands during swelling, which induces the lift of an outer flap to allow for airflow through the skin. When air flows through the flaps, it carries humidity off of the gel pods and into the surrounding atmosphere for human thermal comfort cooling effects. There are three small water pumps located under each bench module on the floor. Humidity

and temperature sensors are incorporated into the BENCH prototype and link to an automated hydro-pump actuator through Arduino servo motor control. The GEMS prototype is pre-tested with sensing and actuating functionality in an environmental test-chamber in a controlled lab setting. The demonstration prototype is currently being fabricated and will be installed for in-situ real-time testing beginning in May 2019. The project integrates the research and development of the author's work through collaborations with material science, electrical and computer engineering, and human health and wellbeing. Future work with the prototypes includes human wellbeing research in a living-lab setting with non-invasive biometric sensing for heart rate variability and sweat biomarkers in correlation to BENCH environmental fluctuations for temperature, humidity, and dynamic daylight conditions.

Keywords: Hydrogel Membranes, Bioresponsive Design, Evaporative Cooling, Machine Learning, CNC Wood Structure

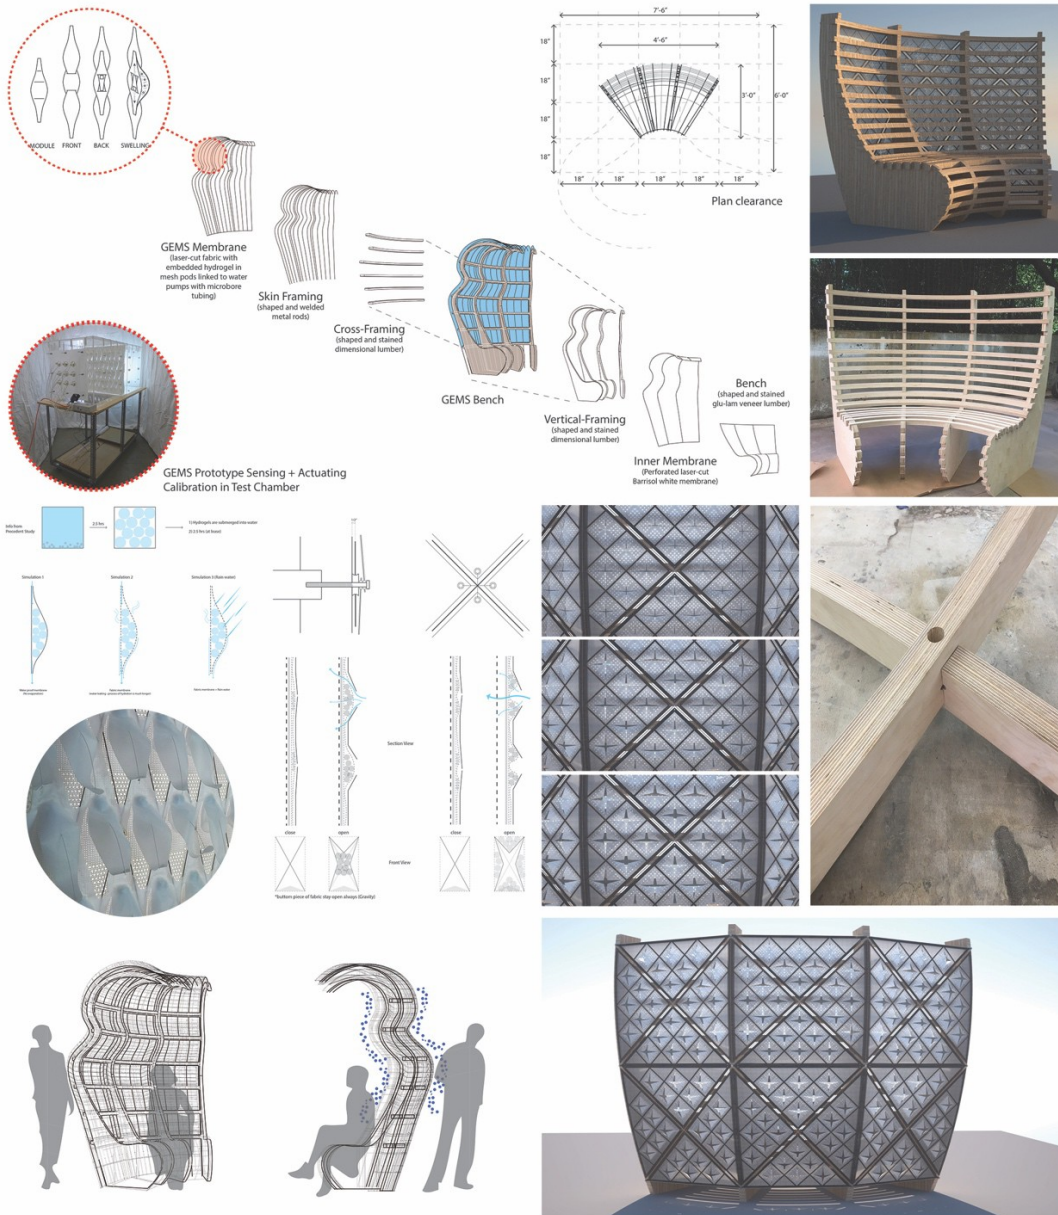

BENCH

Biorhythmic Evaporative-cooling Nano-teCH

Aletheia Ida
University of Arizona
School of Architecture

Jiliang Ye
University of Arizona
School of Architecture

Nicholas Giambanco
University of Arizona
School of Architecture

Zechariah Feng
University of Arizona
School of Architecture

The Biorhythmic Evaporative-cooling Nano-teCH (BENCH) system is conceived as a novel building skin for architectural enclosures responsive to human interactions for thermal comfort in hot-arid climate conditions. The membrane system concurrently integrates natural ventilatory cooling and modulations in daylight transmission for inhabitant wellbeing and multi-sensory phenomena experience. The BENCH demonstration prototype combines CNC shaped and stained laminated plywood with all wood joinery for the structure of a small covered seating area with atmospheric effects. The soft skin membrane encloses the structure with embedded hydrogels that are actuated with water pumping into the mesh pod modules through clear microbore tubing. Each gel pod module expands during swelling, which induces the lift of an outer flap to allow for airflow through the skin. When air flows through the flaps, it carries humidity off of the gel pods and into the surrounding atmosphere for human thermal comfort cooling effects. There are three small water pumps located under each bench module on the floor. Humidity and temperature sensors are incorporated into the BENCH prototype and link to an automated hydro-pump actuator through Arduino servo motor control. The GEMS prototype is pre-tested with sensing and actuating functionality in an environmental test-chamber in a controlled lab setting.

The demonstration prototype is currently being fabricated and will be installed for in-situ real-time testing beginning in May 2019. The project integrates the research and development of the author's work through collaborations with material science, electrical and computer engineering, and human health and wellbeing. Future work with the prototypes includes human wellbeing research in a living-lab setting with non-invasive biometric sensing for heart rate variability and sweat biomarkers in correlation to BENCH environmental fluctuations for temperature, humidity, and dynamic daylight conditions.

Acknowledgments: University of Arizona Water, Energy and Environmental Systems (WEES) Interdisciplinary LINKS Funding (2017 - 2018); University of Arizona Office for Research Discovery and Innovation (ORDI) Accelerate for Success Grant (2018 - 2019)