

# 50. Internationales Wissenschaftliches Kolloquium

September, 19-23, 2005

**Maschinenbau  
von Makro bis Nano /  
Mechanical Engineering  
from Macro to Nano**

**Proceedings**

Fakultät für Maschinenbau /  
Faculty of Mechanical Engineering

Startseite / Index:

<http://www.db-thueringen.de/servlets/DocumentServlet?id=15745>

## Impressum

- Herausgeber: Der Rektor der Technischen Universität Ilmenau  
Univ.-Prof. Dr. rer. nat. habil. Peter Scharff
- Redaktion: Referat Marketing und Studentische Angelegenheiten  
Andrea Schneider
- Fakultät für Maschinenbau  
Univ.-Prof. Dr.-Ing. habil. Peter Kurtz,  
Univ.-Prof. Dipl.-Ing. Dr. med. (habil.) Hartmut Witte,  
Univ.-Prof. Dr.-Ing. habil. Gerhard Linß,  
Dr.-Ing. Beate Schlütter, Dipl.-Biol. Danja Voges,  
Dipl.-Ing. Jörg Mämpel, Dipl.-Ing. Susanne Töpfer,  
Dipl.-Ing. Silke Stauche
- Redaktionsschluss: 31. August 2005  
(CD-Rom-Ausgabe)
- Technische Realisierung: Institut für Medientechnik an der TU Ilmenau  
(CD-Rom-Ausgabe) Dipl.-Ing. Christian Weigel  
Dipl.-Ing. Helge Drumm  
Dipl.-Ing. Marco Albrecht
- Technische Realisierung: Universitätsbibliothek Ilmenau  
(Online-Ausgabe) [ilmedia](#)  
Postfach 10 05 65  
98684 Ilmenau
- Verlag:  Verlag ISLE, Betriebsstätte des ISLE e.V.  
Werner-von-Siemens-Str. 16  
98693 Ilmenau

© Technische Universität Ilmenau (Thür.) 2005

Diese Publikationen und alle in ihr enthaltenen Beiträge und Abbildungen sind urheberrechtlich geschützt.

ISBN (Druckausgabe): 3-932633-98-9 (978-3-932633-98-0)  
ISBN (CD-Rom-Ausgabe): 3-932633-99-7 (978-3-932633-99-7)

Startseite / Index:

<http://www.db-thueringen.de/servlets/DocumentServlet?id=15745>

V. Musalimov / J. Kopytenko

## **The Design of MEMS- Magnitometers' Sensitive Elements with Piezoactuator**

As far as we know, in all magnetometer's design on mechanical basis, elastic elements and film plates are usually used as sensitive elements on which constant magnets are attached.

In the given paper we represent the result of our investigation concerning the registration of super weak magnetic fields at mesolevel which is connected with MEMS systems. A turned-over pendulum is made according to MEMS technology, and the actuator creates of the pendulum base's vibration of high frequency. As a result of it, the given system provides sensibility by two orders greater than sensibility of classical elastic elements, and what is more, that design increases durability of these elements at dynamic loadings.

The sensitive element of the magnetometer's sensor (Figure 1) which is made in the form of a core 1 and its bottom end is connected with the base 2 by hinges, the magnetic element 3 is rigidly fixed on the core 1, besides that, the magnetic element 3 can be attached to any point along the length of the core 1. the base 2 is erected on the elastic support 4. the base 2 is rigidly connected with the actuator 5 with the output of the monitoring block 6 which input connected with the output of the monitoring block 7. The optical system consists of the source of the luminous radiation 8 and the mirror 9, rigidly fixed on the magnetic element 3 and the detector of the luminous radiation 10. The source of luminous radiation 8 is connected with the output 2 of the monitoring block 7. The detector of luminous radiation 10 is connected with the input 3 of the monitoring block 7. The core 1 is initially deviated from its vertical axis and bears against on the edges of the hinge's groove of the base 2. In the given paper we try to show some results of our systematical investigation of the dynamics of the magnetometric system in an alternative magnetic field.

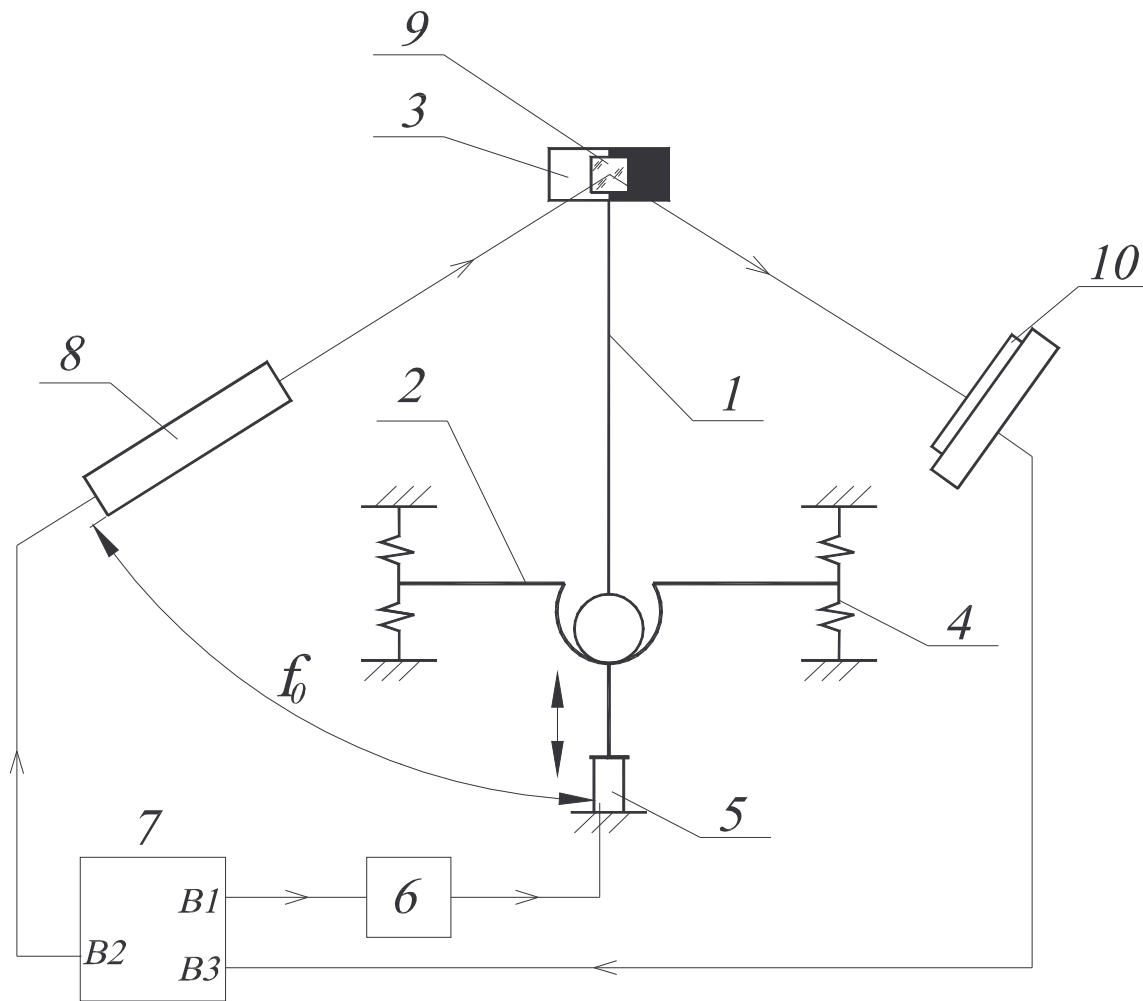


Figure 1 Principal scheme of Magnitometer

**Autorenangabe(n):**

Prof. Dr. sc. techn. Viktor Musalimov

Dipl.-Ing. Jurij Kopytenko

St.-Petersburg University of Information Technology, Mechanics and Optics

Str. Sablinskaya 14

197101, Saint-Petersburg

Tel.: +7(812) 232-97-04

E-mail: musalimov@mail.ifmo.ru