



EVALUATION OF BEHAVIOR ESTIMATION USING WARD'S METHOD IN MULTIFUNCTION OUTLET SYSTEM

Sho Kimura*, Toshihiko Sasama, Takao Kawamura, Kazunori Sugahara

Graduate School of Engineering Tottori University

Tottori University, Private bag 680 8552, Tottori, Japan

Emails: s112022@ike.tottori-u.ac.jp

Submitted: Aug. 5, 2017

Accepted: Nov. 12, 2017

Published: Dec. 1, 2017

Abstract- Home Energy Management System (HEMS) is standard as a system for reducing power consumption in ordinary homes. The system prevents the users from forgetting to turn off home appliances. However the system is too simple to more reduce power consumption. Therefore we aim to reduce power consumption by figuring out a user's behavior to control home appliances. However to estimate user's behavior is difficult for the system. So we develop Multifunction Outlet System into a function to control home appliances. The function uses Ward's method which is an unsupervised learning for estimation of a user's behavior. In this paper, we evaluated a result of estimate of a user's behavior from sensor data by Ward's method.

Index terms: Ward's method, Sensor Networks, HEMS.

I. INTRODUCTION

According as people are raising environmental awareness, reducing power conservation has been required in ordinary homes. A power consumption of latest home appliances decreases year by year. These appliances have some sensors of infrared, temperature and so on. For example, an air conditioner with an infrared sensor has a function of detecting a person in a room. If there is no person in the room, then the air conditioner turns itself off. However a detection range per sensor is so narrow that it gives a false result. So the function needs to use multiple sensors. This method has been realized by Home Energy Management System (HEMS). HEMS connect each home appliance with a network. Therefore HEMS can use multiple sensors to detect a person. Therefore construction of a long-term care system for the elderly and research on stabilization of sensor networks on the premise of HEMS are being conducted [1][2][3][4][5]. On the other hand, HEMS has two problems. One of the problems is that a method of controlling home appliances is too simple. For example, a user can set home appliances to turn off when a person is not detected in a room. However, the way does not consider the user's behaviors like "reading a book" or "watching television" and so on. It can reduce power consumption as well as hindering a user's life in some cases. The other problem is the high cost for users because they must repurchase any home appliances only for HEMS. Accordingly, an energy conservation system for ordinary home needs "a user's behavior can be evaluated" and "low cost".

Some research [6][7][8] have elements for estimation of a user's behavior. This research [9] uses consumption patterns and usage time of home appliances to evaluate a user's behavior. On the other hand, the other research [10] evaluates a user's behavior using some infrared sensors attached in a room. According to the research, the method using only infrared sensors gives accuracy rate over 80%. Based on these studies, we attempt to evaluate a user's behavior by merging the two methods. We develop Multifunction Outlet System [11][12][13]. The system uses attached Adapter unit to all of home appliances in a house. Adapter unit has various sensors to estimate a user's behavior. A tap type system connected to home appliances has been developed some laboratories [14][15][16][17][18]. In these researches [19][20][21], in addition to the sensors installed in the room, the resident has an acceleration sensor to improve the accuracy of behavior estimation. In this research [22], we define that behavior of residents is over 10

minutes and estimate behavior. Our system uses Ward's method to the sensor data of these sensors for behavior classification. In this paper, we evaluate Ward's method estimation of a user's behavior.

II. MULTIFUNCTION OUTLET SYSTEM

Multifunction Outlet System is a system to support saving energy targeting an ordinary home. This system is composed of three units: Adapter unit, Communication Control unit and Server unit. This system needs various type of sensors for classifications. Adapter unit is equipped with multiple sensors to measure air temperature, infrared and light. In addition, this unit measures a power consumption value of a connected appliance using an electric current sensor.

Communication Control unit controls sending information between Adapter unit and Server unit.

Communication between Communication Control unit and Adapter unit uses ZigBee protocol.

These two units are equipped with XBee to use this protocol. XBee is a wireless module of low power consumption [23]. Communication between Communication Control unit and Server unit uses HTTP protocol. Therefore sensor data of Adapter units are stored Server unit via Communication Control unit. It is common to use ZigBee protocol to construct a sensor network. Therefore, a research [24] on the stability of the network is being conducted.

Server unit has two functions. One is to let a user's access by using a browser and figure out sensor data of each Adapter unit. The other is to run an instruction control of home appliances.

The instruction control is created by a user or a system. In case of the user, he registers the action with a time schedule to control home appliances in a room. According to the schedule, the action controls home appliances to connect Adapter unit. In case of the system, Server unit analyzes sensor data for the estimate of the user's behaviors. According to the result of the estimate, the action selects home appliances to control. If this system has a problem like making a wrong estimate, the user can re-control a home appliance by accessing Web server of this Server unit.

Figure1 shows a simple example of using Multifunction Outlet System. A user registers his behaviors as actions to the systems. The user programs his actions to Server unit of the system. In this figure, the program is composed of three patterns: "Action 1: Watching Television", "Action 2: Reading a Book" and "Action 3: Not at Home". Table 1 shows actions and controls of home appliances. In this system, according to a use's action pattern, home appliances are turned off

when they are not used. As a result, an ordinary home can realize saving energy. In the next section, we evaluate the estimate when we use sensor data of Multifunction Outlet System.

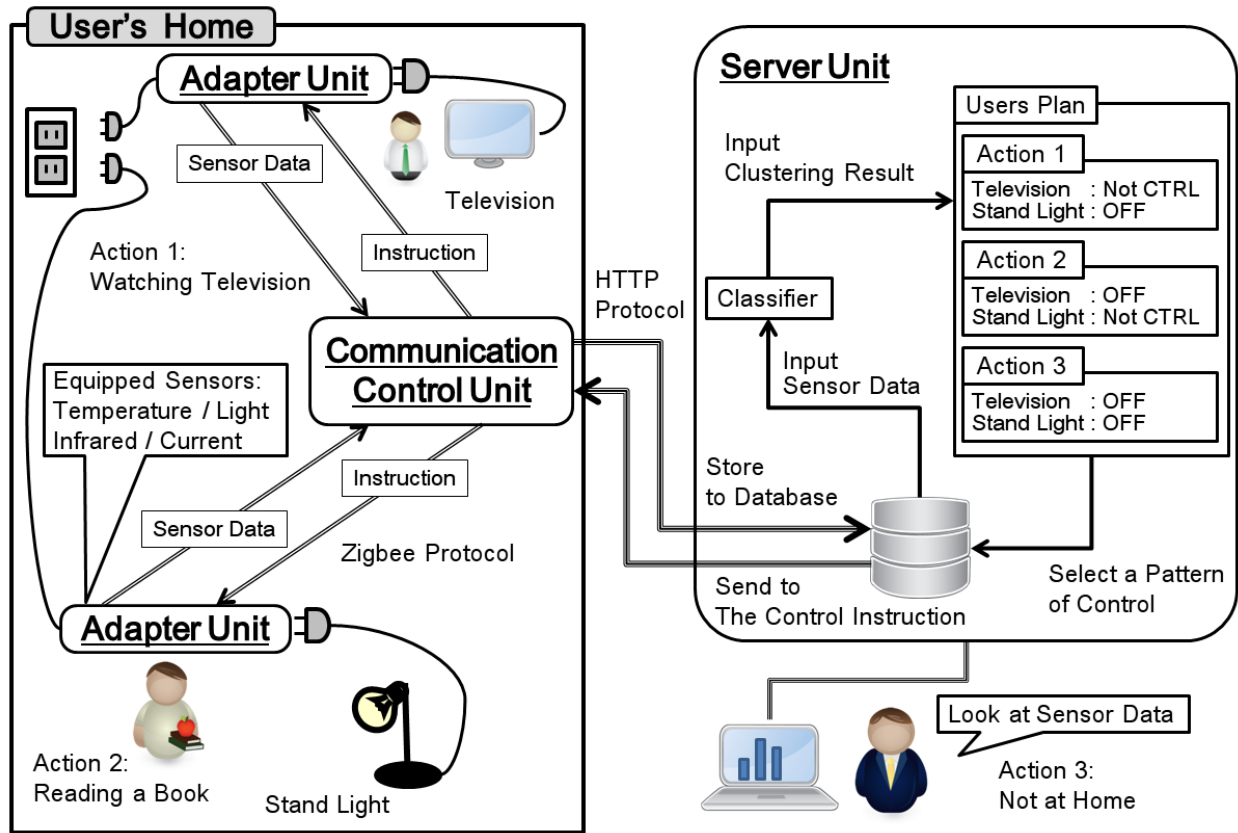


Figure 1. Multifunction Outlet System

Table 1: Action Pattern and a Control of Home Appliances

Pattern	Television	Stand Light
Action 1: Watching Television	* not control	* turn off
Action 2: Reading a Book	* turn off	* not control
Action 3: Not at Home	* turn off	* turn off

III. EXPERIMENTAL PREPARATION

We used two datasets for evaluation. The datasets are sensor data stored in Multifunction Outlet System. The datasets inserted a partition between each action because we use the partition to evaluate the clustering result. The partition means start and end time of a user's action. These two datasets selected from 55 days log of a person living alone using Multifunction Outlet System.

He was twenty and had recorded his own actions and time of data beforehand. In the experiment, we used sensor data of seven Adapter units with four types sensors: air temperature, infrared, light and electric current. These sensor data were sent to Server unit from Adapter units at intervals of ten seconds. The system calculates a mean value for one minute of the data and use the median filter to remove noise from sensor data. Besides, Adapter unit was equipped with various sensors which were different in the range of output. Therefore, this system processed a scaling of sensors' data. As for the scaling we used maximum value and minimum value of each sensor. We defined a dataset of one day as "sample", and we used "sample" as an estimate base of the user's actions. The user's actions are defined in Table 2. We defined the dataset of another day as "test", and we used "test" to evaluate the result of estimate by "sample". The user's actions of "test" are defined in Table 3. These tables show user's actions of one day and each action's times. "Action ID" in these tables shows to assign ID.

In the next section, we show the evaluation of a user's action using Ward's method to "sample" dataset.

Table 2 : Action Log of a Day(Sample Dataset)

Start Time	End Time	User's Action	Action ID
00:00	00:07	cooking	1
00:07	00:52	in the living room	3
00:52	01:02	in the toilet	2
01:02	04:03	in the living room	3
04:03	13:07	sleeping	5
13:07	13:55	in the living room	3
13:55	14:10	in the washroom	6
14:10	14:33	cooking	1
14:33	14:43	in the toilet	2
14:43	15:11	in the living room	3
15:11	17:21	being out	4
17:21	17:33	cooking	1
17:33	18:34	in the living room	3

18:34	18:54	in the washroom	6
18:54	21:38	in the living room	3
21:38	22:00	cooking	1
22:00	22:45	in the living room	3
22:45	22:50	in the washroom	6
22:50	23:03	in the bath room	7
23:03	24:00	in the living room	3

Table 3 : Action Log of a Day(Test Dataset)

Start Time	End Time	User's Action	Action ID
00:00	00:13	in the living room	3
00:13	00:20	in the toilet	2
00:20	03:38	in the living room	3
03:38	10:10	sleeping	5
10:10	10:22	in the living room	3
10:22	10:34	in the toilet	2
10:34	10:43	in the washroom	6
10:43	10:51	in the living room	3
10:51	10:57	in the washroom	6
10:57	11:10	in the living room	3
11:10	20:00	being out	4
20:00	21:58	in the living room	3
21:58	22:04	in the washroom	6
22:04	22:18	in the bath room	7
22:18	22:22	in the washroom	6
22:22	24:00	in the living room	3

IV. EXPERIMENT 1: CLUSTERING BY WARD'S METHOD

a. Ward's Method

Ward's method is one of a hierarchical clustering technique. At the initial state, all clusters are singletons. When using Multifunction Outlet System, sensor data corresponding to a minute becomes each cluster. Next, the method creates a new cluster from two clusters which are a combination like minimum of variance at clusters. The method repeats this process until creating a single cluster all data included.

Figure 2 shows clustering an example of "sample" dataset. We figured the data of the period from 13:10 to 14:30 in the dataset. A sensor data in the example was averaged every ten minutes not per minute. The vertical axis in the figure shows "Level", a variance value which merges any two clusters. The horizontal axis in the figure shows "Cluster" at the initial state.

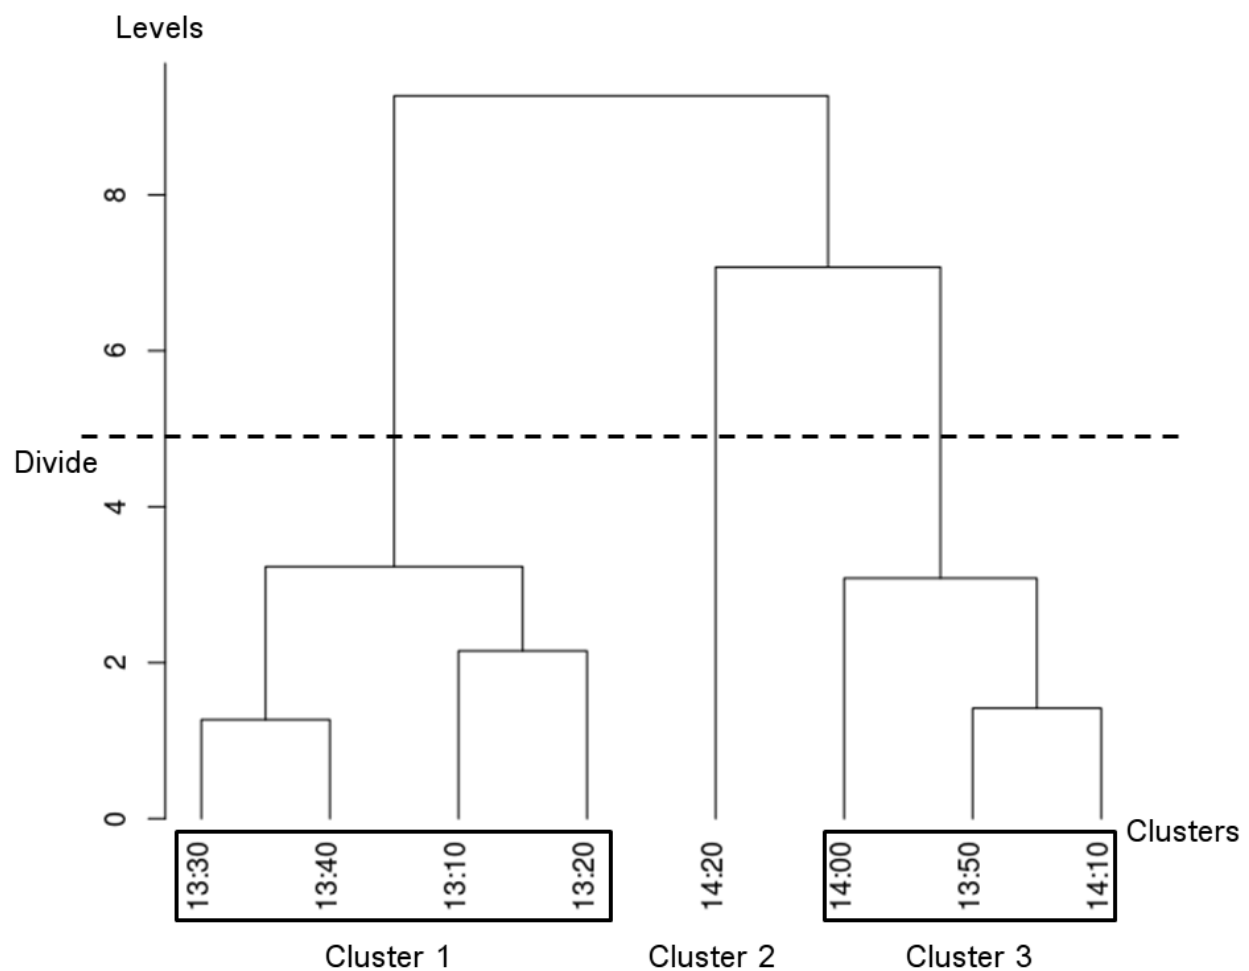


Figure 2. Clustering of Sensor Data by Ward's Method

Table 4 shows a user's actions and the time range. "Divide" in the figure is a location to divide dataset. A location was decided to create three clusters because the user's actions are divided into three patterns. Table 5 shows a result of mapping each cluster to actions. The result of clustering was accurate except for the data of ten minutes from 14:10. A possible cause of this except data is that to include a user action moving from a toilet to a kitchen. We evaluate a result of clustering all "sample" dataset in the next section.

Table 4 : User's Action Log

Time range	Action
13:10 – 13:55	Action 3
13:55 – 14:10	Action 6
14:10 – 14:30	Action 1

Table 5 : Result of Clustering

Cluster ID	Time Range
Cluster 1	13:10 – 13:50
Cluster 2	14:20 – 14:30
Cluster 3	13:50 – 14:20

b. Evaluation of Clustering by Ward's Method

In this section, we changed a time range from ten minutes to per minute for estimation of short time actions. In this case, we divided the dataset into seven because a user creates seven actions of home appliances controls. Table 6 shows a result of clustering. These percentages mean how much proportions of "Action ID" are included in each cluster. 1 to 7 of "Action ID" corresponds to those of Table 2 and 3. In addition, we assigned "ID" from "a" to "g" to the clusters taken from Ward's method. A boldface number appears most frequently in each cluster. In this table, "e" and "f" were exactly classified in each cluster. However "a" and "c" included various actions. Classification of "Action 4" and "Action 5" was difficult for the method because "d" of clustering results was actually a mix of multiple actions.

Table 6 : Result of Clustering by Ward's Method (Number of Clusters are 7)

ID	Action ID						
	1	2	3	4	5	6	7
a	22.1%	6.5%	70.1%	0.0%	0.6%	0.6%	0.0%
b	0.5%	0.0%	98.6%	0.0%	0.0%	0.9%	0.0%
c	9.8%	0.0%	72.2%	1.0%	0.0%	17.0%	0.0%
d	0.0%	0.0%	0.0%	28.2%	71.2%	0.0%	0.0%
e	0.0%	0.0%	0.0%	0.0%	100.0%	0.0%	0.0%
f	0.0%	0.0%	100.0%	0.0%	0.0%	0.0%	0.0%
g	7.2%	7.2%	82.6%	0.0%	0.0%	2.9%	9.4%

The experiment was decided a number of control plans by user. However the number is different by user. Therefore other way is simpler pattern of user's actions than Table 2 and 3. This time we defined three actions: "Active", "Non-Active" and "Not in the room". Table 7 shows a simple pattern of user's actions. "Simple Action ID" in this table is used to assign ID. "Status" in this table shows a user's actions.

Table 7 : Simple Action Patterns

Simple Action ID	Status	Actions(Action ID)
I	Active	cooking(1), in the toilet(2), in the living room(3), in the washroom(6), in the bath room(7)
II	Non-Active	sleeping(5)
III	Not in the Room	being out(4)

"Actions" in this table are used to classify actions of these tables 2 and 3. Table 8 shows the clustering result of this dataset. This result is more accurately clustered than the result of table 6. However, "Action III" does not identify from the result. "Action II" and "Action III" included less active of user in sensor data of "sample" dataset.

Table 8 : Result of Clustering by Ward's Method (Number of Clusters are 3)

ID	Action ID		
	I	II	III
a	0.0%	80.9%	19.1%
b	99.7%	0.0%	0.3%
c	99.4%	0.0%	0.0%

We compared the result of Ward's method with some other results. Figure 3 shows levels when a total of clusters are different. A level is a minimum distance among each cluster. A change amount of levels are smaller than between "2" and "3" for between "3" and "4" in a number of clusters. Therefore we attempted to divide a clustering "sample" dataset into four clusters; the result is shown in Table 9. In the table, "a" was included in "Action III", the result was more accurate than Table 8.

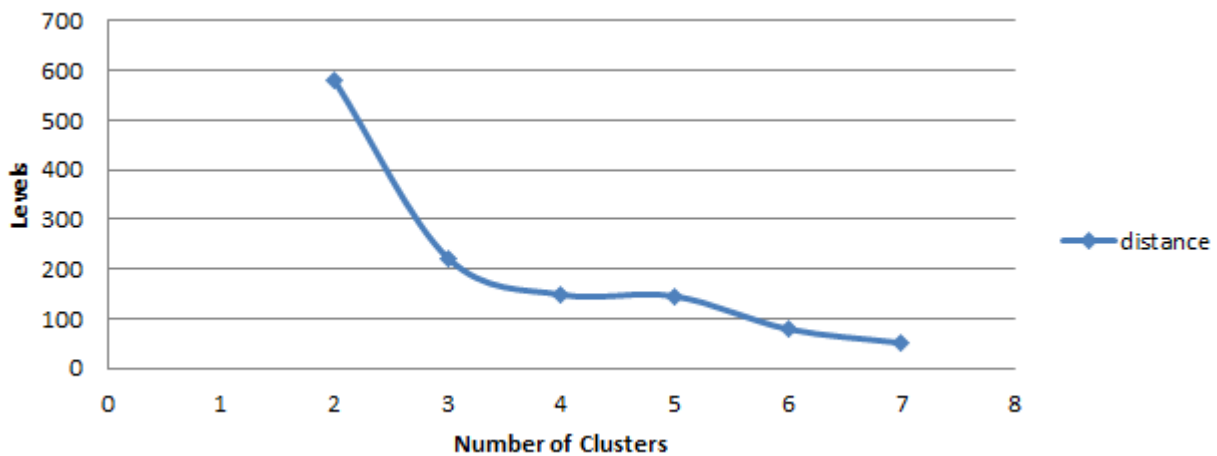


Figure 3. The Minimum of Distance of Each Cluster

Table 9 : Result of Clustering by Ward's Method (Number of Clusters are 4)

ID	Action ID		
	I	II	III
a	0.0%	71.2%	28.8%
b	99.7%	0.0%	0.3%
c	99.4%	0.0%	0.0%
d	0.0%	100.0%	0.0%

V. EXPERIMENT 2: ACTION IDENTIFICATION BY WARD'S METHOD

a. Method of Action Identification Using Ward's Method

This identification of the method uses a result of clustering "sample" dataset by Ward's method. This input data is one minute of "test" dataset. The method measures a distance between each cluster and the input data. The input data is identified to a cluster which is the nearest at all clusters. In this case, the method defined a total number of clusters so that a cluster and an action are homologized. This classifier uses the result of Section IV-B.

b. Result of Action Identification Using Ward's Method

Table 10 shows the result evaluated from a user's behavior estimation using "sample" data. "Action ID" in this table are the same as those of Tables 2, 3. "Result of The Test Dataset by Classifier" in this table shows output results of a cluster labeled from "A" to "G". These labels are the same as "Action ID" from "1" to "7". The right answers of each cluster are in boldface. "Rate" in this table shows the accuracy rate of clustering results that includes number of correctly classified in each clusters.

Some actions were correctly classified like "Action ID" 1 and 4. A correct answer of the Action 1 was number zero because it did not include "cooking" in the "test" dataset. However, other clusters included margins of error from correct answers.

Table 10 : Classification of Sensor data by Ward's Method

Action ID	Result of The Test Dataset by Classifier						
	A	B	C	D	E	F	G
1	0	0	0	0	0	0	0
2	0	0	189	0	0	0	0
3	0	9	40	0	0	19	14
4	0	0	5	530	196	0	0
5	0	0	12	0	196	0	0
6	0	0	49	0	0	0	0
7	0	10	165	0	0	6	0
Rate	100.0%	0.0%	8.69%	100.0%	50.0%	0.0%	0.0%

VI. CONCLUSIONS

In this paper, we evaluated a method to estimate a user's behavior from adapted sensors of many home appliances. In this method, the control pattern of home appliances was defined by a user, and then we clustered sensor data by Ward's method using the number of the pattern as a division number. Some behaviors can be clustered to 100% in one cluster but a few behaviors were mixed multi behaviors in one cluster. Therefore according to the difference of division numbers, the evaluated results gave different clustering accuracy. In the next step, we plan to use the method of machine learning overlaid with this paper's result to improve accuracy.

ACKNOWLEDGMENT

This work was supported by JSPS KAKENHI Grant Number JP15K00726.

REFERENCES

[1] Narayanan C Krishnan and Diane J Cook. "Activity recognition on streaming sensor data", *Pervasive and mobile computing*, 10, <https://doi.org/10.1016/j.pmcj.2012.07.003>, 138-154, Jul 2012.

- [2] Filippo Palumbo et al. "Sensor network infrastructure for a home care monitoring system", *Sensors*, ISSN 1424-8220, 3833-3860, Feb 2014.
- [3] Gina Sprint, Diane Cook, Roschelle Friz and Maureen Schmitter-Edgecombe. "Detecting Health and Behavior Change by Analyzing Smart Home Sensor Data", *Smart Computing (SMARTCOMP)*, 2016 IEEE International Conference on, Electronic-ISBN: 978-1-5090-0898-8, May 2016.
- [4] Muhammad Usman, Vallipuram Muthukkumarasamy and Xin-Wen Wu. "Mobile agent-based cross-layer anomaly detection in smart home sensor networks using fuzzy logic", *IEEE Transactions on Consumer Electronics*, 61-2, ISSN 0098-3063, 197-205, May 2015.
- [5] Tracy S Barger, Donald E Brown and Majd Alwan. "Health-status monitoring through analysis of behavioral patterns", *IEEE Transactions on Systems, Man, and Cybernetics - Part A: Systems and Humans*, 35-1, ISSN 1083-4427, 22-27, Jan 2005.
- [6] Takekazu Kato, Hyun Sang Cho, Dongwook Lee, Tetsuo Toyomura and Tatsuya Yamazaki. "Appliance Recognition from Electric Current Signals for Information-Energy Integrated Network in Home Environments", *International Conference on Smart Homes and Health Telematics 2009*, LNCS 5597, 150-157, Jul 2009.
- [7] Ying-Xun Lai, Chin-Feng Lai, Yueh-Min Huang and Han-Chieh Chao. "Multi-appliance recognition system with hybrid SVM/GMM classifier in ubiquitous smart home", *Information Sciences*, 230, <https://doi.org/10.1016/j.ins.2012.10.002> , 39-55, May 2013.
- [8] Takashi Koiso, Ryusei Shingaki, Hideo Sakamoto, Shinya Umeno and Ken Ueno. "An Analysis for Behaviors Estimation of One Household by Using Environmental And Energy Consumption Sensors in a Home", *IPSJ SIG Technical Report*, 36, AA11838947, 1-8, Mar 2014.
- [9] Wei-Ting Cho, Ying-Xun Lai, Chin-Feng Lai and Yueh-Min Huang. "Appliance-aware activity recognition mechanism for IoT energy management system", *The Computer Journal*, 56-8, <https://doi.org/10.1093/comjnl/bxt047>, 1020-1033, May 2013.
- [10] Kazuya Murao, Tsutomu Terada, Ai Yano, and Ryuichi Matsukura. "Detecting room-to-room movement by passive infrared sensors in home environments", *Proceedings of First Workshop on recent advances in behavior prediction and pro-active pervasive computing*, June 2012.
- [11] Toshihiko Sasama, Takao Kawamura and Kazunori Sugahara. "Multifunctional Electrical Outlet based on Mobile Ad Hoc Network", In: *Proceedings of the International Conference on Embedded and Ubiquitous Computing (ICEUC 2011)*, 2359-2362, Nov 2011.

- [12] Toshihiko Sasama, Shun Iwasaki, Takuya Okamoto, Kenichi Takahashi, Takao Kawamura and Kazunori Sugahara. "Sensor Data Classification for Indoor Situations Using the Multifunctional Outlet", IEEJ Transactions on Electronics, Information and Systems, 134-7, DOI 10.1541/ieejieiss.134.949, 949-955, Feb 2014.
- [13] Shun Iwasaki, et al. "Sensor Data Analysis for Grouping of Room Condition using the Multifunctional Outlet" , Proceedings of Forum on Information Technology, 69-74, Dec 2013.
- [14] Kenji Yuasa, et al, "Energy on Demand over SmartTap Network", TECHNICAL REPORT OF IEICE, 111-134, ISSN 0913-5685, 25-30, Jul 2011.
- [15] Rasika S Ransing and Manita Rajput. "Smart home for elderly care, based on wireless sensor network", Proceedings of 2015 International Conference on Nascent Technologies in the Engineering Field, 978-1-4799-7263-0/15, 1-5, Jan 2015.
- [16] Takanobu Otsuka, et al, "Prototyping and evaluation of a wireless sensor network system that aims easy installation", Joint Agent Workshop and Symposium 2012(2012), Oct 2012.
- [17] Debraj Basu, Giovanni Moretti, Gourab Sen Gupta and Stephen Marsland. "Wireless sensor network based smart home: Sensor selection, deployment and monitoring". In: Sensors Applications Symposium (SAS), 2013 IEEE, ISBN 978-1-4673-4636-8, 49-54, Feb 2013.
- [18] Shoko Nakamura, Akihito Hiromori, Hirozumi Yamaguchi, Teruo Higashino, Yohei Yamaguchi and Yoshiyuki Shimoda. "Activity Sensing, Analysis and Recommendation in Smarthouse", Proceedings of Multimedia, Distributed, Cooperative, and Mobile Symposium 2014, 1557-1566, Jul 2014.
- [19] Zhenyu He and Lianwen Jin, "Activity recognition from acceleration data based on discrete cosine transform and SVM" Systems, Proceedings of the 2009 IEEE International Conference on Systems, Man, and Cybernetics, 978-1-4244-2793-2, 5041-5044, Oct 2009.
- [20] Kazuki Moriya, Eri Nakagawa, Manato Fujimoto, Hirohiko Suwa, Yutaka Arakawa, Aki Kimura, and Keiichi Yasumoto, "Daily living activity recognition with ECHONET Lite appliances and motion sensors", First International Workshop on Mobile and Pervasive Internet of Things'17, 978-1-5090-4338-5, 437-442, Mar 2017.
- [21] Eri Nakagawa, Kazuki Moriya, Hirohiko Suwa, Manato Fujimoto, Yutaka Arakawa, Toshiyuki Hatta, Shotaro Miwa and Keiichi Yasumoto, "Investigating recognition accuracy improvement by adding user's acceleration data to location and power consumption-based in-home activity recognition system", Proceedings of MOBIQUITOUS 2016 Adjunct Proceedings

of the 13th International Conference on Mobile and Ubiquitous Systems: Computing Networking and Services, ISBN 978-1-4503-4759-4/16/11, 100-105. Nov 2016.

[22] Kenki Ueda, Morihiko Tamai, Yutaka Arakawa, Hirohiko Suwa and Keiichi Yasumoto. "A Living Activity Recognition System Based on Power Consumption of Appliances and Inhabitant's Location Information", IPSJ Transactions, ISSN 1882-7764, 57-2, 416-425, Feb 2016.

[23] <https://www.digi.com/products/xbee-rf-solutions/2-4-ghz-modules/xbee-zigbee>

[24] H. Ghayvat, A. Nag, N. K. Suryadevara, S.C. Mukhopadhyay, X. Gui and J. Liu, "Sharing Research Experiences of WSN Based Smart Home" International Journal on Smart Sensing & Intelligent Systems, 7.4, ISSN 1178-5608, 1997-2013, Dec 2014.