

54th INTERNATIONAL SCIENTIFIC CONFERENCE ON INFORMATION, COMMUNICATION AND ENERGY SYSTEMS AND TECHNOLOGIES (ICEST 2019)

Ohrid, North Macedonia, June 27-29, 2019



University St. Kliment Ohridski,
Faculty of Technical Sciences,
Bitola, Macedonia




University of Niš,
Faculty of Electronic Engineering,
Serbia



Technical University of Sofia,
Faculty of Telecommunications,
Bulgaria

Proceedings of Papers




ISSN: 2603-3267 (online)

ISSN: 2603-3259 (print)

Issue: 1

**54th INTERNATIONAL SCIENTIFIC CONFERENCE ON INFORMATION,
COMMUNICATION AND ENERGY SYSTEMS AND TECHNOLOGIES**



iCEST 2019

Proceedings of Papers

Published by Publishing House, Technical University of Sofia

ICEST 2019 – 54th INTERNATIONAL SCIENTIFIC CONFERENCE ON INFORMATION, COMMUNICATION AND ENERGY SYSTEMS AND TECHNOLOGIES

Ohrid, North Macedonia, June 27 - 29, 2019

Proceedings of Papers

Issue: 1

ISSN: 2603-3259 (Print)
ISSN: 2603-3267 (Online)

Number of copies printed: 30

Printed by: Publishing House, Technical University of Sofia, 2019

All rights reserved. This book, or parts thereof, may not be reproduced in any form or by any means, electronic, or mechanical, including photocopying or any information storage and the retrieval system not known or to be invented, without written permission from the Publisher.

**ICEST 2019 - LIV INTERNATIONAL SCIENTIFIC CONFERENCE ON
INFORMATION, COMMUNICATION AND ENERGY SYSTEMS AND
TECHNOLOGIES, North Macedonia, Ohrid, June 27 - 29, 2019**

Proceedings of Papers

Editors: Prof. Dr. Mitko Kostov
Prof. Dr. Nebojša S. Dončov
Assoc. Prof. Dr. Kalin Dimitrov

Technical Support: Assoc. Prof. Dr. Metodija Atanasovski


Published by: Faculty of Technical Sciences, St. Kliment Ohridski University, Bitola, Macedonia
Faculty of Electronic Engineering, University of Niš, Serbia
Faculty of Telecommunications, Technical University of Sofia, Bulgaria

Printed by: Publishing House of Technical University of Sofia, Sofia, Bulgaria

Number of copies printed: 30

Publishing of this edition has been financially supported by
Faculty of Technical Sciences, St. Kliment Ohridski University, Bitola, Macedonia

ISSN: 2603-3259 (Print)
ISSN: 2603-3267 (Online)





organized by



Faculty of Technical Sciences,
St. Kliment Ohridski University, Bitola, Macedonia



Faculty of Electronic Engineering,
University of Niš, Serbia



Faculty of Telecommunications,
Technical University of Sofia, Bulgaria

Under auspices of
Macedonian Ministry of Education and Science

In cooperation with:
Faculty of Tourism and Organizational Sciences – Ohrid

LIST OF ICEST 2019 REVIEWERS

Nikola Acevski
St. Kliment Ohridski University, Bitola, N.Macedonia

Blagoja Arapinoski
St. Kliment Ohridski University, Bitola, N.Macedonia

Aleksandar Atanasković
University of Niš, Serbia

Ivaylo Atanasov
Technical University of Sofia, Bulgaria

Metodija Atanasovski
St. Kliment Ohridski University, Bitola, N.Macedonia

Vesna Ceselkoska
St. Kliment Ohridski University, Bitola, N.Macedonia

Dragan Denić
University of Niš, Serbia

Tijana Dimitrijević
University of Niš, Serbia

Ivo Draganov
Technical University of Sofia, Bulgaria

Goran Đorđević
University of Niš, Serbia

Sandra Đošić
University of Niš, Serbia

Ivo Dochev
Technical University of Sofia, Bulgaria

Nebojša Dončov
University of Niš, Serbia

Gordana Janevska
St. Kliment Ohridski University, Bitola, N.Macedonia

Jugoslav Joković
University of Niš, Serbia

Goran Jovanović
University of Niš, Serbia

Zoran Jovanović
University of Niš, Serbia

Kiril Kasev
Technical University of Sofia, Bulgaria

Mitko Kostov
St. Kliment Ohridski University, Bitola, N.Macedonia

Lyubomir Laskov
Technical University of Sofia, Bulgaria

Ludvig Lubih
Technical University of Sofia, Bulgaria

Nataša Maleš-Ilić
University of Niš, Serbia

Dragan Mančić
University of Niš, Serbia

Zlatica Marinković
University of Niš, Serbia

Aleksandar Markoski
St. Kliment Ohridski University, Bitola, N.Macedonia

Vera Marković
University of Niš, Serbia

Rosen Miletiev
Technical University of Sofia, Bulgaria

Dejan Milić
University of Niš, Serbia

Marija Milijić
University of Niš, Serbia

Nenad Milosević
University of Niš, Serbia

Seferin Mirchev
Technical University of Sofia, Bulgaria

Rumen Mironov
Technical University of Sofia, Bulgaria

Cvetko Mitrovski
St. Kliment Ohridski University, Bitola, Macedonia

Natasa Mojsoska
St. Kliment Ohridski University, Bitola, N.Macedonia

Marin Nedelchev
Technical University of Sofia, Bulgaria

Goran Nikolić
University of Niš, Serbia

Tatjana Nikolić
University of Niš, Serbia

Kamelija Nikolova
Technical University of Sofia, Bulgaria

Oleg Panagiev
Technical University of Sofia, Bulgaria

Aleksandra Panajotović
University of Niš, Serbia

Bratislav Predić
University of Niš, Serbia

Olivera Pronić-Rančić
University of Niš, Serbia

Nikola Rendevski
St. Kliment Ohridski University, Bitola, N.Macedonia

Blagoja Ristevski
St. Kliment Ohridski University, Bitola, N.Macedonia

Mare Srbinovska
Ss. Cyril and Methodius University, N.Macedonia

Zoran Stanković
University of Niš, Serbia

Blagoja Stevanovski
St. Kliment Ohridski University, Bitola, N.Macedonia

Dragan Stojanović
University of Niš, Serbia

Biljana Stošić
University of Niš, Serbia

Ljupco Trpezanovski
St. Kliment Ohridski University, Bitola, N.Macedonia

Zlatka Valkova-Jarvis
Technical University of Sofia, Bulgaria

Boban Veselić
University of Niš, Serbia

TECHNICAL PROGRAM COMMITTEE

Chairman:

Mitko Kostov

St. Kliment Ohridski University, Bitola, N.Macedonia

Vice Chairmen:

Nebojša Dončov

University of Niš, Serbia

Kalin Dimitrov

Technical University of Sofia, Bulgaria

Honorary Chairmen

Cvetko Mitrovski

St. Kliment Ohridski University, Bitola, N.Macedonia

Bratislav Milovanović

Singidunum University, Niš, Serbia

Rumen Arnaudov

Technical University of Sofia, Bulgaria

Local Coordinator:

Stojanče Nusev

Dean of the Faculty of Technical Sciences,
St. Kliment Ohridski University, Bitola, N.Macedonia

Members:

Agata Manolova

Technical University of Sofia, Bulgaria

Biljana Stošić

University of Niš, Serbia

Boyanka Nikolova

Technical University of Sofia, Bulgaria

Brian Barsky

University of California, Berkeley, USA

Chrysostomos Stylios

Technological Education Institute of Epiros, Greece

Đani Juričić

Jožef Stefan Institute, Slovenia

Désiré Dauphin Rasolomampionona

Warsaw University of Technology, Poland

Dimitar Taskovski

Ss. Cyril and Methodius University Skopje, N. Macedonia

Dimiter Alexandrov

Lakehead University, Canada

Dragan Denić

University of Niš, Serbia

Dragan Stojanović

University of Niš, Serbia

Dušanka Bošković

University of Sarajevo, Bosnia and Herzegovina

Eduard Ivanjko

University of Zagreb, Croatia

Evelin Krmac

University of Ljubljana, Slovenia

Evelina Pencheva

Technical University of Sofia, Bulgaria

Fernando Alvarez

University of Extremadura, Spain

Filiz Güneş

Yildiz Technical University, Turkey

Ismail Altas

Karadeniz Technical University, Turkey

Ivan Corbev

Ss. Cyril and Methodius University Skopje, N.Macedonia

J.A.R.P. de Carvalho

University Beira Interior, Portugal

Jair Minoro Abe

Paulista University, Brazil

Jan Machac

Czech Technical University, Prague, Czech Republic

Jugoslav Joković

University of Niš, Serbia

Karel Raz

University of West Bohemia, Czech Republic

Kazumi Nakamatsu

University of Hyogo, Japan

Ljupčo Trpezanovski

St. Kliment Ohridski University Bitola, N.Macedonia

Mariofanna Milanova

University of Arkansas at Little Rock, USA

Mikolaj Bartłomiejczyk

Gdańsk University of Technology, Poland

Mikolaj Leszczuk

AGH University of Science and Technology, Poland

Nikola Donato

University of Messina, Italy

Pece Mitrevski

St. Kliment Ohridski University Bitola, N.Macedonia

Petar Popovski

Aalborg University, Denmark

Peter Planinšič

University of Maribor, Slovenia

Slavko Rupčić

University of Osijek, Croatia

Stanimir Valtchev
Stefan Stancescu
Stevo Bozinovski
Szilvia Nagy
Urban Burnik
Uwe Siart
Vincenzo Piuri
Wojciech Krzysztofik
Wojtek Bock
Zdenka Babić
Zoran Jovanović
Zoran Stanković

New University of Lisbon, Portugal
Polytechnic University of Bucharest, Romania
South Carolina State University, USA
University of Gyor, Hungary
University of Ljubljana, Slovenia
Technical University of Munich, Germany
University of Milan, Italy
Wroclaw University of Technology, Poland
University of Ottawa, Canada
University of Banja Luka, Bosnia and Herzegovina
University of Niš, Serbia
University of Niš, Serbia

CONFERENCE ORGANIZING COMMITTEE

St. Kliment Ohridski University, Bitola, North Macedonia:

M. Atanasovski, B. Arapinoski, G. Janevska, V. Dancevska, N. Mojsovska, J. Pargovski, M. Spirovski, I. Andreevski, D. Koltovska

University of Niš, Serbia:

A. Atanasković, T. Dimitrijević, J. Joković, D. Mančić, N. Maleš-Ilić, Z. Marinković, V. Marković, M. Milijić, O. Pronić-Rančić, B. Stošić, B. Veselić, L. Stoimenov, J. Milošević

Technical University of Sofia, Bulgaria:

L. Laskov, A. Mihaylova, S. Antonov, V. Stoynov, D. Mihaylova, K. Valkov, N. Hristova, D. Kireva-Mihova, T. Brusev, M. Todorov, K. Raynova, K. Stoyanova, M. Stoyanova, M. Nedyalkova, V. Dolapchieva

CONFERENCE SECRETARIAT

Conference Chairman:

Prof. Dr. Mitko Kostov
St. Kliment Ohridski University, Bitola, N. Macedonia
Makedonska Falanga 37, 7000 Bitola, N. Macedonia
phone: +389 47 207 702
e-mail: mitko.kostov@uklo.edu.mk

Technical Editor:

M. Atanasovski, St. Kliment Ohridski University, Bitola, N. Macedonia
e-mail: metodija.atanasovski@uklo.edu.mk

Secretary:

B. Arapinoski, St. Kliment Ohridski University, Bitola, N. Macedonia
e-mail: blagoja.arapinoski@uklo.edu.mk

TABLE OF CONTENTS

PLENARY SESSION

Prognostics and Health Management of Solid Oxide Fuel Cell Systems: Challenges, Accomplishments and Trends	2
Boštjan Dolenc, Pavle Boškosi Department of Systems and Control, Jožef Stefan Institute, Ljubljana, Slovenia	

SESSIONS PER TOPICS

RADIO COMMUNICATIONS, MICROWAVES, ANTENNAS & TELECOMMUNICATION SYSTEMS AND TECHNOLOGY

Comparison of Wave Digital and Circuit Models of Microstrip Single-Stub L-Tuners	11
B. Stošič, N. Dončov	
A Neural Approach for Lumped Element Circuit Based Inverse Modeling of RF MEMS Switches	15
R. Dhuri, T. Ciric, O. Pronic Rancic, V. Markovic, Z. Marinkovic	
Design of CPW-fed Asymmetrical Slot Array for K Band Applications	19
M. Milić, B. Jokanovic	
Channel Selection in 2.4GHz Band for IEEE 802.15.4 Networks	23
S. Djurasevic, U. Pesovic	
Investigation of LTE/LTE-R Functionalities in Train Radio	27
A. Koruni, I. Topalov	
Enabling Adaptivity in IoT-based Smart Grid Architecture	31
N. Petrović, Đ. Kocić	
Traffic Grooming on Designing Elastic Optical Networks	35
S. Miladić-Tešić, G. Marković, V. Radojičić	
MAC-layer Protocol for UWB-Based Single-Tag Indoor Localization	39
M. Jovanovic, I. Stojanovic, S. Đošić, G. Djordjevic	
Method and Algorithm for Automatically Targeting of Unmanned Aerial Vehicle with Vertical Landing on Mobile Landing Site	43
K. Andreev, I. Iliev, G. Stanchev	
Antenna Array Designing with an Application for Navigation Landing of Unmanned Flying Vehicle	45
I. Nachev, I. Iliev	
Strip Horn Array for X-band Operation	49
N. Popović, P. Manojlović, I. Radnovic, B. Virijević	
System for Automatically Targeting of Unmanned Aerial Vehicle with Vertical Landing on Mobile Landing Site	53
K. Andreev, G. Stanchev, R. Arnaudov	

CONTROL SYSTEMS

Practical Experiments and Analysis for Detection of Smoke in the Blue and Infrared Light Spectrum	317
M. Kirov, V. Todorova	
Human-Machine Interaction of Electric Vehicle	321
Z. Sovreski, P. Bouchner, S. Novotny, M. Dzidrov, E. Hristovska	
Mathematical Modeling and Simulation of Hybrid Electric Vehicle	325
G. Janevska, M. Kostov, G. Stojanovski	
C-STAR Simulator Teaching Experience	329
Z. Hubenova, K. Metodiev	
Real Overview on Implemented p-FMEA Methodology in a Real Industrial Entity after a Year from the last Follow Up	333
I. Kuzmanov, R. Pasic, Z. Angelevski, I. Vilos	
Approaches and Principles of Building Functional-Resistant Ergatic Systems	339
Z. Hubenova, F. Iliev, A. Andonov	
Interoperable and Safety Aspects of the Platform-Train Interface	343
K. Mirchev, D. Kireva-Mihova	
Control of Production and Inventory in the Automotive Industry for Multi Customer and Multi Products	347
I. Djordjevic, G. Stojic, D. Petrović	

MEASUREMENT SCIENCE AND TECHNOLOGY

Analysis of Measurement Uncertainty in Wireless Sensor Network based Power Quality Measurement	352
M. Simić, G. Miljković, D. Živanović, D. Denić, Z. Kokolanski	
Low-Cost Energy-Efficient Air Quality Monitoring System Using Sensor Network	356
M. Srbinovska, A. Krkoleva Mateska, V. Andova, M. Celeska, T. Kartalov	
Practical Implementation of Voltage Unbalance Measurement	360
L. Sladojević, L. Korunović, M. Stojanović, V. Milenković	
Sensor Data Fusion for Determine Object Position	364
R. Miletiev, E. Iontchev, P. Kapanakov, L. Hristov	
Wavelet Algorithm for Denoising of MEMS Densor Data	369
L. Hristov, E. Iontchev, R. Miletiev, P. Kapanakov	
Test Methodology for Mains Interference Frequency Measurement	373
G. Mihov, D. Badarov	
AC Current Transducer as an Element of the Electrical Energy Consumption Control System	377
V. Tasic, M. Pavlov-Kagadejev, R. Jeremijic, V. Despotovic, O. Tasic, I. Stojkovic	
Performance Evaluation of IEEE 802.11a 54 Mbps WPA Laboratory Links	381
J. Pacheco de Carvalho, C. Pacheco, H. Veiga	
Impact of Noise in Printing Process	385
Svetlana Mijakovska, Roberto Pasic, Ivo Kuzmanov and Filip Popovski	

HUMAN-MACHINE INTERACTION OF ELECTRIC VEHICLE

Zlatko V. Sovreski^{1,2}, Petr Bouchner,² Stanislav Novotný², Misko Dzidrov³ and
Elizabeta Hristovska⁴

Abstract - The paper provides overview of challenges of driver-car interaction in modern electric vehicles. Different aspects of human-machine interaction are reviewed. Analysis of method of driver-vehicle interaction through in-vehicle display and its influence on using eco driving modes is provided on the example of experimental studies in the field.

Keywords - HMI, Electric Vehicle, Hybrid Car, IVIS

I. INTRODUCTION

One of the main problems of electric vehicles is limited battery capacity and longtime of battery recharge. Unlike in case with conventional cars energy management system is crucial for EV, where it is not a problem of ecology of driving, but it is also essential for general utilization of the EV. The range may vary on driving style and driving conditions in several tens of presents (for contemporary cars the difference is of 100 km). Most of the general rules of eco-driving can be applied to electrical vehicles too. Similarly to conventional cars, the eco-driving techniques may be applied in EV:

- To monitor the fuel use
- To drive smoothly and mind the traffic ahead
- Not to use the break and gas pedals aggressively
- Try to avoid speed oscillations when possible, i.e. on highways. Turn on cruise control when possible
- Not overuse air conditioning
- Use the air conditioner smartly – not under- or overuse
- Check the tire pressure
- Not to overload car with unnecessary load and not to increase aerodynamic drag like one from the roof rack, or open windows

This problem could also be solved with the help of application of automated vehicle systems.

^{1,2} Zlatko V. Sovreski is with the University "St. Climent Ohridski" Bitola - Faculty of Technical Sciences¹ - Department of Traffic and Transportation Sciences, Czech Technical University in Prague - Faculty of Transportation Sciences - Czech republic, and E-mail: zlatkosovre@yahoo.com² and zlatko.sovreski@uklo.edu.mk,

² Petr Bouchner and Stanislav Novotny is with the Czech Technical University in Prague - Faculty of Transportation Sciences¹- Czech republic, E-mail: xnovotny@fd.cvut.cz

³ Misko Dzidrov is with the University "Goce Delcev" Stip, Faculty of Mechanical Engineering, E-mail: E-mail:

misko.dzidrov@ugd.edu.mk - Republic of N. Macedonia

⁴ Elizabeta Hristovska is with the University "St. Climent Ohridski" Bitola - Faculty of Technical Sciences¹ - Republic of N. Macedonia, E-mail: elizabeta.hristovska@uklo.edu.mk

II. SYSTEMS CURRENTLY IN USE

According to time scaling by the IEA (International Energy Agency), we are now living the third age of electrical vehicles. Quite a variety of HMI (Human-machine interaction) systems have been developed since the beginning of development of electrical vehicles by now. Let us assume that vehicle-to-driver (and vice versa) communication can be subdivided into display systems (the information displays and gauges), starter system, pedaling and charging system. Display systems are usually a wide variety of designs. Besides the intuitive design, interface needs to provide useful and relevant information sufficient to keep driver confident in car functioning.

II.1 Different aspects of EV driver-car interaction

There two main streams in approaches to design. The first one pursuing the goal to make the appearance of the systems maximally similar to those in ordinary fuel car with exploitation of mechanical gauges with arrows where and displaying EV systems operation related information instead. The familiar appearance makes the interaction intuitive and transition from fuel to electric cars more comfortable. Placement and manner of delivery of information is to be carried out on the assumption of the general knowledge and standards. According to ANSI (American National Standards Institute) [2] the indicators standardization is not electric vehicle specific, general rules for car displays apply here. Thus, instead of tank fuel level, there is an indicator of battery capacity, energy use and recuperation is usually associated with the revolutions counter, and navigation display usually contains map of refueling stations. The location of the gauges is usually as it were in a fuel car (Mitsubishi I Miev, Nissan Leaf). Sometimes the gauges location varies, like in Tata Vista EV, where the main meter is located at navigation panel place, and in Smart for two Electric Drive energy use and battery controls are above the navigation panel. Also design of indicators can be different (Ford Focus Electric). In those systems the information representation differs – battery charge can be expressed in percent, in km or in scale value. Another approach is quite forward in design, different in location of interface components and even uses the external and portable devices as in-vehicle display (BMW i3). Most of electric vehicles have also a display showing info related to eco-ing.



Fig. 1: Examples of EV charging stations: corporate station at Transportation Faculty, CTU in Prague (left), Tesla public charging station with solar energy source (upper right), home charge station by Easy charge (bottom right)

II.2 Propulsion system interaction

Due to regenerative braking vehicle feedback from pressing the pedals in EV is different. Vehicle decelerates (with possibility to even stop at intersections) by depression of drive pedal only and starts on after idling by its pressing thus making it possible to drive with one pedal only. There is no clutch, to there are only two pedals which can be rather inconvenient for drivers who are used to mechanical gear.

II.3 Audio feedback

We know the importance of audio stimuli, car engine in particular, which is described in relation to automobile simulator engine in [3] and [4]– for driver and, in our context, also for pedestrians', cyclists 'and blind people safety. There exists quite a variety of possibilities for improvement of car to human interaction quality due to possibility of computer simulation of car engine sound. Through proper legislation, it is possible to regulate the sound volume inside and outside the car, solve the problem of sound proofing and make adaptation to electrical vehicles in general more gradual. Obligatory simulation of engine sound in electrical and hybrid vehicles has already been implemented in the USA [5] and in Europe and is referred to as Electrical Vehicle Warning Sound. According to legislation, the sound (Approaching Vehicle Sound for Pedestrians System – Nissan leaf) is activated while driving below the certain speed (50 km/h or 20 mph range in city) and is deactivated at higher speeds, when enough noise is generated by tire friction and aerodynamic drag. Being a necessary solution for pedestrians' safety, it does not intrude into the car cabin acoustic, which is an asset for driver and passengers comfort. Manufacturers of applied systems suggest pedestrian warning and in-cabin sound modules, the later can be switched on and off with possible volume adjustment (Electrical Vehicle Electronic Sound System by EVEESS™, Sound Box by S.M.R.E. Engineering etc.).

II.4 Charging

In electric vehicles, visual interface is concentrated around efficient energy consumption. The basic reason of it is the range anxiety phenomena, which is a fear of electric vehicle driver to run out of “fuel” and not be able to charge the

vehicle in time. The network of charging stations is not as dense as one of the fueling stations. Users, while switching from fuel cars, are to change their habits of route planning. The possibility of driving right after refueling is not available in case of EV, where recharging takes hours while driving electric vehicle requires certain route planning. That is why the infrastructure of charge stations is a very important factor for convenience of vehicle exploitation. Besides, the proper delivery and management of information regarding the charging stations is very important as the factor influences driver's route planning. Charging station solutions for EVs are proposed by special companies (General Electric, Eaton, Siemens etc.) as well as by electric cars manufacturers (Tesla Motors etc.) and can be available on the market as public charge stations, corporate stations for companies supporting the development of green technologies, and for private use at homes. The architecture of station can imitate the fuel station (public solution), parking spot (corporate and public solution) or look like a socket (more or less private solution). For reference please see Figure 1. EV battery can be charged manually at the station or remotely via existing remote control applications for cell phone having your car connected to the socket.

III. RELATED RESEARCH

III.1 Audio feedback

Experimental assessment of EV or hybrid HMI has been conducted by researchers from Sweden [6]. The selected group of participants had no, or little experience of driving electric or hybrid car. Goal of experiment what functional information should be in EV, how it can be presented and what approach of the interface (i.e. traditional, or innovative) should be preferred. Both stationary and while driving interface testing was performed. Probed were allowed to provide comments and opinion during the tests, relevant notes were made for analysis. Besides, number of errors and driver surveying were collected. The tested systems were: battery charge symbol and need of charge, message about limited performance of vehicle, eco meter. Two phases of experiment covered testing of two different concepts. During the first phase the classical (similar to fuel car) approach of HMI was presented for testing, while in phase 2 the one was developed and enhanced according to the reflections collected from participants in phase 1. Interface design changed from imitation of classical gauges, location of information changed too with moving of speedometer to the left and adding more information in the bottom and on the right. The interface looks more like battery device interface. During the experiment drivers related to information by habit and at first understood it intuitively as if they were in a fuel car. Among the compared systems were battery charge level, eco meter, distance to goal indicator, and readiness of EV electric consumption, warnings and some others. The information characteristic to EV (or hybrid) only was accepted better by drivers in the second phase. While in the first they were looking more to where the things should be. The most familiar systems in both cases were the battery level, distance to goal

(and empty) and speedometer, which is quite understandable as the first is familiar from mobile devices and the second – partially, from navigation system interfaces.

Don Norman in his book specifies for basic principles of development of sound of electric cars and hybrids: it shall convey an alerting function (vehicle is somewhere near), it shall serve for orientation regarding vehicle direction of movement, it shall not be annoying and it shall be designed in the terms of certain standards so that it is able to be interpreted as a car sound in relation to the term of skeuomorphic [7].

Cooperative research by a Laboratories Vibrations Acoustique, INSA-Lyon, France and Institute für Psychologies, Technische Universität Darmstadt, Germany was made to compare sound perception by sighted (100 participants) and blind people (53 participants) of diesel and electric car sound [8]. Nine variants of electric car sound were proposed to propends. The task set for participants was to determine from which direction the vehicle was coming in pedestrian crossing in dry and rainy weather (rain sound added) with traffic noise simulation. Better results in response time of vehicles detection were detected in dry weather, and for EV some respondents could identify the approaching car at unsafe (under 7.5 m) distance. There was not a big difference between responses of blind and sighted people.

Visual interface for electric vehicle Efficiency of interface in motivating driver for eco-driving can be assessed in laboratory with the help of vehicle simulator. The emissions, pedals use, acceleration/deceleration can be measure in simulated driving environment.

One of the proposed approaches described in [9], where a system providing static and dynamic feedback is developed. The system will provide voice notifications (warnings) when driver is not driving in eco-mode and driver will be given recommendations on driving after the measurement. In experiment five non-eco types of driving were predefined: rapid acceleration and deceleration, high engine revolutions rate, high speed with high amplitude on highways or freeways and idling while being parked. Visual interface of the proposed system indicated CO₂ emissions. The experiment results showed decrease in CO₂ emissions. There were three tests run, both static (3.43%) and dynamic (5.45%) feedback showed CO₂ emissions reduction.

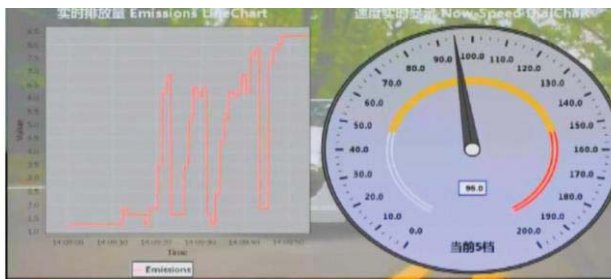


Fig.2: Proposed eco-driving mode notification [11].

Another research proposes interface with notifying driver about eco related information in trucks (Figure 3) [10]. In this experiment drivers were testing a notification system and

were to evaluate the kinds of notifications. The design of experiment was to identify which of the presented information was found useful and helpful for the drivers. There were two types of information on display – permanent (average fuel meter, speed guidance, acceleration/deceleration guidance, and coasting guidance at crests and changing (speed, feed forward advice and performance feedback indicating how well the driver performed in the last event (the stars and text under the speedometer). After the experiment drivers chose the most useful among the presented information – see Figure 4.

Other than visual types of notification have been tested by [11]. There were three systems proposed: Two haptic accelerator pedal systems (haptic forced and haptic stiffness) and one multimodal visual–auditory. The system suggested information about fuel efficiency and position of acceleration pedal. Depending on the section speed limit, probed were advised to select acceleration pedal position angle: increase (15% depression), decrease (0% depression) or maintain their speed (7% depression) – see Figure 5 for reference. Three system notification types showed comparatively similar outcomes, where all systems have successfully improved Eco manner of driving, with the only difference for deceleration with haptic force system, which was more efficient. Visual–vocal interface was considered more loading by the drivers' subjective opinions.

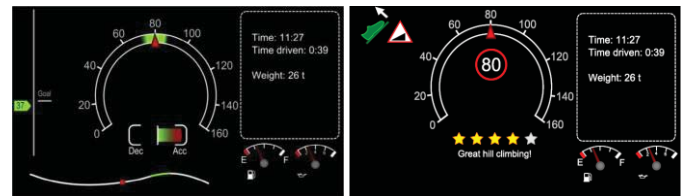


Fig. 3: Permanent and changing information about eco-driving [10].

Number of participants who selected the different eco-driving constituents.

Eco-driving constituent	Number of participants
Speed guidance (continuous)	12
Average fuel meter (continuous)	14
Coasting guidance at crests (continuous)	9
Acceleration/deceleration guidance (continuous)	9
Speed alert (intermittent)	8
Feedforward advice (intermittent)	15
Performance feedback (intermittent)	13

Fig. 4: Notification selection by propends. [10].

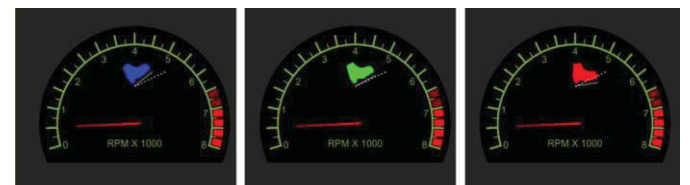


Fig. 5: Acceleration pedal advise in [7] - left is insufficient, right is excessive, middle is normal.

IV. CONCLUSION

Motivation of eco-driving is proved to be efficient method of overall driver awareness of necessity for driving smartly, save natural resources and decrease contamination of the

ecosphere. Real-time dynamic feedback appears to be more efficient method for motivation of eco-driving. Efficiency of notification and study of the target audience of such systems is very important. Average consumer on a vehicle market will be found to be used to classical outline of the in-vehicle system interface. For many drivers over 50 the visualization is found to be unclear or distracting due to vision issues with age. That is why it is important to perform sufficient research on visual design and representation of useful information: more types of notifications (like haptic and acoustic) shall be considered for design by car manufacturers.

REFERENCES

- [1] Yoshizawa, S., et al., Development of HMI and Telematics Systems for a Reliable and Attractive Electric Vehicle, SAE Technical Paper, 2011-01-0554, 2011, doi:10.4271/2011-01-0554.
- [2] Electric Vehicle Standards Panel, Standardization Roadmap for electric vehicles, Version 2.0, American National Standardization Institute, 2013.
- [3] Hajný M., Module of Audio Subsystem of Car Simulator, (in Czech), Diploma thesis, FEE CTU, Prague, 2006
- [4] Ing. Petr Bouchner, Driving Simulators for HMI Research, PhD. Thesis, Institute of control and Telematics, CTU, Prague, 2007
- [5] U.S. Department of Transportation Proposes, New Minimum Sound Requirements for Hybrid and Electric Vehicles, Press Release, 2013 (source <http://www.nhtsa.gov/> last accessed on May 29, 2015).
- [6] Helena Strömberg, et al., Driver Interfaces for Electric Vehicles, AUI 2011 Proceedings, 2011
- [7] *Don Norman*, The Design of Everyday Things: Revised and Expanded Edition. Available from Basic Books, a member of the Peruses Books Group. U.K. MIT Press, 2013.
- [8] Etienne Parizet, et al., Auditory warnings for electric vehicles: Detestability in normal-vision and visually-impaired listeners. Applied Acoustics, Volume 86, December 2014, Pages 50-58
- [9] X.Zhao, Y. Wua, J. Rong, Y. Zhang: Development of a driving simulator based eco-driving support system. Transportation Research Part C: Emerging Technologies. Elsevier Ltd. Contents lists available at Science Direct.
- [10] Carina Fors, Katja Kircher, Christer Ahlström: Interface design of eco-driving support systems – Truck drivers' preferences and behavioural compliance. Transportation Research Part C. September 2015. 2016 Elsevier Ltd.
- [11] Ing. Zlatko V. Sovreski, Ph.D., Doctoral dissertation., Study and application of hydrogen as an alternative propulsion in vehicles in urban mass transportation, CTU in Prague, 2013.